



SPK 2000

P O W E R E D L O U D S P E A K E R

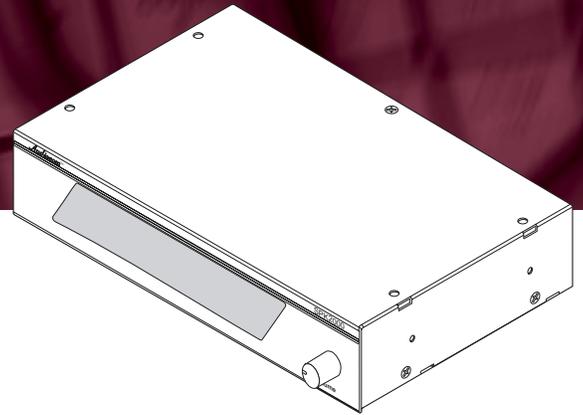

The SPK-2000 is a powered loudspeaker accessory for the US2002 User Station and the ES4000A Expansion Station. It may be used on a desktop, or rack mounted with optional Audiocom rack mount hardware. (Unit is supplied with rubber feet for desktop use.)

The SPK-2000 comes with a 3 ft (.9m) cord for connection to the US2002 or ES4000A speaker jack.

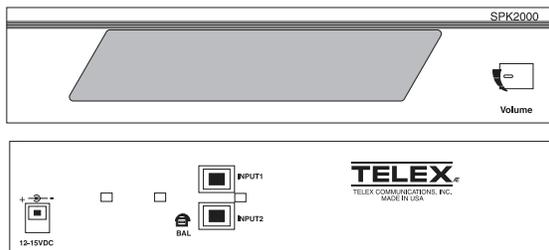

Features:

- Powerful speaker output for public address or stage announce.
- Rack-mountable with optional Audiocom rack mount hardware. Occupies 1/2" wide rack space.
- Two line-level speaker inputs, with balance control to adjust the mix. Combine two channels of intercom audio. Or, connect the monaural mix output from an Audiocom User Station, then connect a local program audio source, such as background music.
- Master volume control on front panel.
- Works with same power pack as US2002 and ES4000A.

Ordering Information

Model No.	Description	Order by Cat.
SPK-2000	Self powered speaker, 1/2 rack wide	90007629000

Distributed by:

All specifications are subject to change without notice.

Telex Communications, Inc.
12000 Portland Avenue South
Minneapolis, MN 55337
1-800-392-3497
fax: 1-800-222-0400

All trademarks are the property of their respective owners.

SPK2000 Specifications

General

Power Requirements:	12 to 15 VDC, 65 to 150 mA (works with PS-L power supply)
Frequency Response:	400 Hz to 8 kHz, ± 3 dB
Input Impedance:	47K ohms, minimum
Input Level:	1 VRMS, nominal
Output Amplifier Power:	4.4 W maximum; 2 W continuous
Signal-to-Noise (ref 2W into 8 ohms):	75 dB
THD:	Less than 0.5% at 2W
Balance Control:	12 dB maximum relative attenuation
Dimensions:	1.75" (44.5 mm) h x 8.25" (209.6 mm) w x 5.25" (133.4 mm) d
Environmental:	0°C to 50°C; 0% to 95% humidity, noncondensing

innovative solutions for today's communications™ Audiocom®