

2 x 1 RF Protection Switch for L band Frequencies

Model 7702BPX-LB & 7703BPX-LB



The 7702BPX-LB / 7703BPX-LB L band 2 x 1 protection switches provide automatic changeover functionality to protect against link failure for RF signals from 950MHz to 2250MHz.

The 7703BPX-LB has integrated VistaLINK™ technology for remote control and monitoring capability via SNMP. This provides the user with the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.



In the application of automatic changeover, the 7702BPX-LB and 7703BPX-LB can be configured to have a MAIN input and a STANDBY input. In this configuration, it will automatically switch to the Standby input when the Main input power is weak or lost. It can be also be configured to have auto or manual switch back to the Main input when the signal is re-established.

The 7702BPX-LB and 7703BPX-LB occupy one card slot and can be housed in either a 1RU frame which holds up to 3 modules, or a 3RU frame which holds up to 15 modules or a standalone enclosure which holds 1 module.

Features

- Intelligent auto switching with input power detection
- User definable threshold levels on 7703BPX-LB version
- Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-LB
- Switch state indication via GPO
- Card edge LEDs indicate active channels, output channel and power levels below threshold
- Fully hot swappable from front of frame
- Wide operating frequency range, 950MHz - 2250MHz
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK™ -enabled on 7703BPX-LB version only

Model 7702 & 7703BPX-LB Block Diagram

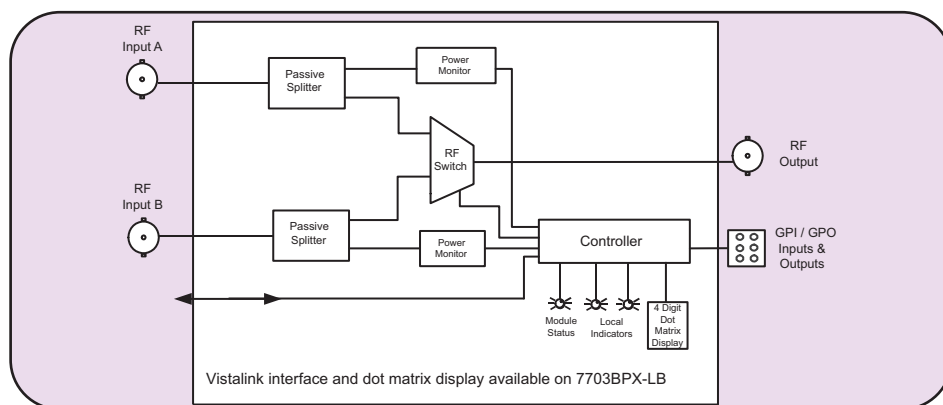

Specifications

RF Input/Output:

Inputs:	2
Outputs:	1
Connector:	BNC per IEC 60169-8 Amendment 2 (F-type optional)
I/O Impedance:	75Ω
Frequency Response:	950MHz to 2250MHz
Insertion Loss:	<±1.5dB
Return Loss:	<4dB
Isolation:	>10dB
Input Power Range:	>50dB
	0dBm to -50dBm

General Purpose Inputs:

Number of Inputs:	2
Type:	Opto-isolated, active low with internal pull-ups to +5V
Connector:	2 pins plus ground on 6 pin terminal strip
Signal Level:	
+5V Pullup:	Low: -5 to +2.5 VDC, High: 3.5 to 10 VDC
+12V Pullup:	Low: -5 to +9.5 VDC, High: 10.5 to 15 VDC
Max Sink Current:	(input shorted to ground) 15 mA
Max Leakage Current for input High:	200 μA

General Purpose Outputs:

Number of Outputs:	1
Type:	"Dry Contact" relay contacts - normally open & normally closed contact provided
Connector:	3 pins on 6 pin terminal strip

Electrical:

Voltage:	+12V DC
Power:	4 Watts

Physical:

Number of Slots:	1
------------------	---

Ordering Information:

7702BPX-LB:	2 x 1 RF Protection Switch for L-Band Frequencies
7703BPX-LB:	2 x 1 RF Protection Switch for L-Band Frequencies, with VistaLINK™ Monitoring

Ordering Options

Rear Plate and Fiber Connector must be specified at time of order
Eg: Model +SC +3RU

Rear Plate Suffix

+3RU	3RU Rear Plate for use with 7700FR-C Multiframe
+1RU	1RU Rear Plate for use with 7701FR Multiframe
+SA	Standalone Enclosure Rear Plate

Connector Suffix:

+F75	75Ω, F-Type Rear Connector
------	----------------------------

Enclosures:

7700FR-C	3RU Multiframe which holds 15 modules
7701FR	1RU Multiframe which holds 3 modules
S7701FR	Standalone enclosure