

# 7702BPX-IF, 7703BPX-IF

## 2x1 RF Protection Switch for IF Frequencies



The 7702BPX-IF and 7703BPX-IF 2x1 RF protection switches for IF frequencies provide automatic changeover functionality to protect against link failure for RF signals from 10MHz to 850MHz. Typical applications include failover protection for 70/140MHz applications.

The 7703BPX-IF has integrated VistaLINK® technology for remote control and monitoring capability via SNMP. This provides the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.


In the application of automatic changeover, the 7702BPX-IF and 7703BPX-IF can be configured to have a MAIN input and a STANDBY input. In this configuration, it will automatically switch to the Standby input when the Main input power is weak or lost. It can be also be configured to have auto or manual switch back to the Main input when the signal is re-established.

The 7702BPX-IF and 7703BPX-IF occupy one card slot and can be housed in either a 1RU frame which holds up to 3 modules, a 3RU frame which holds up to 15 modules or a standalone enclosure which holds 1 module.

### Features & Benefits

- Wide operating frequency range, 10MHz to 850MHz
- Intelligent auto switching with input power detection
- User-definable threshold levels on 7703BPX-IF version
- Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-IF
- Switch state indication via GPO
- Card edge LEDs indicate active input channels, output channel and power levels below threshold

- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® on 7703 version
- VistaLINK® capability is available when 7703BPX-IF modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

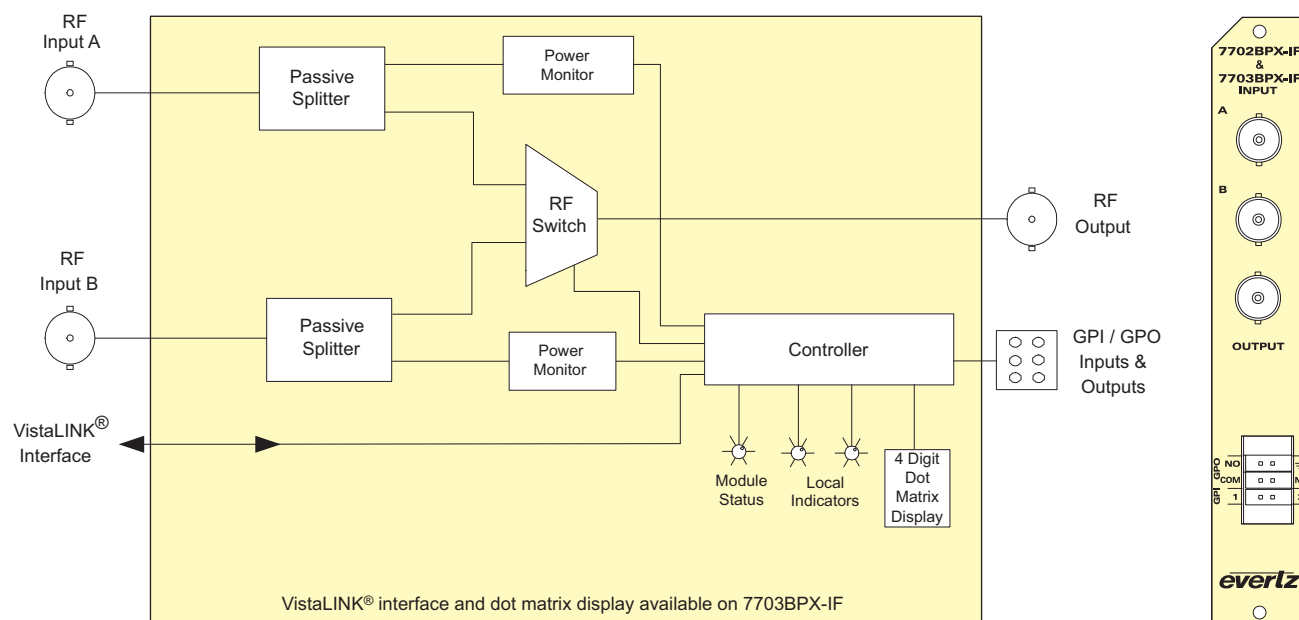

### Specifications

#### RF Input/Output:

Inputs: 2  
Outputs: 1  
Connector: BNC per IEC 60169-8 Amendment 2 (F-type optional)  
I/O Impedance: 75Ω  
Frequency Response:  
10-200MHz: < ±0.25dB  
10-850MHz: < ±0.5dB  
Insertion Loss: < 4dB  
Return Loss:  
10-200MHz: < 15dB  
10-850MHz: < 17dB  
Isolation: > 50dB (10-850MHz)  
Input Power Range: 0dBm to -50dBm

#### General Purpose Inputs:

Number of Inputs: 2  
Type: Opto-isolated, active low with internal pull-ups to +5V  
Connector: 2 pins plus ground on 6-pin terminal strip  
Signal Level:  
+5V Pullup: Low: -5 to +2.5 V DC, High: 3.5 to 10 V DC  
+12V Pullup: Low: -5 to +9.5 V DC, High: 10.5 to 15 V DC  
Max Sink Current: (input shorted to ground) 15 mA  
Max Leakage Current for input High: 200µA

#### General Purpose Outputs:

Number of Outputs: 1  
Type: "Dry Contact" relay contacts - normally open & normally closed contact provided  
Connector: 3 pins on 6-pin terminal strip

#### Electrical:

Voltage: +12V DC  
Power: 3W

#### Physical:

Number of Slots: 1

### Ordering Information:

7702BPX-IF	2x1 RF Protection Switch for IF Frequencies
7703BPX-IF	2x1 RF Protection Switch for IF Frequencies, with VistaLINK® monitoring

**Ordering Options** Rear Plate and optional connector type must be specified at time of order  
Eg: Model +3RU (if 75Ω F-type connector required, order optional +F75)

#### Rear Plate Suffix

+3RU 3RU Rear Plate for use with 7700FR-C Multiframe  
+1RU 1RU Rear Plate for use with 7701FR Multiframe  
+SA Standalone Enclosure Rear Plate

#### Connector Suffix

+F75 75Ω, F-Type Rear Connector

#### Enclosures

7700FR-C 3RU Multiframe which holds up to 15 single slot modules  
7701FR 1RU Multiframe which holds up to 3 single or dual slot modules  
S7701FR Standalone enclosure