



7702BPX-LB, 7703BPX-LB

2x1 RF Protection Switch for L-Band Frequencies

The 7702BPX-LB and 7703BPX-LB 2x1 RF protection switches for L-Band frequencies provide automatic changeover functionality to protect against link failure for RF signals from 950MHz to 2250MHz.


The 7703BPX-LB has integrated VistaLINK® technology for remote control and monitoring capability via SNMP. This provides the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.

In the application of automatic changeover, the 7702BPX-LB and 7703BPX-LB can be configured to have a MAIN input and a STANDBY input. In this configuration, it will automatically switch to the Standby input when the Main input power is weak or lost. It can be also configured to have auto or manual switch back to the Main input when the signal is re-established.

The 7702BPX-LB and 7703BPX-LB occupy one card slot and can be housed in either a 1RU frame which holds up to 3 modules, a 3RU frame which holds up to 15 modules or a standalone enclosure which holds 1 module.

Features & Benefits

- Wide operating frequency range, 950MHz-2250MHz
- Intelligent auto switching with input power detection
- User-definable threshold levels on 7703BPX-LB version
- Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-LB
- Switch state indication via GPO
- Card edge LEDs indicate active input channels, output channel and power levels below threshold
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® on 7703 version
- VistaLINK® capability is available when 7703BPX-LB modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

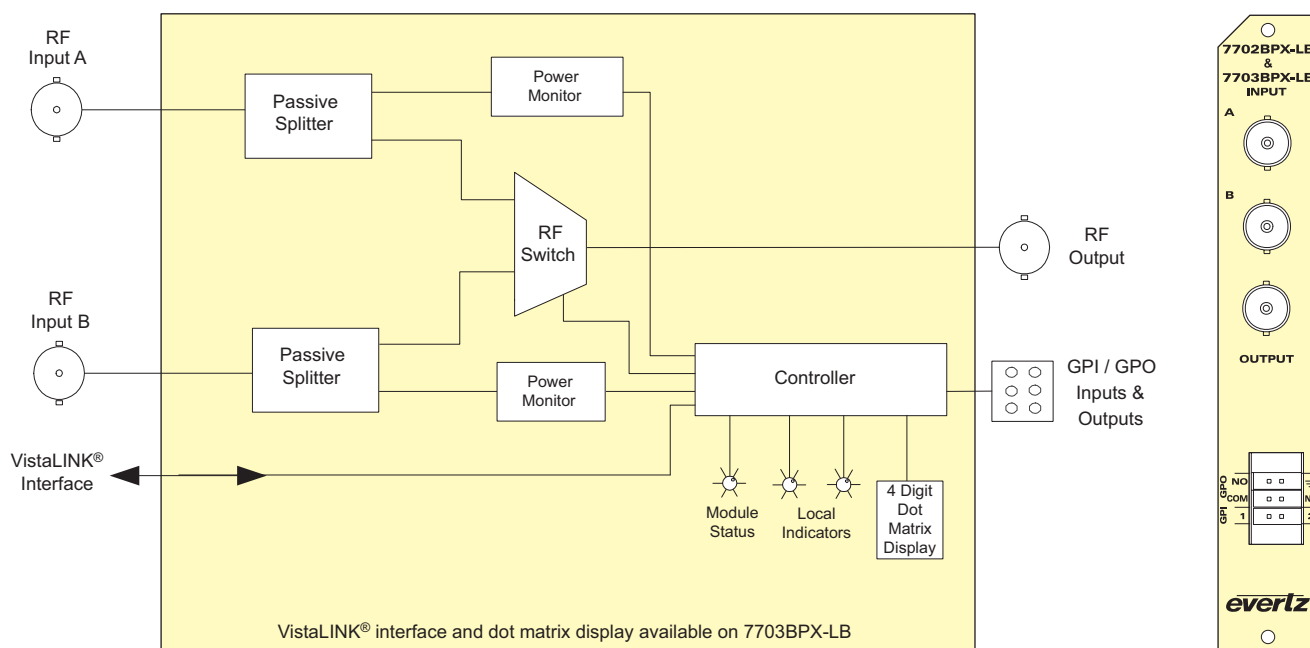

Specifications

RF Input/Output: Inputs: 2 Outputs: 1 Connector: BNC per IEC 60169-8 Amendment 2 (F-type optional) I/O Impedance: 75Ω Frequency Response: 950MHz to 2250MHz: < ±1.5dB Insertion Loss: < 4dB Return Loss: > 10dB Isolation: > 50dB Input Power Range: 0dBm to -50dBm	General Purpose Inputs: Number of Inputs: 2 Type: Opto-isolated, active low with internal pull-ups to +5V Connector: 2 pins plus ground on 6-pin terminal strip Signal Level: +5V Pullup: Low: -5 to +2.5V DC, High: 3.5 to 10V DC +12V Pullup: Low: -5 to +9.5V DC, High: 10.5 to 15V DC Max Sink Current: (input shorted to ground) 15mA Max Leakage Current for input High: 200μA	General Purpose Outputs: Number of Outputs: 1 Type: "Dry Contact" relay contacts - normally open & normally closed contact provided Connector: 3 pins on 6-pin terminal strip Electrical: Voltage: +12V DC Power: 4W Physical: Number of Slots: 1
--	---	--

Ordering Information

7702BPX-LB	2x1 RF Protection Switch for L-Band Frequencies
7703BPX-LB	2x1 RF Protection Switch for L-Band Frequencies, with VistaLINK® Monitoring

Ordering Options Rear Plate and optional connector type must be specified at time of order
Eg: Model +3RU (if 75Ω F-type connector required, order optional +F75)

Rear Plate Suffix
+3RU 3RU Rear Plate for use with 7700FR-C Multiframe
+1RU 1RU Rear Plate for use with 7701FR Multiframe
+SA Standalone Enclosure Rear Plate

Connector Suffix
+F75 75Ω, F-Type Rear Connector

Enclosures
7700FR-C 3RU Multiframe which holds up to 15 single slot modules
7701FR 1RU Multiframe which holds up to 3 single or dual slot modules
S7701FR Standalone enclosure