



BTR-24
Base Station



TR-24
Beltpack



Telex® RadioCom™ BTR-24 & TR-24 2.4 GHz Wireless Intercom

The Telex® BTR-24 and TR-24 series intercom is a full duplex (simultaneous talk and listen) wireless intercom system that offers a complete stand alone solution for 2 to 10 users utilizing the full duplex feature and an unlimited number of listen-only users. The BTR-24 system offers easy set-up, durable beltpacks, 64 bit audio encryption, easy system expansion and a 3 year warranty. The Telex® BTR-24 system operates utilizing the license free 2.4 GHz IEEE 802.11b "WiFi" standard.

The BTR-24 system incorporates the option of three audio channels that are selectable at each TR-24 beltpack. The TR-24 beltpacks also provide the user with adjustable volume control, headset microphone level and local side tone level. The TR-24 will operate with Dynamic or Electret headset microphones and has a built-in lithium ion battery pack that will provide up to 8 hours on uninterrupted operation.

Upon start-up the BTR-24 base station automatically scans and selects the best RF (radio frequency) channel for communication with a feature called ClearScan™. The BTR-24 also has a built-in lithium ion battery pack that will provide up to 10 hours of uninterrupted operation or can be operated with the included wall mount AC power supply. The BTR-24 also includes rack mount hardware.


Features

- License Free Operation
- 64 Bit Encrypted Audio
- Full Duplex Operation
- 3 Audio Channels
- Automatic RF Channel Selection via ClearScan™
- Independent Volume Control and Headset Mic Level Control
- System Supports Up To 7 Beltpacks (Full-Duplex)
- Easy Set-Up and Operation
- Operates on IEEE 802.11b "WiFi" Standard


- Operating Range Up To 800 ft, Line-of-Sight (Beltpack to Base Station)
- Low Battery Indicators on Beltpack and Base Station
- Battery Charge Indicators on Beltpack and Base Station
- Rack Mount for BTR-24 Included
- Independent Local Side Tone Level Control
- Programmable Beltpacks for Remote Group Operation
- Built In Lithium-Ion Battery Packs on BTR-24 and TR-24

Line Drawing

BTR-24

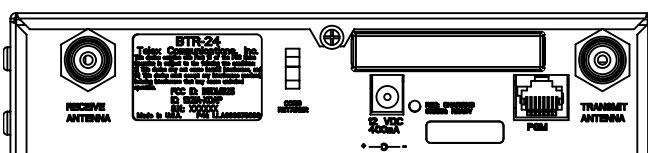

TR-24

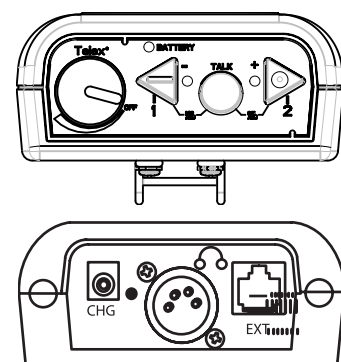

Telex® RadioCom™ BTR-24 & TR-24 Specifications

Technology

2.4 GHz, IEEE 802.11b Wireless LAN Standard (WiFi)

FCC License

None Required (License Free Use)

Number of Users

2 to 10 Users per BTR-24 Base Station (Full-Duplex)

Encryption

64 Bit (DES) Encryption Key

Battery Type

Lithium Ion Rechargeable (Base Station and Beltpack)

Battery Life – BTR-24

8-10 Hrs (Charge time 8 Hrs)

Battery Life – TR-24

6-8 Hrs (Charge time 6 Hrs)

Frequency Response

400 Hz to 5500 Hz

Dynamic Range

>75dB

Antenna

TR-24 Beltpack = Internal

BTR-24 Base Station = External TNC-RP

Headsets

Dynamic or Electret Microphone elements can be used with TR-24 Beltpack

Battery Status Indicators

Included on TR-24 and BTR-24

Charge Status Indicators

Included on TR-24 and BTR-24

Mic Level Adjustment

Programmable on TR-24, with Voice Prompts

Local Sidetone Adjustment

Programmable on TR-24, with Voice Prompts

Channel Indicators

TR-24 Beltpack – YES, Green LED

BTR-24 Base Station – YES, 7 Segment LED

Warranty

3 Year Warranty

BTR-24

Weight: 2lb 11oz

Dimensions: 6.00"L x 7.50"W x 1.72"H

BTR-24 (Packaged, Includes rack mounts, antennas and power supply)

Weight: 5lb 7oz

Dimensions: 18.20"L x 11.50"W x 3.90"H

TR-24

Weight: 12oz

Dimensions: 5.25"L x 3.75"W x 1.68"H

TR-24 (Packaged, Includes power supply)

Weight: 1lb 10oz

Dimensions: 13.25"L x 9.00"W x 3.60"H

SYS-243 (Packaged system, 3 TR-24's, 1 BTR-24, antennas, antennas and power supply)

Weight: 22lb 3oz

Dimensions: 25.30"L x 21.00"W x 9.30"H

Ordering Information

BTR-24 2.4 GHz multi-channel wireless base station access point

Catalog Number: PRD000066000

TR-24 2.4 GHz multi-channel wireless beltpack with A4M headset connector

Catalog Number: PRD000065000

SY3-243 2.4 GHz multi-channel wireless beltpack and base station system

Catalog Number: SYS000007000

PH-100 Single Sided Headset with A4F connector

Catalog Number: 301581007

PH-200 Dual Sided Headset with A4F connector

Catalog Number: 301581002

HR-1 Single Sided Headset with A4F connector

Catalog Number: 300534007

HR-2 Dual Sided Headset with A4F connector

Catalog Number: 300534000

PH-1 Single Sided Headset with A4F connector

Catalog Number: 64438100

PH-2 Dual Sided Headset with A4F connector

Catalog Number: 64437100

RA-3 Omni Antenna (3dB), with TNC reverse polarity connector

Catalog Number: 302054003

RA-7 Omni Antenna (7dB), with TNC reverse polarity connector

Catalog Number: 302054004

RA-5 Omni Antenna (5dB), with TNC reverse polarity connector

Catalog Number: 302054005

FP-11 Flat Panel Directional Antenna (11dB) with TNC reverse polarity connector

Catalog Number: 302054006

RPT-3 3FT Coax with TNC reverse polarity connector

Catalog Number: 302054007

RPT-10

10ft Coax with TNC reverse polarity connector

Catalog Number: 302054008

TNC-RP TNC reverse polarity coupler (jack-to-jack)

Catalog Number: 302054009

CC-24 Carry case for BTR-24 system

Catalog Number: 302054010

LG-Y Headset Y cable for Telex Legacy™

Catalog Number: 302054012

LG-PS US power supply for BTR-24 and TR-24

Catalog Number: 532091000

ANT-FP Dual Diversity, Flat Patch Antenna with Coax

Catalog Number: 302054001

ANT-FPM Tilt and Swivel Antenna Mount Bracket

Catalog Number: 302054000

XOB Adjustable Nylon Belt

Catalog Number: 302054002

Telex Legacy™ Systems do not include headsets. Headsets must be ordered separately. Only Telex® Headsets with dynamic microphones are compatible for use with Telex Legacy™ systems.

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.