

7700ADA-ETSI


High Amplitude Analog Distribution Amplifier (1x4)

The 7700ADA-ETSI High Amplitude Distribution Amplifier is a general purpose amplifier with an equalizing function for distributing a wide range of digital and analog signals. It has been designed to distribute pulses and signals up to $\pm 3.5V$ ITU-T G.703 E12 (Physical/electrical characteristics of hierarchical digital interface at 2048kb/s) signals. The 7700ADA-ETSI features one balanced equalized input with four outputs.

The 7700ADA-ETSI occupies one card slot and can be housed in a 1RU frame which will hold up to three modules, a 3RU frame which will hold up to 15 modules or a standalone enclosure.

Features & Benefits

- 75 Ω input impedance
- Distribute signals up to $\pm 3.5V$ to 30MHz
- High common mode range and common mode rejection ratio (CMRR)
- $\pm 5.5dB$ Gain control range
- Jumper selectable AC or DC coupling
- Cable equalizer adjustment range: 0 to 300m of Belden 8281 or 1694A
- Consistent input impedance if card power is lost

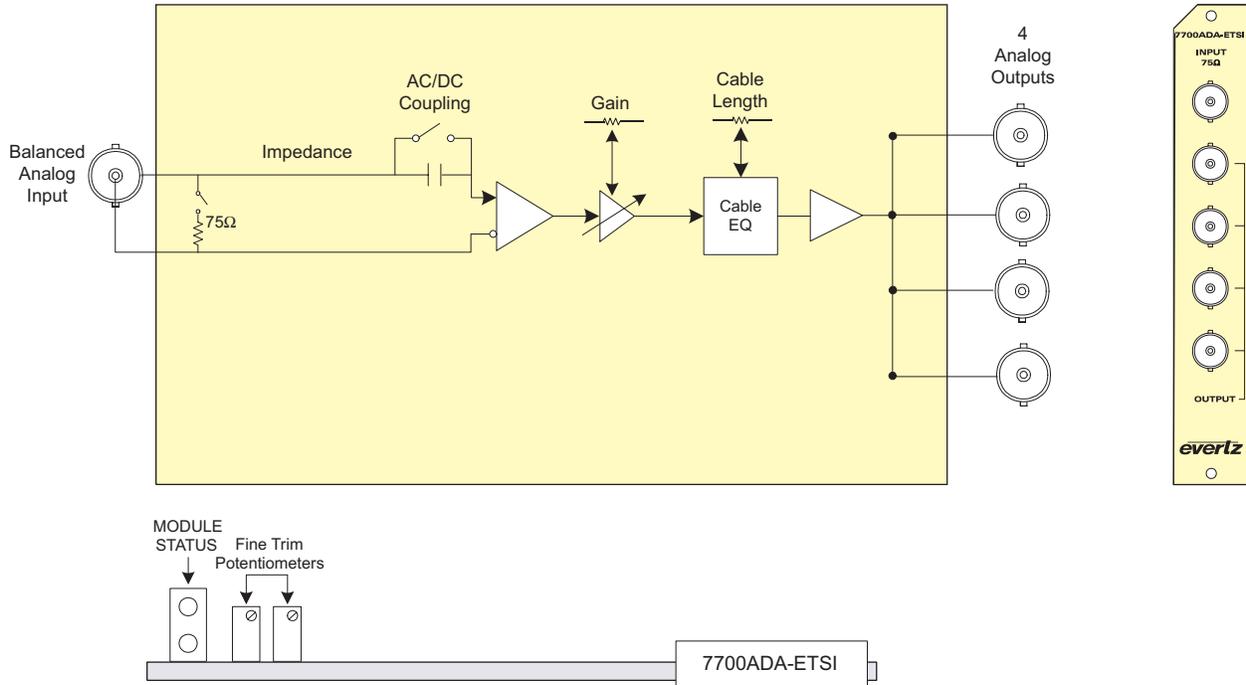

Specifications

<p>Inputs: Standards: Any analog waveform up to $\pm 3.5V$ and 30MHz bandwidth Connector: 1 BNC per IEC 60169-8 Amendment 2 Common mode range: > 6V p-p CMRR: > 60dB to 1kHz Signal amplitude: Up to $\pm 3.5V$ Cable equalizer: 0 to 300m of Belden 8281 or 1694 cable Impedance: 75Ω Coupling: AC or DC (jumper selectable) Return loss: > 40dB to 10MHz, > 25dB to 30MHz</p>	<p>Outputs: Number of Outputs: 4 Per Card Connector: BNC per IEC 60169-8 Amendment 2 Output impedance: 75Ω Gain control range: $\pm 6dB$ Freq. Response: < $\pm 0.05dB$ no equalization (to 5.5MHz) < $\pm 0.09dB$ for 5 to 100m Belden 8281 or 1694A (to 5.5MHz) < $\pm 0.15dB$ for 100 to 300m Belden 8281 or 1694A (to 5.5MHz) Differential Gain: < 0.25% 0 to 300m (for single load) Differential Phase: < 0.19$^\circ$ 0 to 300m C/L gain inequality: < $\pm 0.1\%$ for all cable lengths C/L Delay: < $\pm 2nsec$ Output isolation: > 42dB to 10MHz, > 32dB to 30MHz Output return loss: > 40dB to 30MHz Noise performance: < -68dB RMS NTC7 weighting, < -60dB RMS 15kHz to 5.5MHz</p>	<p>Electrical: Voltage: +12V DC Power: 2.5W</p>
--	---	--

Ordering Information

7700ADA-ETSI High Amplitude Analog Distribution Amplifier (1x4)

Ordering Options Rear Plate must be specified at time of order
Eg: Model +3RU

Rear Plate Suffix
+3RU 3RU Rear Plate for use with 7700FR-C Multiframe
+1RU 1RU Rear Plate for use with 7701FR Multiframe
+SA Standalone Enclosure Rear Plate

Enclosures
7700FR-C
7701FR
S7701FR

3RU Multiframe which holds up to 15 single slot modules
1RU Multiframe which holds up to 3 single or dual slot modules
Standalone Enclosure