

The 500ADA Analog Video Distribution Amplifier is a general purpose amplifier for distributing 75 Ω analog signals. The 500ADA features one balanced input with nine outputs. The 500ADA has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that do not exceed 2V p-p.


The 500ADA is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules.

Features & Benefits

- 75 Ω or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMRR)
- Gain control
- Jumper selectable AC or DC coupling
- Looping feature with external "T" connector
- Consistent input impedance if card power is lost
- VistaLINK[®] capable for remote monitoring via SNMP (using VistaLINK[®] PRO) when installed in 500FR frame with 500FC VistaLINK[®] Frame Controller

Card Edge LEDs

- Module status/Local Fault
- Power supply status

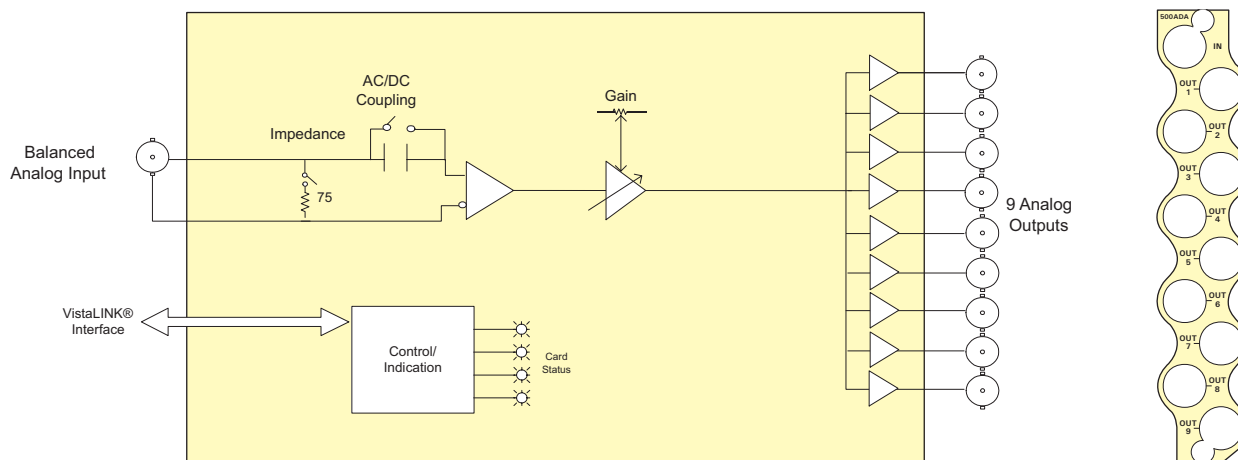

Specifications

Analog Video Input:

Standards: Any analog video format, up to 2V p-p and 30MHz bandwidth
 Connector: 1 BNC per IEC 60169-8 Amendment 2
 Common mode range: > 6V p-p
 CMRR: > 70dB to 1kHz
 Signal amplitude: 2.5V p-p max
 Impedance: 75 Ω terminated, 35k Ω Hi-Z (jumper selectable)
 Coupling: AC or DC (jumper selectable)
 Return loss: > 40dB to 10MHz, > 30dB to 30MHz

Analog Video Outputs:

Number of Outputs: 9 Per Card
 Connector: BNC per IEC 60169-8 Amendment 2
 Output impedance: 75 Ω
 Gain control range: ± 5 dB
 Freq. Response: < ± 0.05 dB (to 5.5MHz)
 Differential Gain: < 0.17%
 Differential Phase: < 0.19°
 C/L gain inequality: < $\pm 0.1\%$
 C/L Delay: < ± 2 ns
 Output isolation: 42dB to 10MHz, 32dB to 30MHz
 Output return loss: > 40dB to 30MHz
 Noise performance: < -78dB RMS NTC7 weighting
 < -70dB RMS 15kHz to 5.5MHz

Electrical:

Voltage: +12V DC
 Power: 1.2W
 EMI/RFI: Complies with FCC Part 15 Class A, EU EMC Directive

Physical:

Number of Slots: 1

Ordering Information

500ADA Analog Video Distribution Amplifier (1x9)

Enclosures
500FR
S501FR

exponent
 Compact High Density Distribution Frame
 Standalone enclosure