

THE COMPLETE SOLUTION PROVIDER



- Monitoring & Control
- Compressed DTV Products
- Closed Captioning / AES
- Master Control & Branding
- Management Software
- Distribution & Conversion
- Production / Post-Production

- L-Band & RF Products
- Routing Systems
- Fiber Optics
- Digital Signage
- Multiviewers
- Time Code
- Processors

2008/2009 Broadcast Pages

EQX & Xenon Routing Systems

# Control room design just got easier!

Up to 72 displays...from one chassis, with up to 576 inputs



vertz VIP-X Series Routers & Maestro Control Software

## **Control Room Design Checklist:**

- ▼ The industry's largest range of routers
  - from 32x32 up to 576x576
  - mission critical, high availability
  - true 3Gb/s routing components
- The industry's largest multi-image display system
  - up to 72 displays
  - unmatched image quality
  - · industry standard control system
  - used by 1000's of broadcasters worldwide
- Any input on any display at any time
  - · no limit to expansion, no blocking

# **The Complete Control Room Solution**



VIP-X offers the most flexible solution in the industry, combining both video routing and multi-image display.

...WITHOUT COMPROMISE

NAB2008 - BOOTH #N1713

Satellite Feed

1-877-995-3700 • www.evertz.com

evertz.



#### www.evertz.com

## PROVIDES SALES & SERVICE COVERAGE WORLDWIDE

### **CORPORATE HEAD OFFICE**

5288 John Lucas Drive Burlington, Ontario Canada, L7L 5Z9 1-905-335-3700 1-877-995-3700 sales@evertz.com

#### SALES OFFICES

- West Coast Sales
  212 N. Evergreen St
  Burbank, CA 91505 USA
  818.558.3910
  uswestsales@evertz.com
  LAsales@evertz.com
- UK Sales / Quartz
   59 Suttons Business Park
   Reading RG6 1AZ UK
   +44 118 935 0200
   uksales@evertz.com
- Washington DC & Gov't Sales 10621 Gateway Blvd. Suite 206 Manassas, VA 20110 USA 703.330.8600 dcsales@evertz.com

- Asia Pacific Sales
   Room 601, 6/F, Nan Fung Tower
   173 Des Voeux RD Central
   Hong Kong
   +852 2159 9653
   asiapacificsales@evertz.com
- South-East Europe Sales+385 1 2059 325darko@evertz.com
- New York Sales newyorksales@evertz.com

## **Table of Contents**

| Master Control Switching & Channel Branding  QMC-MCS & QMC-2  QMG  QMC-DCP  | 1  |
|---|----|
| Mini Master Control & Branding Keyers, Logo Inserters, Media Inserters Media & Logo Insertion  overture™ Branding Software  |    |
| SNMP Monitoring & Control  VistaLINK® & VistaLINK® PRO PLUS   | 2  |
| Monitoring & Multi-Viewers  MVP™ Multi-Image Display & Monitoring System  VIP-X Control Room Routing Platform & Modular Multi-Image Display System  7767 VIP™ Compact Video & Graphic Display Solution  7767 VIPA Advanced "DUO" Output Compact Multi-image Display Processor (8&16)  7767 VIPA Advanced 12 Input Compact Multi-image Display Processor   | 3  |
| Routers  High Density Core Routers  Xenon Multi-Format Routers  Q-Series Routers - Large, Small and Data  Topaz Series Routers  X-Series Bypass Routers  X-Series Bypass Routers (4x1 to 12x1)  RF Routers  Quartz Routers  | 4  |
| Single & Multi-Channel Monitoring Systems-Video, Audio & Data  Discreet Channel Monitoring  | 5  |
| 7700 Series Modular • Terminal Equipment, Signal Processing & Distribution  Frames  VistaLINK® Monitoring & Control  HD/SD Bypass Protection Routers with Downconverters  HD Downconverters & Upconverters  Audio Conversion  Embedders & De-Embedders (Audio/Data/GPI)  Digital to Component Analog Converters  Video D to A (Composite Encoders) & Audio Digital to Analog Conversion  Video A to D (Composite Decoders) & Audio Analog to Digital Conversion  Synchronizing, Delay & Keyer Products                    | €  |
| 7700 Series Modular • Fiber/RF Satellite/RF Distribution Products Analog Video/Audio Fiber Transport SDI Fiber Transport SDI/Audio Fiber Transport SDI/Audio/Data Fiber Transport HD-SDI Fiber Transport HD-SDI Fiber Transport HD-SDI Audio/Data Fiber Transport HD-SDI Audio/Data Fiber Transport Intercom Fiber Transport Datacom/Telecom Fiber Transport Ethernet SONET/SDH Fiber Transport L-Band & 70/140MHz IF Fiber Transport Wavelength Regenerators Optical Combiners/Splitters/Multiplexors & Bypass Switchers | 7  |
| Compressed DTV Products, CODECS & Test Sets  Transport Stream Monitor  HD Translators/CODECS  Reference & Test Generators   | 3  |
| Compact Modular • 500 exponent & 400 Series  Frames & Control  500 Series with Looping  Analog Video  AES & Analog Audio  | 9  |
| Closed Captioning, XDS & 1RU Monitoring   | 10 |
| SPGs, Time Code, Clock Displays Slave Clocks Analog Time Code Master SPG, Master Clock & Test Set/ACO System Digital Time Code  | 11 |
| Miniature Series & Mobile   | 12 |
| Post-Production Accessories & Telecine Tools Production Tools Post-Production Accessories & Telecine Suite Tools  | 13 |

|  | CONTROL SWITCHING & CHANNEL BRANDING   |                |
|--|--|----------------|
| QMC-MCS & QMC-2  | Master Control Switchers   |                |
| QMG<br>QMC-DCP   | Quartz Media Graphics  QMC Desk Control Panel  |                |
|  | QWIC DESK CONTROL Pariet   |                |
| HD9626DSK  | HD Downstream Keyer  |                |
| HD9725LG   | HD/SD Logo Inserter with Front Panel Control/Slate Generator   |                |
| HD9725LGA  | HD/SD Media Keyer with Front Panel Control/Slate Generator   | 12-13          |
| 9725LG   | SDI Logo Inserter System   |                |
| 9725LGA  | SDI Media Inserter System with audio support   |                |
| 7725DSK-LG<br>7725DSK-LG-HD  | SD Downstream Keyer with Internal Logo with VistaLINK® support  HD Downstream Keyer with Internal Logo with VistaLINK® support |                |
| AN9725LG   | Analog Logo Inserter System  |                |
| overture™  | Branding Software  |                |
|  | NITORING & CONTROL PRO PLUS  | 21.26          |
|  |  | 21-20          |
|  | ING & MULTI-VIEWERS  |                |
| MVP™   | Large Scale Multi-viewers Image Display & Monitoring Systems   |                |
| VIPX   | Control Room Routing Platform and Modular Multi-Image Display System   |                |
| 7767 VIP™<br>7767VIP4-HSN  | Small to Mid-scale Multi-Image Display & Monitoring System   |                |
| 7767VIP4-HSN-G   | 4 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output                  |                |
| 7767VIP4-SN  | 4 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHV)                                   |                |
| 7767VIP8-HSN   | 8 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I   |                |
| 7767VIP8-HSN-G   | 8 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output                  |                |
| 7767VIP8-SN  | 8 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHV)                                   |                |
| 7767VIP12-HSN  | 12 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I  |                |
| 7767VIP12-HSN-G  | 12 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output                 |                |
| 7767VIP12-SN<br>7767VIPA8-DUO-3HS                                  | 12 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I   |                |
| 7767VIPA8-DUO-3HS  | 8 Inputs auto-sensing HD, SD, SGD/s, dual display output   |                |
| 7767VIPA16-DUO-3HS   | 16 Inputs auto-sensing HD, SD, 3Gb/s; dual display output  |                |
| 7767VIPA16-DUO-HS  | 16 Inputs auto-sensing HD, SD, dual display output   |                |
| 7767VIPA12-HSN   | 12 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one DVI-I (DVI-D or RGBHV with adapter)                             | 50-51          |
| SECTION 4: ROUTERS<br>High Density Core Routers:<br>EQX26<br>EQX16 | SD/HD/3Gbps Video Router scaleable up to 576x576 & 1152x1152   | 54-55<br>54-55 |
| Xenon 3Gb/s, HD, SD & Audi   |  |                |
| XE4-3232S  | Xenon 4RU 32x32 to 64x64 Standard Definition Router  |                |
| XE4-3232H  | Xenon 4RU 32x32 to 64x64 HD Router   |                |
| XE8-3232S<br>XE8-3232H   | Xenon 8RU 32x32 to 128x128 Serial Video Router Xenon 8RU 32x32 to 128 x 128 Hi-Def Video Router                                |                |
| O Series Bertern   |  |                |
| Q-Series Routers:<br>Large Routers                                 |  |                |
| Q6400-N  | Analog Video Router  | 58-59          |
| Q6400-AA   | Analog Audio Router  |                |
| Q256-AA/-AES-AA  | Digital & Analog Audio Routers (32x32 to 256x256)  |                |
| Analog & Audio Routers:  |  |                |
| Topaz Series Routers   | 40.40.0.00000110100  | 04.6-          |
| QT-1616 & 3232H  | 16x16 & 32X32 HD/SD router   |                |
| QT-1616 & 3232S<br>QT-1616N  | 16x16 & 32x32 SD router  16x16 Analog Video router   |                |
| QT-3232N   | 32x32 Analog Video router  |                |
| QT-1616-AA   | 16x16 Analog Audio router  |                |
| QT-3232-AA   | 32x32 Analog Audio router  | 68-69          |
| EQT-3232   | 32x32 SD/HD router   | 70-71          |
|  |  |                |
| X-series Bypass Routers  |  | 70.70          |
|  | S)4x1 HDTV Router with Quad 4x1 AES Audio)   |                |
| X-0601H-444<br>X-1201H(-AES, -AES4)                                | 6x1 HDTV Dual Link Router with Quad 6x1 AES Audio  |                |
| X-1201H(-AES, -AES4)<br>X-1202H(-AES, -AES4)                       | 12X1 HDTV Router with Dual of Quad 12x1 AES Audio  |                |
| X-0401S  | 4x1 SDI Video Routerwith Quad ASESAudio  |                |
| X-1201S(-AES, -AES4)   | 12X1 SDI Router with Dual or Quad 12x1 AES Audio   |                |
| X-1202S(-AES, -AES4)   | 12x2 SDI Router with Dual or Quad 12x2 AES Audio   | 84-85          |
| Small Routers  |  |                |
| Q1601, 1602, 0802  | HD/SD Analog Video & Audio Routers, 16x1 to 16x2 & 8x2   |                |
| Q16-S & Q32-S  | SD Video & Embedded Audio Routers 16x16 to 32x32   |                |
| Q16-N & Q32-N  | Analog Video Routers 16x16 to 32x32  |                |
| Q16-AES & Q32-AES  | Digital Audio Routers 16x16 to 32x32  Mono & Stereo Analog Audio Routers 16x40 to 32x32  | 94-95          |

| Data Routers   |  |
|--|--|
| Q32-PR & Q64-PR  | Port-to-Port Data Routers  |
| Q16-RR & Q32-RR<br>TR-3200A  | Relay Data Routers         .97           Tally Data Router         .98   |
| TR-3200A   | Tally Data Notice  |
| Control Panels for Quartz Se   | eries Routers:   |
| CP-1000E   | Intelligent Remote Panel, 1RU 16 buttons   |
| CP-1600A & 1601A   | Remote mini XY panel, BPS  |
| CP-1604  | Remote multi-mode panel, 20 button per source  |
| CP-2024E   | Intelligent Remote Panel, 2RU 24 buttons   |
| CP-2032E   | Intelligent Remote Panel, 2RU 32 buttons   |
| CP-2048E   | Intelligent Remote Panel, 2RU 48 buttons   |
| CP-2200E   | Advanced System Control Panel, 2RU   |
| CP-2402<br>CP-2402-LP  | Remote Control Panel   |
| CP-3216PR  | Programmable Audio/Video Proc Control Panel, 2RU   |
| CP-3200E   | Remote Panel with Keypad and Display   |
| CP-3201  | Remote Control Panel, multi-mode, 40 button per source   |
| CP-3208E   | Remote Control Panel, eight destination, 32 button per source  |
| CP-6400E   | Remote Display Panel, XY keypad  |
| CP-6401E   | Remote Display Panel, Multi-mode, 80 button-per-source   |
| CP-6402E,6404E   | Remote Control Panels, 2, 4, 6, 8 destinations   |
| 6406E,6408E  |  |
| 050510114 01/05514   | CONTROLLED FOR DOLLTEDS  |
|  | CONTROLLER FOR ROUTERS   |
| PI-1604A   | System Controller with four ports supporting 64 buttons/lamps  |
| PI-1608A   | System Controller with eight ports supporting 128 buttons/lamps  |
| Quartz Serial Interfaces:  |  |
| CI-0001  | RS-232/422 Serial Interface Card   |
| CI-0004  | Multi Q-Link Card  |
| SI-0001  | Serial Interface Adapter   |
| SI-0004  | Q-Link Isolator/Repeater   |
|  |  |
| System Controller for Quartz   |  |
| EQX Server   | Large Scale Facility Wide Router Control   |
| PTX-2000   | 2RU Qlink Serial Ethernet Protocol Translation & 3rd Party Controller  |
| DE D   |  |
| RF Routers:  | 4DU 0:0 DE Davier  |
| XRF1A-8x8<br>XRF1A-8x8-LNB   | 1RU 8x8 RF Router       .118         1RU 8x8 RF Router with LNB power supply       .118  |
| XRF1A-16x16  | 18U 16x16 RF Router  |
| XRF1A-16x16-LNB  | TRU 16x16 RF Router with LNB power supply  |
| XRF6-32x64   | 32x64 RF Routing System 119-120  |
|  | 64x64 RF Routing System 119-120  |
| XRF6-64x64   |  |
| XKF0-04X04   | Vivorial rodaing operation and the second of |
| Optical/Wideband Routers:  |  |
| Optical/Wideband Routers:<br>X-3232-EO   | Electrical to Optical Router   |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G  | Electrical to Optical Router       .121         16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs       .122  |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G<br>X-1616G-F   | Electrical to Optical Router   |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G<br>X-1616G-F<br>X-3232G  | Electrical to Optical Router       .121         16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs       .122         16x16 GLink™ Router, 16 Electrical inputs, 16 Fiber outputs       .122         32x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs       .122   |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G<br>X-1616G-F<br>X-3232G<br>X-3216G-F   | Electrical to Optical Router       121         16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs       122         16x16 GLink™ Router, 16 Electrical inputs, 16 Fiber outputs       122         32x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs       122         32x16 GLink™ Router, 32 Electrical inputs, 16 Fiber outputs       122   |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G<br>X-1616G-F<br>X-3232G<br>X-3216G-F<br>X-0808-OO  | Electrical to Optical Router       .121         16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs       .122         16x16 GLink™ Router, 16 Electrical inputs, 16 Fiber outputs       .122         32x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs       .122         32x16 GLink™ Router, 32 Electrical inputs, 16 Fiber outputs       .122         8x8 Optical Router with 8 1310nm optical outputs       .123  |
| Optical/Wideband Routers:<br>X-3232-EO<br>X-1616G<br>X-1616G-F<br>X-3232G<br>X-3216G-F   | Electrical to Optical Router       121         16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs       122         16x16 GLink™ Router, 16 Electrical inputs, 16 Fiber outputs       122         32x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs       122         32x16 GLink™ Router, 32 Electrical inputs, 16 Fiber outputs       122   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE   | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE ODISCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM-LITE A & B   | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE OBSCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM2-HD     7760AVM2-HD     7761AVM2-DC   | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE     DISCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM2-HD     7761AVM2-DC     7761AVM2-SDC     7761AVM2-SDC-S   | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE DISCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM-ITE A & B     7760VMS-HD     7761AVM2-SDC     7761AVM2-SDC     7761AVM2-SDC-S  Audio/Video Monitoring                         | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE DISCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM-ITE A & B     7760VMS-HD     7761AVM2-SDC     7761AVM2-SDC     7761AVM2-SDC-S  Audio/Video Monitoring                         | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:     X-3232-EO     X-1616G     X-1616G-F     X-3232G     X-3216G-F     X-0808-OO     X-1616-OO  SECTION 5: SINGLE     DISCREET CHANI     7760AVM2 (A-B)     7760AVM2-HD     7760AVM2-HD     7761AVM2-DC     7761AVM2-DC     7761AVM2-SDC-     7761AVM2-SDC-S  Audio/Video Monitoring     7767BHP     776x-BHP | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router   |
| Optical/Wideband Routers:  | Electrical to Optical Router  121 16x16 GLink™ Router, 16 Electrical inputs, 16 Electrical outputs  122 16x16 GLink™ Router, 16 Electrical inputs, 16 Fiber outputs  123 2x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs  122 32x32 GLink™ Router, 32 Electrical inputs, 32 Electrical outputs  122 32x16 GLink™ Router, 32 Electrical inputs, 16 Fiber outputs  123 3x8 Optical Router with 8 1310nm optical outputs  124 3x8 Optical Router with 8 1310nm optical outputs  125 3x8 Optical Router with 16 1310nm optical outputs  126 XB Optical Router with 16 1310nm optical outputs  127 3x8 MULTI-CHANNEL MONITORING SYSTEMS-VIDEO, AUDIO & DATA:  NEL MONITORING  SDI Video and Audio Monitoring/Conversion with On-screen Display (Single Slot) with Teletext Subtitle Decoder  124-125 FID Video & Audio Monitoring (Conversion (without On-screen Display)  126 HD Monitoring Splitter  127 Dual Channel Video & Analog Audio Monitoring  128-129  Dual S-Video & Analog Audio Monitoring  128-129  Dual S-Video & Analog Audio Monitoring with Dual S-Video Outputs  128-129  Bulkhead Breakout Panels (BHP)  VIP™ Bulkhead Breakout Panels (BHP)  VIP™ Bulkhead Breakout Panels  130-131  AVM Bulkhead Breakout Panels (Single slot modules with 48V DC power supply  38U Multiframe which holds up to 15 single slot modules with 48V DC power supply  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multiframe which holds up to 3 single or dual slot modules  38U Multi  |
| Optical/Wideband Routers:  | Electrical to Optical Router   |

## **Table of Contents**

| 9000NCP                               | VistaLINK® Network Control Panel (1RU)  |
|---------------------------------------|---|
| 9000NCP2                              | VistaLINK® Network Control Panel (2RU)  |
| CP-2200E                              | Advanced System Control Panel, 2RU  |
| CP-3216-PR                            | Programmable Video/Audio Proc Control Panel14   |
|                                       |   |
|                                       | tters with Downconverters and Changeovers:  |
| 7700R2x2-HD                           | 2x2 HD/SD Bypass Protection Router  |
| 7700RD2x2-HD                          | 2x2 HD/SD Bypass Protection Router with Dual HD Downconverter   |
| 7700R2x2-HES                          | 2x2 HD/SD Bypass Protection Router with SoftSwitch™   |
| 7700R4x1-HD                           | 4x1 HD/SD-SDI Modular Router  |
| 7700ACO2                              | Dual SD-SDI Smart Automatic Changeover  |
| 7700ACO-HD                            | HD/SD SDI 8 Channel AES & RS-232/RS422 Auto Changeover  |
| 7700ACO2-HD                           | Dual HD/SD-SDI Smart Automatic Changeover   |
|                                       |   |
| HD DAs                                |   |
| 7700DA6-HD-L                          | HD/SD-SDI Reclocking Distribution Amplifier with Loop Thru  |
| 7700DA7-HD                            | HD SDI Reclocking Distribution Amplifier, (1x7)   |
| 7700DA-HD                             | HD SDI Reclocking Distribution Amplifier, (1x4)   |
| 7700DA8-HD                            | HD SDI Reclocking Distribution Amplifier, (1x8)   |
| 7700DA7-3G                            | 3G/HD/SD-SDI Reclocking Distribution Amplifier  |
|                                       |   |
| SDI & AES DAs                         |   |
| 7700VMDA                              | SD-SDI Monitoring Reclocking Distribution Amplifier   |
| 7700VMDA-2Q                           | SD-SDI Monitoring Reclocking Distribution Amplifier, 2 channels, 3 outputs                                  |
| 7700VMDA-2Q<br>7700DA-DS3             | DS3 Distribution Amplifier  |
| 7700DA-D33<br>7700DA-E3               |   |
|                                       | E3 Distribution Amplifier   |
| 7700DA6-L                             |   |
| 7700DA7                               | 143-540 Mb/s, DVB-ASI, SMPTE 310M, Reclocking Distribution Amplifier (1x7)                                  |
| 7700DA-AESU                           | Auto Equalizing Unbalanced AES/EBU Distribution Amplifier   |
| 7700DA-AESB                           | Auto Equalizing Balanced AES/EBU Distribution Amplifier   |
| 7700DA-AES-RJ                         | Auto Equalizing Balanced AES/EBU Distribution Amplifier over CAT 5 Cable                                    |
|                                       |   |
| Analog DAs                            |   |
| 7700ADA6-EQ-L                         | Equalizing Analog Video Distribution Amplifier with Loop Thru   |
| 7700ADA6-L                            | Analog Video Distribution Amplifier with Loop Thru  |
| 7700ADA7                              | Analog Video Distribution Amplifier with Loop Thru(1X7)   |
| 7700ADA7-EQ                           | Analog Video Equalizing Distribution Amplifier (1X7)  |
| 7700ADA-AUD                           | Dual Analog Audio Distribution Amplifier (1x8 or 2-1X4)   |
| 7000ADA-AUD-MM                        | Dual Analog Audio Distribution Amplifier with Mono Mix  |
| 7700ADA-ETSI                          | High Amplitude Analog Distribution Amplifier (1x4)  |
|                                       | 5 P   |
| <b>HD Down Converters &amp; Upcor</b> | verters & ARCs:   |
| 7710ARC                               | SD Aspect Ratio Converter   |
| 7710ARC-F                             | SD Aspect Ratio Converter with Fill Input and Keying  |
| 7710DCDA-HD                           | HD Down Converter & Distribution Amplifier  |
| 7710UC-KF                             | HD Keyfill Upconverter 177  |
| 77100C-KI<br>7710NR-HD                | HD Noise Reducer with Image Enhancement   |
| 7710XC-HD                             | HD Cross Converter with VANC and Embedded Audio support   |
|                                       | HD Cross Converter with VANC, Embedded Audio and discrete AES support                                       |
| 7710XC-AES4-HD                        | HD Format Up/Cross Converter  |
| 7710XUC-HD                            |   |
| 7710XUC-AES4-HD                       | HD Format Up/Down/Cross Converter with external AES   |
| 7710XUDC-AES4-HD                      | HD Format Up/Down/Cross Converter with external AES   |
| 7711UC-HD                             | HD Upconverter (with Noise Reduction and Image Enhancement)   |
| 7711UC-AES4-HD                        | HD Upconverter (with Noise Reduction and Image Enhancement) and external AES                                |
| 7713HDC                               | Downconverter & Distribution Amplifier  |
| 7714HDC                               | High Quality Downconverter  |
|                                       |   |
| Audio Conversion:                     |   |
| 7720ADC-A4                            | Quad Analog Audio to Dual AES Converter   |
| 7720ADC-A4-B                          | Quad Analog Audio to Dual Balanced AES Converter  |
| 7720DAC-A4                            | Dual AES to Quad Analog audio converter with unbalanced AES inputs  |
| 7720DAC-A4-B                          | Dual AES to Quad Analog audio converter with balanced AES inputs  |
| 7720AM-AES4                           | Quad AES Audio Mixer, Delay, Audio Swapper  |
| 7720AM-AES4-B                         | Quad Balanced AES Audio Mixer, Delay, Audio Swapper   |
| AESIMP-12, -12F                       | AES XLR BNC Bulk Impedance converters   |
|                                       | ·   |
| Embedders & De-embedders              | (Audio/Data/GPI):   |
| 7720AD-A4.AD4.AD4-B)                  | SD-SDI AES Audio De-embedder with 4 unbalanced AES Outputs (2 audio groups)                                 |
| 7720AD-B-A4-LTC                       | SD-SDI AES Audio De-embedder with 2 balanced AES outputs, 4 analog audio outputs and VITC to LTC Translator |
| 7721AD(-A4, 4, -B)-HD                 | HD SDI AES Audio De-embedder  |
| 7721AD8-HD                            | HD/SD 8 AES (16 Channel) Audio De-embedder 19   |
| 7721AD8-HD                            | HD/SD-SDI 8 Balanced AES (16 channel) Audio De-embedder 19  |
| 7721AD8-3G                            | 33/HD/SD 8 AES (16 Channel) Audio De-embedder 19  |
| 7721AD6-3G<br>7720AE4                 | SD-SDI 4 AES (ut offinite) and be-embedder 193  SD-SDI 4 AES Audio Embedder 193                             |
| 7721AE4-HD                            | HD-SDI 4 AES Audio Embedder   |
| 7721AE4-HD<br>7721AE4-B-HD            | HD-SDI 4 AES Audio Embedder 194 HD-SDI 4 Balanced AES Audio Embedder 194                                    |
| 7721AE4-B-HD<br>7721AE8-HD            | HD/SD-SDI 8 AES (16 Channel) Audio Embedder   |
|                                       |   |
| 7721AE8-B-HD                          | HD/SD-SDI 8 Balanced AES (16 Channel) Audio Embedder  |
| 7721AE-A4-HD                          | HD/SD Analog Audio Embedder   |
| 7721AE-A4                             | SD-SDI Analog Audio Embedder  |
| 7721AE8-3G                            | 3G/HD/SD-SDI 8 AES (16 Channel) Audio Embedder  |
| 7720AD8-DD-HD                         | HD/SD-SDI Audio De-embedder & Dolby-E/AC-3™ Decoder & Re-embedder   |
| 7721AE8-AC3E-HD                       | HD/SD-SDI 8 AES Audio Embedder with Dolby Digital (AC-3) Encoder  |
| 7721AE8-DEE-HD                        | HD/SD-SDI Audio Embedder & Dolby-E™ Encoder   |
| 7721DE4-HD                            | HD/SD Quad Data Embedder  |

| 7721DD4-HD                                     | HD/SD Quad Data De-embedder  |         |
|--|--|---------|
| Digital to Component Analog                    | a Converters:  |         |
| 7730DAC  | SDI D to A Component Analog Video Converter  | 208-200 |
| 7730DAC-A4                                     | SDI D to A Component Analog Video Converter with a four-channel Analog Audio converter/embedder  |         |
|  |  |         |
| 7730ADC  | Component Analog Video to SDI Converter  |         |
| 7730ADC-A4                                     | Component Analog Video to SDI Converter with four channel Analog Audio Converter/Embedder  | 210-211 |
| 7730ADC-HD                                     | HD Component Analog Video to HD SDI Converter  |         |
| 7730ADC-A4-HD                                  | HD Component Analog Video to HD SDI Converter with a four channel Analog Audio Converter/Embedder  |         |
| 7731DAC-HD                                     | HD SDI to HD Component Analog or (optional VGA) Converter  | 214     |
| Video D to A (Composite En<br>7736CE2,-A4, -A8 | coders) & Audio Digital to Analog Conversion:  Dual Composite Encoder (-A4 with 4 analog outputs and -A8 with 8 analog outputs)  | 215-217 |
|  | coders) & Audio Analog to Digital Conversion:  |         |
| 7736CD2, -A4, -A8                              | Dual Composite Decoder (-A4 with 4 analog inputs and -A8 with 8 analog inputs)   | 218-219 |
| Synchronizing, Delay & Key<br>7746FSE          | er Products:  SD-SDI Frame Synchronizer  | 220 221 |
| 7746FS-EAES4                                   |  |         |
|  | SD-SDI Frame Synchronizer with 4 AES audio processing support  |         |
| 7746FSE-GPI                                    | SD-SDI and Frame Synchronizer with GPI   |         |
| 7746FSE-GPI-HD                                 | HDISD-SDI and Frame Synchronizer with GPI  |         |
| 7746FSE-HD                                     | HD/SDI Frame Synchronizer  |         |
| 7746FS-EAES4-HD                                | HD/SDI Frame Synchronizer with 4 AES audio pairs, embedded audio processing and AES support  |         |
| 7746FS-EAES8-3G                                | 3G/HD/SD-SDI Frame Synchronizer with Embedded Audio Processing & 8 AES Support   |         |
| 7746FS-EAES8-HD                                | HD/SD-SDI Frame Synchronizer with Embedded Audio Processing & 8 AES Support  |         |
| 7746FS-EAES8-DD-HD                             |  | 232-233 |
| 7746FS-EAES8-DD-AC                             | GE-HD  HD/SD-SDI 8 AES Frame Synchronizer with Dolby Decoder and Dolby Digital (AC-3) Encoder  | 234-235 |
| 7743DLY-HD                                     | HD/SD-SDI Video Delay  |         |
| HDSD9545DLY-PRO                                | HD/SDI Video and Audio Delay/ Profanity Protection System  |         |
| 7725VBI-K-HD                                   | HD/SD VBI Sidechain Bridge   |         |
| SECTION 7: 7700 MOI                            | DULAR - FIBER/RE   |         |
| Satellite/RF Distribution Prod                 |  |         |
| 7702&7703DA4-RF                                | 10MHz-3GHz RF 1x4 Active Splitter  | 242     |
| 7702&7703DA8-RF                                | 10MHz-3GHz RF 1x8 Active Splitter  |         |
| 7702&7703BPX-IF                                | 2x1 RF Protection Switch for IF Frequencies  |         |
| 7702&7703BPX-LB                                | 2x1 RF Protection Switch for L-Band Frequencies  |         |
| 7702LPS-2                                      | Dual Port LNB Power Inserter   |         |
| 7703LPS-2                                      | Dual Port LNB Power Inserter with NMP/VistaLINK® support   |         |
| 7703R8x1-RF                                    | 8x1 Switch, DC 3GHz, VistaLINK®  |         |
| 7703R0X1-RF<br>7703R16x1-RF                    | 16x1 Switch, DC 3GHz, VistaLiNK®   |         |
|  |  |         |
| Analog Video/Audio Fiber Ti                    |  | 040.040 |
| 7707ADVT                                       | Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Transmitter   |         |
| 7707ADVR                                       | Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Receiver  |         |
| 7707CATVTA                                     | CATV Fiber Transmitter   |         |
| 7707CATVRA                                     | CATV Fiber Receiver  |         |
| 7707CVDTA-A4                                   | Analog Video, 4 channel audio and Bi-di RS-232/422 Fiber Transmitter   | 254-255 |
| 7707CVDRA-A4                                   | Analog Video, 4 channel audio and Bi-di RS-232/422 Fiber Receiver  | 256-257 |
| 7707CVTA                                       | Analog Video with 4 channel Analog Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®   |         |
| 7707CVTA-2                                     | Dual Analog Video with 4 channel Analog Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®  |         |
| 7707CVT-4                                      | Quad Analog Video Fiber Transmitter  |         |
| 7707CVT-4-A16                                  | Quad Analog Video, 16 channel Analog Audio Fiber Transmitter   |         |
| 7707CVT-4-AT0<br>7707CVTA-TRI                  | Tri-Level Sync with 4 channel Analog Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®   |         |
| 7707CVTA-TRI                                   | Dual Tri-Level Sync with 4 channel Analog Audio Fiber Transmitter, 1310nm FP Laser, VistaLINK®   |         |
|  | Eight Analog Video Fiber Transmitter   |         |
| 7707CVT-8                                      | Eight Analog Video Fiber Transmitter   |         |
| 7707CVR-8                                      |  |         |
| 7707CVRA-TRI                                   | Tri-Level Sync with 4 channel Analog Audio Fiber Receiver 1310nm FP Laser, VistaLINK®  |         |
| 7707CVRA-2-TRI                                 | Dual Tri-Level Sync with 4-channel Analog Audio Fiber Receiver, 1310nm FP Laser, VistaLINK®  |         |
| 7707SVT-2                                      | Dual S- Video Fiber Transmitter, 1310nm FP Laser, VistaLINK®   |         |
| 7707CVRA                                       | Analog Video with 4-Channel Analog Audio Fiber Receiver, VistaLINK®  |         |
| 7707CVRA-2                                     | Dual Ānalog Video with 4-Channel Ānalog Audio Fiber Receiver, VistaLINK®   |         |
| 7707CVR-4                                      | Quad Analog Video Fiber Receiver   |         |
| 7707CVR-4-A16                                  | Quad Analog Video and 16 Analog Audio Fiber Receiver, VistaLINK®   |         |
| 7707SVR-2                                      | Dual S-Video Fiber Receiver, VistaLINK®  |         |
| 7707RGBT                                       | RGBHV/ DVI/ KVM Fiber Transmitter, VistaLINK® Monitoring   |         |
| 7707RGBR                                       | RGBHV/ DVI/ KVM Fiber Receiver, VistaLINK® Monitoring  |         |
| 7707NGBN<br>7707DVIT                           | DVI/KVM Fiber Transmitter  |         |
| 7707DVII<br>7707DVIR                           | DVI/KVM Fiber Transmitter DVI/KVM Fiber Receiver   |         |
| CDI Eibar Transación                           |  |         |
| SDI Fiber Transport:                           | Triple CDI Floatricel to Optical Convertor 10 AMAL/s = 140 F40MAL/s  | 000     |
| 7705EO-3                                       | Triple SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s  |         |
| 7705OE-3                                       | Triple SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s  |         |
| 7705EO   | SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s   |         |
| 7705OE   | SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s   |         |
| 7707EO-3                                       | Triple SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring   | 286     |
| 7707OE-3                                       | Triple SDI Optical To Electrical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring   |         |
| 7707EO   |  |         |
|  | SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s. VistaLINK® Monitoring  | 288     |
| //U/UE   | SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring  SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring |         |
| 7707OE<br>2405EO                               | SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring  | 289     |
| 2405EO<br>2405OE                               |  | 289     |

| SDI/Audio Fiber Transport:           |  |         |
|--------------------------------------|--|---------|
| 7707VAT                              | SDI with 2 AES Audio Transmitter, VistaLINK® Monitoring  | 292     |
| 7707VAR                              | SDI with 2 AES Audio Receiver, VistaLINK® Monitoring   |         |
| 7707VAR-3G                           | 3G/HD/SD with 4 AES Audio Fiber Receiver   |         |
| 7707VAT-3G                           | 3G/HD/SD with 4 AES Audio Fiber Transmitter  |         |
| 7707VAT-A4                           | SDI with 4 Analog Audio Fiber Transmitter, VistaLINK® Monitoring   |         |
| 7707VAR-A4                           | SDI with 4 Analog Audio Fiber Receiver, VistaLINK® Monitoring  |         |
| 7707VT-4                             | Quad SDI/ ASI Mux Fiber Transmitter  |         |
| 7707VR-4                             | Quad SDI/ ASI Demux Fiber Receiver   |         |
| 7707VT-8                             | 8 Channel SDI/ ASI Fiber Transmitter   |         |
| 7707VR-8                             | 8 Channel SDI/ ASI Fiber Receiver  |         |
| SDI/Audio/Data Fiber Transpo         | ort:   |         |
| 7707MT                               | SDI, 2 AES Audio, Bi-Directional RS-232/422, 2 GPI and 2 GPO, Fiber Transmitter, VistaLINK® Monitoring   |         |
| 7707MR                               | SDI, 2 AES Audio, Bi-Directional RS-232/422, 2 GPI and 2 GPO, Fiber Receiver, VistaLINK® Monitoring  | 304-305 |
| 7707MB                               | Bi-directional Transceiver for 1 SDI, 2 AES, RS-232/422, 2 GPI/O, VistaLINK® Monitoring  | 306-307 |
| HD-SDI Fiber Transport:              |  |         |
| 7705EO-HD                            | HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5Gb/s  | 308     |
| 7705OE-HD                            | HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s  |         |
| 7707EO-3-HD                          | Triple HD or SD Electrical to Optical Converter, 19.4Mb/s to 1.5Gb/s, VistaLINK® Monitoring  |         |
| 7707OE-3-HD                          | Triple HD or SD Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s, VistaLINK® Monitoring  |         |
| 7707EO-HD                            | HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5Gb/s, VistaLINK® Monitoring   |         |
| 77070E-HD                            | HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s, VistaLINK® Monitoring   |         |
| 7707VT-4-HS                          | Quad SD/Dual HD Fiber Transmitter  |         |
| 7707VR-4-HS                          | Quad SD/Dual HD Fiber Receiver   |         |
| 2405EO-HD                            | HDTV Miniature Optical Transmitter, 19.4Mb/s to 1.5Gb/s  |         |
| 2405OE-HD                            | HDTV Miniature Optical Receiver, 19.4Mb/s to 1.5Gb/s   |         |
|                                      |  |         |
| HD-SDI Audio/Data Fiber Tra          |  |         |
| 7707ADVT-HD                          | Analog, SDI or HD-SDI Video with 4-Channel Analog or AES Audio Fiber Transmitter   |         |
| 7707ADVR-HD                          | Analog, SDI or HD-SDI Video with 4-Channel Analog/AES Audio Fiber Receiver   |         |
| 7707VAR-HD                           | HDTV with 4 AES Audio Fiber Receiver   |         |
| 7707VAT-HD                           | HD-SDI with 4 AES Audio Fiber Transmitter  |         |
| 7707MRA-HD-F2<br>7707MRA-HD-W        | HD-SDI 4 AES Audio, Bi-Directional RS-232/422, 2 GPI/GPO, Fiber Receiver, VistaLINK®   |         |
| 7707MRA-HD-W<br>7707MTA-HD-F2        | HD-SDI 4 AES Audio, Bi-Directional RS-232/422, 2 GPI/GPO, Fiber Receiver, single WDM VistaLINK®  |         |
| 7707MTA-HD-W                         | HD-SDI 4 AES Audio, Bi-Directional RS-232/422, 2GPI/GPO Fiber Receiver single WDM VistaLINK®   |         |
| 7707W174-11B-VV                      | TID-0014 ALC Addio, Di-Directional No-202422, 2df and O Fiber Necesser Single Wolf Visualinto  |         |
|                                      |  |         |
| Audio Fiber Transport:               |  |         |
| 7707AT-8                             | 8 Channel AES Audio Fiber Transmitter Mux - VistaLINK® Monitoring  |         |
| 7707AT-8U                            | 8 Unbalanced Channel AES Audio Fiber Transmitter Mux - VistaLINK® Monitoring   |         |
| 7707AT-16                            | 16 Channel AES Audio Fiber Transmitter Mux, VistaLINK® Monitoring  |         |
| 7707AT-A8                            | 8 Channel Analog Audio Fiber Transmitter Mux - VistaLINK® Monitoring   |         |
| 7707AT-A12                           | 12 Channel Analog Audio Fiber Transmitter Mux, VistaLINK® Monitoring   |         |
| 7707AR-8                             | 8 Channel AES Audio Fiber Receiver Demux, VistaLINK® Monitoring  |         |
| 7707AR-8U                            | 8 Unbalanced Channel AES Audio Fiber Receiver Demux, VistaLINK® Monitoring   |         |
| 7707AR-16                            | 16 Channel AES Audio Fiber Receiver Demux, VistaLINK® Monitoring   |         |
| 7707AR-A8                            | 8 Channel Analog Audio Fiber Receiver Demux, VistaLINK® Monitoring   |         |
| 7707AR-A12                           | 12 Channel Analog Audio Fiber Receiver Demux, VistaLINK® Monitoring  |         |
| Intercom Fiber Transport:            |  |         |
| 7707IT-3                             | 3 Channel Intercom Transceiver, VistaLINK® Monitoring  | 332-333 |
| 7707IT-8                             | 8 Channel Intercom Transceiver, VistaLINK® Monitoring  |         |
| D-4                                  |  |         |
| Datacom/Telecom Fiber Tran<br>7707DT | sport:  Multi RS-232/422/485 Fiber Data Transceiver - VistaLINK® Monitoring  | 334 335 |
| 7707DT<br>7707DT-GPIO                | Multi RS-232/422/465 Fiber Data Transceiver - VistaLINK Monitoring  Multi RS-232/422/485 Fiber Data Transceiver with GPIO- VistaLINK® Monitoring |         |
| 7707DT-GPIO<br>7707ET                | Ethernet Fiber Transceiver - VistaLINK® Monitoring   |         |
| 7707ET<br>7707ET-TE1                 | Ethernet and T1/E1/JI Fiber Transceiver - VistaLINK® Monitoring  |         |
| 7707ET-1E1                           | Quad Ethernet Fiber Transceiver - VistaLINK® Monitoring  |         |
| 7707GT                               | Gigabit Ethernet Fiber Transceiver - VistaLINK® Monitoring   |         |
| 7707GPS-DT-F2                        | Dual GPS Data FiberTransmitter   |         |
| 7707GPS-DR-F2                        | Dual GPS Data Fiber Receiver   |         |
| 7707EO-DS3                           | DS3 Electrical to Optical Converter - VistaLINK® Monitoring  |         |
| 77070E-DS3                           | DS3 Optical to Electrical Converter - VistaLINK® Monitoring  |         |
| 7707EO-E3                            | E3 Electrical to Optical Converter   |         |
| 7707OE-E3                            | E3 Optical to Electrical   |         |
|                                      | •  |         |
| Ethernet SONET/SDH Fiber             |  |         |
| 7707VB-2-OC12                        | Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver   |         |
| 7707VB-3-HS-OC48                     | Triple HD/SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver  |         |
| 7707VB-8-OC48                        | 8 Channel SDI + Ethernet SONET/SDH Fiber Transceiver   |         |
| 7707VT-8-OC48                        | 8 Channel SDI + Ethernet SONET/SDH Fiber Transmitter, VistaLINK®   |         |
| 7707VR-8-OC48                        | 8 Channel SDI + Ethernet SONET/SDH Fiber Receiver, VistaLINK®  |         |
| 7707VT-3-HS-OC48                     | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Trasmitter   |         |
| 7707VR-3-HS-OC48                     | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Receiver   |         |
| L/Band and 70/140MHz IF Fil          | per Transport:   |         |
| 7705IFTA                             | 70/140MHz IF Fiber Transmitter   |         |
| 7705IFRA                             | 70/140MHz IF Fiber Receiver  |         |
| 7705LTA                              | L-Band Satellite Fiber Transmitter   |         |
| 7705LR                               | L-Band Satellite Fiber Receiver  |         |
| 7707IFTA                             | 70/140MHz IF Fiber Transmitter with VistaLINK® Monitoring  | 366-367 |

| 7707IFRA 7707LR 7707LR-WB 7708LRA 7708LR-H 7708LT 7707LTA 7707LTA-WB 2408LT 2400PSU-8                               | 70/140MHz IF Fiber Receiver with VistaLINK® Monitoring L-Band Satellite Fiber Receiver - VistaLINK® Monitoring L-Band Satellite Fiber Receiver, Wideband with VistaLINK® Monitoring L-Band Satellite Fiber Receiver with VistaLINK® and SmartMON™ L-Band Satellite High Sensitivity Receiver with VistaLINK® and SmartMON™ L-Band Satellite Fiber Transmitter with VistaLINK® and SmartMON™ L-Band Satellite Fiber Transmitter - with VistaLINK® Monitoring L-Band Satellite Fiber Receiver, Wideband with VistaLINK® Monitoring L-Band Outdoor Fiber Transmitter with VistaLINK® and SmartMON™(Replaces 2407LT) Outdoor, eight output power supply for 2408LT series (Replaces 2400PSU-4) | 370-371<br>370-371<br>372<br>372<br>373<br>374-375<br>374-375 |
|---|--|---|
| Wavelength Regenerators:<br>7707OO<br>7707OO-HD<br>7707OO-2-OC<br>7707OO-2L-OC<br>7707OO-2L-3G<br>9000EDFA-B,-L & P | Optical Regenerator/Wavelength Converter, 19.4Mb/s to 540Mb/s Optical Regenerator/Wavelength Converter, 19.4Mb/s to 1.485Gb/s Optical to Optical Wavelength Shifter/Regenerator Optical to Optical Dual Line Wavelength Shifter/Regenerator Dual Optical to Optical Wavelength Shifter/Regenerator Erbium Doped Fiber Amplifiers   | 377<br>378-379<br>378-379                                     |
| Optical Combiners/Splitters/I   | Multiplexors & Bypass Switchers: Coarse WDM Optical Modules  | 202 202   |
| 7705CWDM<br>7705DS-4  | Four Channel Optical Splitter  |   |
| 7705DS-8  | Eight Channel Optical Splitter   |   |
| 7705WDM   | Wavelength Multiplexor & Splitters   | 385   |
| 7705WDM13/15  | Standard Wavelength Multiplexor & Splitters  |   |
| 7705DS  | Fiber Distribution Splitter  |   |
| 7705MS<br>7705DWDM  | Active Fiber Monitoring Splitter  Dense WDM Optical Modules  |   |
| 9000DWDM  | DWDM 1RU Optical Mux/De-mux  |   |
| 7707BPX   | 2x1 Optical Bypass Protection Switch   |   |
| SRF1-16-1x2   | 16-channel 1x2 splitter/combiner in 1RU chassis  |   |
| SRF1-8-1x4<br>SRF3-64-1x2   | 8-channel 1x4 splitter/combiner in 1RU chassis   |   |
| SRF3-32-1x4   | 32-channel 1x4 splitter/combiner in 3RU chassis  |   |
| 7702SP2   | 1x2 Passive Splitter   |   |
| 7702SP4   | 1x4 Passive Splitter   |   |
| 7702SP2-LNB<br>7702SP4-LNB  | 1x2 Passive Splitter, passes LNB power 1x4 Passive Splitter, passes LNB power  |   |
| CWDM/DWDM   | CWDM & DWDM Wavelength Ordering Information  |   |
|   |  |   |
|   | SSED DTV PRODUCTS, CODECS & TEST SETS  |   |
| 7780TSM-IP<br>7780TSM-ASI   | MPEG2/H.264 IP Transport Stream Monitor  MPEG2/H.264 ASI Transport Stream Monitor  |   |
| 7780ASI-IP2   | Dual Channel ASI to IP Encapsulator  |   |
| 7780DLY-ASI   | ASI Delay  |   |
| 7780IP-ASI2   | Dual Channel IP to ASI De-encapsulator   |   |
| 7780M4-ASI<br>7780R2x1-ASI-CS   | Quad ASI TDM-Mux   |   |
| 7780R2x1-ASI-CS-2   | Dual Compressed TS Automatic Smart Switch  |   |
| 7772MFD-HD  | HD JPEG.2000 Decompression CODEC   | 400   |
| 7772MFC-HD  | HD JPEG.2000 Compression CODEC   |   |
| 7772MFX-HD<br>7750TG-TS   | SMPTE 310M/DVB ASI Transport Stream Generator  |   |
| 77001010  |  |   |
| Reference and Test General  |  | 40-   |
| 7751TG2-HD<br>7751TG2-CF-HD   | Dual HD Test Signal Generator with Embedded Audio HD/SD-SDI Test Signal Generator with Trouble Slide   |   |
| 7751SRG-HD  | HD Tri-Level Sync Generator  |   |
| 7750TG  | SDI Test Signal Generator  |   |
| 5600MSC   | Master SPG/Master Clock System   |   |
| 5600ACO/ACO2  | Automatic Changeover   | 400-409   |
| SECTION 9: COMPAC<br>Frames & Control:  | CT MODULAR - 500 EXPONENT, 350FR & 400 SERIES  |   |
| 300 Series  |  |   |
| 350FR   | 3RU Portable Multiframe  | 409   |
| 400 Series  |  |   |
| 400FR   | Compact High Density Balanced Audio Distribution Frame   |   |
| 400ADA-AUD  | Analog Audio Distribution Amplifier (1x9)  |   |
| 400DA-AESB<br>400DA2Q-AESB  | Balanced AES Audio Distribution Amplifier (1x9)  Dual Balanced AES Audio Distribution Amplifier (2 - 1x4)  |   |
| .005, 20, 1205  |  |   |
| 500 Series  |  |   |
| 500FR   | Compact High Density Distribution Frame  |   |
| S501FR<br>500FR-L-A   | Standalone Compact High Density Distribution Frame  Compact High Density Analog Looping Distribution Frame   |   |
| 500FR-L-D   | Compact High Density Digital Looping Distribution Frame  |   |
| 500FC   | VistaLINK® Frame Controller  | 416   |
| 500FC-DA-HD   | VistaLINK® Frame Controller with HD/SD Reclocking DA   |   |
| 500FC-DA-HD-L   | VistaLINK® Frame Controller with HD/SD-SDI DA with Loop Thru   | 418   |

| 500 Series with Looping<br>500DA-L<br>500DA-HD-L<br>500ADA-EQ-L  | Reclocking Distribution Amplifier for Digital Looping Frame  HD/SD-SDI Reclocking Distribution Amplifier for Digital Looping Frame  Analog Video Distribution Amplifier with Cable Equalization  | .420   |
|--|--|--|
| HD<br>500DA-HD<br>500DA2Q-HD<br>500ACO2-HD/SD<br>500DCDA-HD  | HD/SD Reclocking Distribution Amplifier (1x8) HD/SD-SDI Dual Reclocking Distribution Amplifier (2 - 1x4) Dual HD/SD-SDI Digital Auto Signal 2x1 Changeover HD Downconverter & Distribution Amplifier with Closed Caption Monitoring  | .423<br>.424   |
| <b>SDI</b> 500DA 500DA2Q 500DA2Q-3G 500DA2Q-3G-N 500DA-3G 500VMDA  | SD-SDI Reclocking Distribution Amplifier (1x9) Dual Reclocking Distribution Amplifier (2 - 1x4) 3G/HD/SD-SDI Dual Reclocking Distribution Amplifier (32-1x4 DA's in 3RU Rack Space) 3G/HD/SD-SDI Dual Non-Reclocking Distribution Amplifier (32-1x4 DA's in 3RU Rack Space) 3G/bs SDI Reclocking Distribution Amplifier (1x8) SD-SDI Monitoring Reclocking Distribution Amplifier  | .427<br>.428<br>.429<br>.430   |
| Analog - Video<br>500ADA<br>500ADA-EQ  | Analog Video Distribution Amplifier (1x9)  Analog Video Distribution Amplifier with Cable Equalization (1x9)   | .432   |
| AES & Analog Audio<br>500DA-AESB<br>500DA-AESU<br>500DA-AESU-L<br>500DA2Q-AESU<br>500AMDA-AESU<br>500ADA-AUD<br>500ADA-W<br>520DARS-W<br>520DD-AESU<br>520AD4-DD-HD<br>520AD4-HD<br>520AD4-HD<br>520AD8-HD<br>520AD8-HD<br>520AE8-HD | Balanced AES Audio Distribution Amplifier (1x4) Unbalanced AES Audio Distribution Amplifier (1x9) Unbalanced AES Audio Distribution Amplifier with Loop Thru Dual Unbalanced AES Audio Distribution Amplifier (2 - 1x4) Unbalanced AES Audio DAC & Distribution Amplifier Analog Audio Distribution Amplifier (1x4) Word Clock Distribution Amplifier (1x9) Unbalanced AES Word Clock Extractor Audio Distribution Amplifier Dolby-E/AC-3™ Decoder Dolby-E/AC-3™ Decoder Dolby-E/AC-3™ Decoder D/SD Audio De-embedder & Dolby-E/AC-3™ Decoder D/SD Audio De-embedder with 4 Unbalanced AES Inputs HD/SD Audio Embedder with 4 Unbalanced AES outputs HD/SD Audio De-embedder with 8 Unbalanced AES outputs HD/SD Audio Embedder with 8 Unbalanced AES inputs | .435<br>.436<br>.437<br>.438<br>.439<br>.440<br>.441<br>-443<br>.445<br>.446<br>.447 |
| SECTION 10: CLOSED<br>Closed Caption & XDS Monito<br>7760CCM-HD<br>CaptionWare<br>HD9084<br>8084<br>8084AD<br>8083XDS-AD<br>3410<br>ProCAP   | CAPTIONING, XDS & 1RU MONITORING  ring: HD-SDI Closed Caption Monitor and CEA-608/CEA-708 Translator Closed Caption and XDS Configuration Utility HD/SD-SDI DTV Closed Caption Encoder SDI Closed Caption Encoder Analog & SD/SDI Closed Caption Encoder Analog & SD/SDI XDS Encoder Multivert (10 SD-SDI to Analog Monitoring Converter) Offline Captioning Software 456-   | .451<br>.452<br>.453<br>.453<br>.454   |
| •  | ME CODE & CLOCK DISPLAYS   |  |
| Slave Clocks:<br>1200DD/1201DD<br>1212<br>1216<br>1275A  | Data Digital Display & Green LED  12" Diameter Analog Clock Display  16" Diameter Analog Clock Display  9" Digital Clock Display   | .459<br>.459   |
| Analog Time Code:<br>5010-GPSII<br>5010-VITC-GPSII<br>5010<br>5010-24Fps<br>5010-VITC<br>5010-VITC-24Fps<br>5300<br>5950   | Time Code Generator with GPSII  VITC Time Code Generator with GPSII  LTC Time Code Gen/Reader/Character Inserter  LTC Time Code Gen/Reader/Character Inserter  LTC Time Code Gen/Reader Character Inserter (with 24Fps)  462- LTC and VITC Time Code Gen/Reader/Character Inserter  LTC and VITC Time Code Gen/Reader/Character Inserter (with 24Fps)  Time Code Analyzer  VITC/LTC Time Code Reader/Character Inserter  | .461<br>-463<br>-463<br>-463<br>-463   |
| Master SPG, Master Clock & 7<br>5600MSC  | Master SPG/Master Clock System   |  |
| 5600ACO/ACO2<br>500ACO2-HD/SD  | Automatic Changeovers  |  |
| Digital Time Code:<br>8010TM<br>8010TM-IRIG<br>HD9010TM<br>HD9010TM-IRIG   | SDI Time Code Generator/Reader with Character Inserter SDI Time Code Master with IRIG Reader HD Time Code Generator/Reader HD Time Code Master with IRIG Reader 472- HD Time Code Master with IRIG Reader 474-   | .471<br>-473   |
| 2405EO<br>2405OE<br>2405EO-HD  | RE SERIES & MOBILE  SDI Miniature Optical Transmitter, 19.4Mb/s and 143-540Mb/s  SDI Miniature Optical Receiver, 19.4Mb/s and 143-540Mb/s  HDTV Miniature Optical Transmitter, 19.4Mb/s - 1.5Gb/s  | .477   |

| 2405OE-HD                     | HDTV Miniature Optical Receiver, 19.4Mb/s - 1.5Gb/s                             | 479     |
|-------------------------------|---|---------|
| 2407DVIT                      | DVI/KVM Miniature Fiber Transmitter   |         |
| 2407DVIR                      | DVI/KVM Miniature Fiber Receiver  | 482-483 |
| 2408LT                        | L-Band Outdoor Fiber Transmitter with VistaLINK® and SmartMON™                  | 484     |
| 2400PSU-8                     | Outdoor, eight output power supply for 2408LT series                            | 485     |
| 2407RGBT                      | RGBHV/DVI/KVM Miniature Fiber Transmitter                                       |         |
| 2407RGBR                      | RGBHV/DVI/KVM Miniature Fiber Receiver  |         |
| 2430DAC-HD                    | HD Miniature D to A Converter: YPrPb/RGB/VGA via High Density DB5               | 490     |
| 2430GDAC                      | GLink™ Digital to Analog Converter  |         |
| 2430GDAC-WARP                 | GLink™ Digital to Analog Converter  |         |
| 2410MD-HSN                    | HD Miniature Monitoring Downconverter with 24sF processing                      |         |
| 7700PCO                       | Power Changeover Unit   |         |
| TAC-4, TAC-6, TAC-12          | Tactical Mobile Fiber Optic Cable Reels + Breakout Assemblies                   |         |
| MBL-IRC-420                   | Mobile Transit Case   |         |
| MBL-IRCBH+AB                  | Anton Bauer Quad Battery Holder   |         |
|                               | •   |         |
| SECTION 13: PRODUC            | CTION, POST PRODUCTION & TELECINE TOOLS   |         |
| Production & Post Production: |   |         |
| 5010-24fPS                    | LTC Time Code Gen/Reader Character Inserter (with 24Fps)                        | 462-463 |
| 7751SRG-HD                    | HD Tri-Level Sync Generator   |         |
| ECAS-HD                       | Fiber Optic Enabled Camera Adapter System for HDCAM Sony cameras                |         |
| ECAX-HD                       | Fiber Optic Enabled Camera Adapter System for XDCAM-HD Sony cameras             |         |
| ECAP-HD                       | Fiber Optic Enabled Camera Adapter System for high definition Panasonic cameras |         |
| ECB-HD                        | Base station for camera adapters  |         |
| 7732DVP-HD                    | HD Dual Link Video Processor  |         |
| 7732DVP-3D-HD                 | 3D HD Video Processor   |         |
| HD9690                        | HD Graticule Generator  | 502-503 |
| HD9690-444                    | 4:4:4 Graticule Generator   |         |
| 9590                          | SDI Digital Graticule Generator   | 504     |
| 7732PFT-HD                    | HDTV Progressive Format Translator  |         |
|                               | •   |         |
| KeyKode Readers:              |   |         |
| 5550                          | Universal Decoder   | 506-507 |
| 5550/KR-16/35                 | 5550 Decoder with KR16/35 head & 10 ft. cable                                   | 506-507 |
| 5550/UV-3                     | 5550 Decoder with UV-3 Head & 20 ft. cable                                      | 506-507 |
| 5550/UVT-3                    | 5550 Decoder with UVT-3 (Touchless) Head & 20 ft. cable                         | 506-507 |
|                               |   |         |
| Afterburner & Film Footage Er |   |         |
| HDSD9155Q                     | HD/SD Afterburner   |         |
| HDSD9045TR                    | HD/SD 4:2:2 Film Footage Encoder  | 510-511 |
|                               |   |         |
| Post Production Accessories:  |   | F       |
| KeyLog Tracker                | Telecine Logging & Configuration Management Tool                                |         |
| Morronty                      |   | E40     |
| Warranty                      |   |         |

The Evertz® 2008/2009 catalog features a series of quick reference icons located in the margin of each product page. The icons have been designed to quickly illustrate the primary characteristics of individual products. This includes products that are VistaLINK® -capable, ThumbLINK™ -enabled, compatible with the Evertz® exponent frames, have Dolby-E™ & Dolby Digital capabilities, and work with overture™ software.

#### VistaLINK®

VistaLINK® offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). This gives the flexibility to manage operations, including signal monitoring and module configuration, from SNMP -capable control systems (Manager or NMS).



ThumbLINK™ -enabled products give you the ability to monitor and configure via SNMP and also to get thumbnails back to the new VistaLINK® Thumbnail Server. Thumbnails can be viewed in separate windows or embedded into custom user-designed Graphics Client UI screens.



Evertz® **exponent** products include the 500FR and the S501FR Compact High Density Distribution Frames, as well as a wide variety of 500 series modular products that are housed within the Evertz® 500 series **exponent** frames.

#### Dolby-E™ Partner

This icon identifies products that can pass and/or process Dolby-E™ or Dolby Digital audio data, including Audio Embedders & De-embedders, Audio Mixers, Frame Synchronizers, Dolby Encoders and Dolby Decoders. The icon may exist across all of Evertz® platforms including the 7700 series and 500 series exponent modules.

#### overture™

This easy-to-use software is used to create logo files for video insertion. overture ™ can import graphic files created in the Tiff, Target, BMP, Gig or JPG formats from professional graphics programs and transfer them to the logo inserter.






















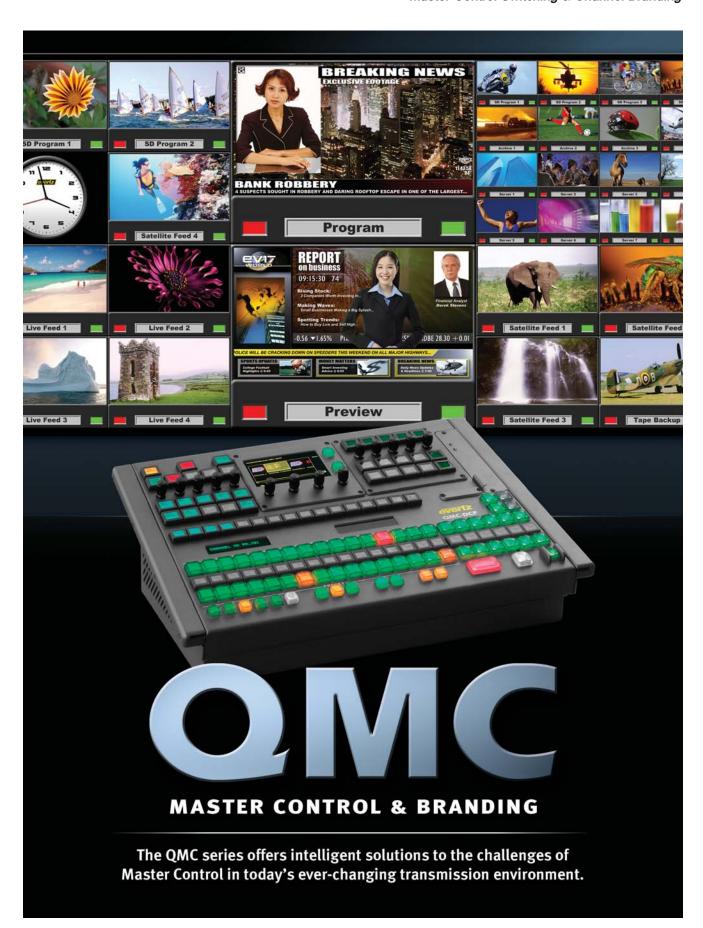

Master Control is the heart of any broadcast facility. Demands for reliability, serviceability, and signal protection are essential. Equally essential, is a Master Control that can be expanded to provide for future growth as facilities migrate from analog to SD to HD. Many broadcasters look at master control as a major long-term investment.

The QMC-2 master control switcher has been designed to meet the current Master Control needs with the capacity to meet future needs. The QMC-2 platform provides a cost-effective solution for facilities converting to SD and HD. The hardware platform runs solid field-proven software to form a foundation that meets the latest playout and branding needs. Other major features the platform includes are bypass and emergency inputs, hot-swappable hardware, and redundant power supplies. Combined, these features create a reliable system for 24/7 year round programming.

Evertz® Integrated Solution: The QMC-2 offers a unique approach to Master Control with SD and HD channels with a number of options and a broad selection of configurable control panels. QMC-2 systems can be assembled to meet any need and size. A QMC-2 system is comprised of an upstream router, feeding a number of processing channels. This architecture allows systems to scale from a single channel up to a complex multi-channel installation with minimal effort. The feature rich QMC-2 can be easily controlled under automation or manual control. The QMC-2 intelligent LCD pushbutton control panels give operators high flexibility in panel layout and user-friendly functionality. The QMC-2 also integrates seamlessly with the Evertz multi-viewer MVP product line, which allows customers to have a complete "turn key" master control solution.


#### **▶QMC System Diagram**









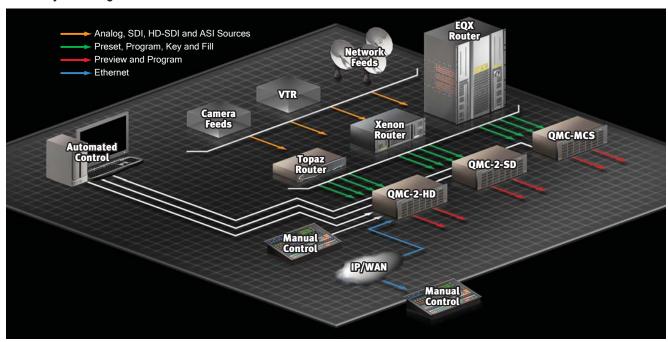

#### ▶The QMC-2 Platform

QMC-2 is designed to support both high definition as well as standard definition video formats. The formats include: 525i/59.94, 625i/50, 720p/59.94, 720p/50, 1080i/59.94, and 1080i/50. Each QMC-2 processes a complete Program and Preset path, which provides a Program output and a full "look-a-head" Preview of the next transition. There is an Emergency input, which provides a third input allowing users to quickly go to a safe feed in case of emergency. The QMC-2 also provides an auxiliary output for "Clean feeds". For audio, the QMC-2 provides support for 16 channels of embedded audio on the Program, Preset, and Emergency inputs. Also provides for discrete AES inputs and AES outputs. The QMC-2 frame is 3RU with dual power supplies. The frame has built-in bypass relays, which provide maximum protection for the Program and Clean feed in cases of failure. The frame has been designed to allow for two HD or SD QMC-2 channels to operate independently of each other.



#### **▶QMC** Control

**Manual Control:** The QMC-2 system was designed for ease of use in live and automated environments. The range of QMC-2 control panels has been optimized for size and ease of use in single and multi-channel playout applications. All QMC panels use 10 character LCD buttons, providing a dynamic control environment. Every button is user-configurable, which enables panel layouts that are operator friendly. The panel layout provides a menu system, which exposes the full capability of the QMC-2 to the operator. The control panels start with the 1RU QMC-CP-1000E version to the full size QMC-DCP desktop control panel.

**Automated Control:** Each QMC-2 channel can connect to the leading automation systems through a dedicated serial port located on every channel. This gives low latency and maximum protection against on-air problems. Crosspoint control of upstream routers is handled directly by the QMC-2 so only a single port on the automation system is required for each active channel.

**Upstream Router Control:** Each QMC-2 channel can control any size of router matrix ranging from 12 inputs to 256 inputs. For "turn key" environments, the QMC-2 integrates seamlessly with the Evertz Topaz, Xenon, and EQX router product lines. For existing routing infrastructures, the QMC-2 has support for the leading router vendors.

The QMC system showcases a number of key operational features allowing for the creation and control of some amazing graphic presentation:

- Static & animated logos
- Audio & voice-overs
- Up to 3 key layers
- · Video & audio transitions
- Dynamic visual effects









**Video/Audio Transitions:** The standard QMC-2 configuration includes a number of video & audio transitions such as V-Fades, Mixes, and Split audio/video as well as optional wipe transitions. These transitions can be controlled via the QMC-2 control panel or the automation system and can be customized at any time.

Audio, Dolby, & Voice-overs: The QMC-2 has powerful and flexible audio capabilities. With a standard 16 channels of embedded audio, it is easy to integrate into any station. Audio level adjustments may be made from the panel at any time and stored on a source-by-source basis. Internal audio shufflers allow routing from any input to any output. Built-in sample rate converters allow any mix of 44.1kHz and 48kHz sources to be used and silently switched on-air. Optional Dolby-E/AC-3™ Decoders and Dolby-E™ Encoders allow the QMC-2 to handle Dolby 5.1 programming.


The QMC-2 can perform two independent stereo voice-overs, each map-able to any or all output channels. Full "pre-hear" allows level and voice-over ratio to be set prior to going on-air. Voice-overs can be taken to air combined with another transition or independently.

**Keyers:** Up to three external key layers may be fitted to all QMC-2 models. One keyer is standard while two additional keyers can be optionally added. They have a full range of user adjustments stored and recalled on a source-by-source basis. Keyers may be taken on and off air with other key levels or independently, and order/priority can be set.

**Branding:** The internal Logo store for the QMC-2 is optional. It allows a station, channel or program identification to be keyed over the Program output. Logos can be transitioned onto the Program output at any time using any of the standard video transitions. Multiple logos are stored within the QMC and can be called up from an automation system or from the control panel. The addition of the QMG will allow for enhanced branding that include: multi-layered static/animated media, audio clips, time/temperature logos, text headliners, and text crawls,

**DVE:** The two-channel 2D DVE option provides live and dynamic visual effects, such as picture sizing and positioning, and is fully integrated within the QMC-2. The DVE is fully assignable within the video-processing path of the QMC-2. The DVE may be controlled manually or from the automation system and is independent of the key and logo (bug) layers.

#### ▶QMC-2 Block Diagram

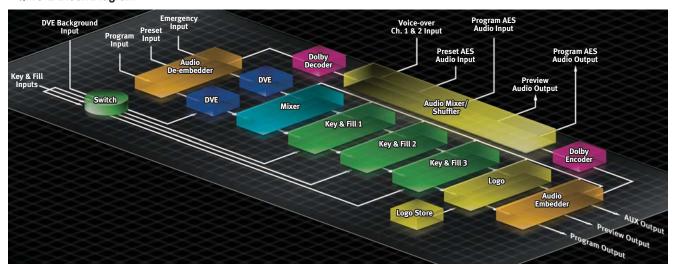









#### Specifications for the QMC-2 HD/SD Master Control Switcher

Video Connections:

Inputs:

7 standard: Program, Preset, Keyer-1 Fill,

Keyer-1 Key Emergency, Program

Bypass, Auxiliary Bypass Keyer-2 Fill, Keyer-2 Key 5 optional: Keyer-3 Fill, Keyer-3 Key

**DVE** Background

Outputs:

3 standard (dual): Program, Preview, Auxiliary

Standard Definition (QMC-2-SD):

Video Inputs (apart from bypass inputs) Signals supported: SMPTE 259M Signal Level: 800mV p-p nominal Impedance:  $75\Omega$  terminating 5 - 270MHz: 15dB typical Return Loss: Belden 8281

Cable equalization: BBC PSF1/2: 250m min BBC PSF1/3: 150m min

Timing window: ±1/2 line w.r.t. Reference input BNC per IEC 61169-8 Annex A, Connectors:

75 $\Omega$  terminating

Video Outputs:

Signal Level: 800mV p-p ±10% 75Ω terminating 5 - 270MHz: 15dB typical Impedance: Return Loss: D.C. offset:

Rise/fall times < 0.4ns Output jitter: 0.2 UI p-p

BNC per IEC 61169-8 Annex A, Connectors:

75Ω terminating

Switching Reference:

Analog 525/625 Reference input: Signal level: 1V p-p ±3dB

Connector: BNC,  $75\Omega$  with looping connector

High Definition (QMC-2-HD):

Video Inputs (apart from bypass) Signals supported: SMPTE 292M-1998 Signal Level: 800mV p-p nominal  $75\Omega$  terminating Return Loss: 5 - 1485MHz: 15dB typical Cable equalization: Belden 1694AA: 90m min Timing window: ±1/2 line w.r.t. Reference input Connectors: BNC per IEC 61169-8 Annex A,

 $75\Omega$  terminating

Video Outputs:

Signal Level: 800mV p-p ±10%  $75\Omega$  terminating 5 - 1485MHz: 15dB typical Impedance: Return Loss:

DC offset: Connectors: BNC per IEC 61169-8 Annex A,

 $75\Omega$ 

Rise/fall times: < 0.270ns

0.2 UI p-p at 100kHz, 1 UI at 10Hz Output jitter:

Switching Reference:

Reference input (HD/SD): Analog 525/625 or Tri-level

50/59.94/60Hz

Signal level: 1V p-p  $\pm$  3dB BNC per IEC 61169-8 Annex A, 75 $\Omega$ Connector:

with looping connector

Audio Connections (Balanced frame):

Inputs: 18 standard:

Program (A1/A2, A3/A4, A5/A6, A7/A8) Preset (A1/A2, A3/A4, A5/A6, A7/A8) Emergency (A1/A2, A3/A4, A5/A6, A7/A8)

Voice Over-1 (A1/A2, A3/A4) Voice Over-2 (A1/A2, A3/A4) Program Bypass (A1/A2, A3/A4)

Outputs:

Program (A1/A2, A3/A4, A5/A6, A7/A8) 8 standard:

Preview (A1/A2, A3/A4, A5/A6, A7/A8)

Audio Inputs:

Signals supported: Signal Frequency: 32 - 96kHz Audio Resolution: 24 bit 200mV - 10V p-p Signal Level: Impedance: 110Ω terminating Return Loss: 0.1 - 6MHz: > 20dB

Connectors: Audio Outputs:

2V - 7V, nominally 5V p-p ±10%

D50 female

Signal Level: Signal Frequency: 48kHz 110Ω Impedance:

Return Loss: 0.1 - 6MHz: 20dB typical

< 0.025 UI Intrinsic Jitter: Connectors: D50 female

Audio Connections (Unbalanced frame):

Inputs:

10 Standard: Program (A1/A2, A3/A4), Preset

(A1/A2, A3/A4), Emergency (A1/A2, A3/A4) Voice Over-1 (A1/A2) Voice Over-2 (A1/A2)

Program Bypass (A1/A2, A3/A4) Outputs:

8 Standard: Program (A1/A2, A3/A4)

Preview (A1/A2, A3/A4) Program (A1/A2, A3/A4)

Audio Inputs:

AES-3id, SMPTE 276M unbalanced

Signals supported: Signal Frequency: Audio Resolution: 32 - 96kHz 24 bit Signal Level: 320mV - 1.2V p-p Impedance:  $75\Omega$  terminating 0.1 - 6MHz: > 15dB Return Loss:

BNC per IEC 61169-8 Annex A,  $75\Omega$ Connectors:

Audio Outputs:

1V p-p ±20% Signal Level: Signal Frequency: 48kHz

Impedance:  $75\Omega$ 

0.1 - 6MHz: 15dB typical Return Loss: < 0.025 UI Intrinsic Jitter:

BNC per IEC 61169-8 Annex A Connectors:

Metadata Connections (with Dolby-E decoder option): 2 x 8-pin RJ45 RS232/ RS422 link Serial:

selectable

Control: Q-Link:

2 x BNC with loop-through

connections,  $75\Omega$  (max length 500m) Serial: 1x D9 female, 3 x 8-pin RJ45 RS232/RS422 link selectable

8-pin RJ45 Ethernet 10BaseT: 1x D25 female

7 or 8 TTL inputs. < 0.8V for logic low. Inputs: > 3.5V for logic high

Outputs 7 or 8 normally open contact pairs

Contact rating 24A @0.5A DC resistive load

Bypass control & Alarm:

4-way Klippon, mating connector

supplied



### QMC-2, QMG, QMC-DCP

#### Master Control Switching & Channel Branding

#### ▶ QMG - Enhanced Branding Solution for Master Control



As the traditional Master Control environment evolves, demands on branding have increased. The QMG option enhances the on-air branding capabilities of the QMC-2. It adds a complete logo and media insertion package to the Master Control path, which will simultaneously key an additional 16 layers of static or animated "bugs" over the HD or SD video signal. It also offers the options for the use of audio chimes/snipes, text teasers, and dynamic text crawls. The QMG occupies one slot in the QMC-2 3RU frame.

The QMG has been designed to manage and store multiple static/animated logos and audio clips. The size of each logo is variable and range from 1/25th to full screen. Various media formats (such as Tiffs, TGA, Bitmaps, and Wave files) can be imported into the Evertz® overture™ media software and transferred to the QMG via Ethernet. The position of the logo, fade rates, clip association and animation rates can be controlled through the various QMC

Media is stored into flash memory that can be quickly recalled by the various QMC-2 control panels or automation. With the removable compact flash option you can have access to up to 16GB of on-line media storage space. The Network Attached Storage option utilizes the Gigabit Ethernet of the QMG to connect a media server device. This allows the QMG to access virtually unlimited archived media storage. This approach in addition to the Overture™ suite simplifies the workflow within the Master Control environment.


The QMG can be used in two modes: Key/Fill or Program/Preview. In the Key/Fill mode, the QMG generates a Key and Fill signal that is connected to the QMC-2. In the Program/Preview mode, the QMG is downstream of the QMC-2. The on-board preview allows users to cue their logos for position and content verification prior to going on-air. As well, the Program/Preview mode allows for an optional two-channel 2D DVE to be inserted in the processing path to provide two programs over a background effect.


#### ▶ Features & Benefits

- · Stores and inserts static and animated logos or media clips
- Multiple simultaneous logos can be keyed directly onto the HD or SD video
- · Multi-layer keying with 16 available layers
- Supports 525i/59.94, 625i/50, 720p/50, 720p.59.94, 1080i/50, and 1080i/59.94 formats
- Full 12-bit linear video keyer with logo fade-in and fade-out processing
- · Independent control of logo position, transparency and offset
- · Independent control of fade in and fade out of static logos
- · Input bypass relays for power failure protection
- Automatic equalization up to 100m @ 1.5Gb/s (Belden 1694A or equivalent)
- Program and Preview outputs

- · Reference to input video or color black
- · Gigabit Ethernet interface
- Manage media from a standard PC using Ethernet and Overture™ software
- Standard 256MB compact flash storage with 512MB playout cache
- · Optional +TXT feature to support crawls and text teasers/snipes
- Optional +NAS feature for Network Attached Storage support
- Optional +DVE for 2D DVE effects
- Optional additional removable flash memory of 2GB, 4GB or 8GB
- · Option to increase playout cache to 2GB, 4GB or 8GB DRAM
- Optional +E for Emergency Alert System support (North America only)
- · Occupies one slot in 3RU QMC-2 frame

#### ▶QMG Operating Modes

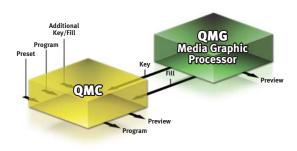

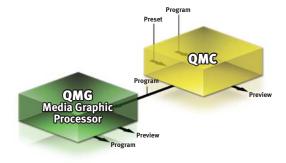

#### ▶Specifications for the QMG Option

#### Video Connections:

Outputs

2 standard (dual): Program (Key), Preview (Fill)

#### Video Inputs (apart from bypass inputs)

Number of Inputs: 1 Program SMPTE 259M or 292M Input Standard: Signal Level: 800mV p-p nominal Impedance:  $75\Omega$  terminating Return Loss:

5 - 270MHz 15dB typical 5 - 1.485GHz:

Cable equalization: Belden 8281 up to 250m (270Mb/s) Belden 1694A: Up to 90m (1.5Gb/s) BNC per IEC 61169-8 Annex A Connectors:

75Ω terminating

#### Video Outputs:

Number of Outputs: 1 Program (Key), 1 Preview (Fill)

SMPTE 259M or 292M Output Standard:

Signal Level: 800mV p-p ±10% Impedance:  $75\Omega$  terminating Return Loss:

5 - 270MHz: 15dB typical 5 - 1.485GHz: 15dB typical DC offset: 0 ±0.5V Rise/fall times: < 0.4ns Output jitter: 0.2 UI p-p

BNC per IEC 61169-8 Annex A,  $75\Omega$ Connectors:

#### Reference Input: Standard:

Analog Black Signal level: 1V p-p ±3dB

BNC per IEC 61169-8 Annex A,  $75\Omega$ Connector

with looping connector

#### **Audio Connections**

Audio Inputs:

Input Standard: SMPTE 276M, AES-3 Quantity 4 Voice Over, 8 Program Signal Frequency: 32-96kHz Audio Resolution: 24 bit Signal Level:

200mV - 10V p-p Impedance:

110Ω terminating (balanced QMC-2

 $75\Omega$  terminating (unbalanced QMC-2

frame) Return Loss: 0.1 - 6MHz: > 20dB

D50 female (balanced QMC-2 frame) BNC per IEC 61169-8 Annex A,  $75\Omega$ 

(unbalanced QMC-2 frame)

#### Control: Serial:

1x D9 female, 3 x 8-pin RJ45 RS232/RS422 link selectable

8-pin RJ45 Ethernet 1000BT:

1x D25 female

#### Physical:

Operating Temperature: 0-40°C









For any Master Control environment, the user interface is highly critical. The key criteria are simplicity, flexibility, and ease-to-use. The QMC-DCP desktop control panel features assignable control buttons, using a combination of fixed and dynamic LCD buttons. The multi-colored LCD buttons are capable of displaying multiple lines of text or graphics. The QMC-DCP is integral in the complete "turn key" solution Evertz offers for Master Control.

The base panel features 98 buttons and 5 shaft encoders. Using configurable menus, the QMC-DCP allows the operator access to the full capability of the QMC-2. There are plug-able modules for further customization. The 4.3" LCD screen and additional LCD buttons expand the QMC-DCP's functionality. The QMC-DCP is the all-in-one control surface for Master Control.

#### ▶ QMC-DCP Desktop Control Panel

Preset & program bus select buttons use a quiet tactile button and a shared LCD display for source labeling. Buttons are available for dedicated key, DVE, logo and voice-over levels. Transition types and speeds can be also assigned to the tactile buttons. The other LCD buttons (with up to 255 different colors) offer 10 character displays for complete customization of the QMC-DCP. Facilities can customize the QMC-DCP to suit their needs.

The QMC-DCP base panel can be expanded with various optional sub modules. Each extends the functionality of the panel. The first optional

module contains 15 buttons and 5 shaft encoders, and offers an extension to the configurable buttons of the base panel. The second optional module contains a 4.3" LCD display, ideal for audio level monitoring from the QMC-2 & logo previews from the QMG. The third optional module contains a T-bar and fixed buttons ideal for selecting transition types.

The QMC-DCP is designed for use on a desktop, in a console, mounted in standard 19" equipment rack, or on a sliding tray in a rack.



#### ▶Key Operational Features

- Flexible feature or menu driven configurations providing quick & simple access
- · Easily reconfigured for dynamically changing environments
- Each LCD display can display up to 10 characters of text or a graphic
- Each LCD display backlight is full RGB color capable offering up to 255 different color and intensity control
- Fully assignable and programmable operation
- Button per source selection with buttons to select more sources
- Panel lock button to protect against unauthorized or accidental selection
- Control up to 64 QMC-2 channels from a singular QMC-DCP
- Two informational VFD displays
- 8 tally ins and 8 tally outs
- Dual Gigabit Ethernet
- · Dual power supplies

#### ▶ Specifications

Control:

Ethernet: RJ45, 10/100/1000 Mbit/s, redundant

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/RS422: DB9 female Tally: DB25 female



## QMC-2, QMG, QMC-DCP

#### Master Control Switching & Channel Branding

#### **▶▶▶**Ordering Information for the QMC-2

QMC-2-SD-U SD Master Control Switcher, Single Channel SDI Switcher/Mixer

unbalanced with 3RU frame and one power supply SD Master Control Switcher Single Channel SDI Switcher/Mixer

QMC-2-SD-B balanced with 3RU frame and one power supply

QMC-2-SD-CH2 Additional Switcher/Mixer Channel (SD)

HD Master Control Switcher Single Channel HD SDI Switcher/Mixer QMC-2-HD-U

unbalanced with 3RU frame and one power supply HD Master Control Switcher Single Channel HD SDI Switcher/Mixer

balanced AES audio with 3RU frame and one power supply

QMC-2-HD-CH2 Additional Switcher/Mixer Channel (HD)

QMC-2 Ordering Options

+AES8 Upgrade to 8 mono AES audio I/Os - Only available for the balanced QMC-2 frame (QMC-2-SD-B or QMC-2-HD-B)

2D DVE Option for QMC-2 (includes background input) +DVE

+KEY1 Additional Key Layer - Add a 2nd level of Key & Fill 2 Additional Key Layers - Adds a 2nd & 3rd level of Key & Fill Internal Logo Store & Keyer - Stores logos and keys onto PGM +KFY2 +LG output. Includes 256MB Media Store.

Note: Maximum 2 logos per channel

+DD1 Dolby-E™/AC-3 Decoder Option (Emergency Input) decodes an

incoming Dolby-E™ signal on the emergency input. This is a single

Dolby-E™ Decoder for the QMC-2 channel +DD2 Dolby-E™/AC-3 Decoder Option (Program & Preview Pair) decodes

an incoming Dolby-E™ signal. One pair can be fitted to each QMC-2

#### \*Note: +KEY1 cannot be ordered with +KEY2 option.

#### General Ordering Options

+2PS Power Supply - QMC Master Control Switcher. May be used as redundant power supply or as a spare +WP Wipe Option - Horizontal, vertical and diagonal wipes with

colored borders with hard or soft edges

QMC-2 Frame only with balanced AES audio and one power supply. QMC-2-FRAME-B QMC-2-FRAME-U QMC-2 Frame only with unbalanced AES and one power supply

#### >>> Ordering Information for Control Panels

QMC-DCP QMC Control Panel

QMC-CP-1000E QMC Auxiliary Control Panel -Fully programmable panel with 16 integral 10 character LCD buttons and Ethernet. 1RU rack mount. QMC Control Panel - Standard panel with fully programmable 10-QMC-CP-E

character LCD buttons and Ethernet. 2RU rack mount. QMC-CP-2048E QMC Buddy Panel - Three rows of 16 integral 10 character LCD

buttons which can used in conjunction with other QMC control panels

for extend control. 2RU rack mount with Ethernet.

QMC FC Control Panel - Traditional style control panel with integral LCD multi-character displays. T-bar fader arm and user assignable

#### **Enclosures**

QMC-2-FRAME-B QMC-2 Frame only with balanced AES audio and one power supply QMC-2-FRAME-U QMC-2 Frame only with unbalanced AES and one power supply

#### >>>Ordering Information for the QMG

QMG Quartz Media Graphics for QMC-2

#### QMG Ordering Options

EAS Crawl Support (NA only) +E +TP Air Temperature Probe

+TXT HD/SD Texting Features including crawls, text teasers, etc.

+NAS Network Attached Server

2D DVE Option for QMC-2 (includes background input +DVE

#### **QMG Memory Options**

Basic Unit is equipped with 512MB internal playout memory and 256MB internal compact flash +MEM2G Memory Upgrade Kit: includes internal playout memory of 2GB

internal compact flash of 2GB, and external compact flash of 2GB +MFM4G

Memory Upgrade Kit: includes internal playout memory of 4GB internal compact flash of 4GB, and external compact flash of 4GB

\* Note: Other memory options are available. Contact factory for more information.

#### **Enclosures**

QMC-2-FRAME-B QMC-2 Frame only with balanced AES audio and one power supply QMC-2-FRAME-U QMC-2 Frame only with unbalanced AES and one power supply

#### >>> Ordering Information for the QMC-DCP

QMC-DCF QMC Desk Control Panel

Ordering Options

+ABP Additional Button Panel +I CD 4.3" LCD Display

+TBAR T-Bar for fader arm applications











# evertz/

#### Master Control Switching & Channel Branding

Evertz® Mini Master Control Switchers are an excellent addition to your broadcast facility. As you reduce cost and increase revenue, it is important to use the same rack space for more distribution channels. These 2RU units offer ample features for the most demanding environments in a very compact solution. Full automation support from many vendors using the industry standard M2100 automation protocol guarantees easy installation and full integration within your existing infrastructure.



#### **▶User-Interfaces & Control**



The Mini Master Control Switchers host a variety of control options. Each of the units ship with the standard 1RU control panel. Evertz® also offers the QMC-DCP for a more robust control panel for installation where operator control is required.

The switcher units also support the GVG110, M2100 and M2100 Mini Master Control Panels. Automation control is offered through the 10XL automation protocol as well as the M2100 protocol, Quartz protocol and XY for logo control only. This full range of automation interfaces guarantees easy installation and facility compatibility.

#### **▶** Audio Processing



The Mini Master Control Switchers incorporate the latest in audio processing. Source selection is defined on an input-by-input basis. Each input can be either embedded or discrete as each unit has support for 8 channels of associated audio. Transition switching from embedded to discrete inputs is married to the video transition rate and handled internally by the system processor.

The robust audio processing is being successfully used for multi-language broadcasts, channel remapping, 5.1 audio mixing, SAP programming, EAS audio voice-over insertion, live news and weather, secondary audio channel device control, and a host of other audio processing situations. All audio configurations are done from the internal HTML configuration server.

#### Master Control Switching & Channel Branding




All of Evertz® Mini Master Control Switchers are logo-enabled. They incorporate the complete keyer functionality found in our standard Logo Inserter products. This includes full-screen logo playout, animated and static logos, time and temperature logos as well as crawling text and EAS insertion.

#### ▶ Video Inputs & Outputs

Each Mini Master Control Switcher incorporates an Evertz® 1200 series video router, providing ample inputs from digital servers, upstream feeds, cart machines, live cameras and VTR units. The separate program and preview output paths allow you

to preview content prior to going to air. Separate Key and Fill inputs allow for the insertion of external computer generated data from any capable source and does not interfere with the Logo Insertion keyer layer.

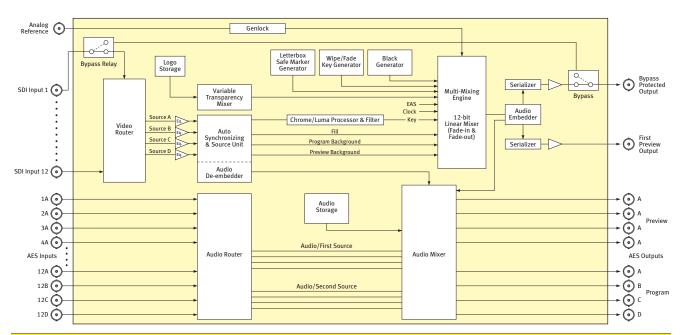

#### **>>>**Ordering Information

PKG9625SW PKGHD9625SW

SD Mini Master Control Switcher Package **HD Mini Master Control Switcher Package** 



Trusted by networks & production facilities worldwide, Evertz® family of Channel Branding products offers a wide range of capabilities and features that meet the needs of the modern broadcast facility. The lineup of Keyers and Logo & Media Inserters provide the solutions for your HD, SD and Analog branding requirements.

#### ▶ Channel Branding Products

The fully integrated systems have been designed to meet not only immediate branding needs, but also provide for future expansions. This includes flexible memory options, static and animated logos, multi-layering of graphics, text crawls and teasers,

and audio clips. Evertz® also understands the need for reliability and redundancy of the modern broadcast facility. The Channel Branding products are based on solid-state design, with features like redundant power supplies and bypass relays.

#### ▶Downstream Keyers - HD9626DSK



The Downstream Keyer System incorporates the latest technology to provide an advanced fully-digital keyer. It is ideal for mixing key and fill signals in the "On-Air" environment. The system also features letter-boxing, wipes, fades, and more, providing storage and retrieval capabilities of several user setups and presets. Access to the system can be from the front panel, optional rack mount or desktop control panel.

#### Logo Inserters - HD9725LG, HD9725LGA, 9725LG, 9725LGA



The Logo Inserter System is a complete package that will key in one - or many - static/animated "bugs" over a full bandwidth HD, SD or Analog video signal. Static and animated logos that are created in BMP, TIFF, TGA, QuickTime, and AVI file formats are imported using the *Overture*™ software using Ethernet. Various memory options allow for up to 8GB of playout cache and up to 16GB of compact flash.

#### ▶ Media Inserters - AN9725LG



The Media Inserter System is a complete Logo and Audio insertion package that will key in one - or many - static/animated "bugs" over a full bandwidth HD, SD or Analog video signal (like the Logo Inserters). It will also "duck insert" preformatted audio WAV clips. Various memory options allow for up to 8GB of playout cache and up to 16GB of compact flash.

#### Modular Media/Inserters - 7725DSK-LG, 7725DSK-LG-HD

The Modular Media Inserter fits into the 7700FR and offers a complete Logo and Audio insertion package. The module media will insert static/animated media over the HD or SD video signal. It will also "duck insert" preformatted audio WAV clips. The modular Media Inserter allow over a Key and Fill input for external devices.

### The HD9626DSK Downstream Keyer System incorporates the latest technology to provide an advance and fully digital keyer. It is ideal for things like bug keying and side-by-side comparison applications.





The HD9626DSK system features letterboxing, safe area/safe title, wipes, fades and more. It consists of a 1RU frame with front panel control, optional remote control panel, and GPI control for stored presets.

It provides storage & retrieval capabilities of several user setups & presets. Evertz® automation protocol allows control from 3<sup>rd</sup> party sources for life-line monitoring as well as function control. Contact your Automation provider for driver availability.

#### ▶ Features & Benefits

- Both mix and additive keying modes provided
- · Auto-timing HD key, fill and background inputs (up to 1 line)
- GPI and RS232/422 inputs for fade/transition control
- · Internal black generator for fade-to-black applications
- Built-in letterbox generator for non-16x9 aspect ratio cropping
- 12-bit processing linear keying providing high quality results for both transparency and soft edges
- · Control of key, gain and offset are provided
- · Full control and status is provided from front panel display
- Level triggered programmable GPIs
- · User-programmable presets are provided
- · Optional rack mount or desktop remote control
- · Optional redundant power supply
- · Optional bypass relay for program output

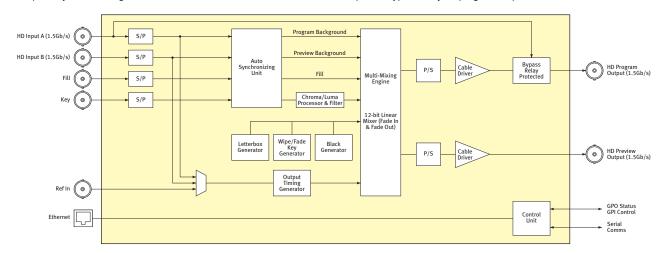



#### ▶ Specifications

Serial Digital Video Input:

Standard: SMPTE 292M 1.485Gb/s 1080i/60, 1080i/59,94, 1080/50,

1080p/24(sF), 1080p/23.98(sF), 720p/60, 720p/59.94, 480p/60,

480p/59.94

Number of Inputs: 4 (A. B. Key and Fill) BNC per IEC 60169-8 Connector:

Amendment 2 Automatic to 100m @1.5Gb/s with Equalization:

Belden 1694A (or equivalent) 25m with bypass relay installed

Impedance: 750

#### Digital Video Output:

Same as input 2 (Program and Preview) BNC per IEC 60169-8 Number of Outputs Connector:

Amendment 2 Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI Impedance 75Ω

#### Control: Serial Control:

Upgrade:

RS-232/422, 8 bits, no parity 9600, 19200, 38400, 57600 baud

computer control of all functions RS-232, 57600 baud, 8 bits, no parity

for firmware upgrades

#### General Purpose In/Out:

Number of inputs: Number of outputs

Type:

Connector: Female High Density DB-15

+5V nominal

Opto isolated, active low

Signal level:

#### **>>>**Ordering Information

HD9626DSK HD Downstream Kever

#### **Ordering Options**

+2PS Redundant power supply +DCP Optional Desktop Control Panel +RCP Optional Rack Mount Remote Control Panel

Physical:

Weight:

Electrical:

Power:

Safety:

EMI/RFI:

Dimensions:

19"W x 1.75"H x 18.75"D

8lbs (3.5kg)

ETL Listed

EU EMC Directive

(483mm W x 45mm H x 477mm D)

Auto ranging 100-240V AC 50/60Hz

Complies with EU safety directive

Complies with FCC Part 15 Class A









#### HD/SD Logo Inserter and Media Keyer



The HD9725LG Logo Inserter system is a complete HD/SD Logo Insertion package that will key one, or many, static/animated "bugs" over an HD or SD video signal. Logos created in BMP, Tiff, TGA or Wave file formats can be imported into the Evertz  $\textit{overture}^{\, \text{\tiny TM}}$  software and transferred to the HD9725LG via Ethernet. Logos are stored in flash memory and can be quickly accessed via front panel, quick select keys, GPI inputs, automation and *overture*™. With the removable Compact Flash option you can have access of up to 8 Gigabytes of on-line logo storage space and virtually unlimited archived media storage.


The HD9725LGA Media Inserter system is a complete Logo and Audio insertion package that will key one, or many, static/animated "bugs" over an HD or SD video signal. It will also duck program audio, insert preformatted audio clips (WAV files), and voiceovers

The HD9725I G and HD9725I GA have been designed to manage and store multiple logos. The size of each logo is variable and ranges from 1/25th to full screen. The position of the logo, fade rates, clip association and animation rates are user-controllable.

Up to 16 logos can be keyed simultaneously with independent fade control for each logo. The onboard preview allows you to cue your logos for position and content verification prior to going "On Air". The Media Inserter Voice Over audio input allows for 1 button audio switching.

The EAS crawl support allows for connection to an existing EAS decoder. This RS232 connection allows weekly tests (white text on green), watch alerts (white on yellow) and warnings (white on red) to be scrolled across the video with no need for format conversion. The variable height text font can be positioned anywhere on the screen and rendered with any True Type font. A GPI can be used to insert the EAS audio on the HD9725LGA.

The HTXT option allows for the creation of custom text messages that can be displayed as crawls or fixed position fields on top of keyed graphic logos. These user-defined elements can be dynamically updated by Ethernet using the overture™ software. Text crawls and fields retain display information such as background/foreground transparency, color, position and font while the dynamic text may be changed without re-creating the associated logo graphics.

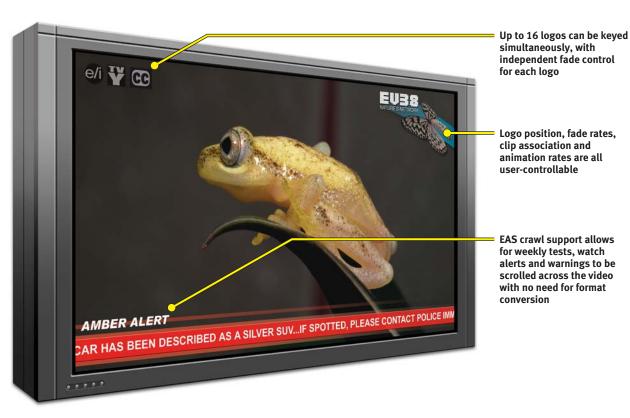

#### ▶ Features & Benefits

- · Stores and inserts static and animated logos or media clips
- Multiple simultaneous logos can be keyed directly onto the HD or SD video signal
- Multi-layer keying
- Supports 1080i, 720p, 1035i, 1080psF, 480p, 525, and 625 formats
- Full 12-bit linear video keyer with logo fade-in and fade-out processing
- · Independent control of logo position, transparency and offset
- Independent control of fade in and fade out of static logos
- · Input bypass relays for power failure protection
- Automatic equalization up to 100m @ 1.5Gb/s (Belden 1694A or equivalent)
- Program and Preview outputs
- · Reference to input video or color black
- · Gigabit Ethernet interface
- LTC input for analog or digital "Breakfast clocks"
- Manage logos from a standard PC using Ethernet and overture<sup>™</sup>
- Standard 256MB compact flash storage with 512MB playout cache

- Optional +HTXT feature to support crawls and text teasers/snipes
- Optional 2GB, or 4GB internal compact flash storage
- Optional additional removable flash memory of 2GB, 4GB or 8GB
- Option to increase playout cache to 2GB, 4GB or 8GB DRAM
- Download logos and audio clips from a standard PC using ethernet using Evertz® **overture**™ software (included)

#### HD9725LGA Additional Features

- · Eight AES pair inputs and eight AES pair outputs
- Full 4 pair audio voice over mixing for Dolby 5.1 audio
- · Includes embedded audio mixing with 4 AES pair de-embedding and re-embedding for voice over and clip inserts
- Audio bypass mode for passing Dolby-E™


#### **EAS Option Features**

- Emergency alert crawls
- · Interfaces to TFT and Sage EAS decoders

## HD9725LG, HD9725LGA

#### HD/SD Logo Inserter and Media Keyer

#### ▶HD9725LGA Rear Panel

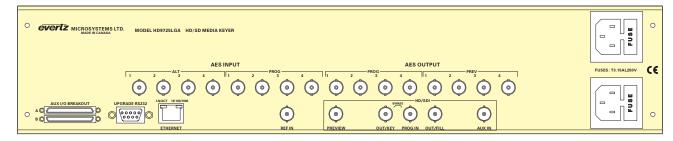

#### ▶ Specifications

Serial Digital Video Input:
Standard: SMPTE 292M, 1.485Gb/s SMPTE 259M-C, 270Mb/s

Number of Inputs:

Connector BNC IEC 61169-8 Annex A Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: > 15dB up to 1.5Mb/s

Serial Digital Video Outputs:

Standard: Same as input Number of Outputs: : 2 Program, 1 Preview Connectors BNC IEC 61169-8 Annex A 800mV nominal Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude Wide Band Jitter: < 0.2 UI

Video Reference:

Menu Selectable from Input Video or Source:

Reference Input

Type: Auto Detect depends on video format NTSC or PAL Color Black 1V p-p BNC IEC 61169-8 Annex A Connector:

Termination:

AES Audio Inputs (HD9725LGA only):

SMPTE 276M single ended AES Standards 4 Program, 4 Alternative Number of Inputs: Connector: BNC IEC 61169-8 Annex A

Sampling Rate: 48kHz 1V p-p ±10% Signal Level:

AES Audio Outputs (HD9725LGA only):

Standards: SMPTE 276M single ended AES Number of Outputs: 4 Program, 4 Preview

Background and voice over source assignable for each channel Connector: BNC IEC 61169-8 Annex A

Sampling Rate: 48kHz Signal Level: 1V p-p

From Video Reference Reference:

Embedded Audio (HD9725LGA only):

SMPTE 299M

De-embedder Groups 1 to 2 of embedded audio in

video input

Embedder: Program audio embedded to groups 1 and 2 on program video outputs

Preview audio embedded to groups 1 and 2 on preview video output

LTC Reader:

SMPTE 12M Standard:

Frame Rate: 25 and 30 Fps nominal 3-pin female XLR type connector Connectors: 0.2 to 4V p-p, balanced or unbalanced

Control:

Upgrade 232 Port: 9-pin female "D", RS-232 57600 baud, 8 bits, no parity firmware upgrade Remote Panel Port: 9-pin female "D", RS-422 9600 baud, 8

bits, no parity

Remote control panel interface (only available on RCP or DCP versions)

Serial Control Port (3; additional 4 optional):

9-pin female "D", RS-232/422 8 bits, no parity, baud rate depends on protocol Selectable protocols: Automation. EAS Interface, temperature probe interface

RJ-45 1000Base T Ethernet, TCP/IP Media Transfers:

General Purpose Inputs and Outputs:

Number of Inputs: 16 (standard) additional 16 (optional) Number of Outputs: 8 (standard); additional 8 (optional) Opto-isolated, active low Type: Connector Terminal block on breakout panel

Physical: Dimensions

Electronics: 19" W x 3.5" H x 18.75" D (483mm W x 90mm H x 477mm D)

Rack Mount Control Panel:

19" W x 3.5" H x 4.25" D

(483mm W x 90mm H x 110mm D)

Desktop Control Panel:

7.75" W x 2.0" H x 6.5" D

(197mm W x 50mm H x 160mm D)

Electrical: Power:

Electronics Autoranging 100-240V AC 50/60Hz,

60V A Optional Remote Control Panel:

12V DC 9W Autoranging 100-240V AC 50/60Hz

power adapter provided

Safety: ETL listed

Complies with EU safety directive FMI/RFI Complies with FCC Part 15 Class A,

EU EMC Directive

#### >>> Ordering Information

HD9725LG

HD/SD Logo Inserter System HD9725LGA HD/SD Media Inserter System with audio support **Ordering Options** +DCP Optional Desktop remote control panel (replaces front panel control) +RCP Optional Rack mount remote control panel (replaces front panel control) +2PS Optional Redundant power supply +CF Optional Front Panel Compact Flash Drive (does not include compact flash memory card)

+HTXT Optional Texting features (includes crawls and text teasers)

Optional Air temperature probe +E

Optional EAS crawl insertion (North America only) +NAS Optional Network Attached Storage support +PC2G

Optional Internal Playout Memory expansion to 2GB DRAM +PC4G Optional Internal Playout Memory expansion to 4GB DRAM +PC8G Optional Internal Playout Memory expansion to 8GB DRAM Optional Internal Compact Flash memory expansion to 2GB +IF2G Optional Internal Compact Flash memory expansion to 4GB +MFM2G Optional Memory Upgrade Kit to 2GB (includes +PC2G, +IF2G, and +CF2G) +MEM4G Optional Memory Upgrade Kit to 4GB (includes +PC4G, +IF4G, and +CF4G) Accessories

9700BHP-AUX

+CF2G Optional External Compact Flash Expansion to 2GB (includes front panel compact flash drive)

+CF4G Optional External Compact Flash Expansion to 4GB (includes front panel compact flash drive)

+CF8G Optional External Compact Flash Expansion to 8GB (includes front panel compact flash drive)

Optional second breakout bulkhead panel for additional GPI/O serial communication ports







# evertz/

#### SDI Logo & Media Inserter Systems with Audio Support



The 9725LG Logo Inserter is a complete SD Logo Insertion package that will key one, or many, static/animated "bugs" over SD video signal. Logos created in BMP, Tiff, TGA file formats can be imported into the Evertz<sup>®</sup> **overture** \*\* software and transferred to the 9725LG via Ethernet. Logos are stored in flash memory and can be quickly accessed via front panel, quick select keys, GPI inputs, automation and **overture** \*\*. With the removable Compact Flash option you can have access of up to 4 Gigabytes of on-line logo storage space and virtually unlimited archived media storage.

The 9725LGA Media Inserter is a complete Logo and Audio insertion package that will key one, or many, static/animated "bugs" over an SD video signal. It will also "Duck" insert preformatted audio clips (WAV files).

The 9725LG and 9725LGA have been designed to manage and store multiple logos. The size of each logo is variable and ranges from 1/25th to full screen.

The position of the logo, fade rates, clip association and animation rates are user-controllable. Up to 16 logos can be keyed simultaneously with independent fade control for each logo.

The onboard preview allows you to cue your logos for position and content verification prior to going "On Air". The Media Inserter Voice Over audio input allows for 1 button audio switching.

The EAS crawl support allows for connection to an existing EAS decoder. This RS232 connection allows weekly tests (white text on green), watch alerts (white on yellow) and warnings (white on red) to be scrolled across the video with no need for format conversion. The variable height text font can be positioned anywhere on the screen and rendered with any True Type font.

The TXT option allows for the creation of custom text messages that can be displayed as crawls or fixed position fields on top of keyed graphic logos. These user-defined elements can be dynamically updated by Ethernet using the *overture*™ software. Text crawls and fields retain display information such as background/foreground transparency, color, position and font while the dynamic text may be changed without re-creating the associated logo graphics.



#### ▶Features & Benefits

- Stores and inserts static or animated logos
- Multiple simultaneous logos can be keyed directly into SD video
- Incorporates a linear keyer that provides various transparency to your logos
- Multi-layer keying
- Provides independent fade control for each logo
- 32 programmable GPI contact closures
- 16 programmable GPO outputs
- Download media from a standard Windows PC running  $\textit{overture}^{™}$  software
- FTP file transfer and maintenance using **overture**™ software
- Fade all out capability provided on program video output
- Standard 256MB flash storage with 512MB playout cache
- Program output bypass relay protected
- · Preview/Program or key/fill output modes


- Optional redundant power supply
- Optional rackmount or desktop remote control panels
- · Optional EAS crawl support for Sage, TFT and DASDEC Decoders
- EAS supports all new alert codes including amber alerts
- Optional 1GB or 2GB internal flash storage space
- Optional additional removable memory 1GB, 2GB or 4GB compact flash storage
- Optional TXT features for scrolling and dynamic text titling (snipes) and crawls
- Up to 4GB playout cache memory options

#### 9725LGA Additional Features

- Associate audio clips to play when logos are faded in
- 1 button alternate audio voice overs
- · Quad AES inputs and outputs for discreet 5.1 Dolby

#### SDI Logo & Media Inserter Systems with Audio Support

#### ▶9725LGA Block Diagram



#### ▶ Specifications

Serial Digital Video Input

Standard: SMPTE 259M, 270 Mb/s Number of Inputs:

BNC IEC 61169-8 Annex A Connector:

Equalization: Automatic to 200m @ 270 Mb/s with Belden 1694A or equivalent cable

Return Loss: > 15dB up to 270Mb/s

**Serial Digital Video Outputs:**Standard: SMPTE 259M, same as input Number of Outputs: 2 Program, 1 Preview Connectors: BNC IEC 61169-8 Annex A

Signal Level: 800mV nominal 0V ±0.5V DC Offset: Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot: Wide Band Jitter: < 0.2 UI

AES Audio Inputs (9725LGA Only):

SMPTE 276M single ended AES Standards: Number of Inputs: 4 (Program), 4 (Alternative) BNC IEC 61169-8 Annex A Connector:

Sampling Rate Signal Level: 1V p-p ±10%

AES Audio Outputs (9725LGA Only):

SMPTE 276M single ended AES

Number of Outputs: 4 Program, 4 Preview Background and voice over source

and +CF1G)

and +CF4G)

assignable for each channel BNC IEC 61169-8 Annex A

Optional Internal Playout Memory expansion to 1GB DRAM Optional Internal Playout Memory expansion to 2GB DRAM

Optional Internal Playout Memory expansion to 4GB DRAM

Optional Internal Compact Flash memory expansion to 1GB Optional Internal Compact Flash memory expansion to 2GB

Optional Internal Compact Flash memory expansion to 4GB

Optional Memory Upgrade Kit to 1GB (includes +PC1G, +IF1G,

Optional Memory Upgrade Kit to 2GB (includes +PC2G, +IF2G,

Optional Memory Upgrade Kit to 4GB (includes +PC4G, +IF4G,

Connector: Sampling Rate: 48kHz

Signal Level: 1v p-p

+PC2G +PC4G

+IF1G +IF2G

+MEM1G

+MEM2G

+MEM4G

From Video Reference

Embedded Audio (9725LGA only):

Standard: SMPTE 272N

Groups 1 to 2 of embedded audio in De-embedder

video input Embedder:

Program audio embedded to groups 1 and 2 on program video outputs Preview audio embedded to groups 1

and 2 on preview video output

LTC Reader:

SMPTE 12M Standard: Frame Rate: 25 and 30 Fps nominal

Connectors: 3-pin female XLR type connector 0.2 to 4V p-p, balanced or unbalanced Level:

Control:

Upgrade 232 Port: 9-pin female "D", RS-232 57600 baud, 8 bits, no parity firmware

upgrade

Remote Panel Port: 9-pin female "D", RS-422 9600 baud,

8 bits, no parity

Remote control panel interface (only available on RCP or DCP versions)

Serial Control Port (3 standard):

9-pin female "D", RS-232/422 8 bits. no parity, baud rate depends on

protocol

Selectable protocols: Automation, EAS Interface. Temperature Probe

Interface

Media Transfers: RJ-45 1000Base T Ethernet, TCP/IP General Purpose Inputs and Outputs:

Number of Inputs: 16 (standard) additional 16 (optional) Number of Outputs: 8 (standard); additional 8 (optional) Opto-isolated, active low Type:

Connector Terminal block on breakout panel

Physical Dimensions:

Electronics: 19" W x 1.75" H x 18.75" D

(483mm W x 45mm H x 477mm D)

Rack Mount Control Panel: 19" W x 1.75" H x 4.25" D

(483mm W x 45mm H x 110mm D)

Desktop Control Panel:

7.75" W x 2.0" H x 6.5" D

(197mm W x 50mm H x 160mm D)

Electrical: Power:

Electronics: Autoranging 100-240V AC 50/60Hz,

60V A

Optional Remote 12V DC 9W

Control Panel: Autoranging 100-240V AC 50/60Hz

power adapter provided

Safety: ETL listed

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **▶** ► ► ► Ordering Information

| 9725LG<br>9725LGA | SDI Logo Inserter System<br>SDI Media Inserter System                   | Accessories<br>+CF1G | Optional External Compact Flash Expansion to 1GB (includes front panel compact flash drive) |
|-------------------|---|----------------------|---|
| Ordering Options  |   | +CF2G                | Optional External Compact Flash Expansion to 2GB (includes front                            |
| +DCP              | Optional Desktop remote control panel (replaces front panel control)    |                      | panel compact flash drive)  |
| +RCP              | Optional Rack mount remote control panel (replaces front panel control) | +CF4G                | Optional External Compact Flash Expansion to 4GB (includes front                            |
| +2PS              | Optional Redundant power supply   |                      | panel compact flash drive)  |
| +CF               | Optional Front Panel Compact Flash Drive (does not include compact      | 9700BHP-AUX          | Optional second breakout bulkhead panel for additional GPI/O serial                         |
|                   | flash memory card)  |                      | communication ports   |
| +TXT              | Optional Texting features (includes crawls and text teasers)            |                      |   |
| +TP               | Optional Air temperature probe  |                      |   |
| +E                | Optional EAS crawl insertion (North America only)                       |                      |   |
| +NAS              | Optional Network Attached Storage support                               |                      |   |
| +PC1G             | Optional Internal Playout Memory expansion to 1GB DRAM                  |                      |   |



#### HD/SD Logo Inserter & Media Keyer

The 7725DSK-LG Downstream Keyer and Logo Inserter is a complete package that will insert simultaneous static or animated logos over a full bandwidth SDI program video signal.

The 7725DSK-LG has been designed to manage and store multiple logo objects. Logos are stored in non-volatile Flash memory and may be downloaded to the hardware via an RS-232 serial interface or via Ethernet FTP using the overture" software. The 7725DSK-LG has a key and fill input to allow for external keyer In addition to the support for another external keyer, one animated logo or up to 16 static logos can be keyed simultaneously with independent fade control for each static logo. The size of each logo is variable and ranges from 1/25th to full screen. The position of the logo, fade rates, and animation rates are also user controllable. The 7725DSK-LG comes with 384MB of playout cache and 1GB of compact flash storage.

The onboard preview allows you to cue your logos for position and content verification prior to going "On Air". The optional features of the 7725DSK-LG are an air temperature probe and a crawl option which provides the ability to insert crawls with static content.


#### ▶ Features & Benefits

- · SDI mixer or downstream keyer with full preview
- Supports 525i/59.94 and 625i/50 video formats (in 7725DSK-LG only)
- Supports 525i/59.94, 625i/50, 720p/50, 720p/59.94, 1080i/50, and 1080i/59.94 video formats (in 7725DSK-LG-HD only)
- · Variety of smooth transitions including cut, fade and 8 angles of wipes
- Full 12 bit linear keyer with video fade-in and fade-out processing
- · Stores and inserts 1 animated or up to 16 static logos with independent control of logo position, transparency and offset. Independent controls of fade in and fade out for static logos
- Download logos from a standard PC using Ethernet using overture<sup>™</sup> software
- 384MB of playout cache; 1GB of compact flash storage
- · LTC input for analog or digital 'Breakfast Clock' logos
- · Built-in Black Generator

- · 8 channel embedded audio support
- Automatic equalization up to 250m (Belden 8281 or equivalent cable)
- Video input bypass relays for power failure bypass protection
- · Multiple control interface options including GPI, RS232 automation control
- · Optional Rack mount control panel
- · Optional crawl support for static crawls
- Optional desktop remote control panel available
- · Optional temperature probe for temperature logos

#### **EAS Option**

- Emergency alert crawls
- · Interfaces to TFT and SAGE EAS decoders
- · Maximum number of static logos reduced to 15

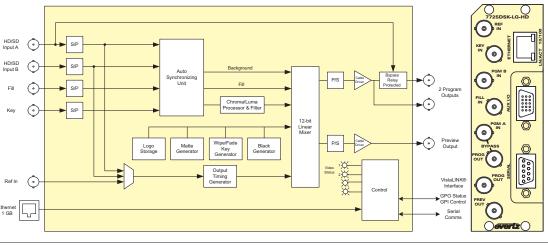

#### ▶ Specifications

Serial Video Input

Number of Inputs:

Standard: 270Mb/s SMPTE 259M-C, 525 or 625 line component

1.5Gb/sec SMPTE 292M (7725DSK-LG-HD only) 2 Background, 1 Fill, 1 Key BNC IEC 61169-8 Annex A

Connector: Automatic 300m @ 270 Mb/s, 100m @ Equalization:

1.5Gb/s with Belden 1694A or

equivalent cable

Return Loss: > 15dB up to 1.5Gb/s

#### Serial Video Outputs

Number of Outputs: 2 Program, 1 Preview Standard: Same as input BNC IEC 61169-8 Annex A Connectors

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal < 10% of amplitude Overshoot:

Wide Band Jitter: < 0.2 UI Video Reference

NTSC or PAL Color Black 1 V p-p Type: Connectors: BNC IEC 61169-8 Annex A

Termination

## LTC Reader (on breakout cable) Standard: SMPTE 12M

Frame Rate: 25 and 30 Fps nominal Connectors: 3-pin female XLR type connector Level: 0.2 to 4V p-p, balanced or unbalanced

Control (on breakout cable)

Remote Panel Port: 9-pin female "D", RS-422 9600 baud, 8

bits, no parity

Remote control panel interface (only available on RCP or DCP versions) Serial Control Port: 9-pin female "D", RS-232/422 8 bits.

no parity, baud rate depends on

protocol

COM D Port: 9-pin female "D", RS-232/422 8 bits

no parity, baud rate depends on

protocol

Selectable protocol: Automation, temperature probe

RJ-45 100Base T Ethernet, TCP/IP, Ethernet Port: logo transfers, Virtual serial ports

#### General Purpose Inputs and Outputs:

8. programmable control functions Number of Inputs: Number of Outputs: 4, programmable tally functions Opto-isolated, active low 15-pin female High-density D Pulled up to Vext supplied voltage Connector: Signal Level:

3.3V DC provided

Electrical:

Voltage: +12V DC 22 W

EMI/RFI:

Complies with FCC Part 15 Class A,

EU EMC Directive

Physical:

Number of Slots:

#### >>> Ordering Information

7725DSK-LG 7725DSK-LG-HD **Ordering Options** 

SD Downstream Keyer with Internal Logo with VistaLINK® support HD Downstream Keyer with Internal Logo with VistaLINK® support

Rear Plate must be specified at time of order

Eg: Model +3RU

+RCF Optional Rack mountable remote control panel Optional Desktop remote control panel +CLH +TP Optional crawl support (static contents) Optional Air temperature probe

Optional EAS crawl insertion (North America only)

Rear Plate Suffix

+3RU

3RU Rear Plate for use with 350FR and 7700FR-C Multiframe

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules

#### Logo Inserter System




The AN9725LG Logo Inserter system is a complete analog logo insertion package that will key one or many static/animated "bugs" over a composite analog video signal. Logos created in BMP, Tiff, and TGA file formats can be imported into the Evertz® **overture™** software and transferred to the AN9725LG via Ethernet. Logos are stored in flash memory and can be quickly accessed via front panel, quick select keys, GPI inputs, automation and **overture™**. With the removable Compact Flash option you can have access of up to 2 Gigabytes of on-line logo storage space and virtually unlimited archived media storage.

The AN9725LG has been designed to manage and store multiple logos. Each logo size is variable and ranges from 1/25th to full screen. The position of the logo, fade rates and animation rates are user-controllable. Up to 16 logos can be keyed simultaneously with independent fade control for each. The onboard preview allows you to cue your logos for position and content verification prior to going "On Air".

The EAS crawl support allows for connection to an existing EAS decoder. This RS232 connection allows weekly tests (white text on green), watch alerts (white on yellow) and warnings (white on red) to be scrolled across the analog video with no need for format conversion. The variable height text font can be positioned anywhere on the screen and rendered with any True Type font.

The TXT option allows for the creation of custom text messages that can be displayed as crawls or fixed position fields on top of keyed graphic logos. These user-defined elements can be dynamically updated by Ethernet using the **overture** of software. Text crawls and fields retain display information such as background/foreground transparency, color, position and font while the dynamic text may be changed without re-creating the associated logo graphics.

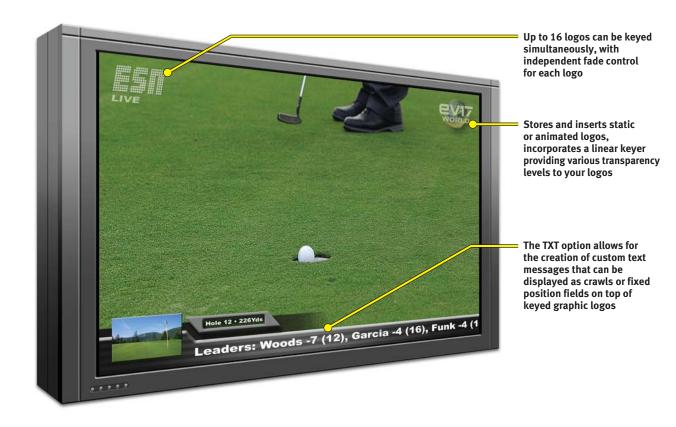












#### Logo Inserter System

#### ▶ Features & Benefits

- · Multiple simultaneous logos can be keyed directly into composite analog video
- · Stores and inserts static or animated logos
- Incorporates a linear keyer that provides various transparency levels to your logos
- Provides independent fade rates for each logo
- 32 programmable GPI contact closures
- 16 programmable GPO outputs
- Download media from a standard Windows PC running overture<sup>™</sup>
- · EAS supports all new alert codes including child abduction emergency
- FTP file transfer and maintenance using *overture*™ software · Fade all out capability provided on program video output
- Program output bypass relay protected
- Matches logo to input video ±3dB range

- · Can correct video levels ±3dB
- Standard 256MB flash storage with 512MB playout cache
- Multi-layer keying
- Preview/Program output modes
- Optional 1GByte or 2GBytes internal flash storage space
- Optional additional removable memory 1GB or 2GB compact flash storage
- · Optional rackmount or desktop remote control panels
- · Optional EAS crawl support for Sage, TFT and DAS DEC Decoders
- Optional TXT for scrolling and dynamic text titling
- · Optional redundant power supply
- · SDI upgrade by factory retrofit
- · Up to 2GB Playout memory options

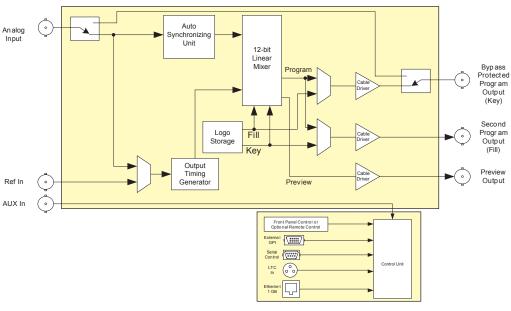

#### ▶ Specifications

Composite Analog Video Input: Standard: SMPTE 170M (NTSC) ITU-R BT.470 (PAL-B) Number of Inputs

BNC IEC 61169-8 Annex A Connector:

Impedance:  $75\Omega$ 

Return Loss: > 40dB up to 4.2MHz

Composite Analog Video Outputs:

Same as Input 2 Program, 1 Preview BNC IEC 61169-8 Annex A Number of Outputs Connector:

Signal Level 1V nominal Impedance: 75Ω DC Offset: 0V ±0.5V

> 40dB up to 4.2MHz Return Loss:

Frequency Response: < 0.1dB to 5.5MHz for Program

Differential Gain: 0.25% p-p Differential Phase: 0.22° p-p

SNR: >65dB (black video, 100kHz to 5.0 MHz)

LTC Reader:

SMPTF 12M Standard:

Frame Rate: 25 and 30 Fps nominal 3-pin female XLR type connector Connectors: 0.2 to 4V p-p, balanced or unbalanced

Control: Upgrade 232 Port: 9-pin female "D", RS-232 57600

baud, 8 bits, no parity firmware upgrade Remote Panel Port: 9-pin female "D", RS-422 9600 baud,

8 bits, no parity. Remote control panel interface (only available on RCP or

DCP versions)

Serial Control Port (3 standard; additional 4 optional):

9-pin female "D", RS-232/422 8 bits, no parity, baud rate depends on protocol Selectable protocols: Automation, EAS interface, temperature probe

interface

Media Transfers: RJ-45 1000Base T Ethernet, TCP/IP

General Purpose Inputs and Outputs:

16 (standard) additional 16 (optional) Number of Inputs: Number of Outputs: 8 (standard) additional 8 (optional) Type: Opto-isolated, active low Terminal block on breakout panel Connector

Physical: Dimensions

Electronics

19" W x 1.75" H x 18.75" D. (483mm W x 45mm H x 477mm D)

Rack Mount Control Panel:

19" W x 1.75" H x 4.25" D. (483mm W x 45mm H x 110mm D)

**Desktop Control Panel** 

7.75" W x 2.0" H x 6.5" D.

(197mm W x 50mm H x 160mm D)

Electrical:

Power: Electronics

Autoranging 100-240V AC 50/60Hz, 60V A

Optional Remote Control Panel:

12V DC 9W

Autoranging 100-240V AC 50/60Hz

power adapter provided

Safety: ETL listed Complies with EU safety directive

EMI/RFI: Complies with FCC Part 15 Class A,

FU FMC Directive

#### >>>Ordering Information

| AN9725LG         | Logo Inserter System  | +IF2G<br>+MEM1G | Optional Inte<br>Optional Mer |
|------------------|---|-----------------|-------------------------------|
| Ordering Options |   |                 | and +CF1G)                    |
| +DCP             | Optional Desktop remote control panel (replaces front panel control)    | +MEM2G          | Optional Mer                  |
| +RCP             | Optional Rack mount remote control panel (replaces front panel control) |                 | and +CF2G)                    |
| +2PS             | Optional Redundant power supply   |                 |                               |
| +CF              | Optional Front Panel Compact Flash Drive (does not include compact      | Accessories     |                               |
|                  | flash memory card)  | +CF1G           | Optional Exte                 |
| +TXT             | Optional Texting features (includes crawls and text teasers)            |                 | panel compa                   |
| +TP              | Optional Air temperature probe  | +CF2G           | Optional Exte                 |
| +E               | Optional EAS crawl insertion (North America only)                       |                 | panel compa                   |
| +PC1G            | Optional Internal Playout Memory expansion to 1GB DRAM                  | 9700BHP-AUX     | Optional sec                  |
| +PC2G            | Optional Internal Playout Memory expansion to 2GB DRAM                  |                 | communicati                   |
| +IF1G            | Optional Internal Compact Flash memory expansion to 1GB                 |                 |                               |

ernal Compact Flash memory expansion to 2GB emory Upgrade Kit to 1GB (includes +PC1G, +IF1G,

emory Upgrade Kit to 2GB (includes +PC2G, +IF2G,

ternal Compact Flash Expansion to 1GB (includes front

act flash drive)

ternal Compact Flash Expansion to 2GB (includes front act flash drive)

cond breakout bulkhead panel for additional GPI/O serial



#### Media Creation & Management



All of Evertz® Logo and Media Insertion products ship with the overture™ Software Suite. The Overture Software Suite is used to create logo/media files for insertion into the Analog, SD, or HD video path. Overture allows for easy-to-use tools to create, manage, and control the Evertz Logo/Media Insertion product line, thus simplifying the graphics workflow in the broadcast environment.

The Overture Software Suite is comprised of four tools, each providing for specific functionality within the graphics workflow. The tools are:

Overture Media Designer
Overture Media Manager
Overture User Manager
Overture Media Commander

#### **▶overture™ Media Desig**ner

Flexible Design Canvas: Overture™ Media Designer's design canvas provides users with ease to access design objects, toolbars, and positioning controls. The canvas can be set to various video standard to allow for accurate display and positioning of design objects such as static and animated logos. The design canvas also has tools to import AVI or MOV files, and play them inline.

Static or Animated: Overture™ Media Designer allows users to create the "look" they want to present to the viewers. The tool can import graphic files created in the Tiff, Targa, BMP, GIF, JPG, AVI or MOV formats from professional graphics programs. The tool converts these graphic files into an RGB or YCbCr/YPbPr format, which is used by the Evertz Logo/Media Insertion products in the video domain.

The static logos are fixed-position/fixed-transparency images. The static logos can also have effects such as fade, wipes, and pushes. Animated logos have an active position and active transparency series of images displayed at any size up to full-screen. Duration of playout depends on storage size and playout memory installed on the logo/media insertion device. Audio clips and repeat counts can be added to the animations.

Clocks: Overture™ Media Designer allows for the creation of a number of different clock objects. An analog clock object has a rendering of a traditional wall clock, driven from an internal real-time clock or saved to the LTC input. The digital clock object has a digital clock characters, rendered using the internal device CG. Time display options include HH:MM, HH:MM:SS, or HH:MM:SS:FF in 12 or 24-hour styles. Up and down counter objects can also be created.


Date & Temperature: Overture™ Media Designer allows for the creation of date and ambient air temperatures objects. Both are rendered using the internal device CG. Internal date values run from either internal real-time clock or slaved to the LTC

output if date information is available. This is an ideal feature for the re-transmitting of date-specific material. Temperature display options include Celsius or Fahrenheit, with or without the degree symbol. Temperature values are derived from a manual entry on the device, a text file loaded on the device, connection to the METAR website, or the optional external temperature probe (+TP option for channel branding devices).

**Text Crawls:** Overture ™ Media Designer allows for the creation of text crawl objects. The static or dynamic text crawl objects are rendered by the internal device CG. The crawl objects include foreground/background color and transparency settings, rate and display positioning, and font type setting (using any TrueType font). The contents of the crawl object can be entered in manually upon creation, via text file, or an RSS (Really Simple Syndication) web feed. The user also can set the appearance of the crawl object when brought onto screen. Note: the text crawl feature is an orderable option on the channel branding devices.

**Text Headliners:** *Overture* Media Designer allows for the creation of a 3-line text headline object. The text headline object is rendered by the internal device CG. The text headline object includes: effects (such as fade, push, and wipe), rate and display positioning, and font type setting (using any TrueType font). The contents of the text headline object can be entered via a text file. Note: the text headline feature only available as part the text crawl option on the 9725 and QMG series of channel branding devices.

**Playlists:** *Overture™* Media Designer allows for the creation a complete graphic "look" by using playlists. Users can create their layered look on the same design canvas by creating and positioning the various design objects. *Overture™* Media Designer will build all the objects into a playlist, which can then be accessed on the Logo/Media Insertion device.

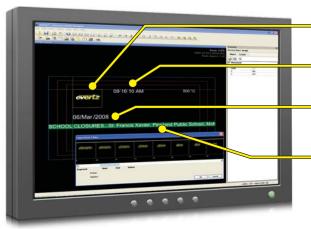

#### Static or Animated Logos:

Images can be displayed at any size up to full-screen

#### **Analog or Digital Clock:**

Up & down timers are also included

#### **Date & Temperature Logos:**

Video inserted date & ambient air temperatures are rendered using internal device CG

#### **Crawl Creation:**

Features include foreground & background color and transparency









#### Media Creation & Management









#### **▶overture** ™ Media Manager

**Device Management: Overture**™ Media Manager is a password-protected tool. Users can add and group channel branding devices that they want to control and manage the media on. Users create devices by specifying an IP address and providing a description. Upgrading device firmware can be done via this tool.

 $\textbf{Media Management: } \textit{Overture}^{\intercal \!\!\!\!\! \mathsf{M}} \text{ Media Manager allows users to drag-and-drop}$ logo, audio, font and text files from the local PC, connected network space, to the channel branding devices. Files can be uploaded, downloaded, archived, or deleted using the easy "right-click" functionality. Status of transfers and actions are also provided to the user.

Playout Control: Overture™ Media Manager allows for the quick access to a host of features including the "fade-in" and "fade-out" functions. Media can be taken to or off air using these functions. The tool also allows media control from remote

Object Properties: Using Overture™ Media Manager, users can "right-click" on any media file to display the properties and view a thumbnail of the associated logo. Thumbnail views can be displayed from the connected device as well as on the local PC or network storage space. Media properties that can be displayed include: horizontal and vertical positions, gain settings, and clock parameters.

#### **▶overture** ™ User Manager

**Device Security: Overture**™ User Manager provides the ability to add security to the devices. Since the channel branding devices are typically in-path, protection from unauthorized access needs to be provided. Overture™ User Manager allows for the creation of user profiles with passwords.

**Tools Security: Overture** ™ User Manager allows for the creation of user profiles that give permission to particular tools and their functions within the *Overture* \*\* software suite. Profiles for graphics departments, operators and engineering can be created to allow users access to specific functions with the various tools.

#### **▶overture** ™ Media Commander

**Device Control:** Overture  ${}^{\text{\tiny{TM}}}$  Media Commander is a password-protected tool. The graphical interface allows operators to control various devices to take media on or off air using a touch screen interface or computer screen. Operators can also edit crawl messages via a simple editor. This is ideal for breaking news or emergency crawls. The *Overture*™ Media Commander also allows for a central control point for remote devices.












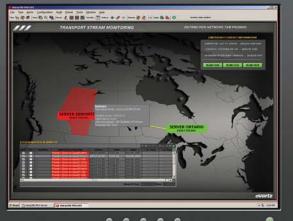





# istal

**SNMP MONITORING & CONTROL SOFTWARE** 

With effective and simple-to-use graphics, unparalleled drill-down information, external notification tools and a network of efficient SNMP monitoring & configuration architecture, VistaLINK® and VistaLINK® PRO PLUS provide you with all of the details!

SNMP Monitoring & Control Software for all Applications

From a simple module setup and configuration tool, to an advanced level monitor and control element manager - and everything in between. Rely on VistaLINK® and VistaLINK® PRO PLUS to cover all of your application needs.

#### ▶ VistaLINK® PRO

Configuration Management: VistaLINK® PRO configuration software (VLPRO-C) is provided free to users allowing unlimited configuration capabilities for Evertz® VistaLINK® -capable equipment.

Alarm/Event Notification Client: Expand the VistaLINK® PRO configuration tool by adding centralized alarm management. Define & set critical alarms, alarm severities and filters. Built-in external alarm notification tools include audible alerts, "smart" email notification and/or contract closure triggers.

#### **▶VistaLINK® PRO PLUS**

Building on standard VistaLINK® PRO configuration clients, add user-configurable pictorial representations of your broadcast facility - local and remote. Start with global perspectives and drill down to specific rack and frame layouts or consolidate important status information and direct configuration control on a single display.

Import facility block diagrams or generate an off-line simulation using virtual equipment and graphics from the VistaLINK® media library. Link multiple views for the most effective facility or application presentation. Integrate your VistaLINK® PRO PLUS graphic screens with a VIP™ or MVP® and get the best of both on-screen signal display and network

#### **▶ThumbLINK™**

Video, audio and data signal monitoring is enhanced in VistaLINK® through the ability to view thumbnail images from supporting modules, which can be viewed in separate windows or embedded into custom user-designed graphics client UI screens.

#### ▶Third-party Monitoring & Interfacing

For 3rd-party SNMP-enabled or legacy equipment monitoring & configuration, VistaLINK® may be extended to unify all of your system monitoring needs in one package.

#### ▶ Monitor Everything, View by Exception

Through built-in 'signal sniffer' modules, and with VistaLINK® monitoring all signals 24/7 and sending fault notifications while displaying only these signals as they occur, you can further increase performance and cost efficiency.

#### ▶ Monitor Web Clients

Unlock the capability of a remote system or facility health monitoring solution through VistaLINK® PRO + WEB clients. Go beyond a firewall to monitor your facility conveniently through a browser, while receiving email and pager fault notifications as they occur.

#### ▶Scheduling & Auto-Response

Automate facility monitoring & configuration operations or limit false alarming by scheduling changes based on times & dates or events. Program hardware & router changes to be triggered by incoming alarms or exceeded parameter thresholds. Combine routines and Boolean logic to create complex automated logic response systems. Routines can be created within the program wizard or via external scripting mechanisms.

#### ▶ Router Control

Evertz® and third-party router control provides full X-Y style panels or custom usercreated virtual panels to handle even the most specific router control needs.

#### ▶VistaLINK® & SNMP

The real 'plus' of SNMP is its simplicity. Through VistaLINK®, thousands of network nodes are monitored and configured world-wide via SNMP. VistaLINK® PRO and VistaLINK® PRO PLUS unite all SNMP-based equipment from Evertz® and beyond, providing monitoring & configuration capabilities for your mission critical needs. VistaLINK® is the most complete & comprehensive entirely SNMP-based signal monitoring & equipment configuration solution.

Features include terminal equipment configuration & monitoring (on the same module), fiber module health status & link monitoring, discrete signal monitoring, multi-wall display monitoring and monitoring-by-exception solutions.

Simple, reliable, secure and efficient network monitoring a control for your facility equipment through VistaLINK® and SNMP. All of Evertz® VistaLINK® -capable products have built-in probing and monitoring.

Effective and simple-to-use graphics, unparalleled drill-down information, external notification tools, and a network efficient SNMP monitoring & configuration architecture. VistaLINK® PRO PLUS provides you with all the details.

#### ▶ Network Control Panels

The 1RU 9000NCP and 2RU 9000NCP2 VistaLINK® Network Control Panels are low-powered, rack mounted control panel interfaces to VistaLINK® -capable modules, allowing for real-time selection & configuration control of enabled parameters through SNMP.

The NCP units can be used to control a subset of an enabled module's full parameter set - usually the 'proc amp' - and operational parameters such as video & audio level adjustments and gain control. An updated list of NCP-controlled modules & parameters can be found on the Evertz website. NCP units connect to the network via Ethernet and can be further customized with user-specific labels and preset quick-access configuration buttons.





# VistaLINK® & VistaLINK® PRO PLUS

SNMP Monitoring & Control Software for all Applications

Streaming is Believing: With audio, video and data signal monitoring - through discrete modules or multidisplay virtual walls - in place & network monitoring through VistaLINK®, the ability to configure & stream the signal from a remote location to a central monitoring facility or to enabled web clients over IP, signal confidence monitoring is further enhanced.

### ▶ VistaLINK® Capabilities



### ▶VistaLINK® Features












# Tes Mann Configuration Augit Typis Planter Heb ロロログの口が同じ 原発性 か タク 近れ場合には MVP™ Series 500/7700 Series **Thumbnail Streaming SNMP Traps Configuration Client (VLPRO-C) Network** LAN, WAN, VPN Friday, Jan 24, 2003, 12:43:24 Findly, Jan 24, 2022 Severity, Major Jodio Ch2 Level Too Guiet (Video A) ring Labet BullsudSilence2Truevi 77614/W42-DC Device Class: 77614/W42-DC Fridge, Jan 24, 2003, 12-43-44 Acknowledged By: administrator 192.188.8.141 Host Address: 192.168.8.141 Stot 13 **Alarm Client** - 野草連 (中央+ - 福田田 an C pers 10 2 12 per 12 10 日 Destroyan for despot only from Some Some w = w = = **Monitor Grid Client Router Control View**




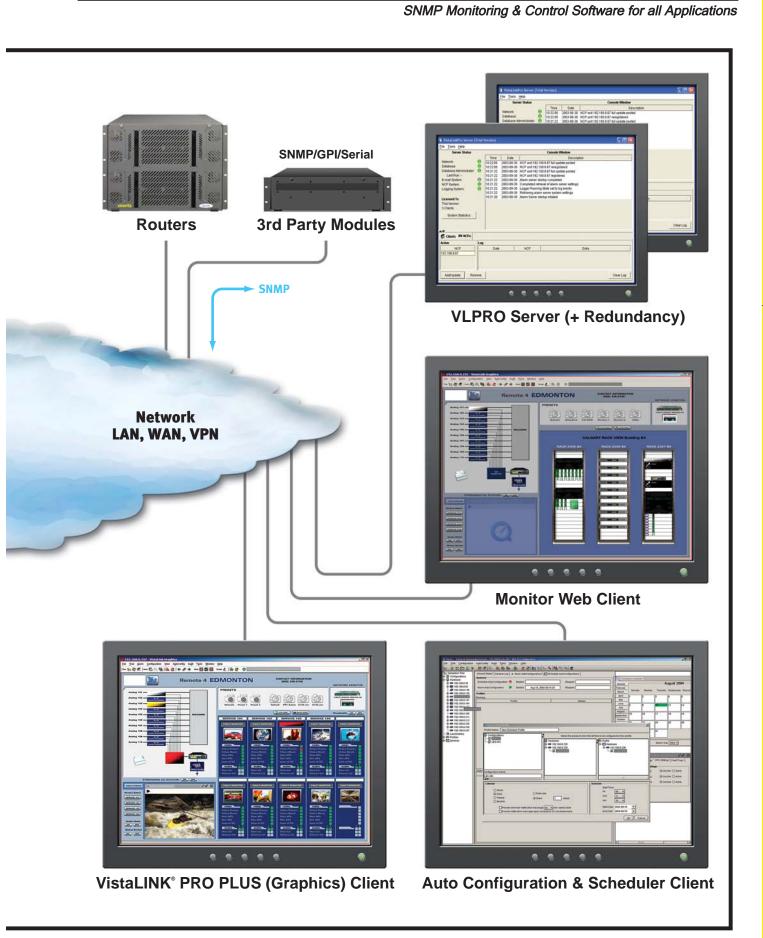

# VistaLINK® & VistaLINK® PRO PLUS

SNMP Monitoring & Control Software for all Applications

▶ VistaLINK® & SNMP - Simple, Reliable, Secure & Efficient

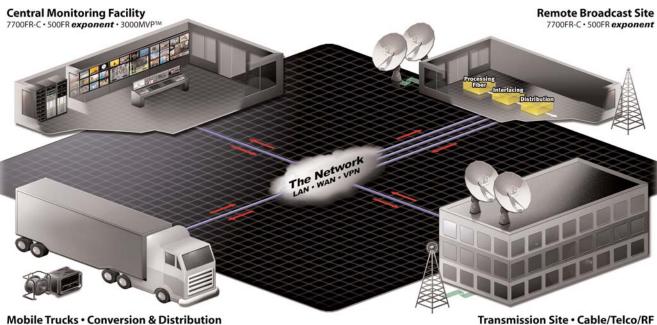

### >>> Ordering Information

7700FR-C • 500FR exponent

VLPRO-C VistaLINK® PRO SNMP configuration-only

Free with every 7700FC, 500FC or 3000FC module

VistaLINK® PRO SNMP alarm monitoring, email notification and VLPRO

configuration (1 client, 1 year)
VistaLINK® PRO PLUS SNMP alarm monitoring, email notification VLPRO PLUS

and configuration (1 client, 1 year)

Ordering Options

VistaLINK® PRO automated configuration & scheduler software

+RSFRV Redundant VistaLINK® PRO server +TSERV

Thumbnail Server option Third Party TRAP Monitoring option

+web-1 Remote site VistaLINK® system monitoring client (1) using Internet browser

+web-5 Remote site VistaLINK® system monitoring clients (5) using Internet browser Upgrade Options

VLPRO PLUS Upgrade existing VistaLINK® PRO client to VistaLINK® PRO PLUS

(1 client, 1 year)

Upgrade existing VistaLINK® PRO to include automated configuration VLPRO-SCH

& scheduling software

VLPRO-WEB1 Upgrade for existing VistaLINK® PRO to include remote site VistaLINK®

system monitoring

Training & Yearly Subscriptions

VLPRO Set-up VLPRO Training

VistaLINK® configuration & training session (per diem)

VLPRO-SER/SUP/LIC 1, 2 or 3 Year


Extra 1, 2 or 3 year VistaLINK® PRO PLUS license & support per client

7700FR-C • 500FR exponent

Network Control Panels

9000NCP VistaLINK® Network Control Panel (1RU) 9000NCP2 VistaLINK® Network Control Panel (2RU)



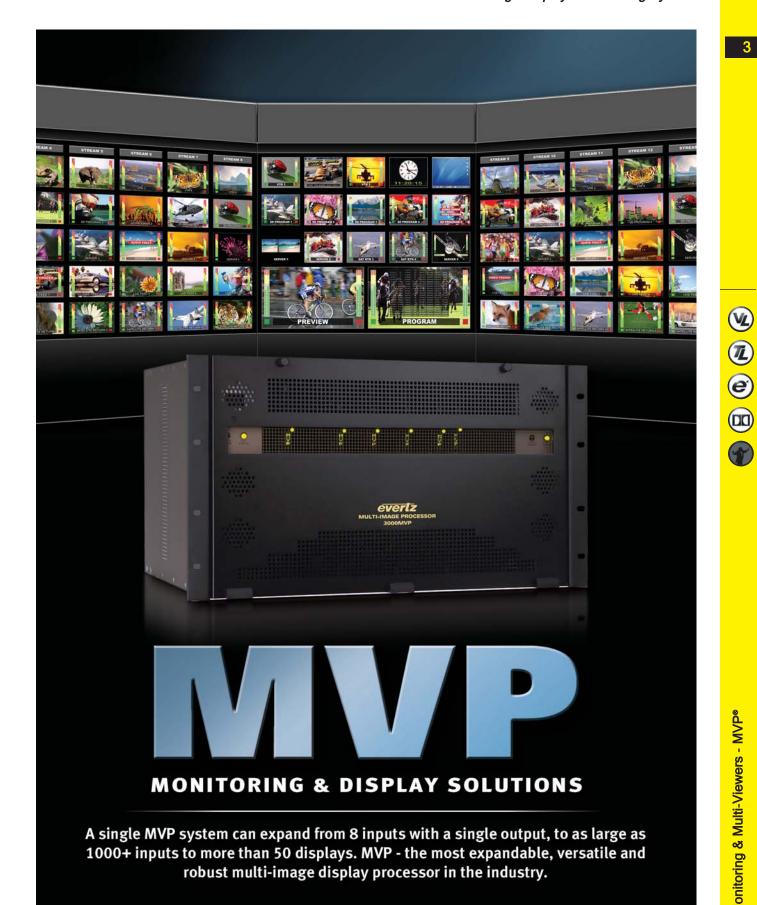

# Multi-Image Display & Monitoring System

Evertz® MVP® revolutionizes the multi-display marketplace with a highly flexible, intuitive, simple yet comprehensive approach to virtual wall monitor applications. The possibility of displaying any input signal to any output monitor can now be realized without the need for DAs or upstream monitor routers.

### ▶MVP® - Expect the Best

The MVP® is the next generation of Multi-Image Display Processor technology, boasting the most flexible and feature-rich platform available, making it ideal for all applications where video/audio monitoring & display are required. The MVP® architecture is revolutionary in its approach, as it does NOT use a PC platform at the core of its operation. By doing so, the MVP® platform is "bulletproof" and wellsuited for 24/7 mission critical environments. Combine this "bulletproof" architecture with the simple and intuitive control interface, and you have a system perfect for any control room.

Evertz® now also offers a completely integrated Master Control environment when interfacing the MVP® with the Quartz line of Master Control products plus the facility monitoring capability of VistaLINK® PRO software.

### ▶The MVP® at a Glance



VBI data (Closed Cap., Program Rating, etc.) signal decoding, monitoring & display

Selectable or detectable aspect ratios for customized display of video inputs

**Transport Stream Monitoring** 

Computer graphic inputs up to UXGA resolution

Multiple user-configurable static/dynamic UMDs, on-screen text, tallys, fault messages, borders and background images with transparency control

Up to 4 AES or 4 stereo analog pair audio level with phase correlation metering

Up to 128 unique inputs displayed on a single output

Auto-sensing HD/SD/Analog video on the same BNC

Dolby-E™ Metadata decode/display

Aspect ratio markers

### ▶ Features & Benefits

- · Consolidated scaling, signal sniffing (fault monitoring), routing and fan-out of inputs
- Supports many output display destinations
- Eliminates the need for a preview/monitor router to support multiple inputs to
- Show multiple copies of the same BNC input across displays
- Monitor everything View By Exception with VistaLINK® and display video inputs only when faults are detected through built-in signal monitoring
- Hardware based no PC on board, no hard-drive
- Not a frame limited architecture P-LINK™ interconnects and Ethernet control; does not exhibit PCI bandwidth limitations
- RTOS Real-Time Operating System
- Highest quality video images single pass processing

- Expandable frame not limited to a maximum number of inputs per system
- cumulative bandwidth
- True hot-swappable, front-access input, output modules and PSU
- Redundancy options for mission critical operations
- Fast power cycle recovery (15 seconds)
- Fiber output option single fiber (single or Multi-Mode) up to 10km support
- HD/SD serial output option
- 9:16 output aspect ratio support (WARP™)
- Flexible usually 2-3 solutions from the same system with options for future growth
- "Out of the box" implementation set-up is quick and easy
- User-friendly GUI drag and drop control, fast preset recall and off-line development; real time display layout control
- Remote monitoring & thumbnailing with VistaLINK<sup>®</sup>

### ▶Applications

- · Broadcast Facility Master Control
- · Satellite Uplink and Downlink
- · Cable Head End and IPTV Head End
- Production
- OB Trucks

- Video Walls
- NOC Control Rooms
- · Surveillance Security Information Displays
- Traffic and Transportation Applications
- The Gaming and Entertainment Industry



### ▶ Multi-Input Format & Display









- Auto-sensing HD/SD/Analog video
- input on same BNC
- DVI/RGB
- NTSC/PAL

- · 525i/625i
- 1080i/60 • 1080i/59.94
- 1080i/50

- 1080p/24sF
- 1080p/23.98sF
- 720p/60
- 720p/59.94

- 720p/50
- · 480p/60 • 480p/59.94

### ▶ Flexible Output Options









With single displays, multiple displays, virtual walls and WARP™ displays, Evertz® offers a wide variety of options to suit all of your display & monitoring needs.

### Output Resolutions Supported:

- XGA (1024x768)
- WARP (768x1280)
- SXGA (1280x1024)
- 720P (1280x720)
- WARP 2 (768x1366)
- SXGA+ (1400x1050)
- 480P (720x480)
- WXGA (1280x768) • UXGA (1600x1200)
- 576P (720x576)
- WXGA 2 (1366x768)
- HD (1920x1080)

# ▶ Complete Aniclary Data Monitoring & Decode





### Decodes:

- HD & SD VITC/Source ID
- •WSS/AFD adjust/display
- •Detect Encoded Audio (AC3/Dolby-E™)
- EIA-608/EI-708 SD/HD Captions
- WST World Standard Teletext
- Source Standard
- Decode/Display Dolby-E<sup>™</sup> Metadata

### **▶** Extensive Graphic Components



- · On-screen time of day clocks (analog & digital with external LTC reference and configurable offsets)
- Up and Down timers


- · User-definable labels
- Dynamic UMDs & tally from routers and switchers
- · Safe area markers

# ▶MVP® - The Industry's Largest Multi-Image Display Platform

Up to 1024 input to 64 displays - no tie lining, no blocking.

The MVP® is a collection of linked input and output modules residing in one or several 6RU, 15-slot frames. The interface between the input and output

modules is a serialized data link "P-Link" using a standard BNC-coax cable - hence, there is no frame/chassis daisy chaining required for expandability. This eliminates blocking which is present in other more limited multi-viewer architectures.

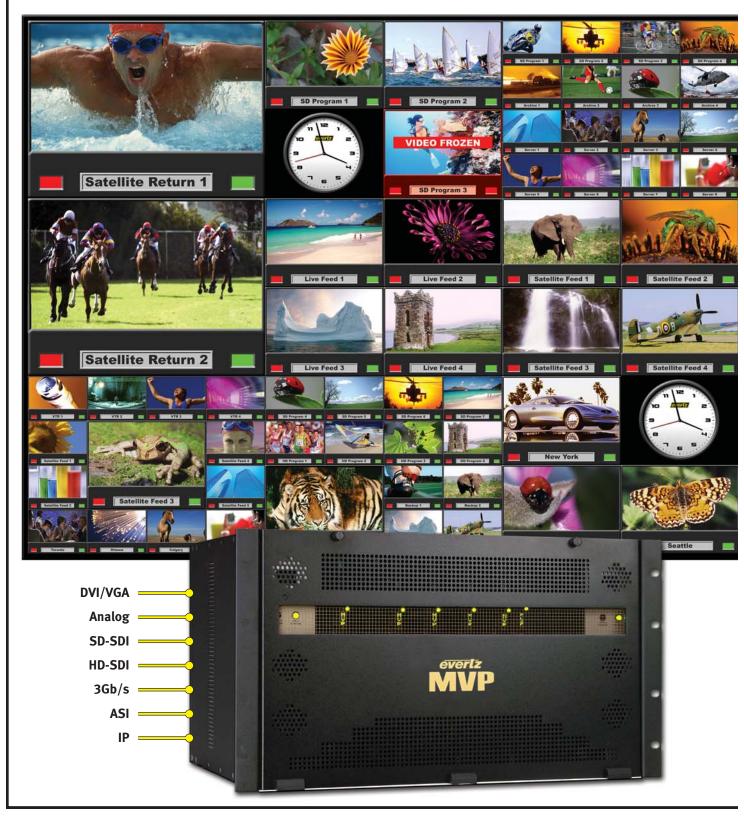





# ▶MVP® - The Industry's Most Flexible Multi-Image Display Platform

MVP® supports all formats of input content found in today's most advanced broadcast facilities from base band composite analog video, SD-SDI, HD-SDI - even tackling 3Gb/s. It can handle outputs from a variety of graphic sources using DVI, VGA and HDMI. For facilities where base band

video is not present or feasible, the MVP® also offers support for ASI and IP based MPEG transport stream decoding and monitoring. No other platform in the industry offers the same range of I/O.



Now control both the MVP® and the VIP™ using a single point of control, allowing for a fully integrated mixed hardware system. Perfect for control room environments where large MVP® display walls are required with smaller VIP™ agile displays.

### ▶ Comprehensive Signal & Data Monitoring

- · Loss of video
- · Active picture levels
- EDH errors
- · Frozen or black video
- Motion detection
- Video format detection
- · Loss of audio channels
- · Mono audio detection
- Phase reversal
- Audio too loud or too quiet
- · Loss of closed captioning
- · Loss of closed captioning waveform
- . Loss of text channels
- Loss of program rating
- · Source ID missing
- · VITC missing

# ▶ Specifications

### Auto-Detecting Video Inputs: Analog Video: NTSC/PAL

Digital Video: SD-SDI (SMPTE 259M-C)

HD-SDI (SMPTE 292M, 1.5Gb/s) Built-in embedded audio extraction

(up to 2 groups)

HD Formats: 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF 720p/60, 720p/59.94, 480p/60,

480p/59.94

### Computer Graphic Video Inputs:

Audio:

2 or 4 input module

From 640x480 (VGA) to 1600x1200 (UXGA) resolution

DVI or 15-pin D-sub via adapter

Balanced/Unbalanced AES

Balanced analog stereo On-screen display of level & phase bars

Audio monitoring output, 2 groups (AES/EBU)

Video Outputs: Single, dual & multiple output support

for XGA up to HD resolution DVI-I connector, BNC and/or fiber interfaces (module dependent)

6RU, 15-module agnostic slots Frame:

Rack-mountable Front access

Dual redundant PSU, hot-swappable

### AUX Inputs/Outputs:

Un to 64 GPI inputs & 44 GPO outputs LTC for clock/timer reference RS-232/422 serial interface

### Configuration Control:

Maestro™ graphic interface for design

DCP desktop control panel via Ethernet

# Electrical:

Genlock:

Dual redundant power supplies with separate AC inlets

Auto-ranging voltage, 100-240V AC,

50/60Hz

Maximum power dissipation: 650W Typical power dissipation: 350W, 8A

Separate NTSC (SMPTE 170M) and

PAL (ITU624-4), color black via BNC

### Front Panel Indicators:

PSU status LED & local error/failure LED

### Tally Output (GROC):

4-pin terminal, relay N/O, N/C for

status/fault alarm

# **▶▶▶**Ordering Information

### SDTV/Analog Packages Signal Display PKG3000MV/P-8-SN 8 to 72 auto-detecting SD-SDI (with embedded audio as PKG3000MVP-16-SN 16 CH a standard feature) and Composite Analog (NTSC, PAL) PKG3000MVP-24-SN 24 CH video inputs, with frame and frame controller, single PKG3000MVP-32-SN 32 CH power supply and single processor/output display module PKG3000MVP-40-SN 40 CH PKG3000MVP-48-SN 48 CH PKG3000MVP-56-SN PKG3000MVP-64-SN 64 CH 72 CH PKG3000MVP-72-SN

### HDTV/SDTV/Analog P

Signal Display PKG3000MVP-8-HSN 8 CH PKG3000MVP-16-HSN PKG3000MVP-24-HSN 24 CH PKG3000MVP-32-HSN 32 CH PKG3000MVP-40-HSN 40 CH PKG3000MVP-48-HSN 48 CH PKG3000MVP-56-HSN 56 CH PKG3000MVP-64-HSN 64 CH PKG3000MVP-72-SN

### Description

8 to 72 auto-detecting HD-SDI, SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL) video inputs, with frame and frame controller, single power supply and single processor/ output display module

With the MVP™, there are many different possible I/O combinations including dual, quad and octo-output display solutions along with redundancy to meet your multi-signal monitoring & display needs. For systems that exceed the standard package input counts, please contact your MVP™ specialist to discuss your options.

For a multi-viewer in a smaller form factor, also ask about the VIP™ - the mini-MVP™ - in out popular 7700 series frame.

3000MVP-GI 3000MVP-AI

Dual (2) or Quad (4) computer video inputs per input module Monitor up to 4 analog pairs or 4 AES/EBU audio channels per

3000BHP-U

1RU breakout bulkhead panel to support either balanced stereo analog inputs or balanced AES/EBU audio

3000BHP-BAL

2RU breakout bulkhead panel to support either balanced stereo

analog inputs or balanced AES/EBU audio

video input

3000BHP-AUX 7700PTX-MVP 3000MKT-AUX 2430GDAC

Breakout bulkhead panel for GPI/O, LTC input and serial communications Protocol Translator - Connect multiple serial input devices to MVP™ Rackmount panel for AUX breakout board

G-LINK™ to DVI converter

G-LINK™ to DVI converter, with 90° display rotation support Allows you to change your display's presets from numerous possibilities P-LINK™/G-LINK™ Optical to Electrical/Electrical to Optical converter













# THE COMPLETE CONTROL ROOM SOLUTION

Today's control rooms require two key components: Routers & Multi-Image Display... Evertz now offers a complete solution to address both...WITHOUT COMPROMISE

The VIP-X simultaneously addresses two common challenges by combining a functional and highly reliable control room routing platform with a modular multi-image display system in one integrated package. Building your next control room will be simple using the VIP-X, as it enables two complex items in the control room to function as a single system.


# ▶ VIP-X Family - The Complete Control Room Solution

The new VIP-X control room solution from Evertz® represents the best of Evertz® technology:

- Advanced routing technology: Xenon & EQX
- Advanced multi-viewer technology: MVP® & VIP
- Advanced user control system: MVP® server and Maestro™ software
- · Highest quality multi-image outputs: Most advanced scaling technology

The VIP-X eliminates system complexity, saves space and is more economical compared to the traditional autonomous solutions. The VIP-X can be tailored for all control room signals and budget requirements. It is available in several package sizes from a 32 input system with up to 32 router outputs and as many as 24 multiimage displays, or it can be ordered as a larger systems that accommodate up to 288 inputs and 288 router outputs and as many as 72 multi-image displays.





VIP-X multi-image display modules use the latest scaling technology. The technology is Evertz® proprietary and borrowed from our industry renowned up/down conversion products. The engine does not use image enhancement tricks to try and artificially enhance the input quality; it applies a single pass high qualityscaling algorithm which provides the highest quality reproduction of the source



### **▶**Complete Facility Solution

VIP-X is the complete solution for your next control room, or better yet your facility. Offering both a complete facility routing platform and industry leading multi-image display technology in a single modular package, no control room or facility is too large or too small.



### ▶ Any Input, Any Output, Any Display, Any Size...

VIP-X continues Evertz® tradition of truly flexible multi-image display systems. Each input in the system can be displayed any number of times at any size, with out compromise. Systems of any size offer this flexibility, even the largest VIP-X system allows any input to be displayed on each and every display each at a unique size.





# Control Room Routing Platform and Modular Multi-Image Display System

### ▶The Largest System in the Industry

VIP-X offers the largest system footprint in the industry. With inputs in the thousands, and display outputs in the hundreds, it is guaranteed to meet the largest facility requirements without compromise or blocking restrictions.



### ▶ Monitoring: On-screen and Using SNMP


VIP-X offers real time monitoring both with visual on screen alarms, but also via SNMP. VIP-X continues Evertz® monitoring tradition, and offers all of the extensive alarming the industry has come to value, including monitoring for video loss, active picture level, and audio loss, over, and under, etc.



### ▶Industry Standard User-Interface

VIP-X multi-image display outputs are controlled using Evertz® industry standard graphical interface: Maestro™. Maestro™ is installed in the over a thousand locations world wide, and has been used by tens of thousands of operators in the industry. In fact, MVP® layouts can be loaded on VIP-X displays and VIP-X layouts on the MVP®.

Through it's use of simple drag and drop control, Maestro $^{\text{TM}}$  is simple to use and easy to learn. To simplify the control of VIP-X further, Evertz $^{\circ}$  has added on screen mouse and keyboard control.

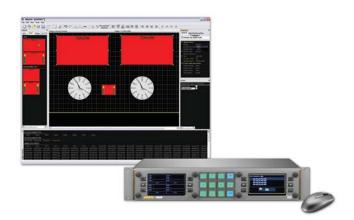

# ▶3Gb/s Support

VIP-X is a true 3Gb/s platform with end to end support of SMPTE 424M HD-SDI content. The router is not only capable of passing 3Gb/s, but the multi-image display system can display 3Gb/s images also. The product supports the complete range of SDI video content from 525i/625i SD-SDI, 720p/1080i to 3Gbs, all handled seamlessly and auto-sensed at the inputs.












The Complete Control Room Solution: the big differentiator between VIP-X and other multi-image display systems is that at the foundation is a purpose built routing platform. VIP-X can be used to satisfy both the routing component for any project and the multi-image display component, without compromise to either the router or the multi-viewer size or functionality. The solution is perfect for production control, outside broadcast, edit suites, audio control, graphics suites, and anywhere high quality multi-image display is needed.

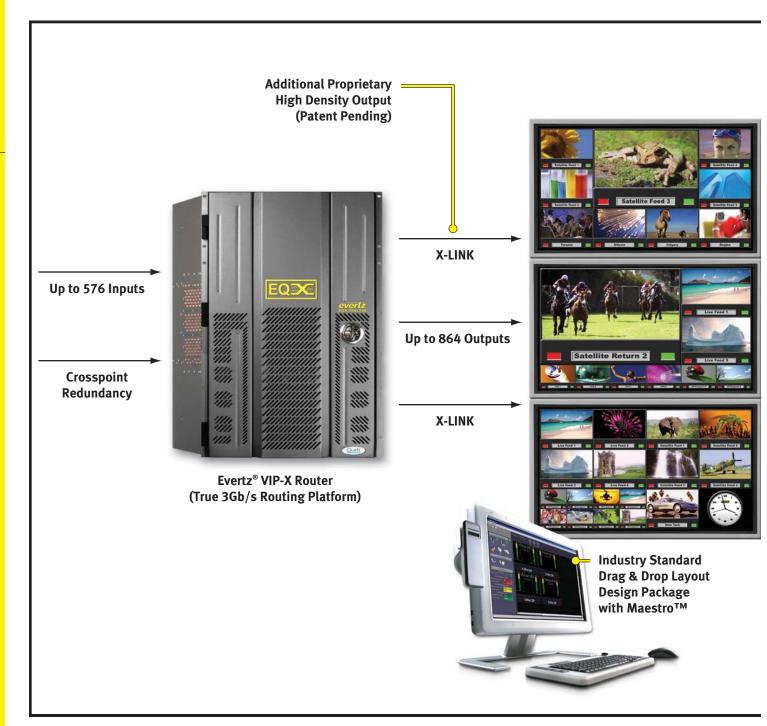








# evertz/

# Control Room Routing Platform and Modular Multi-Image Display System

### ▶XE4-VIPX Package

Uses the compact 4RU Xenon router as the foundation platform, with up to 64 3G/HD/SD inputs and up to 64 outputs for source routing, plus connectivity to up to 12 multi-image display outputs using X-LINK Technology and the modular 7767VIP-X output cards. VIP-X is very flexible and does not compromise the foundation router in anyway, offering any source to be independently routed to any router output, plus any source to be displayed any number of times, sizes and aspect ratios on any multi-image display output.


The modular 7767VIP-X card offers up to two DVI outputs, plus two HD-SDI outputs, and supports a wide range of display resolutions. The DVI output can be easily extended using the DVI-EV-EXT-PKG, which is a compact single fiber extension technology, supporting all output resolutions from the VIPX at distances of up to 500m (1,660').

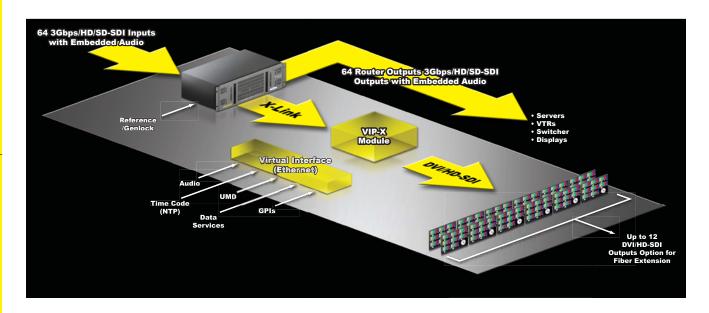

# ▶XE8-VIPX Package

Using the versatile 8RU Xenon router as the foundation platform, with up to 128 3G/HD/SD inputs and up to 128 outputs for source routing, plus connectivity to up to 24 multi-image display outputs using X-LINK Technology and the modular 7767VIP-X output cards. The Xenon routing platform is specifically built for live control and master control room routing, and therefore can be trusted to handle "on air" signals in the chain. VIP-X is very flexible and does not compromise the foundation router in anyway, offering any source to be independently routed to any router output, plus any source to be displayed any number of times, sizes and aspect ratios on any multi-image display output.

The modular 7767VIP-X card offers up to two DVI outputs, plus two HD-SDI outputs, and supports a wide range of display resolutions. The DVI output can be easily extended using the DVI-EV-EXT-PKG, which is a compact single fiber extension technology, supporting all output resolutions from the VIPX at distances of up to 500m (1,660).

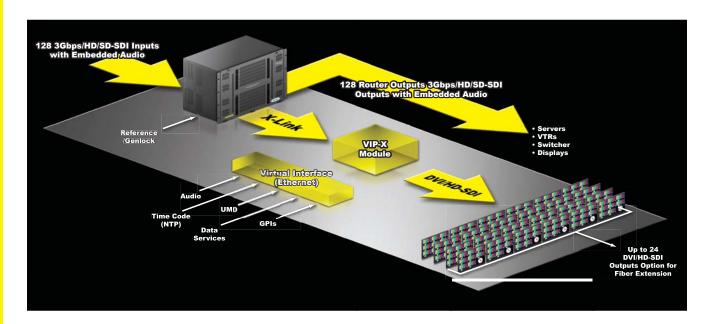


### Control Room Routing Platform and Modular Multi-Image Display System

### ▶ EQX16-VIPX Package

Using the 16RU EQX router as the foundation platform, with up to 288 3G/HD/SD inputs and up to 288 outputs for signal routing, plus connectivity to up to 36 multiimage display outputs using X-LINK Technology and the modular 7767VIP-X output cards. No other router is more advanced in terms of technology and redundancy, designed for core routing in the most demanding facilities, EQX is the most reliable router available to date. VIP-X is very flexible and does not compromise the foundation router in anyway, offering any source to be independently routed to any

router output, plus any source to be displayed any number of times, sizes and aspect ratios on any multi-image display output.

The modular 7767VIP-X card offers up to two DVI outputs, plus two HD-SDI outputs, and supports a wide range of display resolutions. The DVI output can be easily extended using the DVI-EV-EXT-PKG, which is a compact single fiber extension technology, supporting all output resolutions from the VIPX at distances of up to 500m (1,660').

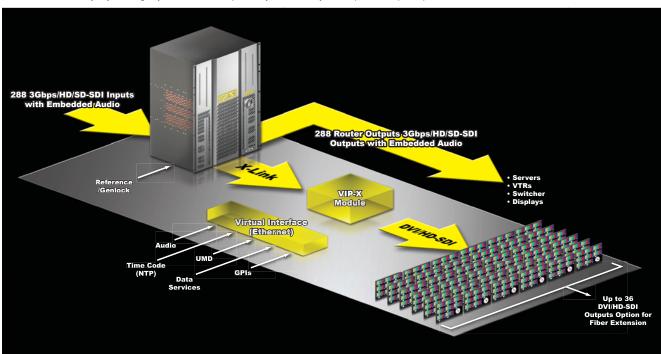

### ▶Specifications

Serial Video Inputs:

3Gb/s (SMPTE 424M), and/or Standard: HD-SDI (SMPTE 292M), SD-SDI (SMPTE259M-C)

Number of Inputs: Router platform dependent BNC IEC 61169-8 Annex A Connector:

Input Impedance: 750

Automatic to 100m (Belden 1694A) Equalization: 5 - 1485MHz 15dB typical Return Loss:

Embedded Audio: SMPTE 272M-A

Graphic inputs (RGBHV/DVI) Video Input: Standard: G-LINK (Evertz proprietary) requires

video to G-LINK formatter Number of Inputs: Router platform dependent BNC IEC 61169-8 Annex A Connector: Input Resolution: 640x480 (VGA) to 1600x1200

(UXGA)

Input Impedance:  $75\Omega$ 

Serial Video Output:

3Gb/s (SMPTE 424M), and/or HD-SDI (SMPTE 292M), Standard: SD-SDI (SMPTE259M-C)

Number of Outputs: : Router platform dependent Connector: BNC IEC 61169-8 Annex A Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time 200ps nominal (HD)

740ps nominal (SD) < 10% of amplitude Overshoot:

Multi-Image Display Video Output per VIPX card: Standard: VESA (DVI-D) up to WUXGA (1920x1200)

Number of Outputs: Connector: DVI-I

Video: 1V p-p RGB, 60/50 Hz refresh

Impedance:  $50\Omega$ 

Multi-Image Display Serial Video Output per VIPX card: Standard:

3Gbps (SMPTE 424M), and/or HD-SDI (SMPTE 292M) SD-SDI (SMPTE259M-C)

Number of Outputs: Connector:

BNC IEC 61169-8 Annex A Impedance: 75Ω

Genlock Input:

NTSC/PAL color black Type: Level: 1V p-p nominal

Connector: Requires 7700FR-D (frame genlock

option)

General Purpose Interface I/O per VIPX card:

Number of Inputs: Number of Outputs: 2

Type: GPI: 1 Opto-isolated, active low with

internal pull-ups to +5V 1 Relay closure to ground

GPO: Input Signal: Closure to ground

HD-15 Connector:

Input/Output Serial Port per VIPX card:

Number of Ports: 1 RS-232 (pins 6,7) or 1 RS-422 (pins

1.2.6.7) Connector: HD-15 Baud Rate: Up to 1Mbaud Format: Image Video, TSL

Ethernet: Network Type:

Fast Ethernet 100 Base-TX 1EEE 802.3U standard for 100Mbps base

band CSMA/CD local area network

Connector RJ-45 x2

Electrical VIPX card:

Voltage: +12V DC 75W

### **▶▶▶** Ordering Information

PKGVIPX-XF4

PKGVIPX-XE4-3232S-2, 4, 6, 8, 10 & 12 Xenon 4RU, 32 SD inputs, 32 SD outputs, plus 1 VIPX16x2 up to 6

PKGVIPX-XE4-3232S-2, 4, 6, 8, 10 & 12 Xenon 4RU. 32 HD inputs, 32 HD outputs, plus 1 VIPX16x2 up to 6 VIPX16x2 displays

PKGVIPX-XE8-3232S-2, 4, 6, 8, 10 & 12 Xenon 8RU 32 SD inputs, 32 SD outputs, plus 1 VIPX16x2 up to 12

PKGVIPX-XE8-3232S-2, 4, 6, 8, 10 & 12 Xenon 8RU 32 HD inputs, 32 HD outputs, plus 1 VIPX16x2 up to 12 VIPX16x2 displays

**EQX SAMPLE PACKAGES:** PKGVIPX-EQX16-18H-2 up to 36

EQX 16RU, 18 HD inputs, (no outputs), plus 1 VIPX16-2 displays up to 18VIPXx16x2 displays

PKGVIPX-EQX198x18-12/18-24

EQX 16RU, 198 HD inputs, 18HD outputs, plus 6 VIPX16-

displays/plus 12 VIPX16-2 displays

PKGVIPX-EQX198x108-12

EQX 16RU, 198 HD inputs, 108HD outputs, plus 6

PKGVIPX-EQX198x108-24

EQX 16RU, 198 HD inputs, 108HD outputs, plus 12


VIPX16-2 displays



The VIP™ provides a feature-rich yet cost-effective signal monitoring & display solution displaying up to WUXGA (1920x1200) resolution. It accepts up to 12 inputs and conveniently fits into Evertz® widely installed 7700FR-C universal 3RU frame.

With auto-sensing HD, SD and NTSC/PAL on the same BNC, as well as configurable presets and a separate background DVI-I input, the VIP $^{\text{TM}}$  is a compact video & graphic solution ideally suited for dedicated signal monitoring applications with limited rack space and/or number of signals.

VIP™ modules are also VistaLINK° -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocal (SNMP) from EvertzV own VistaLINKV PRO or a third party NMS.

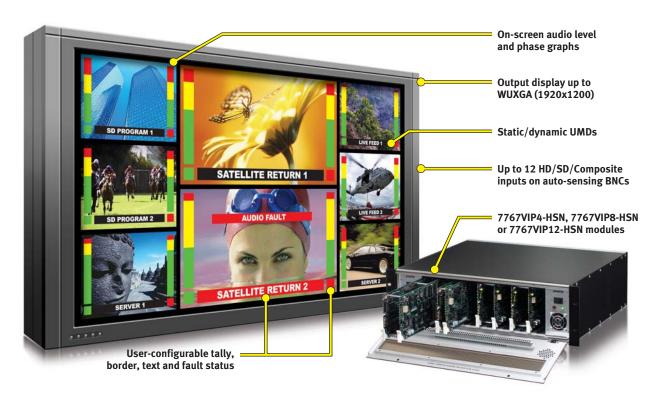

### ▶ Features & Benefits

- Accepts up to 4 (VIP4), 8 (VIP8) or 12 (VIP12) video inputs with embedded audio or optional discrete audio
- Auto-sensing HD/SD and NTSC/PAL inputs
- Plus additional computer input for dynamically updated backgrounds
- Output display up to WUXGA (1920x1200) resolution or HD/SD serial output & optional fiber output
- · User-configurable display presets, borders, tallys and UMDs
- Module conveniently fits into Evertz<sup>®</sup> widely-installed, universal 7700FR-C frame (3RU)
- Thumbnails of any or all selected inputs
- VistaLINK® -capable for configuration and monitoring via SNMP
- Modules are cascadable for more inputs to a single display
- Up to 40 signals in a 3RU frame
- Internal routing of selected video and audio channels

### ▶Applications

- OB outside broadcast
- PCR production controlMCR master control
- TOC technical operation centers
- · Head-end cable
- IPTV head-end
- Satellite head-end
- Digital Signage
- Command & control
- Security & surveillance
- Remote monitoring

# ▶ Production Display Solution

- · Auto-sensing HD, SD and NTSC inputs
- includes 23.98sF or 24psF
- Provides an HD-SDI output
- 720p, 1080i, or 1920x1080p over DVI at 50 or 60Hz

- Eliminates color matching of numerous monitors
- User-controlled and positionable on-screen display elements
   Easily select any single input to a full resolution output

### ▶Integrated Solutions

- · Built-in video, audio and data signal monitoring
- · Additional computer input
- Allows for dynamically updated background images

- Integrated thumbnail output from selectable inputs
- VistaLINK® -capable for configuration and monitoring

### ▶ Compact Video & Graphic Display SOlution

- Compact 1RU unit
- 4x composite analog or 4x S-Video and 4x DVI-I inputs
- a total of 8 inputs on a single display
- Additional background DVI-I input

- · Freely position windows
- Add various on-screen graphic display elements
- Front panel control for preset selection





### **▶**Specifications

Auto-Detecting Video Inputs:
Analog Video: NTSC/PAL

Analog Video: Digital Video: SD-SDI (SMPTE 259M-C) HD-SDI (SMPTE 292M, 1.5Gb/s)

Built-in embedded audio extraction

(up to 2 groups)

HD Formats: 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 480p/60,

480p/59.94

Computer Graphic Video Inputs: From 640x480 (VGA) to 1600x1200

(UXGA) resolution

DVI or 15-pin D-sub via adapter

Audio:

Unbalanced AES Balanced analog stereo On-screen display of level &

> Audio monitoring output, 1 group (AES/EBU)

Video Outputs:

Frame:

Single output support for XGA up to WUXGA resolution
DVI-I connector, BNC and/or fiber

interfaces (module dependent)

3RU, 15-module agnostic slots Rack-mountable Front access, modules & power

supply units

AUX Inputs/Outputs: Up to 20 GPI inputs & 8 GPI outputs (GPO) - 16 GPI on 7767BHP-AUX LTC for clock/timer reference RS-232/422 serial interface

Configuration Control: Maestro™ VIP™ graphic interface

Electrical: Dual redundant power supplies with

spearate AC inlets Auto-ranging voltage, 100-240V AC,

50/60Hz

Separate NTSC (SMPTE 170M) and PAL (ITU624-4), color black via BNC

Front Panel Indicators:

Genlock:

PSU status LED & local error/failure

LED










# evertz/

# VIP™ Four Input Video Monitoring & Display

The 7767VIP4 signal monitoring module simultaneously accepts, auto-detects, analyzes and displays four synchronous or asynchronous HD/SD/Analog video signals. A fifth input is a computer graphic input for display of a dynamic background image. Displaying up to WUXGA (1920x1200) resolution, the 7767VIP4 module fits conveniently into Evertz® universally installed 7700FR-C frame, and provides a cost-effective & space-efficient signal monitoring & display solution.

The 7767VIP4 module is VistaLINK® -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). This product feature offers another solution to manage operations including signal monitoring and module configuration from SNMP -capable control systems (Manager or NMS) locally or remotely.

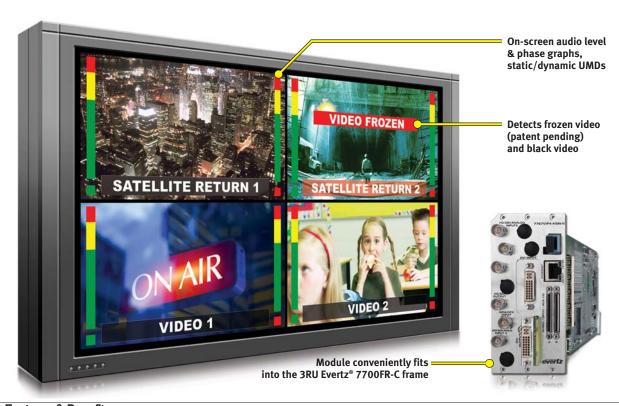

# ▶ Features & Benefits

### Video Inputs

- Up to four auto-sensing HD/SD/NTSC/PAL inputs (same BNC)
- Accepts either 4:3 or 16:9
- Auto-detects 525/625 format SD inputs (single frame rate conversion)
- Computer graphic input (DVI-I up to UXGA resolution) source is used for background display or for cascading multiple VIP™ modules together Also can be used in place of the last video input as a scaled source

### Audio Inputs

- Handles embedded, discrete unbalanced AES/EBU, and balanced analog audio (up to 16 AES and 4 L/R) via break-out panel
- VU/PPM level indicators

### Video Output

- One DVI-I output Drive a single DVI-D and a single RGBHV (VGA-type) display simultaneously with the same content up to WUXGA (1920x1200 resolution)
- One selectable HD/SD serial digital (BNC) video output, same content as DVI-I output or select from input
- Minimal processing delay (~1 frame)
- Optional fiber output (-G option)
- Optional support for "portrait" display via 2430GDAC-WARP
- Thumbnails of any or all selected inputs to VistaLINK® PRO Thumbnail Server (or equivalent)

### Granhics

- User-configurable tally indicators and configurable UMD static and/or dynamically updated text, background colors
- User-configurable borders
- LTC input drives digital clock display
- · Count-up or down timer displays (GPI triggered)

### Signal Monitoring

- Extensive list of user-configurable signal fault conditions with "logic" settings
- · Detects frozen video (patent pending) and black video
- User-configurable fault condition alert messages per video input with configurable background colors, opacities, thresholds and duration settings
- Closed caption presence detection

### **Auxiliary Inputs**

- RS-232/RS-422 communication port Interface to common UMD protocols -TSL, Image Video
- 20 assignable general purpose inputs, 8 general purpose outputs

### Physical

- Number of slots 3
- Genlock reference loop input for proper timing 1 NTSC/PAL
- Fast power-cycle time (< 30 seconds)


### Network Management

- Built-in VistaLINK® support for remote monitoring and control via SNMP (using VistaLINK® PRO)
- The 7767VIP module does not require a 7700FC VistaLINK® Frame Controller
- A direct Ethernet connection to the network for VistaLINK® operations must be provided by user
- Screen configurations via Maestro-VIP™ GUI software (included)
- Web browser interface allows for simple configuration without the need for additional software

# 7767VIP4-HSN, 7767VIP4-HSN-G and 7767VIP4-SN

# VIP™ Four Input Video Monitoring & Display

### ▶7767VIP4 Block Diagram & Rear Panel

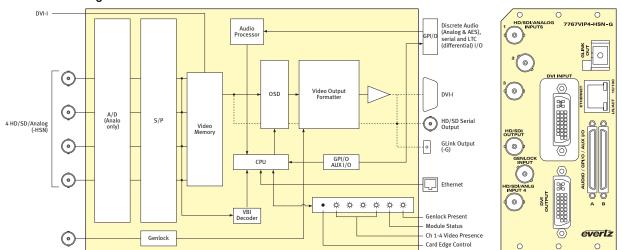

### ▶Specifications

### Standard Video Inputs:

Standard Auto-sensing HD-SDI (SMPTE 292M,

SD-SDI (SMPTE 259M-C)

Number of Inputs: Up to 4

BNC IEC 61169-8 Annex A Connector: Equalization: Automatic to 100m (Belden 1694A)

> 15dB up to 270Mb/s Return Loss: Embedded Audio: SMPTE 272M-A

Composite Analog Video Inputs:

NTSC (SMPTE 170M), PAL (ITU624-4) Standard:

Number of Inputs: Up to 4

BNC IEC 61169-8 Annex A Connector:

Signal Level: DC Offset: 1V nominal 0V ±0.1V Input Inpedance:

Return Loss: 40dB up to 5MHz

Background (Computer) Video Input:

Auto-detecting, VESA (DVI-I, for DVI

and RGBHV inputs)

Number of Inputs:

Connector: DVI-I (Female)

Input Resolution: 640x480 (VGA) to 1600x1200

(UXGA) Signal Level: 1V nominal

Discrete Digital AES Audio Inputs:

Standard: SMPTE 276M Number of Inputs: 4 AES per video input Connector: Dual SCSI (F) Resolution: 24-hit

Sampling Rate: 48kHz Impedance:  $75\Omega$  unbalanced Discrete Analog Audio Inputs:

Number of Inputs: 12 balanced stereo audio pairs Connector Dual SCSI (F) 20kΩ minimum (differential) Input Impedance:

Sampling Frequency: 48kHz

Peak Signal and Common Mode Level: 30dBu

Display Video Output:

VESA (DVI-I) up to WUXGA Standard:

(1920x1200)

Number of Outputs:

Connector: DVI (with DVI to RGBHV Adapter) Video: 1V p-p RGB or 0.7V p-p VGA,

60Hz refresh

Impedance:

Serial Video Output:

Selectable HD/SD serial monitoring Standard: output (720p, 1080i, 625i, 525i)

Number of Outputs:

BNC IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise & Fall Time: 200ps nominal (HD). 740ps nominal (SD) Overshoot:

Genlock Input:

Type: Level: 1V p-p nominal

< 10% of amplitude

NTSC/PAL color black Connector BNC IEC 61169-8 Annex A General Purpose Interface I/O (GPI/GPO):

Number of Inputs: 20 (16 via 7767BHP-AUX breakout

panel) Number of Outputs: 8

Type:

GPI: 1 Opto-isolated, active low with internal pull-ups to +5V

GPO: 1 Relay closure to ground Breakout panel TBlocks via SCSI Connector connection to dual SCSI (F)

Input Signal: Closure to ground

Data Input/Output Serial Port:

1 RS-232 or 1 RS-422 Number of Ports: Breakout panel TBlocks via SCSI Connector:

connection to dual SCSI (F)

Baud Rate: Up to 1Mbaud

Configurable for various UMD interfaces Format:

Ethernet:

Network Type: Fast Ethernet 100 Base-TX 1EEE

802.3U standard for 100Mb/s baseband CSMA/CD local area

R.I-45

Connector:

Electrical:

Voltage: +12V DC Power: < 34W

Safety: ETL Listed, complies with EU low

voltage directive Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of Slots: 3

## **▶▶▶**Ordering Information

7767VIP4-HSN Up to four asynchronous HD/SD/NTSC/PAL inputs with embedded

audio, one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout

7767VIP4-HSN-G With single built-in fiber output (requires 2430GDAC on Rx end to

Up to four asynchronous SD/NTSC/PAL inputs with embedded audio one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI.

Accessories 2430GDAC

GLink to DVI converter (extender requires -G module) 2430GDAC-WARP

GLink to DVI converter (extender and portrait mode display, requires -G module)

7767VIP-AI-U Discrete unbalanced AES/EBU audio input (4 AES per video input)

support with breakout panel

7767VIP-AI-BAL

Discrete balanced analog audio input support with breakout panel 3000MKT-AUX Dual BHP-AUX auxiliary GPI/O and serial break-out panel rack

mounting kit

**Enclosures** 350FR 7700FR-C 7702FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

7767VIP4-SN

+3RU 3RU Rear Plate for use with 350R & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

**484** 

Rear Plate for Standalone




# **evertz**

# VIP™ Eight Input Video Monitoring & Display

The 7767VIP8 signal monitoring module simultaneously accepts, auto-detects, analyzes and displays eight synchronous or asynchronous HD/SD/Analog video signals. A ninth input is a computer graphic input for display of a dynamic background image. Displaying up to WUXGA (1920x1200) resolution, the 7767VIP8 module fits conveniently into Evertz® universally installed 7700FR-C frame, and provides a cost-effective & space-efficient signal monitoring & display solution.

The 7767VIP8 module is VistaLINK® -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). This product feature offers another solution to manage operations including signal monitoring and module configuration from SNMP -capable control systems (Manager or NMS) locally or remotely.

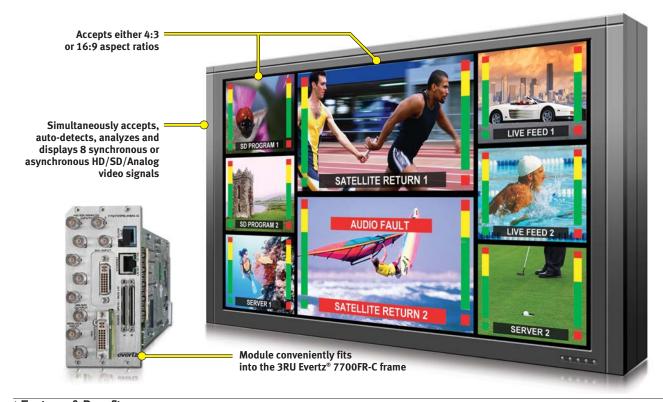

# ▶ Features & Benefits

### Video Inputs

- Up to eight auto-sensing HD/SD/NTSC/PAL inputs (same BNC)
- Accepts either 4:3 or 16:9
- Auto-detects 525/625 format SD inputs (single frame rate conversion)
- Computer graphic input (DVI-I up to UXGA resolution) source is used for background display or for cascading multiple VIP™ modules together Also can be used in place of the last video input as a scaled source.

### Audio Inputs

- Handles embedded, discrete unbalanced AES/EBU, and balanced analog audio via break-out panel
- VU/PPM level indicators

### Video Output

- One DVI-I output Drive a single DVI-D and a single RGBHV (VGA-type) display simultaneously with the same content up to WUXGA (1920x1200 resolution)
- One selectable HD/SD serial digital (BNC) video output, also carrying same content as DVI-I output or select from input
- Minimal processing delay (~1 frame)
- Optional fiber output (-G option)
- Optional support for "portrait" display via 2430GDAC-WARP
- Thumbnails of any or all selected inputs to VistaLINK® PRO Thumbnail Server (or equivalent)

### Graphics

- User-configurable tally indicators and configurable UMD static and/or dynamically updated text, background colors
- User-configurable borders
- LTC input drives digital clock display
- · Count-up or down timer displays (GPI triggered)

### Signal Monitoring

- Extensive list of user-configurable signal fault conditions with "logic" settings
- · Detects frozen video (patent pending) and black video
- User-configurable fault condition alert messages per video input with configurable background colors, opacities, thresholds and duration settings
- Closed caption presence detection
- WSS/AFD detection

### Auxiliary Inputs

- RS-232/RS-422 communication port Interface to common UMD protocols -TSL, Image Video
- 20 assignable general purpose inputs, 8 general purpose outputs

### Physical

- Number of slots 3
- Genlock reference loop input for proper timing 1 NTSC/PAL
- Fast power-cycle time (< 30 seconds)


### Network Management


- Built-in VistaLINK® support for remote monitoring and control via SNMP (using VistaLINK® PRO)
- The 7767VIP module does not require a 7700FC VistaLINK® Frame Controller
- A direct Ethernet connection to the network for VistaLINK® operations must be provided by user
- Screen configurations via Maestro-VIP™ GUI software (included)
- Web browser interface allows for simple configuration without the need for additional software

# 7767VIP8-HSN, 7767VIP8-HSN-G and 7767VIP8-SN

VIP™ Eight Input Video Monitoring & Display

# ▶7767VIP8 Block Diagram & Rear Panel

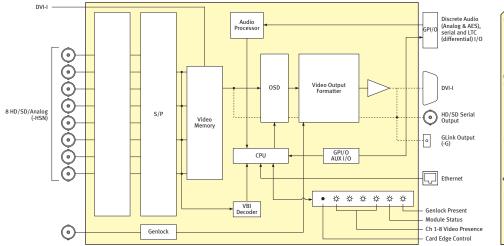



### ▶ Specifications

### Standard Video Inputs:

Auto-sensing HD-SDI (SMPTE 292M, Standard:

SD-SDI (SMPTE 259M-C)

Number of Inputs: Up to 8

BNC IEC 61169-8 Annex A Connector: Automatic to 100m (Belden 1694A) Equalization:

Return Loss: > 15dB up to 270Mb/s Embedded Audio: SMPTF 272M-A

Composite Analog Video Inputs:

NTSC (SMPTE 170M), PAL (ITU624-4) Standard:

Number of Inputs: Up to 8

BNC IEC 61169-8 Annex A Connector:

1V nominal Signal Level: DC Offset: 0V ±0.1V Input Inpedance:  $75\Omega$ 

Return Loss: 40dB up to 5MHz

### Background (Computer) Video Input:

Auto-detecting, VESA (DVI-I, for DVI Standard:

and RGBHV inputs)

Number of Inputs:

DVI-I (Female) Connector:

Input Resolution: 640x480 (VGA) to 1600x1200

(UXGA) Signal Level: 1V nominal

### Discrete Digital AES Audio Inputs:

Standard: SMPTE 276M Number of Inputs: 4 AES per video input Dual SCSI (F) Connector: Resolution:

Sampling Rate: 48kHz 750 unbalanced Impedance

Discrete Analog Audio Inputs:

Number of Inputs: 12 balanced stereo audio pairs Dual SCSI (F) Connector Input Impedance: 20 kΩ minimum (differential)

Sampling Frequency: 48kHz

Peak Signal and Common Mode Level: 30dBu

Display Video Output:

VESA (DVI-I) up to WUXGA Standard: (1920x1200)

Number of Outputs

DVI (with DVI to RGBHV Adapter) Connector 1V p-p RGB or 0.7V p-p VGA, Video:

60Hz refresh

Impedance: 75Ω

### Serial Video Output:

Selectable HD/SD serial monitoring Standard: output (720p, 1080i, 625i, 525i)

Number of Outputs

Connector: BNC IEC 61169-8 Annex A Signal Level 800mV nominal

DC Offset: 0V ±0.5V Rise & Fall Time: 200ps nominal (HD) 740ps nominal (SD) Overshoot: < 10% of amplitude

Genlock Input:

NTSC/PAL color black Type: Level: 1V p-p nominal BNC IEC 61169-8 Annex A Connector

General Purpose Interface I/O (GPI/GPO):

20 (16 via 7767BHP-AUX breakout Number of Inputs:

Number of Outputs: 8

Type:

GPI: 1 Opto-isolated, active low with internal pull-ups to +5V GPO: 1 Relay closure to ground Breakout panel TBlocks via SCSI Connector: connection to dual SCSI (F)

Input Signal: Closure to ground

### Data Input/Output Serial Port:

Number of Ports: 1 RS-232 or 1 RS-422 Connector Breakout panel TBlocks via SCSI

connection to dual SCSI (F) Baud Rate:

. Configurable for various UMD interfaces

Ethernet:

Network Type: Fast Ethernet 100 Base-TX 1EEE

802.3U standard for 100Mb/s baseband CSMA/CD local area

network RJ-45

Connector

Electrical:

Voltage: +12V DC < 39W Power:

Safety: ETL Listed, complies with EU safety

directives EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of Slots: 3

# **>>>**Ordering Information

7767VIP8-HSN

Up to eight asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout

7767VIP8-HSN-G

7767VIP8-SN

Up to eight asynchronous SD/NTSC/PAL inputs with embedded audio one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI.

Up to eight asynchronous SD/NTSC/PAL inputs with embedded audic one background DVI-I (DVI-I or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI.

Ordering Options

Rear Plate must be specified at time of order Eg: Model +3RU

Rear Plate Suffix

+3RU +SA

3RU Rear Plate for use with 350R & 7700FR-C Multiframe Rear Plate for Standalone

2430GDAC

GLink to DVI converter (extender requires -G module) 2430GDAC-WARP GLink to DVI converter (extender and portrait mode display, requires

7767VIP-AI-U Discrete unbalanced AES/EBU audio input (4 AES per video input)

support with breakout panel 7767VIP-AI-BAL

Discrete balanced analog audio input support with breakout panel 3000MKT-AUX Dual BHP-AUX auxiliary GPI/O and serial break-out panel rack

Enclosures 350FR 7700FR-C

7702FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules

Standalone enclosure







# **evertz**

# VIP™ Twelve Input Video Monitoring & Display

The 7767VIP12 signal monitoring module simultaneously accepts, auto-detects, analyzes and displays twelve synchronous or asynchronous HD/SDI/Analog video signals. Ultimately displaying up to WUXGA (1920x1200) resolution, the 7767VIP12 module fits conveniently into Evertz<sup>®</sup> universally installed 7700FR-C frame, and provides a cost-effective & space-efficient signal monitoring & display solution.

The 7767VIP12 module is VistaLINK® -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). This product feature offers another solution to manage operations including signal monitoring and module configuration from SNMP -capable control systems (Manager or NMS) locally or remotely.



### ▶ Features & Benefits

### Video Inputs

- Twelve auto-sensing HD/SD/analog video inputs
- · Accepts either 4:3 or 16:9
- Auto-detects 525/625 format SD inputs (single frame rate conversion)
- Computer graphic input (DVI-I up to UXGA resolution) source is used for background display or for cascading multiple VIP™ modules together. Also can be used in place of the last video input as a scaled source.

### Audio Inputs

- Handles embedded or unbalanced AES/EBU, and balanced analog audio (up to 48 AES and 12 L/R) via break-out panel
- VU/PPM level indicators

### Video Output

- One DVI-I output Drive a single DVI-D and a single RGBHV (VGA-type) display simultaneously with the same content up to WUXGA (1920x1200 resolution)
- One selectable HD/SD serial digital (BNC) video output, also carrying same content as DVI-I output or select from input
- Minimal processing delay (~1 frame)
- Optional fiber output (-G option)
- Optional support for "portrait" display via 2430GDAC-WARP
- Thumbnails of any or all selected inputs to VistaLINK® PRO Thumbnail Server (or equivalent)

### Graphics

- User-configurable tally indicators and configurable UMD static and/or dynamically updated text, background colors
- User-configurable borders
- LTC input drives digital clock display
- · Count-up or down timer displays (GPI triggered)

### Signal Monitoring

- Extensive list of user-configurable signal fault conditions with "logic" settings
- · On-screen messages triggered by fault conditions
- Detects frozen video (patent pending) and black video
- User-configurable fault condition alert messages per video input with configurable background colors, opacities, thresholds and duration settings
- · Closed caption presence detection

### Auxiliary Inputs

- RS-232/RS-422 communication port Interface to common UMD protocols -TSL, Image Video
- 20 assignable general purpose inputs, 8 general purpose outputs

### Physical

- Number of slots 4
- Genlock reference loop input for proper timing 1 NTSC/PAL
- Fast power-cycle time (< 30 seconds)


### Network Management

- Built-in VistaLINK® support for remote monitoring and control via SNMP (using VistaLINK® PRO)
- The 7767VIP module does not require a 7700FC VistaLINK® Frame Controller
- A direct Ethernet connection to the network for VistaLINK® operations must be provided by user
- Screen configurations via Maestro-VIP™ GUI software (included)
- Web browser interface allows for simple configuration without the need for additional software

# 7767VIP12-HSN, 7767VIP12-HSN-G, 7767VIP12-SN

# VIP™ Twelve Input Video Monitoring & Display

### ▶7767VIP12 Block Diagram & Rear Panel

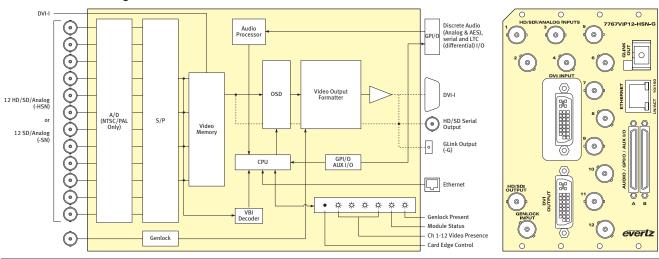

### ▶Specifications

### Standard Video Inputs:

HD-SDI (SMPTE 292M), and/or Standard: SD-SDI (SMPTE 259M-C)

Number of Inputs:

BNC IEC 61169-8 Annex A Automatic to 100m (Belden 1694A) Connector: Equalization:

15dB up to 270Mb/s Return Loss: Embedded Audio: SMPTE 272M-A

### Composite Analog Video Inputs:

NTSC (SMPTE 170M), PAL (ITU624-4)

Number of Inputs:

BNC IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal DC Offset: 0V ±0.1V Input Inpedance: 750 40dB up to 5MHz Return Loss:

### Background (Computer) Video Input:

Standard: Auto-detecting, VESA (DVI-I, for DVI

and RGBHV inputs)

Connector: DVI-I (Female) 640x480 (VGA) to 1600x1200 Input Resolution:

(UXGA)

Signal Level:

### Discrete Digital AES Audio Inputs:

SMPTE 276M Standard: 4 AES per video input Number of Inputs: Dual SCSI (F) with BHP Connector:

Resolution: 24-bit Sampling Rate: 48kHz

Impedance: 75Ω unbalanced

### Discrete Analog Audio Inputs:

12 balanced stereo audio pairs Number of Inputs: Dual SCSI (F) with BHP Connector Input Impedance: 20 kΩ minimum (differential)

Sampling Frequency: 48kHz

Peak Signal and Common Mode Level: 30dBu

### Display Video Output:

VESA (DVI-I) up to WUXGA Standard:

(1920x1200)

Number of Outputs:

DVI (with DVI to RGBHV Adapter) Connector: Video: 1V p-p RGB or 0.7V p-p VGA,

Impedance: 750

### Serial Video Output:

Selectable HD/SD serial monitoring Standard: output (720p, 1080i, 625i, 525i)

Number of Outputs: 1

BNC IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset 0V +0.5V Rise & Fall Time: 200ps nominal (HD). 740ps nominal (SD) Overshoot: < 10% of amplitude

### Genlock Input:

NTSC/PAL color black Type: 1V p-p nominal BNC IEC 61169-8 Annex A I evel: Connector

### General Purpose Interface I/O (GPI/GPO):

Number of Inputs: 20 (16 on 7767BHP-AUX)

Number of Outputs: 8

GPI 1 Opto-isolated, active low with internal pull-ups to +5V GPO: 1 Relay closure to ground Connector: Breakout panel TBlocks via SCSI

connection to dual SCSI (F)

Input Signal: Closure to ground

### Data Input/Output Serial Port:

1 RS-232 or 1 RS-422 Number of Ports:

Connector Breakout panel TBlocks via SCSI connection to dual SCSI (F)

Up to 1Mbaud

Baud Rate:

Configurable for various UMD interfaces Format

### Ethernet:

Network Type:

Fast Ethernet 100 Base-TX 1EEE 802.3U standard for 100Mb/s baseband CSMA/CD local area

network RJ-45

### Connector: Electrical:

Voltage: +12V DC

< 50W Power

EMI/RFI: Complies with FCC Part 15, Class A EU EMC Directive

# Physical:

Number of Slots:

### >>> Ordering Information

7767VIP12-HSN

Up to twelve asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI.

7767VIP12-HSN-G Up to twelve asynchronous SD/NTSC/PAL inputs with embedded audio one background DVI-I (DVI-D or RGBHV with adapter) input. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI. Single built-in fiber output (requires 2430GDAC on Rx end to display)
Up to eight asynchronous SD/NTSC/PAL inputs with embedded audio one background DVI-I (DVI-I or RGBHV with adapter) input. Single

7767VIP12-SN

DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool, GPI/O break-out panel (BHP-AUX) and Maestro-VIP™ display layout GUI Ordering Options

Rear Plate must be specified at time of order

Eq: Model +3RU

Rear Plate Suffix

+3RU

Accessories

GLink to DVI converter (extender requires -G module)

2430GDAC

2430GDAC-WARP GLink to DVI converter (extender and portrait mode display, requires -G module)

7767VIP-AI-U

Discrete unbalanced AES/EBU audio input (4 AES per video input)

support with breakout panel

7767VIP-AI-BAL 3000MKT-AUX

Discrete balanced analog audio input support with breakout panel Dual BHP-AUX auxiliary GPI/O and serial break-out panel rack

3RU Rear Plate for use with 350R & 7700FR-C Multiframe

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 350FR 7700FR-C 3RU Multiframe which holds up to 15 single slot modules







# 7767VIPA8-DUO-HS/3GHS, 7767VIPA16-DUO-HS/3GHS

# Advanced "DUO" Output Compact Multi-image Display Processor

The VIP Advanced DLIQ is the most advanced compact multi-image display processor technology available. It supports up to 3Gbps SDI inputs and up to two unique display outputs. The VIP-A DUO takes compact multi-image display to the

The VIP Advanced DUO is available in two sizes: 8 inputs with up to 2 outputs, and 16 inputs with up to 2 outputs. The VIP-A DUO inputs are auto-sensing SD, HD, and 3Gbps (SMPTE 424M). Each VIP-A DUO input can be displayed in any size, position or aspect ratio on any display. Both display outputs from the VIP-A DUO are provided over DVI and HD-SDI, which are both available simultaneously. The VIP-A DUO provides the best quality input reproduction, borrowing the latest in video processing technology from Evertz industry acclaimed conversion products.

The VIP Advanced DLIQ is a hot-swappable device, and which can be populated in Evertz widely installed 3RU 7700 multi-frame chassis with an option for redundant power supplies.


The VIP Advanced DUO device is VistaLINK® -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). The VIP-A DUO is easily configurable via the web server interface or card edge. Similar to the MVP, layout creation can be performed in a live control environment using Evertz' Maestro™ software. Other key features include automatic aspect ratio adjustment on a source-by-source basis, graticule generation, VITC/HD time code decode, and much more.

### ▶ Features & Benefits

- · Accepts 8 (VIPA8-DUO), or 16 (VIPA16-DUO) inputs with embedded audio
- Uses Evertz next generation image processing technology, which is the same technology used in conversion products
- Auto-sensing HD/SD and 3Gbps (SMPTE 424M) inputs (3HS version)
- Supports display resolutions of up to 1920x1080p on both outputs simultaneously
- Allows for full screen viewing of any input on both outputs
   Supports both DVI and HD-SDI outputs (active simultaneously)
- · Provides support for dynamic under monitor displays and tallies from router
- · Supports advanced on screen graphics, including analog clocks, transparency control of objects, raised bezels and borders, drop shadows, and bitmap backgrounds
- · Supports true type font including non-Latin alphabets
- Built-in graticule generator, user defined per window
- Enables the decoding and display of VITC/HD time code (RP-188)
- · Devices can be easily cascaded together to expand the total number of images on the displays
- · Built-in video, audio, and data fault monitoring with on screen fault notification
- · VistaLINK® -capable for configuration and monitoring via SNMP
- Minimal processing delay (~1 frame)
- Real time control of display outputs via Maestro™




### ▶7767VIPA8-DUO-3GHS/HS

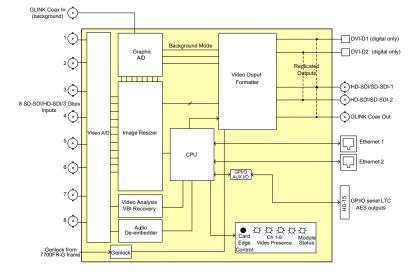

# 7767VIPA8-DUO-HS/3GHS, 7767VIPA16-DUO-HS/3GHS

# Advanced "DUO" Output Compact Multi-image Display Processor

### ▶7767VIPA16-DUO-3GHS/HS

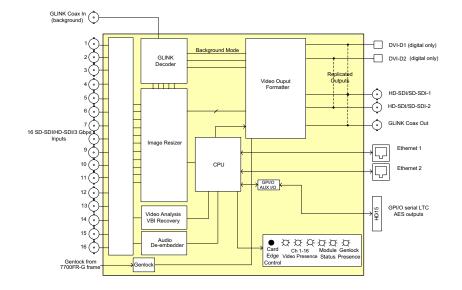

# ▶Specifications

Serial Video Inputs:

3Gb/s (SMPTE 424M)

HD-SDI (SMPTE 292M), and/or SD-SDI (SMPTE259M-C)

8 or 16

Number of Inputs: Connector:

BNC IEC 61169-8 Annex A Equalization: Automatic to 100m (Belden 1694A)

> 15dB up to 270Mb/s Return Loss:

Embedded Audio: SMPTE 272M-A

Background (Computer) Video Input:

GLINK (Evertz proprietary) requires Standard:

video to GLINK formatter (ie. 7707RGBT-GC)

Number of Inputs:

Connector:

BNC IEC 61169-8 Annex A Input Resolution: 640x480 (VGA) to 1600x1200 (UXGA)

Input Impedance: 75Ω

Display Video Output:

VESA (DVI-D) up to 1080p Standard:

(1920x1080) Number of Outputs: 2

Connector: DVI-I

1V p-p YPrPb/RGB Video:

60Hz refresh

50Ω Impedance:

Serial Video Output:

Selectable HD/SD serial monitoring output (720p, 1080i, 625i, 525i)

Number of Outputs: 2

BNC IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V +0.5V Rise and Fall Time: 200ps nominal (HD)

740ps nominal (SD) Overshoot: < 10% of amplitude

Genlock Input:

NTSC/PAL color black Туре:

Level: 1V p-p nominal

Requires 7700FR+G (frame genlock Connector:

option)

General Purpose Interface I/O (GPI/GPO):

Number of Inputs: 4 (pins 10,11,12,13)

Number of Outputs: 2 (pins 4,9)

Type: GPI:

1 Opto-isolated, active low with

internal pull-ups to +5V

GPO: 1 Relay closure to ground Input Signal: Closure to ground

HD-15 Connector:

input/Output Serial Port:

1 RS-232 (pins 6,7) or 1 RS-422 (pins

1,2,6,7) Connector: HD-15 Baud Rate: Up to 1Mbaud

Format: Configurable for various UMD

interfaces

Ethernet:

Network Type: Fast Ethernet 100 Base-TX 1EEE

802.3U standard for 100Mbps base band CSMA/CD local area network

RJ-45 x2 Connector:

Electrical:

Voltage: +12V DC

75W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of Slots: 3 (VIPA8-DUO)

4 (VIPA16-DUO)

### **>>>**Ordering Information

7767VIPA8-DUO-3GHS 7767VIPA8-DUO-HS 7767VIPA16-DUO-3GHS 7767VIPA16-DUO-HS

8 inputs auto-sensing HD, SD, 3Gbps; dual display output 8 inputs auto-sensing HD, SD; dual display output 16 inputs auto-sensing HD, SD, 3Gbps; dual display output

16 inputs auto-sensing HD, SD; dual display output

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

**Ordering Options** 

3RU Rear Plate for use with 7700FR-D Multiframe

Enclosures 7700FR-D

3RU Multiframe which holds up to 15 single slot modules



# Advanced 12 Input Compact Multi-image Display Processor

The VIP Advanced (VIP-A) is the most advanced and highly affordable compact multi-image display processor available. VIP-A has been developed to meet the demands of the broadcast control room with the features and the reliability expected in Production Control, Outside Broadcast and Master Control environments.

The VIP Advanced supports up to 12 auto-sensing HD, SD, and analog video inputs. Each input can be displayed in any size, position or aspect ratio on it's output. The VIP-A supports all display technologies using one of the various output formats available: DVI, VGA, and HD-SDI, with resolution support of up to 1920x1200, including 1920x1080 and 1600x1200. The VIP-A provides the best quality input reproduction, employing the latest in video processing technology.

The VIP Advanced is a hot-swappable device, and can be populated in Evertz widely installed 3RU 7700 multi-frame chassis with an option for redundant power supplies.

The VIP Advanced device is VistaLINK® -capable, offering remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). The VIP-A is easily configurable via the web server interface or card edge. Similar to the MVP, layout creation can be performed "live" using Evertz' Maestro™ software. Other key features include a graphic input (DVI/VGA) that can be used as a background source or in place of a scaled video source, automatic aspect ratio adjustment on a source-by-source basis, graticule generation, VITC/HD time code (RP-188) decode, display per input, and much more.

### ▶ Features & Benefits

- 12 Auto-sensing HD/SD with embedded audio and NTSC/PAL inputs
- Output resolution of up to 1920x1200, including 1920x1080p resolution
- Support for all advanced output formats including: DVI, VGA, HD-SDI outputs (all active simultaneously)
- · Highest quality image reproduction through the use of the Evertz next generation image processing technology (same technology used in Evertz industry renowned conversion products)
- · Support for embedded audio with up to 8 channels of monitoring including alarms and on screen metering
- Provides support for dynamic under monitor displays and tallies via a variety of protocols
- · Supports advanced on screen graphics, including analog clocks, graticule generator, transparency control of objects, raised bezels and borders, drop shadows, and bitmap backgrounds


- · Supports true type font including non-Latin alphabets
- Additional computer input, can be used to display RGB/DVI based video images as a background or as a scaled source. Can also be used to cascade VIP-As to increase total number of images per display
- · Automatic input format detection for accurate reproduction of input aspect ratio on a per source basis
- · Built-in video, audio, and data fault monitoring with on screen fault notification
- VistaLINK® -capable for configuration and monitoring via SNMP
- Minimal processing delay (~1 frame)
- Real time control of display outputs via Maestro™
- Highly reliable, hot-swappable platform, including redundant power supplies






# Advanced 12 Input Compact Multi-image Display Processor

# ▶7767VIPA12-HSN Block Diagram & Rear Panel

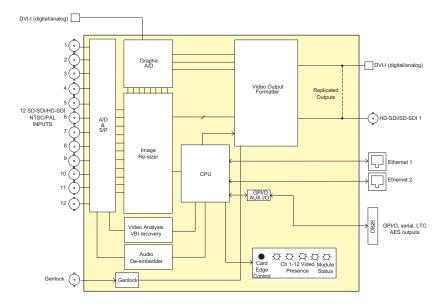

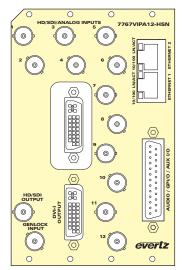

### ▶Specifications

Serial Video Inputs

HD-SDI (SMPTE 292M), and/or Standard:

SD-SDI (SMPTE259M-C)

Number of Inputs:

Connector: BNC IEC 61169-8 Annex A

Automatic to 100m (Belden 1694A) > 15dB up to 270Mb/s Equalization:

Return Loss: SMPTE 272M-A Embedded Audio:

Composite Analog Video Inputs: Standard: NTSC (SMPTE 170M)

PAL (ITU624-4) Number of Inputs:

BNC IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal DC Offset: 0V ±0.1V Input Impedance: 750

40dB up to 5MHz Return Loss:

Background (Computer) Video Input:

Auto-detecting, VESA (DVI-I, for DVI and RGBHV inputs) Standard:

Number of Inputs Connector: DVI-I (Female)

640x480 (VGA) to 1600x1200 (UXGA) Input Resolution:

1V nominal Signal Level:

Display Video Output:

VESA (DVI-I) up to WUXGA (1920x1200) Standard:

Number of Outputs: DVI-I (with DVI to RGBHV Adapter) Connector:

Video: 1V p-p YPrPb/RGB or 0.7V p-p VGA, 60Hz refresh

Impedance: 75Ω

Serial Video Output:

Selectable HD/SD serial monitoring Standard: output (720p, 1080i, 625i, 525i)

Number of Outputs:

Connector: BNC IEC 61169-8 Annex A Signal Level: 800mV nominal

DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal (HD), 740ps nominal (SD)

Overshoot: < 10% of amplitude

Genlock Input:

NTSC/PAL color black Type: 1V p-p nominal BNC IEC 61169-8 Annex A Level:

Connector:

General Purpose Interface I/O (GPI/GPO):

Number of Inputs: Number of Outputs: 2

Type: GPI:

1 Opto-isolated, active low with internal pull-ups to +5V GPO: 1 Relay closure to ground

Input Signal: Closure to ground Connector: DB-25

Input/Output Serial Port:

Number of Ports: 1 RS-232 or 1 RS-422 Connector DB-25

Up to 1Mbaud Baud Rate: Configurable for various UMD Format:

interfaces

Ethernet:

Network Type: Fast Ethernet 100 Base-TX 1EEE

802.3U standard for 100Mbps base band CSMA/CD local area network

Connector RJ-45 x 2

Electrical:

Voltage: +12V DC

75W Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical:

Number of Slots:

# **>>>**Ordering Information

7767VIPA12-HSN Up to twelve asynchronous HD/SD/NTSC/PAL inputs with

embedded audio, plus one DVI-I (DVI-D or RGBHV with adapter) input. Product supports advanced features like improved on-screen graphics and real time layout control. Single DVI-I (DVI-D or RGBHV with adapter) or one serial monitor output. Includes VistaLINK® VLPRO-C software configuration tool and Maestro display layout GUI

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR and 7700FR-D Multiframe +3RU

**Enclosures** 350FR 7700FR-D

3RU Portable Multiframe which holds up to 7 single slot modules

3RU Multiframe which holds up to 15 single slot modules

# Product Line Comparison Chart











| Points of Comparison            | MVP™ Multi-Image Display & Monitoring System  | VIP™ Compact Multi-Image Display Processor  |
|---------------------------------|---|---|
| Video Input Format              | Auto detecting format HD, SDI, Composite on the same card   | Auto detecting format HD, SDI, Composite on the same card   |
| Number of Inputs/Video Card     | 8 inputs per video card including HD  | • 4, 8 or 12 video inputs + 1 standard DVI background input   |
| Number of Inputs/Graphics Card  | Selection of 2 or 4 inputs per card   | • 4 on GI version, 1 standard DVI background  |
| Limitation on Input Cards       | No limitation on the number of input cards; each frame has     15 agnostic slots  | Self-contained module fits 7700FR-C frame   |
| Number of Inputs per Display    | Modular design up to 104 inputs - ability to scale same input<br>multiple times (fan-out)   | Up to 4 or up to 12, module dependent with user-configurable<br>or selectable factory presets   |
| Input Aspect Ratio              | • 4:3 and 16:9  | • 4:3 and 16:9  |
| Number of Outputs               | <ul> <li>Variable; standard system can drive up to 4 outputs per<br/>output module and drive 8 displays simultaneously; larger<br/>systems are possible</li> </ul>  | Single DVI-I (DVI and RGBHV) display up to WUXGA<br>(1920x1200) resolution, offers simultaneous serial output of<br>same content or input selection tool  |
| Output Formats                  | • Graphics, SDI, HD-SDI, built-in Fiber Optics option   | • Graphics, SDI, HD-SDI, built-in Fiber Optics option   |
| Router Control                  | Optional interface  | • N/A   |
| Dynamic UMDs                    | Image Video, TSL, ASCII and XY protocol built-in; others optional   | • Image Video, TSL built-in; others optional  |
| GPI Inputs and Outputs          | • 64 in and 44 out occupy NO slot   | • 20 in and 8 out built-in  |
| Analog Audio Cards              | Selection between one card can handle 16 channels of<br>analog and AES/EBU both dual group; Evertz® - up to 2<br>groups per video input embedded or discrete, with both<br>analog and discrete inputs on the same audio module  | Optional interface with breakout panel  |
| AES/EBU Audio Cards             | • 16 channel AES/EBU Dual groups  | Optional interface with breakout panel  |
| Embedded Audio Support          | Standard  | • Standard  |
| Limitation on Audio Cards       | No limitation   | Single audio interface module per VIP™  |
| Audio Break Out Panel           | • Optional  | • Optional  |
| GPI Break Out Panel             | Standard  | • Standard  |
| Other Display Elements          | Analog and digital clocks, count up/down timers, UMDs,<br>tallies, bitmaps from files, closed captioning text, VITC   | Digital clocks, count up/down timers, UMDs, tallies   |
| Video Monitoring                | <ul> <li>Loss of video sync (analog), burst (analog), video (digital),<br/>change of video source, APL level, max APL over detection,<br/>min APL under detection, peak video level, black level, AP<br/>and FF EDH error, frozen video, motion detector/non-frozen<br/>video, black video</li> </ul> | <ul> <li>Loss of video sync (analog), burst (analog), video (digital),<br/>change of video source, APL level, max APL over detection,<br/>min APL under detection, peak video level, black level, AP<br/>and FF EDH error, frozen video, motion detector/non-frozen<br/>video, black video</li> </ul> |
| Audio Monitoring                | <ul> <li>Phase Reversal</li> <li>Channels 1/2, 3/4, 5/6, 7/8, stereo/mono detection</li> <li>Channels 1/2, 3/4, 5/6, 7/8, loss of: VITC, source ID (embedded), UMD (if routing from external source), program rating (V-chip) &amp; loss of closed captioning</li> </ul>                              | Phase Reversal Channels 1/2, 3/4, 5/6, 7/8, stereo/mono detection Channels 1/2, 3/4, 5/6, 7/8, loss of: VITC, source ID (embedded), UMD (if routing from external source), program rating (V-chip) & loss of closed captioning  |
| Layout Configuration Control    | Maestro™ and DCP, VistaLINK® and GPI  | VIP-Maestro™ and layouts via VistaLINK® or GPI  |
| Control Panel                   | • DCP, NCP, NCP2  | • DCP, NCP, NCP2  |
| On-screen Display Graphics      | Yes - tally, border, UMDs, audio bar graphs, analog and<br>digital clock and timers   | Yes - tally, border, UMDs, audio bar graphs, digital clock and timers   |
| Card-edge Configuration Control | • No  | Partial - no layout creation control  |
| SNMP/VistaLINK® - capable       | Yes - presets, UMD and fault configuration  | Yes - presets, UMD and fault configuration  |
| Processing Delay                | • ~2.5 frames   | • ~1 frame  |
| Portrait Display Mode           | Possible through GLink with 2430GDAC-WARP   | Possible through GLink with 2430GDAC-WARP   |
| LTC Input                       | • Yes   | • Yes   |
| Closed Caption Decode           | • Available, 608, 708   | No, presence detection only   |
| Frame Type                      | • 3000FR, 6RU   | • 7700FR-C, 3RU   |
| Number of Slots                 | • 1-3, module dependent   | • 3 or 4, module dependent  |
| System Design                   | <ul> <li>Evertz® 3000 frame has 15 diagnostic slots which can be<br/>filled with combinations of input and output modules<br/>providing the most flexibility</li> </ul>   | Standard 7700FR-C frame has 15 agnostic slots which can be filled with numerous VIP™ modules  |










The EQX routing platform can handle up to 576x576 in a single frame.

The Xenon is available in 4RU or 8RU with matrix sizes ranging from 32x32 to 128x128.

High Density Routers - up to 576x576

The only routing solution for mission critical applications...the EQX platform has the ability to route up to 576x576 signals in a compact 26RU frame or up to 288x288 in the 16RU Frame. The EQX is ideal for mission critical and demanding 24/7 environments, including network, local broadcaster, mobile production, cable, military, government and corporate applications.

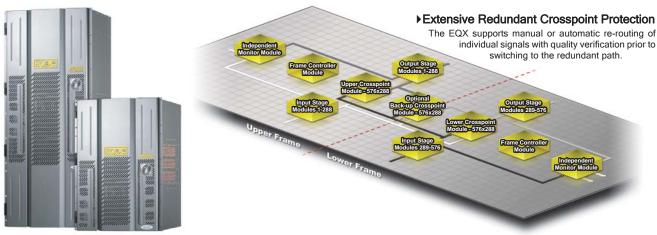

### ▶ Designed for Performance Ultra Wide Band Routing

By offering a format independent data path, the EQX supports signals from 3Mb/s all the way up to 3Gb/s including SD-SDI, HD-SDI, DVB-ASI, SMPTE 310M digital video formats as well as optical formats and other high data rate signals. In addition to this the EQX supports four independent timing planes which provides independent SMPTE compliant switching for up to four different digital video signal formats.

### ▶ Intelligent Auto-Configuration

The EQX's exceptional Source-By-Source intelligent auto configuration facility allows the path to each destination to be independently and instantly reconfigured to suit the requirements of the source being switched. This includes auto selecting the Reclocking/Non-reclocking circuitry, the ASI mode as well as selecting the correct switch point.

### ▶System Flexibility

The inspired modular approach of the EQX's design provides excellent inservice expansion capabilities. In convenient steps of 18, the number of inputs and/or outputs can be increased from the base size of 18x18 all the way up to 576x576, and beyond, in square and non-square configurations.

# Internal (1152x 1152 Expansion)

Utilizing internal passive splitting technology the EQX can offer passive looping inputs that remain SMPTE compliant. Using the passive input splitting as well as passive output combining the EQX offers the ability to scale up to 1152x1152 without requiring complex, expensive and difficult to install and maintain external splitting and combining or active DA-ing of sources and switching of destinations

### ▶ High Density

Available Double Density Outputs allow the EQX to grow past 576 outputs in the 26RU chassis and past 288 outputs in the 16RU chassis.

### ▶ Multiview Processor Integration

The EQX now integrates X-Link on both 16 and 26RU models. X-Link is a high density interconnect to a wide variety of Evertz Multiveiw Processors that DOES NOT use up standard router outputs. A 576x576 EQX will still have the full 576 outputs while supporting more than 200 additional outputs to an Evertz Multiview Processor. XLink technology is a unique Evertz signal interconnect carrying a large block of signals over a single connector.

### ▶ Audio Routing

The EQX supports the ability to DE-embed AES from any input signal deliver it as discrete AES, Analog Audio, MADI, or to be recombined with other AES channels, Analog inputs, Discrete AES inputs and RE-embedded on any output video. Any type of input: Embedded AES, Discrete AES, Analog to any type of output: Embedded AES, Discrete AES, Analog.

### ▶ Compact Design

The EQX delivers a high broadcast quality 576x576 routing capability in a compact 26RU frame, while expansion to 1152x1152 ensures a migration path for even larger applications.

### **▶** Comprehensive Control

The EQX provides comprehensive connectivity to suit the most demanding installations. The internal frame controllers provide complete connectivity to any number of remote control panels and 3rd party control devices such as automation systems via multiple Q-Link, F-Link, Ethernet and Serial ports. The optional advanced EQX control system makes enterprise installations with advanced tie-lines, automated pathfinding, and advanced control surfaces easy to implement and manage.

### ▶Independent Monitoring

EQX provides extensive signal monitoring of both inputs and outputs, power supply voltages, interior temperatures and fan speeds. All monitored data is available through SNMP for facility-wide monitoring systems such as VLPRO.

# **▶**Simple Maintenance

The advanced design of the EQX ensures that all active components, including input, output, crosspoint modules, frame controllers, cooling fans and power supplies, are accessible from the front of the frame and can be hot swapped at any time for maintenance.

### **▶Outstanding Redundant Protection**

The EQX is the ultimate design in terms of system availability. The EQX architecture contains redundant protection for all of the critical system elements. The architecture provides redundant cross-point configurations, redundant frame controllers, external redundant load sharing power supplies, redundant easy access cooling fans and a dedicated monitoring bus that is independent of the system cross-points. In the event of a failure, manual or automatic re-routing of signals on an output-by-output Path-by-Path basis is fully supported by the system software. Using the EQX monitoring capabilities, output quality can be verified prior to switching to redundant signal paths. The EQX is fully SNMP enabled and supports seamless integration with VistaLINK® PRO command and control systems.

### ▶ Features & Benefits

### High performance format independent platform

- SD-SDI, HD-SDI, DVB-ASI, SMPTE 310M and more!
- Any fiber optical signal from 3Mb/s up to 3Gb/s
- Scalable to 576x576 in a single 26RU frame
- Scalable to 288x288 in a single 16RU frame
- Input expansion in steps of 18
- Output expansion in steps of 18
- Up to 1152x1152 in multiple frames
- Source-by-source intelligent auto configuration
- Input equalization (On/Off)
- Output reclocking (On/Off)
- ASI Mode (On/Off)
- Switch Point (Variable)

### Advanced system control & interfacing

- Supports the full range of Quartz remote control panels
- Full VistaLINK® PRO command & control, SNMP & AVM
- Full integration with 3rd party automation systems
- Supports a wide selection of control protocols
- Ethernet, Serial RS422/232, F-Link and Q-Link ports

### High availability, 24/7 design

- Full modular design
- All modules are hot swappable
- All components are front accessible (electronics & cooling fans)
- Passive I/O
- Full redundant design
- Redundant crosspoint
- Redundant frame controller
- Redundant power supply (seperate IRO)
- Redundant cooling fans
- Comprehensive system monitoring bus
- VistaLINK® PRO SNMP & AVM monitoring of I/O & crosspoint modules
- Temperature monitoring
- Power supply monitoring

### ▶ Specifications

Configuration:

576x576 in 26RU (PSU separate 1RU) 288x288 in 16RU (PSU separate 1RU) Selectable in blocks of 18 Inputs: Outputs Selectable in blocks of 18

Redundant Protection: Redundant Crosspoint

Redundant Frame Controller Redundant Power Supply Redundant Cooling Fans

BNC IEC 61169-8 Annex A

Video Inputs:

SMPTE 259M, SMPTE 292M, Formats SMPTE 310M, SMPTE 424M, ASI

Optical Formats SMPTE 292M, GLINK, any optical signal between 3Mb/s and 3Gb/s

Signal Level 800mV p-p

75Ω terminating >15db typical (5-1500 MHz) >10db typical (1.5-3GHz) Return Loss

Cable Equalization Belden 1694A @ 270 MHz 300m Belden 1694A @ 1.5GHz 100m

Connectors

Impedance

Video Outputs: Signals Supported Same as Input Reclocking Configurable Non-Reclocking Configurable 800mV p-p ± 10% Signal Level

75Ω terminating >15 db typical (5-1500 MHz) Return Loss >10db typical (1.5-3GHz)

DC Offset  $0 \pm 0.5\dot{V}$ Output Jitter 0.2 UI

BNC IEC 61169-8 Annex A

Reference Timing:

Analog 525/625/tri-level HD Switching Reference: Looping connections

Connector: 2 BNC IEC 61169-8 Annex A Signal Level: 1 V p-p ± 3dB

Impedance: 75Ω terminating active loop out

Reference Timing: 4 independent timing planes programmable output by output

Control:

Q-Link:  $4x75\Omega$  video cable (max length

500m) 2x RJ45 F-Link: Serial RS422/232: 2x D9 female

10/100baseT, 2x RJ45 Ethernet:

Physical: Height:

45.5" (115.5cm) 26RU 28" (49cm) 16RU

19" (483mm) 19" Rack Mount Width: 19.4" (493mm) over hinges and Depth:

**BNCs** Operating Temperature: 0°C -40°C Cooling: Fan cooled, front to rear Power: Voltage

Auto ranging 100 to 240V 50/60Hz Up to 4 load sharing PS modules in 1RU frame - separate mains input for each module or external 48VDC

1200 W per PS module 1500 W for fully loaded 288x288

confia 3000 W for fully loaded 576x576

config

Separate 1RU frame with up to 4 Redundancy PS modules for 1:1 redundancy

>>> Ordering Information - Contact factory for system configuration

576x576- 26RU Frame:

EQX26-18X18S 18 input, 18 output SDI/ASI Video Router with single power supply 18 input, 18 output HD/SDI/ASI Video Router with single power EQX26-18X18H

EQX26-18x18-3G 18 input, 18 output 3G/HD/SDI/ASI Video Router with single power

EQX26-18x36-3G-F 18 input, 36 output 3G/HD/SDI/ASI Video router with Fiber I/O and

single power supply

288x288 - 16RU Frame

EQX16-18x36-3G-F

EQX16-18X18S 18 input, 18 output SDI/ASI Video Router with single power supply EQX16-18X18H 18 input, 18 output HD/SDI/ASI Video Router with single power

EQX16-18x18-3G 18 input, 18 output 3G/HD/SDI/ASI Video Router with single power

> 18 input, 36 output 3G/HD/SDI/ASI Video router with Fiber I/O and single power supply

Ordering Options (to expand 26RU up to 576x576, 16RU up to 288x288): EQX-PS-FR 1RU frame which holds up to 4 power supply m

1RU frame which holds up to 4 power supply modules (EQX-PS) EQX-PS Power Supply module 4 for 26RU frame & 2 for 16RU frame EQX-FC Redundant frame controller for 26RU and 16RU frame EQX-XPT-576x288 Redundant crosspoint module for 26RU frame EQX-XPT-288x288 Redundant crosspoint module for 16RU frame EQXS64-1x2-3G

Available for either 16RU frame or 26RU frame:

EQX-IP18S 18 Input SDI/ASI Module EQX-IP18H 18 Input HD/SD/ASI Module EQX-IP18-3G 18 Input 3G/HD/SD/ASI Module EQX-OP18S 18 Output SD/ASI Module 18 Output HD/SD/ASI Module EQX-OP18-3G 18 Output 3G/HD/SD/ASI Module

Ordering Options (to expand 26RU up to 1152x1152):

For fiber optics options contact factory Greater than 576x576, contact factory









# riz

Xenon brings many advanced new capabilities to the world of routing switchers, building on a new generation design that starts with a solid, multi-format router core.

### ▶Xenon: Excel Beyond Expectations

In today's broadcast environment, a router must be reliable, resilient and cost effective. Xenon excels in all of these areas while offering the flexibility of multiformat operation, and the ability to add Signal Processing Technology.

Great care has been taken in the design of Xenon to avoid single points of failure. Active assemblies are all hot swappable from the front of the frame. Power, control, cooling and reference generation are available in redundant configurations.



### ▶ Features & Benefits

### Configuration

Xenon allows any mix of formats within a frame in independent blocks of 32 inputs or outputs. Any of the supported formats, 3G/HD/SD/AES, can be expanded to fill an entire 128x128 frame.

The Xenon is housed in a 4RU frame, switching up to 64 sources to 64 destinations, or in an 8RU frame switching up to 128 sources to 128 destinations. Additional input and output modules can be installed in to the router at anytime.

### Contro

The Xenon router includes, as standard, an internal Frame Controller module which supports four Q-Link ports, two Ethernet ports and two Serial ports mounted on the rear of the router.

The Xenon has a number of control options, they are:

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Xenon router connected via Q-Link.

**External third party control:** The Xenon router can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

### Expansion

The input and output stages of the Xenon can be expanded in steps of 32 at any time by adding additional I/O modules. The Xenon can not be expanded beyond its frame size.

### Power Supply

The power supplies for the Xenon are internal. The 4RU & 8RU frame can be fitted with an optional redundant power supply with separate AC power inlet & alarm output.

### Designed for Performance Ultra Wide Band Routing

By offering a format independent data path, the EQX supports signals from 3Mb/s all the way up to 3Gb/s including SD-SDI, HD-SDI, DVB-ASI, SMPTE 310M digital video formats as well as optical formats and other high data rate signals. In addition to this the EQX supports four independent timing planes which provides independent SMPTE compliant switching for up to four different digital video signal formats.

### Video

Xenon supports 3G, HD, SD and ASI video routing. It is available as 3G/HD/SD or HD/SD or SD only, offering cost savings for those who do not require 3G and or HD capability. For those applications requiring the signal to be reclocked, reclocking modules can be added in blocks of 8 outputs.

### Audio

Xenon supports AES Audio routing. Balanced AES or unbalanced AES on BNCs are supported in any mixture in blocks of 32 inputs or outputs. AES routing within the Xenon is performed as mono channels so signals can be shuffled amongst AES pairs. Xenon also supports Analog audio I/O. the audio is converted and routed as digital so that analog sources can route to AES destinations and AES sources can route to analog destinations. Analog blocks are in groups of 32 stereo pairs.

### Signal and System Monitoring

Xenon supports SNMP signal monitoring and comprehensive system monitoring, including power supply voltages, interior temperatures and fan speeds. System status may also be monitored remotely by a network based remote connection over TCP/IP or a direct serial connection to a PC. User-configurable closing contacts are also provided for connection to an external alarm system.

### Feature Summary

- Multiple signal formats within a single frame
- Optional output reclocking in blocks of 8 outputs
- · All outputs can switch in one TV frame
- · Dual reference inputs
- Advanced audio features including Soft Switching
- Dolby-E<sup>™</sup> signal compatible
- · Redundant internal controllers
- Q-Link, Ethernet and RS485 control interfaces
- · Deterministic switching
- · SNMP and system monitoring
- Powerful and intuitive WinSetup Software

# Xenon Multi-Format Routers

### ▶Specifications

Configuration:

Inputs Selectable in blocks of 32 Outputs: Selectable in blocks of 32

Standard Definition SD Video Inputs:

Signals supported: SMPTE 259M 1997, ASI DVB standard 800mV p-p nominal Signal Level:

Impedance:  $75\Omega$  terminating Return Loss:

5 - 270MHz 15dB typical Belden 8281 Cable equalization: BBC PSF1/2: 250m min BBC PSF1/3: 150m min

BNC per IEC 61169-8 Annex A Connectors:

SD Video Outputs:

800mV p-p ±10% Signal Level: Impedance:  $75\Omega$  terminating

Return Loss:

5 - 270MHz 15dB typical DC Offset: 0 ±0.5V

BNC per IEC 61169-8 Annex A

Signal Path:

< 0.4ns Rise/fall times: Path Length: 12ns, typical

0.2 UI p-p with < 250m input cable Output jitter:

High Definition: **HD Video Inputs:** 

SMPTE 292M Signals supported: Signal Level: 800mV p-p nominal Impedance: 75Ω terminating Return Loss:

5 - 1485MHz 15dB typical Belden 1694A, 90m Cable equalization:

BNC per IEC 61169-8 Annex A Connectors:

**HD Video Outputs:** 

Signal Level: 800mV p-p ±10% Impedance:  $75\Omega$  terminating Return Loss:

5 - 1485MHz 15dB typical DC Offset:

Connectors: BNC per IEC 61169-8 Annex A

Signal Path:

Rise/fall times: < 0.4ns 12ns, typical Path Length:

0.2 UI p-p with < 95m input cable Output jitter:

Fiber Inputs/Outputs

Dual Optical SFP Transmitter, Up to SFP1T13-2

3Gbs, 1310nm

SFP1R-2 Dual Optical SFP Receiver, Up to 3Gbs Audio Inputs - AES: Balanced version (D50)

32kHz, 44.1kHz, 48kHz, and 96kHz Sample rates:

Standard: AES3-1992 Signal level: 0.2-7V p-p 110Ω ±20% Impedance:

Transformer coupled ±50V DC on input:

Connectors: D50 female carrying 16 signals

Unbalanced Version (BNC):

SMPTE 276M Standard: Impedance:  $75\Omega$ 25dB. 0.1-6.0kHz Return loss:

BNC per IEC 61169-8 Annex A Connectors:

Audio Outputs - AES: Balanced version (D50)

Signal level: 2-5V p-p

Impedance: 110Ω Transformer coupled

DC isolation: +50V Rise/fall time:

D50 female carrying 16 signals

Unbalanced version (BNC): Signal level: 1.0V p-p ±50%

Impedance

25dB, 0.1-6.0kHz Return loss:

Conforms to ANSI S4.40 - 1992 Jitter: Connectors: BNC per IEC 61169-8 Annex A

Analog to Digital Audio Conversion:

48kHz or 96kHz Sampling Freg: Connectors: 50 way "D" type female Freq Response: ± 0.05dB

Input Impedance: 12kΩ minimum 0dBfs - 18dBu or 24dBu Signal Level: -113dB A-weighted >95dB (typically >98dB) THD+N: CMRR: >85dB @1kHz

Crosstalk:

I/O Delay: 0.85ms @48kHz or 0.43ms @96kHz

Digital to Analog Audio Conversion:

Sampling Freq: 48kHz or 96kHz Connectors: 50 way "D" type female ± 0.06dB Freg Response:

Output Impedance:  $400\Omega$ 

0dBfs - 18dBu or 24dBu Signal Level: Noise: THD+N: -115dB A-weighted >95dB (typically >98dB)

DC Offset: Crosstalk: <-95dB

1.3ms @48kHz or 0.66ms @96kHz I/O Delay: Dynamic Range:

24 bits

Analog Audio Performance:

Sampling Freq: 48kHz or 96kHz Connectors: 50 way "D" type female

Freq Response: ± 0.08dB Output Impedance:  $400\Omega$ 

Input Impedance: 12kΩ minimum Signal level: 0dBfs = 18dBu or 24dBu -110dB A-weighted Noise: THD+N: >95dB (typically >98dB)

DC Offset: >±30mV Crosstalk: <-95dB

1.3ms @48kHz or 0.66ms @96kHz I/O Delay:

Dynamic Range: 24 bits

Switching Reference:

Reference inputs (SD):2x, BNC, analog 525/625

Reference inputs (HD/SD):

Tri level analog 625 or 525 Signal level: 1V p-p ±3dB

Impedance: 75Ω terminating

Line switching: Lines 3/319 (625), Lines 10/273 (525)

Line 7 (HD)

Connectors: BNC per IÉC 61169-8 Annex A

Electrical:

Auto ranging 100 to 240V AC 50/60Hz Supply:

Power 8RU: Typical 300VA Max 500VA Typical 150VA 4RU: Max 250VA

Not including the SPT modules

Optional

Backup:

Physical: Height 4RU: 7" (178mm) 14" (355mm) 19" (483mm) 8RU Width: 17 3/4" (450mm) Depth

Weight 4RU: 16kg 8RU: 31ka

Operating Temp.: Spec. maintained to 30°C Operation to 40°C

Ventilation: Fan cooled from the front to the rear

of the left hand and right hand side of

Control:

Q-Link: 4x75Ω video cable (max length 500m)

F-Link: 2xRJ45 Serial RS422/232: 2xD9 female Ethernet, 10baseT: 2xRJ45

Compliance:

EMC:

Compliant with CSAC22.2 No 60065-03 Safety:

IEC 60065

Complies with CE low voltage directive 93/68/EEC

Complies with FCC Part 15, Class A CE EMC Directive 89/336/EEC

### **>>>**Ordering Information

XE4 Up To 64x64 Base Systems

Xenon 4RU 32x32 SDI Router Xenon 4RU 32x32 SDI Router (fiber capable - no modules) XF4-3232SX

XE4-3232SX+F XE4-3232HX Xenon 4RU 32x32 HD/SD Router

XE4-3232HX+F Xenon 4RU 32x32 HD/SD Router (fiber capable - no modules)

Xenon 4RU 32x32 3G/HD/SD Router Xenon 4RU 32x32 3G/HD/SD Router (fiber capable - no modules)

XE4-3232-3G+F XE4-3232AESB Xenon 4RU 32x32 Digital Audio Router (Balanced) XE4-3232AESU Xenon 4RU 32x32 Digital Audio Router (Unbalanced)

XE8 Up To 128X128 Base Systems

XE8-3232SX Xenon 8RU 32x32 SDI Router

Xenon 8RU 32x32 SDI Router (fiber capable - no modules) Xenon 8RU 32x32 HD/SD Router XE8-3232SX+F

XE8-3232HX

Xenon 8RU 32x32 HD/SD Router (fiber capable - no modules) XE8-3232HX+F Xenon 8RU 32x32 3G/HD/SD Router
Xenon 8RU 32x32 3G/HD/SD Router (fiber capable - no modules) XE8-3232-3G

XF8-3232-3G+F Xenon 8RU 32x32 Digital Audio Router (Balanced) XE8-3232AESB XE8-3232AESU Xenon 8RU 32x32 Digital Audio Router (Unbalanced)

Ordering Options

XE4-3232-3G

+2PS Redundant Power Supply (1 required for 4RU Frame), (2 required for

Redundant Controller Module +FU Redundant Reference module (Can only be fitted on frames with 64 +REF

or more, outputs)

Reclocking option for 8 HD/SD outputs +P8 Reclocking option for 16 HD/SD outputs +R16 Reclocking option for 24 HD/SD outputs +R24

+R32 Reclocking option for 32 HD/SD outputs Synchronous AES Audio +SS +SRC Sample Rate Converters for AES audio

XE-IP32SX 32 Standard Definition inputs

XE-IP32SX+F 32 Standard Definition inputs (fiber capable) XE-IP32HX 32 HD/SD inputs XE-IP32HX+F XE-IP32-3G 32 HD/SD inputs (fiber capable)

32 3G/HD/SD inputs 32 3G/HD/SD inputs (fiber capable) XE-IP32-3G+F XE-IP32-AESB 32 AES Balanced inputs XE-IP32-AESU 32 AES Unbalanced inputs

XE-IP32-AA 32 Analog inputs XE-OP32HSX 32 HD/SD outputs

XF-OP32HSX+F 32 HD/SD outputs (fiber capable) 32 Standard Definition inputs XE-OP32SX XE-OP32SX+F 32 Standard Definition inputs (fiber capable)

XE-OP32-3G 32 3G/HD/SD outputs 32 3G/HD/SD outputs (fiber capable) XE-OP32-3G+F XE-OP32-AESB 32 AES Balanced outputs XE-OP32-AESU 32 AES Unbalanced ouputs XF-OP32-AA 32 Analog outputs

Fiber Optic Module

SFP1T-13-2 Dual optical SFP fiber transmitter module Dual optical SFP fiber receiver module SFP1R-2







### ▶ Features & Benefits

### Configuration

The Q6400-N is housed in a 3RU frame. It is available in three fixed sizes - 32x32, 64x32 and 64x64. It can be upgraded by returning the router to the local service center.

The Q6400-N router includes, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. An optional internal CI module can be fitted to increase the number of Q-Link and Serial ports.

The Q6400-N has a number of control options, they are:

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q6400-N via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q6400-N router connected via Q-Link.

External Third Party Control: The Q6400-N router can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

### Expansion

The input or output stage of the Q6400-N can be expanded from 16 to 32. In both cases the router needs to be returned to the local service centre to be upgraded. It can not be expanded beyond its frame size.


### **Power Supply**

The power supply for the Q6400-N is internal. An optional redundant power supply with separate AC power inlet and alarm output is available.

- 50Mhz bandwidth and terminated inputs for best possible signal performance
- DC restored inputs for composite signals ensures switching free from the picture disturbances often encountered in DC coupled only designs
- Vertical interval switching for clean switching, reverts to free running if no sync reference (video or pulse) with all levels of the same route switching in the same field
- Dual 525/625 reference input

### Operational Features

- Frames can be stacked for parallel component analog video routers, or a single frame can be split to provide separate routers from a single frame
- Diagnostic monitoring of temperature and PSU status
- · All modules are installed from the front for easy access for upgrades and maintenance, not possible with some alternative designs
- · Built-in control system

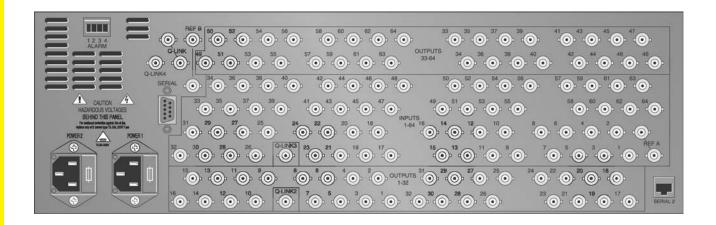



# Q-Series Large Routers

#### **▶**Specifications

Configuration:

Inputs Selectable: Outputs Selectable: 32 or 64 32 or 64

Analog Video Inputs:

Signal level: 1V p-p nominal, +3dB max.

Impedance: 75Ω terminating Return Loss to 5.5MHz:

Connectors: BNC per IEC 61169-8 Annex A

Analog Video Outputs:

Impedance: Return Loss to 5.5MHz: 38dB +50mV

BNC per IEC 61169-8 Annex A Connectors:

DC on output:

Signal Path:

Insertion gain: HF response: ±0.1dB

15kHz to 5.5MHz ±0.1dB to

20MHz

±0.2dB -3dB bandwidth > 50MHz

LF response, tilt at 50Hz: 0.5% 2T pulse, pulse/bar,

0.25% bar slope:

Luma/Chroma Inequalities: ±0.5% gain, ±5ns delay 0.15%, 0.15° (10-90% APL) Diff Gain and Phase:

Luminance non-linearity: 0.2% Path length, typical: Timing spread at 3.58/4.43MHz:

±2° at any output Crosstalk at 3.58/4.43MHz:-63dB

Noise to 5.5MHz: -68dB rms

Control:

Serial RS232/422:

Q-link to remote panels:

1 as standard (additional 3 Qlinks with CI-0004 option)  $75\Omega$ video cable 500m max. length

1 as standard (additional port with CI-0001 or CI-0004

option)

Switching Reference:

NTSC/PAL 1V p-p  $\pm 3$ dB or 1-4V pulses 75 $\Omega$  looping Reference: Signal level: Impedance:

Switching Line : 6/319 - 11/324

Power:

Auto ranging 100 to 240V AC Supply:

50/60Hz Power Consumption: 34W

Physical:

3RU, 133mm (5.25" nom.) Height: 19" rack mount Width: 485mm (19" nom.) Depth: . Weight: 11.25kg (23lb) Operating Temp: 0-40°C

10-30°C Specification maintained:

Ventilation: Fan cooled, air drawn in from the front and exhausted from

the side

#### **▶▶▶**Ordering Information

Up to 64x64 in a 3RU frame with single or redundant power supplies

32x32 Analog Video Router 64x32 Analog Video Router 64x64 Analog Video Router Q6400-3232N Q6400-6432N Q6400-6464N

Ordering Options

AK-0002

+2PS CI-0001 Redundant power supply

Sub-module that enables a second RS232/422 serial port Sub-module that enables three additional Q-Links and one extra CI-0004

RS232/422 serial port 1RU Rear frame supporting kit

Contact factory for other configurations and for further options.









#### Analog Audio Router

The Q6400-AA is a mid-sized analog audio router handling up to 64 inputs and 64 outputs of stereo audio in just 3RU of rack space including an integral control system. All modules are installed from the front for easy access for upgrades and maintenance. The Q6400-AA supports an audio reverse feature which allows the left and right channels in a stereo pair to be swapped. This feature can also be used to arrange the router into a 128x64 mono configuration.

#### ▶ Features & Benefits

#### **Feature Summary**

- Frames may be stacked for multi-level systems
- Many matrix sizes available from 32x32 up to 64x64 mono or stereo, or even 128x64 mono
- Field upgradeable output modules in blocks of 16
- · Handles time code, even at spooling speeds, as well as genuine audio signals
- Electronically balanced inputs with excellent common mode rejection
- Electronically balanced outputs
- · Optional Output Crossover in blocks of 16 outputs provides the following extra features:
  - Left and right channels can be reversed
  - Left (or right) channel can be fed to both left and right outputs
  - Mono mix of left and right channels to both outputs

#### Configuration

The design of the Q6400-AA router allows it to be configured in square or nonsquare sizes. It is housed in a 3RU frame and is available in a redundant power supply configuration. The input and output stage of the router is selectable in blocks of 16 up to a maximum size of 64x64 stereo or 128x64 mono.

#### Control

The Q6400-AA includes, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the Q6400-AA to increase the number of Q-Link and serial ports.

The Q6400-AA has a number of control options, they are:

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q6400-AA router connected via Q-Link.


External third party control: The Q6400-AA router can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

#### Expansion

The input or output stage of the Q6400-AA can be expanded in blocks of 16 or 32 depending upon the audio format of the router, mono or stereo.

#### **Power Supply**

The power supply for the Q6400-AA is internal and can be fitted with an optional redundant power supply with separate AC power inlet and alarm output.

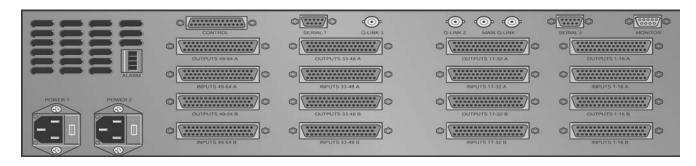

#### ▶Specifications

#### Configuration:

Inputs: Stereo

16. up to 64 blocks of 16 32 to 128 blocks of 32 Mono: Outputs:

Stereo 16, 32, 48, 64 Mono: 32 or 64

#### Analog Audio Inputs:

0dBu nominal, +24dBu max Signal level: Impedance:  $20k\Omega$ 

Common Mode Rejection:

20Hz to 3kHz: -80dB, -100dB typical at 50/60Hz 3kHz to 20kHz: -60dB, -70dB typical at 20kHz Common Mode Level: +27dBu maximum, no signal Connectors: D50 female, XLR Breakout panels

available

#### Analog Audio Outputs:

 $40\Omega$  balanced DC on output: ±50mV

Connectors: D50 female, XLR Breakout panels available

#### Signal Path:

Insertion gain: ±0.1dB

Frequency Response at 20Hz to 20kHz:

±0.25dB to 150kHz -3dB

Delay between two routes 1µs Total Harmonic Distortion:

> 0.02%, 0.01% typical -10dBu to +20dBu and 20Hz to 20kHz

-80dB Noise (unweighted)

20Hz to 20kHz:

20Hz to 20kHz: -85dB rms.

#### Control:

Crosstalk:

Q-link: 1 as standard (additional 3 Q-links

with CI-0004 option) 75Ω video cable 500m max length

Serial RS232/422: 1 as standard (additional port with CI-0001 or CI-0004 option) D9 female

Supply Auto ranging 100 to 240V AC 50/60Hz

120W Power Consumption:

Backup: Optional with alarm output

#### Physical:

3U, 133mm (5.25" nom.) Height: Width: 19" rack mount Depth: 485mm (19" nom.) 12.7kg (27.9lb) fully loaded Weight Audio Connectors: D50 female multi-pin connectors carrying 16 balanced signals

Operating Temp: 0-40°C Specification maintained: 10-30°C

Ventilation: Fan cooled. Intake at front, exhaust at

right-hand side and rear



## **▶▶▶Ordering Information**

| Q6400-4816-AAM   | 48x16 Mono Audio Router               |
|------------------|---------------------------------------|
| Q6400-4832-AAM   | 48x32 Mono Audio Router               |
| Q6400-4848-AAM   | 48x48 Mono Audio Router               |
| Q6400-6416-AAM   | 64x16 Mono Audio Router               |
| Q6400-6432-AAM   | 64x32 Mono Audio Router               |
| Q6400-6448-AAM   | 64x48 Mono Audio Router               |
| Q6400-6464-AAM   | 64x64 Mono or 32x32 Dual Audio Router |
| Q6400-3232-AAS   | 32x32 Dual Audio Router               |
| Q6400-4816-AAS   | 48x16 Dual Audio Router               |
| Q6400-4832-AAS   | 48x32 Dual Audio Router               |
| Q6400-4848-AAS   | 48x48 Dual Audio Router               |
| Q6400-6416-AAS   | 64x16 Dual Audio Router               |
| Q6400-6432-AAS   | 64x32 Dual Audio Router               |
| Q6400-6448-AAS   | 64x48 Dual Audio Router               |
| 40.000.000       | 64x64 Dual Audio Router               |
|                  | 48x16 Dual Audio Router with Xover    |
| G0.00 100E700    | 48x32 Dual Audio Router with Xover    |
|                  | 48x48 Dual Audio Router with Xover    |
|                  | 64x16 Dual Audio Router with Xover    |
| 40.000.000       | 64x32 Dual Audio Router with Xover    |
|                  | 64x48 Dual Audio Router with Xover    |
| 40.00 0.01.000   | 64x64 Dual Audio Router with Xover    |
|                  | 96x16 Mono Audio Router               |
|                  | 96x32 Mono Audio Router               |
|                  | 96x48 Mono Audio Router               |
|                  | 128x16 Mono Audio Router              |
|                  | 128x32 Mono Audio Router              |
|                  | 128x48 Mono Audio Router              |
| Q6400-128064-AAM | 128x64 Mono Audio Router              |

Ordering Options +2PS CI-0001 Redundant power supply RS232/RS422 Serial Card Modification to add second serial port to

monitoring routers

monitoring routers
CI-0004 Multi Q-Link Card
AK-0002 1RU Rear Frame Support Kit,
AK-0006 Audio Connectors, D50 male (each)
AK-0008 16 way XLR Breakout Panel, Male
AK-0009 16 way XLR Breakout Panel, Female
M-MO-AA-1601-0000 Q6400 Audio Output Monitoring Module, Primary
M-MO-AA-1601-0100 Q6400 Audio Output Monitoring Module, Secondary











# Q256-AA, Q256-AES (Balanced & Unbalanced)

## Digital & Analog Audio Routers: 32x32 to 256x256

The Q256 Series features multi-format audio routers supporting both digital (balanced and unbalanced) and analog audio I/Os. Its features include Sample

Rate Conversion (SRC), "Soft Switching" and "Wild Shuffling" as well as comprehensive monitoring and diagnostic facilities.

#### ▶ Features & Benefits

#### Configuration

The Q256-AES and Q256-AA are housed in a 16RU frame, switching up to 256 sources to 256 destinations. The Q256-AA is also available in an 8RU frame, switching up to 128 sources to 128 destinations. The modular design of the Q256-AES/AA allows additional input and output modules to be installed in to the router at anytime in blocks of 32. AES and analog audio modules can be mixed in any combination within the same frame. As the analog-to-digital and digital-to-analog conversion is handled by the input and output modules, any input can be routed to any output regardless of its format type.

#### Control

The Q256-AES/AA routers require an external control system that operates alongside its internal controller. The external controller can be either the SC-500A or SC-1000. The SC-500A is a simple non-redundant system controller suitable for non-critical installation while the SC-1000 is a comprehensive fully redundant system controller suitable for all critical on-air installations. The SC-1000 should always be used when 100% redundancy protection is required. The System Controller handles the management of the router as well as optionally providing additional redundancy features. It's an expandable platform that supervises all of the communication and interface requirements of the Q256-AES/AA router and its control panels.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q256-AES/AA router connected via Q-Link and the System Controller.

External third party control: The Q256-AES/AA router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port. Some automation systems have the ability to connect directly to the Q256-AES/AA while others connect via the System controller.

#### Router Expansion

The Q256-AES/AA router can be expanded by installing extra plug-in modules into a part-populated router frame or adding additional frames to provide a routing matrix up to 1024x1024. The Q256-AES/AA router is scaled in steps of 32 from 32x32 through to 256x256 in a single 16RU frame and up to 1024x1024 by using multiple frames.

#### Power Supply

The power supplies for the Q256-AES/AA are internal. Both 8RU and 16RU frame can be fitted with an optional redundant power supply configuration with separate AC power inlets and alarm outputs.

#### Sample Rate Conversion

Sample Rate Conversion (SRC) allows the Q256-AES/AA router to accept audio input sample rates of 32kHz, 44.1kHz, 48kHz and 96kHz. On each input these sample rates are then converted to the chosen internal sample rate of 48kHz or 96kHz, before being switched to the required output destination. The use of SRC removes the complexity normally associated with systems routing multiple audio sample rates.

#### Soft Switching

Audio clicks can sometimes be experienced when switching between audio sources with an asynchronous or synchronous audio router. The soft switching technology used in the Q256-AES/AA router is able to predict these occasions and smooth out the audio transition for a guaranteed click- free switch. Soft switching requires a valid reference input to be present at all times.

#### Wild Shuffling

The Q256-AES/AA router also features Wild Shuffling allowing any input audio track to be selected with any other input audio track and routed to the same output destination.


#### Balanced and Unbalanced AES audio


The modular nature of the Q256-AES/AA router enables simultaneous support for a combination of both AES balanced (D50) and unbalanced (BNC) inputs and outputs.


#### Monitoring and Diagnostics

An important feature of the design is the integral monitoring and diagnostic facilities which allows the signal to be monitored at the inputs and at the outputs of the router. The monitoring is available externally or can be processed internally. In addition there is comprehensive monitoring of the power supplies and cooling fans. The monitoring and diagnostics can be controlled and the resulting data accessed through a serial or Ethernet port.

#### ▶8RU Q256-AA, 16RU Q256-AES/AA (Balanced) & Q256-AES (Unbalanced) Rear Panels



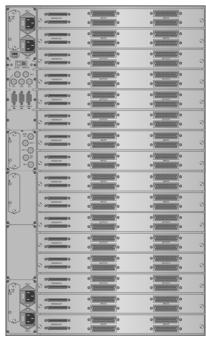

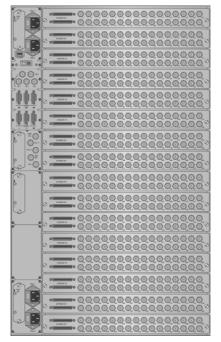

# Q256-AA, Q256-AES (Balanced & Unbalanced)

Digital & Analog Audio Routers: 32x32 to 256x256

#### **▶**Specifications

Configuration:

Selectable in blocks of 32 Inputs: Outputs: Selectable in blocks of 32

Audio Inputs - AES:

32kHz, 44.1kHz, 48kHz, and 96kHz Sample rates:

Balanced version (D50):

AFS3-1992 Standard: Signal level: 0.2-7V p-p 110Ω ±20% Impedance: Transformer coupled DC on input:

±50V Connectors:

D50 female carrying 16 signals

Unbalanced version (BNC):

Standard: SMPTE 276M Impedance: Return loss: 25dB, 0.1-6.0kHz

BNC per IEC 61169-8 Annex A Connectors:

Audio Inputs - Analog:

Signal level: 0dBu nominal, +24dBu max. 20kO

Impedance: Common mode rejection

20 to 22kHz: -74dB (typical -80 @ 50Hz)

Connectors: D50 female Audio Outputs - AES:

Balanced version (D50) Signal level:

Impedance:  $110\Omega$  Transformer coupled DC isolation: ±50V

Rise/fall time: 3.5-10ns

Connectors: D50 female carrying 16 signals

Unbalanced version (BNC):

Signal level: 1.0V p-p ±50% Impedance: 25dB, 0.1-6.0kHz Return loss:

Conforms to ANSI S4.40 - 1992 Jitter:

BNC per IEC 61169-8 Annex A Connectors:

Audio Outputs - Analog: Impedance:  $40\Omega$  balanced DC on output: ±50mV D50

Control:

Q-link to remote panels:

 $4x75\Omega$  video capable 500m max. length

Serial RS232/422 3x D9 female Maintenance RS232: D9 female

2x RJ-45, 100BaseT, TCP/IP

Monitoring: Input monitoring

Output monitoring

Power:

Auto ranging 100 to 240V AC 50/60Hz

Supply: Power Consumption:

1000W 16U: 1700W

Optional with alarm output Backup:

Physical: Height:

14" (355mm) 8U: 16U: 28" (710mm) Width: 19" rack mount (483mm) 19" nom. (483mm) Depth:

Weight:

16U: 32 lbs (100kg) Operating temp: 0-40°C Specification mair ained: 10-30°C

Ventilation: Fan cooled right to left, as viewed from

the front of the unit

#### **▶▶▶** Ordering Information

Q256-032032-AESB Q256 32x32 Digital Audio Router (Balanced)
Q256-032032-AESU Q256 32x32 Digital Audio Router (Unbalanced)

**Ordering Options** 

+2PS Redundant power supply +FU Redundant controller module Q256-IP32-AESU 32 Unbalanced digital audio inputs Q256-IP32-AESB Q256-OP32-AESU 32 Balanced digital audio inputs 32 Unbalanced digital audio outputs Q256-OP32-AESB 32 Unbalanced digital audio outputs

System monitor module









## Topaz High & Standard Definition Routers

Designed to meet the needs of both the broadcast and professional video users, Topaz is an aggressively low priced routing system combining no-compromise technical specifications with a market leading control system.

With broadcast quality, reliability, and affordability, Topaz is suited to many applications, including professional, corporate/industrial markets, educational uses and the AV and presentation markets.

Topaz-High Definition routers offer a full 1.5Gb/s bandwidth to handle uncompressed HD signals. Automatic Bit Rate Detection on the input equalizer allows any mix of HD and SD signals in the same unit.

Up to 95m of cable equalization is provided at HD data rates (250m at SD rates).

#### ▶ Features & Benefits

#### Configuration

The QT-1616H's are housed in a 2RU frame and switches 16 sources to 16 destinations. Both the input and output stage of the QT-1616H are fixed at 16. The QT-3232H's are also housed in a 2RU frame and can switch up to 32 sources to 32 destinations. Both the input and output stage of the QT-3232H are fixed at 32.

#### Control

The entire range of Topaz routers are compatible with the existing ranges of Quartz routers, remote control panels and control systems. The Topaz routers include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router.

The Topaz routers have a number of control options, they are:

Local Control Panel: The CP-2402-LP can be fitted to the QT-1616H and QT-3232H.

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Topaz routers via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Topaz routers connected via Q-Link.

External Third Party Control: The Topaz routers can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

#### Expansion

The input and output stage of the Topaz routers are fixed at 16 and 32. They can not be expanded beyond their frame size.


#### Power Supply

The power supply for the the Topaz routers is external and connects to the frame via secure bayonet locking connector. The Topaz routers can be fitted with an optional redundant external power supply. An optional mounting tray securely supports both of the power supplies without the need for additional rack space.


#### **Feature Summary**

- · Full broadcast specifications
- · Silent operation convection cooled
- · Powerful built-in control systems
- · Q-Link and Serial control
- · Ethernet control
- · Compatible with all Quartz routers and remote control panels
- Frames can be segmented into multiple smaller routers
- Optional power supply tray
- Redundant power supply option
- · Bayonet locking power connectors

#### ▶QT-1616H Rear Panel

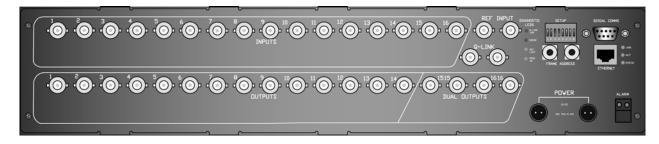

#### ▶QT-3232H Rear Panel

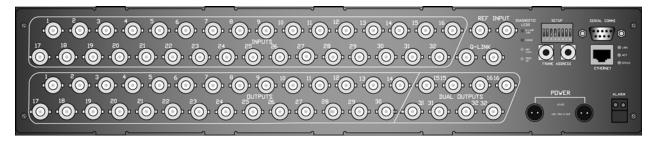



# QT-1616H, QT-3232H, QT-1616S, QT-3232S

Physical:

Height:

Width:

Depth:

Weight:

PSU:

Frame:

Humidity:

Ventilation:

Operating temp. (a

## Topaz High & Standard Definition Routers

3.5" (90mm)

1.45kg

0.4kg

mbient):

Specification maintained (ambient):

0-40°C

19" (483mm)

4.75" (120mm)

10-90% non-condensing

Natural convection

#### **▶**Specifications

Configuration:

Inputs/Outputs: Fixed at 16x16 or 32x32

Serial Video Inputs:

Standard:

SMPTE 292M (1.5Gb/s), SMPTE 259M (143, 177, 270, 360)

Signal Level: 800mV p-p nominal Impedance:  $75\Omega$  terminating

Return Loss, 5-1485MHz: 15dB

Cable equalization at 1485MHz: Belden 8281: 95m min

BNC per IEC 61169-8 Annex A Connectors:

**HD Video Outputs:** 

Standard:

SMPTE 292M (1.5Gb/s), SMPTE 259M (143, 177, 270, 360)

(non-reclocking) Signal Level: 800mV p-p ±10% Impedance:  $75\Omega$  terminating

Return Loss, 5-1485MHz:

DC Offset: 0 ±0.5V BNC per IEC 61169-8 Annex A Connectors:

Signal Path:

Rise/fall times: 200 to 400ps < 200ps Output jitter:

Control:

Q-Link to remote panels:

Cable type:  $75\Omega$  video cable

Max length

Serial RS232/422: RS232/422 Signal:

Connector D9 socket Ethernet: RJ45

Switching Reference:

Analog 625 or 525 tri-level Reference inputs: Signal level: 1V p-p ±3dB or 1-4V pulses

Impedance:  $75\Omega$ 

Switching Line : Lines 6/319, (625)

Lines 10/273, (525)

Power:

Auto ranging 100 to 240V AC 50/60Hz Supply, external:

Power consumption: 20W

Connections: Two pin bayonet locking

Power Fail Alarm Output:

Relay contact rated 250mA, 50V

Connector screw terminals

Redundant PSU: Optional

## **▶▶▶**Ordering Information

QT-1616H HD/SD 16x16 High Definition router

QT-3232H QT-1616S HD/SD 32x32 High Definition router SD 16x16 router SD 32x32 router

Ordering Options

+2PS +TL

+TR CP-2402-LP

Redundant power supply Lefthand power supply support tray Righthand power supply support tray











## 4

## Topaz Analog Video Routers

Designed to meet the needs of both the broadcast and professional video users, Topaz is an aggressively low priced routing system combining no-compromise technical specifications with a market leading control system.

With broadcast quality, reliability, and affordability, Topaz is suited to many applications, including professional, corporate/industrial markets, educational uses and the AV and presentation markets.

Topaz-Analog Video routers provide excellent performance and reliability at an exceptional price for any analog video application. Full Broadcast Specifications with  $75\Omega$  terminating inputs. DC Restored Inputs and vertical interval switching for disturbance free switches.

Component Video signals can be handled by stacking multiple units, or internally splitting the unit into several virtual levels. This allows support of many formats by simple configuration changes.

#### ▶ Features & Benefits

#### Configuration

The QT-1616N router is housed in a 2RU frame and switches 16 sources to 16 destinations. Both the input and output stage of the QT-1616N is fixed at 16. The QT-3232N router is also housed in a 2RU frame and can switch up to 32 sources to 32 destinations. Both the input and output stage of the QT-3232N is fixed at 32.

#### Control

The entire range of Topaz routers are compatible with the existing ranges of Quartz routers, remote control panels and control systems. The Topaz routers include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router.

The Topaz routers have a number of control options, they are:

Local Control Panel: The CP-2402-LP can be fitted to the QT-1616N and QT-3232N.

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Topaz routers via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Topaz routers connected via Q-Link.

External third party control: The Topaz routers can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

#### Expansion

The input and output stage of both the Topaz routers are fixed at 16 and 32. They can not be expanded beyond their frame size.


#### **Power Supply**

The power supply for the Topaz routers is external and connects to the frame via secure bayonet locking connector. The Topaz routers can be fitted with an optional redundant external power supply. An optional mounting tray securely supports both of the power supplies without the need for additional rack space.


#### Feature Summary

- Full broadcast specifications
- · Silent operation convection cooled
- · Powerful built-in control systems
- · Q-Link and Serial control
- Ethernet control
- Compatible with all Quartz routers and remote control panels
- · Frames can be segmented into multiple smaller routers
- · Optional power supply tray
- · Redundant power supply option
- · Bayonet locking power connectors

#### ▶QT-1616N Rear Panel

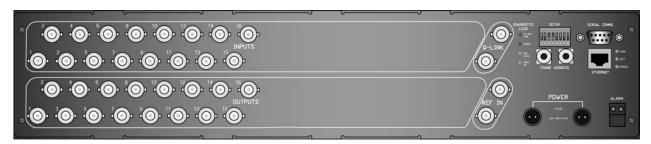

#### ▶QT-3232N Rear Panel

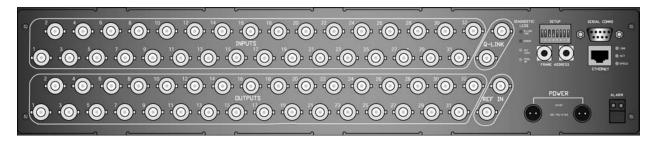



## Topaz Analog Video Routers

## **▶**Specifications

Configuration: Inputs/Outputs:

Fixed at 16x16 or 32x32

Analog Video Inputs:

Nominal signal Level: 1V p-p Video signal: Sync pulse (separate H+V): 2V p-p Max signal level:

DC restored inputs Video signal: +6dB Sync pulse (separate H+V): 2.5V p-p

DC coupled inputs ±0.7V

Impedance:  $75\Omega$  terminating Return Loss, 5-270MHz:

40dB DC on input (DC restored): ±3V

BNC per IEC 61169-8 Annex A Connectors:

Analog Video Outputs:

75Ω Impedance: Return Loss to 5.5MHz:

DC on output: +50mV

BNC per IEC 61169-8 Annex A Connectors:

Insertion Gain:

±0.1dB Insertion gain: Gain spread betw en inputs ±0.05dB

Distortion:

HF response 15kHz to 5.5MHz: ±0.1dB 5.5 to 10MHz:  $\pm 0.2 dB$ 10MHz to 100MHz +0.5, -1.0dB Above 100MHz: smooth roll off LF response, tilt at 50Hz: ±0.5%

Y-C gain inequality: ±0.5% Y-C delay inequality: ±5ns Differential Gain (10-90% APL): 0.25%

Differential Phase (10-90% APL):

0.15° Path length, typical: 13ns typical

**Unwanted Residual Effects:** Crosstalk, at 5.5MHz worst case: -60dB

Noise to 5.5Mz: -70dBrms

Control:

Q-Link to remote panels:  $75\Omega$  video cable Max length: 500m

Serial RS232/422: Connector: D9 socket Ethernet: R.145

Switching Reference:

Reference inputs: Analog 625 or 525 Signal level: 1V p-p +6dB, -3dB Impedance:

Switching Line:

Lines 6/319 (625) Lines 10/273 (525) Power:

Supply, external: Auto ranging 100 to 240V AC 50/60Hz

Power Consumption: 20W

Connections: Two pin bayonet locking Power Fail Alarm Output: Rated 250mA, 50V Relay contact: Screw terminals

Redundant PSU: Optional

Physical:

Height: 3.5" (90mm) 19" (483mm) 4.75" (260mm) Width: Depth:

Weight:

Frame: 1.45kg PSU: 0.4kg Operating temp.(ambient): 0-40°C

Specification main ained (ambient):

10-30°C

10-90% non-condensing Humidity: Ventilation: Natural convection

# **>>>**Ordering Information

QT-1616N 16x16 Analog Video router QT-3232N 32x32 Analog Video router

Ordering Options

+2PS Redundant power supply +TL Lefthand power supply support tray +TR Righthand power supply support tray

CP-2402-LP Local Control Panel









## Topaz Analog Audio Routers

Designed to meet the needs of both the broadcast and professional video users, Topaz is an aggressively low priced routing system combining nocompromise technical specifications with a market leading control system.

With broadcast quality, reliability, and affordability, Topaz is suited to many applications, including professional, corporate/industrial markets, educational uses and the AV and presentation markets.

Topaz-Analog Audio routers may be used as a companion audio router, working with Topaz video routers, or as a standalone audio router. With its outstanding performance the Topaz-AA even suits the most demanding audio applications.

Timecode Signals may be passed through Topaz-AA, even when shuttling tape. Each Topaz-AA Frame carries two channels of audio. Frames may be stacked when additional channels are required or split into sections to add channels in the same frame.

#### ▶ Features & Benefits

#### Configuration

The QT-1616-AA router is housed in a 2RU frame and switches 16 sources to 16 destinations. Both the input and output stage of the QT-1616-AA is fixed at 16. The QT-3232-AA router is also housed in a 2RU frame and can switch up to 32 sources to 32 destinations. Both the input and output stage of the QT-3232-AA is fixed at 32.

The entire range of Topaz routers are compatible with the existing ranges of Quartz routers, remote control panels and control systems. The Topaz routers include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router.

The Topaz routers have a number of control options, they are:

Local Control Panel: The CP-2402-LP can be fitted to the QT-1616-AA and QT-3232-AA.

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Topaz routers via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Topaz routers connected via Q-Link.

External third party control: The Topaz routers can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.

#### Expansion

The input and output stage of both the Topaz routers are fixed at 16 and 32. They can not be expanded beyond their frame size.


#### **Power Supply**

The power supply for the Topaz routers is external and connects to the frame via secure bayonet locking connector. The Topaz routers can be fitted with an optional redundant external power supply. An optional mounting tray securely supports both of the power supplies without the need for additional rack space.


#### Feature Summary

- Full broadcast specifications
- · Silent operation convection cooled
- Powerful built-in control systems
- · Q-Link and Serial control
- Ethernet control
- Compatible with all Quartz routers and remote control panels
- Frames can be segmented into multiple smaller routers
- · Optional power supply tray
- · Redundant power supply option
- · Bayonet locking power connectors

#### ▶QT-1616-AA Rear Panel

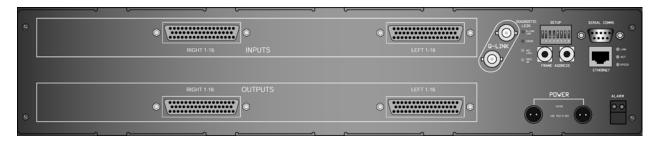

#### ▶QT-3232-AA Rear Panel

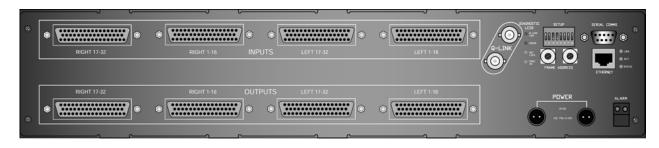



#### **▶**Specifications

Configuration:

Inputs/Outputs: Fixed at 16x16 or 32x32 Stereo

Analog Audio Inputs:

Signal Level: 0dB nominal, +24dBu max  $20k\Omega$ 

Impedance: Common Mode Rejection:

Typical at 50/60Hz: -100dBu Nominal 20Hz to 3kHz: -80dBu

Nominal 3khz to 20kHz: -60dBu

Common Mode Level:

+27dBu maximum, no signal

Connectors: D50 female

Analog Audio Outputs:

 $40\Omega$  balanced DC on output: +50mV D50 female Connectors:

Signal Path:

Insertion gain:  $\pm 0.1 dB$ Frequency response: 20Hz to 20kHz: ± 20kHz to 150kHz: Delay between two routes:

1ms Total harmonic distortion:

-10dBu to +20dBu: 0.02%, 0.01% typical

Crosstalk 20Hz to 20kHz:

Noise (un-weighted) 20Hz to 20kHz: -85dB rms

Control:

Q-Link to remote panels: Cable type: 75Ω Max length: 500n 75Ω video cable

500m Serial RS232/422:

RS232/422 Signal: Connector: D9 socket RJ45

Power:

Supply, external: Auto ranging 100 to 240V AC

50/60Hz 20W

Power consumption: Connections: Two pin bayonet locking

Power Fail Alarm Output: Rated 250mA, 50V Relay contact: Connector:

Screw terminals Redundant PSU: Optional

Physical:

Height: 3.5" (90mm) 19" (483mm) 4.75" (120mm) Width: Depth:

Weight: 1.45kg PSU: 0.4kg Operating temp.(ambient) 0-40°C

Specification maintained (ambient):

10-30°C

10-90% non-condensing Humidity: Ventilation: Natural convection

#### **>>>**Ordering Information

16x16 Analog Audio router 32x32 Analog Audio router

**Ordering Options** 

+2PS Redundant power supply

+TL +TR Lefthand power supply support tray Righthand power supply support tray Local Control Panel

CP-2402-LP











The EQT-R is a routing solution for mission critical applications. Its revolutionary design provides 100% redundant protection from the Input circuits through to the cross point and on to the Output circuits. With this, and the ability to route up to 32x32 signals in a compact 2RU frame, the EQT-R is ideal for all mission critical and demanding 24/7 environments.

Being format independent data paths the EQT-R supports digital signals from 3Mb/s all the way up to 3Gb/s including SD-SDI, HD-SDI, DVB-ASI, SMPTE310.

Configuration: The EQT-R is housed in a 2RU frame and switches 32 sources to 32 destinations. Both the input and output stage of the EQT-R are fixed at

Control: The EQT-R router is compatible with the existing ranges of Quartz routers, remote control panels and control systems.

The EQT-R routers includes, as standard, an internal Frame Controller module which supports a single Q-Link, dual Serial ports and dual Ethernet ports on the rear of the router. The redundant option provides dual redundant Frame Controllers.

The EQT-R router has a number of control options, they are:

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the EQT-R router connected via Q-Link or Ethernet.

External Third Party Control: The EQT-R router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port.

Expansion: The input and output stage of the EQT-R is fixed at 32. It can not be expanded beyond it's frame size.

Power Supply: The power supply for the EQT-R router is internal. The EQT-R router can be fitted with an optional redundant internal power supply.

Technical: The EQT-R Router offers a full 3Gb/s bandwidth to handle uncompressed HD signals. Automatic Bit Rate Detection on the input equalizer allows any mix of HD and SD signals in the same unit.

#### ▶ Features & Benefits

- Full broadcast specifications
- · Fan cooled
- · Powerful built-in control systems
- · Q-Link and Serial control
- · Ethernet control

- · Compatible with all Quartz routers and remote control panels
- Frames can be segmented into multiple smaller routers
- Redundant I/O & Crosspoint option
- · Redundant power supply option

#### 32x32 SD/HD Front Accessible Router

#### **▶**Specifications

Serial Video Inputs:

SMPTE 292M, SMPTE Standard

259M, SMPTE 310M, SMPTE

424M, ASI

Signal Level 800mV p-p nominal Impedance  $75\Omega$  terminating 15dB (5 - 270MHz) Return Loss

Cable equalization

300m @ 270Mhz, 100m @ Belden 1694

1.5Gb/s

BNC per IEC 61169-8 Connectors

Annex A

Serial Video Outputs:

Standard Same as input (Reclocking) Signal Level 800mV p-p ± 10% Impedance  $75\Omega$  terminating 15dB (5 - 270MHz) Return Loss  $0 \pm 0.5 V$ DC offset

Connectors

BNC per IEC 61169-8 Annex A

Signal Path

Rise/fall times 0.6 to 0.9ns Path length 12ns, typical

Output jitter 0.2UI p-p with < 250m input

cable

Switching Reference:

Reference inputs Analogue 625 or 525 Tri-level Signal level 1V p-p ± 3dB

Impedance  $75\Omega$ 

Lines 6/319 (625)Lines Switching Line

10/273 (525)Line 7 (HD)

Control:

Q-Link to remote panels

Cable Type  $75\Omega$  video cable 500m

Max Length

Serial

RS232/422 Signal Connector D9 socket Ethernet RJ45

Power:

Supply Auto ranging 100-240V AC,

50/60Hz Power Consumption TBA

Power Fail Alarm Output

Relay Contact Rated 250mA, 50V Connector Screw Terminals Redundant PSU Optional

Physical:

Dimensions 19"W x 10.3"D x 3.5"H

Weight Frame (TBD) kg Operating Temp. 0-40°C (ambient)

10-30°C (ambient) 10-90% non-condensing Humidity

Specification Maintained

Ventilation Fan assisted

Configuration:

Inputs/Outputs Fixed at 32x32

## **>>>**Ordering Information

EQT-3232H 32x32 SD/HD router, with front accessible, hot-swappable card and power supply, (3mb/s to 1.5Gb/s) using standard BNC connectors

EQT-3232H-R 32x32 SD/HD router, with front accessible, hot-swappable cards and

power supplies, (3mb/s to 1.5Gb/s) using standard BNC connectors,

with full I/O and XPT redundancy.

EQT-3232-3G 32x32 SD/HD/3G router, with front accessible, hot-swappable card

and power supply, (3mb/s to 3Gb/s) using standard BNC connectors

EQT-3232-3G-R 32x32 SD/HD/3G router, with front accessible, hot-swappable cards

and power supplies, (3mb/s to 3Gb/s) using standard BNC

connectors, with full I/O and XPT redundancy.









#### 4x1 HDTV Router with Quad 4x1 AES Audio



The X-0401H HDTV four input routing switcher provides a convenient, low cost way to route high definition and standard definition serial digital signals. The X-0401H routers are used for 1.5Gb/s, 270Mb/s, 360Mb/s, 540Mb/s and DVB-ASI serial digital signals. The unit can also be used for SMPTE 310M (19.4Mb/s) signals with the reclocker turned off. When the unit is ordered with the Quad 4x1 AES router option the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mount remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 or RS-422 serial remote control port using industry standard switcher protocols.

#### SoftSwitch™ Features (X-0401H-AES4-HSS)

Routers equipped with SoftSwitch™ have the following additional features. The video output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the video output. All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.


#### Embedded SoftSwitch™ Features (X-0401H-AES4-HES)

Routers equipped with the Embedded SoftSwitch™ have all the features of the SoftSwitch™ versions as well as the following additional features. The embedded audio on the Video 1 buss uses Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed. Embedded SoftSwitch™ is performed on all 4 audio groups.

#### ▶ Features & Benefits


- Supports SMPTE 292M (1.5Gb/s), SMPTE 259M (270, 360 or 540Mb/s) and DVB-ASI video signals
- Supports SMPTE 310M (19.4Mb/s) signals with reclocker turned off
- SoftSwitch™ equipped models eliminate hot-switch audio pop on AES outputs
- Auto timing of video inputs to perform a clean video switch on SoftSwitch™ & Embedded SoftSwitch™ versions
- Embedded SoftSwitch™ equipped versions eliminate hot-switch audio pops on embedded audio (all 4 audio groups)
- Switch point is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- Front panel or remote control panel version available
- · Second control panel can be ordered for any version

- Programmable source input names available on the front panel
- · Bypass verification test using main menu
- Field upgradeable firmware as new features become available
- · Programmable tally output bus
- · RS-422 remote control via GVG TEN-XL protocol
- SoftSwitch™ model provides clean video and popless AES switching
- Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power configuration
- Remote control via SNMP (using VistaLINK® PRO or 9000NCP2 control panel)

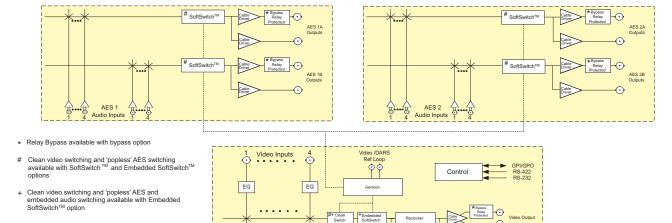

#### ▶X-0401H Rear Panel

Refer to www.evertz.com for more detailed information



# X-0401H, X-0401H-AES4, X-0401H-AES4-HSS, X-0401H-AES4-HES

#### 4x1 HDTV Router with Quad 4x1 AES Audio

#### **▶**Specifications

Video Inputs:

SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s, 360Mb/s,

540Mb/s) and DVB-ASI

SMPTE 310M with reclocker turned off Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Automatic up to 100m @1.485Gb/s Equalization with Belden 1694A (or equivalent) cable

(50m on input 1 when the +HBP is installed)

> 15dB up to 1.5Gb/s Return Loss:

Input Timing

(On X-0401H-AES4-HSS & X-0401H-AES4-HES Routers): Input Range: Measured with respect to the Genlock

reference

 $\pm 1/2$  line when Course phase = 1, Fine phase = 0

Video Outputs:

Standard: Same as Input Number of Outputs: 2 per bus, 1 bus

Input 1 bypass protected with +HBP

option

BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level:

DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps for SMPTE 292M 950ps for SMPTE 259M < 10% of amplitude

Return Loss: > 15dB up to 1Gb/s, > 12dB up to

1.5Gb/s

Output Timing

Jitter:

(On X-0401H-AES4-HSS & X-0401H-AES4-HES Routers): Output Phase: Measured with respect to the Genlock

reference Adjustable 1 line to a full

frame of delay - set by Coarse phase parameter. The active video content will align to the nearest line

AES Audio Inputs (AES4 versions only): Standards: SMPTE 276M single ended AES

Number of Inputs: 4 per bus, 4 bus BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p ±10% AES Audio Outputs (AES4 versions only):

Standards: SMPTE 276M single ended AES Number of Outputs: 2 per bus, 4 busses

Input 1 bypass protected with +HBP

BNC per IEC 61169-8 Annex A Connector:

Signal Level:

1V p-p From Video Reference Reference: On SoftSwitch™ model, menu selectable to Video or DARS

Video Reference:

Menu selectable - depends on video format NTSC or PAL Color

Black 1V p-p

Composite Bi-level sync (525i/59.94

or 625i/50) 300mV HD Tri-level Sync

Connectors: 2 BNC per IEC 61169-8 Annex A

Termination:

Standard models: High impedance loop through SoftSwitch™ model: High impedance loop through or non-looping or  $75\Omega$  non-looping

(jumper selectable)

Ethernet:

Fast Ethernet 100 Base-TX IEEE Network Type 802.3u standard for 100 Mbps

baseband CSMA/CD local area network

Ethernet 10 Base-T IEEE 802.3 standard for 10 Mbps baseband CSMA/CD local area network

Connector:

Function: Router control using VistaLINK®

DARS Reference:

(X-0401H-AES4-HSS & X-0401H-AES4-HES Routers):

DARS reference requires jumper configuration inside the router Standard: SMPTE 276M single ended AES Digital Audio Signal with 48khz Type:

sample rate

BNC per IEC 61169-8 Annex A Connector: Termination: Inactive or High impedance

non-looping or  $75\Omega$  non-looping (jumper selectable)

Signal Level: 1V p-p

Freq. Lock Range: ±100ppm from nominal

GPI Control Port:

Number of Inputs: 8 opto-isolated, programmable

functions

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Current: 1A at 30V DC

Serial Remote Control:

Standard: RS-232 or RS-422, programmable

baud rate 9-pin female "D"

Connector: GVG Ten XL ASCII, master or slave Protocol:

or Remote Control Panel

Remote Control Panel

Remote Control Panel Port:

Standard: RS-422, 9600 baud rate Connector 6 pins on GPIO 25-pin female "D"

Protocol: Physical:

Height: 1.75" (45mm) Width: 19" (483mm) Depth: 7.75" (196mm) Weight: 8lbs (3.5kg)

Electrical:

EMI/RFI:

Auto ranging 100-240V AC, Voltage:

50/60Hz 40W Fuse Rating: 250V, 1 amp time delay

ETL Listed, complies with EU safety

directives

Complies with FCC Part 15 Class A

regulations

Complies with EU EMC Directive

#### >>> Ordering Information

X-0401H X-0401H-AES4 4x1 HDTV video router

4x1 HDTV video router with 4 (4x1) AES busses

4x1 HDTV video router with 4 (4x1) AES busses and SoftSwitch<sup>th</sup>
4x1 HDTV video router with 4 (4x1) AES busses and Embedded X-0401H-AES4-HSS X-0401H-AES4-HES

Ordering Options

+HBP Optional bypass relay +2PS Redundant power supply

+RCP Rackmount remote control panel (replaces front control panel)

X-0401H-PANEL Additional Remote Control Panel (works in addition to front control panel)



## 6x1 HDTV Dual Link Router with Quad 6x1 AES Audio




The X-0601H-444 HDTV six input video router provides a convenient, low cost way to route dual link 1.5Gb/s HDTV serial digital signals. When the unit is ordered with the 6x1 AES router option the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mounted remote control panel that replaces the built-in control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 serial remote control port using industry standard switcher protocols.

#### ▶ Features & Benefits


- Supports dual link SMPTE 372M and single link SMPTE 292M (1.5Gb/s) video signals
- Can be operated in a non-reclock mode to pass SMPTE 259M video signals
- Switch line is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- · Front panel or remote control panel versions available
- Second control panel can be ordered for either version

- Parallel GPI and RS-232 serial control
- Programmable source input names available on the front panel
- · Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power supplies
- Field upgradeable firmware as new features become available

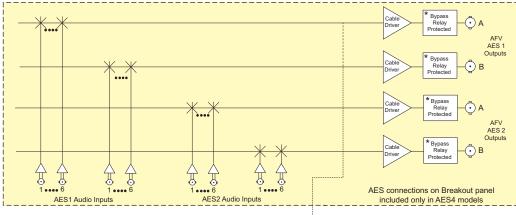


Relay Bypass available with bypass option

Refer to www.evertz.com for more detailed information

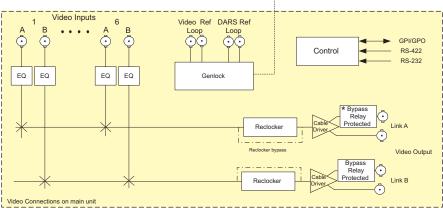


#### 6x1 HDTV Dual Link Router with Quad 6x1 AES Audio

#### ▶X-0601H-444 Rear Panel



#### ▶X-0601 Audio AES Breakout Panel



#### **▶** Specifications

HD Video Inputs:

Standard: SMPTE 372M dual link (1.5Gb/s) or

292M (1.5Gb/s)

SMPTE 259M with reclocker turned

off

Number of Inputs:

6 dual link pairs BNC per IEC 61169-8 Annex A Connector: Equalization Automatic 100m @ 1.485Gb/s with

Belden 1694A (or equivalent) (50m on input 1 with +HBP option)

Return Loss: > 15dBV up to 1.5Gb/s

HD Video Outputs:

Same as input Standard: Number of Outputs: 2 dual link pairs

Input 1 bypass protected with +HBP

option BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal < 10% of amplitude Overshoot:

Return Loss: > 15dB up to 1Gb/s, > 12dB up to 1.5Gb/s

Jitter: < 0.2 UI

#### AES Audio Inputs (AES4 version only):

Standard:

AES3-2003 balanced +B option: SMPTE 276M single ended AES +U option: Number of Inputs: 6 per buss, 4 busses Connector (On breakout panel(s) provided): +B option: Removable terminal strips +U option: BNC per IEC 61169-8 Annex A

Signal Level:

+B option: 2-7V p-p ±10% +U option: 1V p-p ±10%

AES Audio Outputs (AES4 version only):

Standard: Same as input Number of Outputs: 2 per buss, 4 busses

Input 1 bypass protected with +HBP

option

Connector: Same as input Signal Level:

+B option: 2V p-p nominal +U option: 1V p-p nominal

Video Reference:

Menu selectable - depends on video Type:

format HD Tri-level Sync

NTC or PAL Color Black 1V p-p

Composite Bi-level sync (525i/59.94 or 625i/50) 300mV

2 BNC per IEC 61169-8 Annex A Connectors: Termination: High impedance loop through

GPI Control Port:

Number of Inputs: 14 opto-isolated, programmable

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Rating: 1A at 30V DC

Serial Remote Control:

Standard: RS-232 or RS422, programmable

baud rate Connector: 9-pin female "D"

Protocol: GVG Ten XL ASCII, master or slave

or remote control panel

Physical:

Height: 1.75" (45mm) 19" (483mm) Width: Depth: 18.75" (477mm) 8lbs (3.5kg) Weight:

Electrical:

Safety:

Auto ranging 100-240V AC 50/60Hz Voltage:

40W ETL Listed

Complies with EU safety directives EMI/RFI:

Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

X-0601H-444

6x1 Dual Link HDTV Router

X.0601H-444-AES4 6x1 Dual Link HDTV video router with 4 (6x1) AES busses (includes 1 AES breakout panel)

Ordering Options

+HBP Bypass Relay Protection +2PS Redundant Power Supply

Rack Mount Remote Control Panel (replaces front control panel)

(Must specify +B or +U version when ordering AES4)

+B Balanced AES Audio Breakout Panel +U Unbalanced AES Audio Breakout Panel

Accessories

X-0601H-444-PANEL

X-0601ABO

Additional Remote Control Panel(works in addition to front control panel)

Unbalanced AES Audio Breakout Panel

X-0601ABOB Balanced AES Audio Breakout Panel

X-0601ABOB-BP X-0601ABO-BP

Balanced AES Audio Breakout Panels (with Bypass Relays) Unbalanced AES Audio Breakout Panel (with Bypass Relays)





The X-1201H HDTV twelve input video router provides a convenient, low cost way to route standard and high definition serial digital signals. The X-1201H routers are used for 1.5Gb/s HDTV serial digital signals. When the unit is ordered with the Dual 12x1 AES router or Quad 12x1 AES router options the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mounted remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 serial remote control port using industry standard switcher protocols.

#### Optional SoftSwitch™ Features (+HSS Option)

Routers equipped with the SoftSwitch™ option have the following additional features. The video output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the video output (for HD video only). All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.


#### Optional Embedded SoftSwitch™ Features (+HES Option)


Routers equipped with the Embedded SoftSwitch™ option have all the features of the SoftSwitch™ versions as well as the following additional features. The embedded audio on the Video 1 buss uses Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed. Embedded SoftSwitch™ is performed on all 4 audio groups.

#### ▶ Features & Benefits

- Supports SMPTE 292M (1.5Gb/s) video signals
- Can be operated in a non-reclock mode to pass SMPTE 259M video signals
- Units can be genlocked to an external source so that a "clean switch" can be achieved
- Autotiming of V1 buss inputs to perform a clean video switch when SoftSwitch™ or Embedded SoftSwitch™ option is installed
- Optional SoftSwitch™ technology eliminates hot-switch audio pops on AES outputs following V1 buss
- Optional Embedded SoftSwitch™ technology eliminates hot-switch audio pops on embedded audio on V1 buss
- With embedded SoftSwitch™ option, SoftSwitch™ is performed on all 4 audio groups


- · Switch line is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- Front panel or remote control panel versions available
- Second control panel can be ordered for either version
- Parallel GPI and RS-232 serial control
- Programmable source input names available on the front panel
- Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power supplies
- Field upgradeable firmware as new features become available

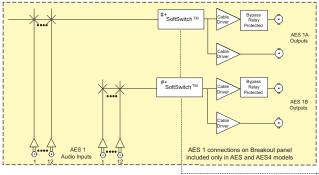

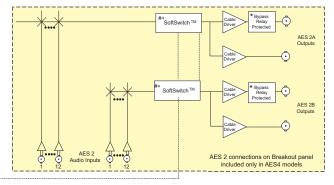

- Relay Bypass available with bypass option
- # Clean video switching and 'popless' AES switching available with SoftSwitch TM version
- + Clean video switching and 'popless' AES and embedded audio switching available with Embedded SoftSwitch™ version


Refer to www.evertz.com for more detailed information

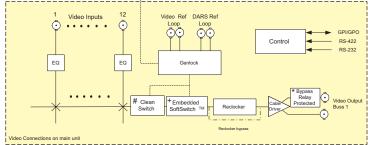

# X-1201H, X-1201H-AES, X-1201H-AES4

#### 12x1 HDTV Router with Dual or Quad 12x1 AES Audio

#### ▶X-1201H Rear Panel



#### ▶X-1201 Audio AES Breakout Panel



(Qty 1 with AES option, Qty 2 with AES4 option, Note: the bypass relay is optional)

#### ▶Specifications

HD Video Inputs:

Standard: SMPTE 292M (1.5Gb/s)

SMPTE 259M with line synchronizer. reclocker and embedded

SoftSwitch™ turned off

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic 100m @ 1.485Gb/s with

Belden 1694A (or equivalent) (50m on input 1 with +HBP option) > 15dBV up to 1.5Gb/s

Return Loss: Input Timing (On +HSS and +HES Optioned Routers): Input Range: Measured with respect to the Genlock

reference

 $\pm 1/2$  line when Course phase = 1,

Fine phase = 0

Auto timer for HD Video only

#### HD Video Outputs:

Same as input Number of Outputs: 2 per bus, 1 bus

Input 1 bypass protected with +HBP

option

Connector: BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 200ps nominal < 10% of amplitude > 15dB up to 1Gb/s, > 12dB up to 1.5Gb/s Overshoot:

Return Loss: Jitter: < 0.2 UI Output Timing (On +HSS and +HES Optioned Routers):

Output Phase

Measured with respect to the Genlock reference

Adjustable 1 line to a full frame of delay - set by Coarse phase parameter The active video content will align to

the nearest line only Output phasing for HD Video only AES Audio Inputs (AES & AES4 versions only):

Standard:

+B option: AES3-2003 balanced SMPTE 276M single ended AES +U option: Number of Inputs: 12 per bus, 2 or 4 busses optional Connector (On breakout panel(s) provided):

+B option: Removable terminal strips +U option: BNC per IEC 61169-8 Annex A Signal Level:

+B option: 2-7V p-p ±10% +U option: 1V p-p ±10%

#### AES Audio Outputs (AES & AES4 versions only):

Standard:

Same as input 2 per bus, 2 or 4 busses optional Number of Outputs:

Connector: Same as input

Signal Level: +B option:

2V p-p nominal +U option: 1V p-p nominal

From Video Genlock Reference Reference DARS reference available with +HSS

or +HES options

Video Reference:

Menu selectable - depends on video Type:

format

HD Tri-level Sync

NTSC or PAL Color Black 1V p-p Composite Bi-level sync (525i/59.94

or 625i/50) 300 mV

Connectors: 2 BNC per IEC 61169-8 Annex A Termination: High impedance loop through

#### **DARS Reference**

(On +HSS and +HES Optioned Routers):

Digital Audio Signal with 48kHz Type:

sample rate

Standard: SMPTE 276M single ended AES Connector: 2 BNC per IEC 61169-8 Annex A Termination: High impedance loop through

Signal Level: 1V p-p

Freq. Lock Range: ±100ppm from nominal GPI Control Port:

Number of Inputs: 14 opto-isolated, programmable

functions

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Rating: 1A at 30V DC

#### Serial Remote Control:

Standard: RS-232 or RS422, programmable

baud rate

9-pin female "D' Connector:

Protocol: GVG Ten XL ASCII, master or slave

or remote control panel

#### Physical:

1.75" (45mm) Height: 19" (483mm) 18.75" (477mm) Width: Depth: . Weight: 8lbs (3.5kg)

Electrical:

Safety:

Auto ranging 100-240V AC 50/60Hz Voltage:

Fuse Rating: 250V, 1 amp time delay

FTI Listed

Complies with EU safety directives EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

12X1 HDTV video router X-1201H

12x1 HDTV video router with 2 (12x1) AES busses (includes 1 AES X-1201H-AFS

breakout panel) X-1201H-AES4

12x1 HDTV video router with 4 (12x1) AES busses (includes 2 AES breakout panels)

Ordering Options

SoftSwitch™ Option +HSS +HES Embedded SoftSwitch™ Option +HBP Bypass Relay Protection Redundant Power Supply

+RCP Rack Mount Remote Control Panel (replaces front control panel) (Must specify +B or +U version when ordering AES or AES4)

+R Balanced AES Audio Breakout Panel +Ū Unbalanced AES Audio Breakout Panel

Accessories

X-1201H-PANEL X-1201ABO X-1201ABOB X-1201ABOB-BP

Additional Remote Control Panel(works in addition to front control panel) Unbalanced AES Audio Breakout Panel (for all 1201 series routers) Balanced AES Audio Breakout Panel (for all 1201 series routers) Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1201 series routers)

X-1201ABO-BP

Unbalanced AES (with Bypass Relays) Audio Breakout Panel (For

all 1201 series routers)





The X-1202H HDTV twelve input video router provides a convenient, low cost way to route standard and high definition serial digital signals. The X-1202H routers are used for 1.5Gb/s HDTV serial digital signals. It features redundancy protection by providing optional dual power supply and relay bypass options. When the unit sordered with the Dual 12x2 AES router or Quad 12x2 AES router options the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mounted remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 or RS-422 serial remote control port using industry standard switcher protocols.

#### Optional SoftSwitch™ Features (+HSS Option)

Routers equipped SoftSwitch™ option have the following additional features. The Video 1 output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the V1 output (for HD Video only). All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs that follow the Video 1 buss use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.


#### Optional Embedded SoftSwitch™ Features (+HES Option)


Routers equipped with the Embedded SoftSwitch™ option have all the features of the SoftSwitch™ versions as well as the following additional features. The embedded audio on the Video 1 buss uses Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed. Embedded SoftSwitch™ is performed on all 4 audio groups.

#### ▶ Features & Benefits

- Supports SMPTE 292M (1.5Gb/s) video signals
- Can be operated in a non-reclock mode to pass SMPTE 259M video signals
- Units can be genlocked to an external source so that a "clean switch" can be achieved
- Autotiming of V1 buss inputs to perform a clean video switch when SoftSwitch™ or Embedded SoftSwitch™ option is installed
- Optional SoftSwitch™ technology eliminates hot-switch audio pops on AES outputs following V1 buss
- Optional Embedded SoftSwitch™ technology eliminates hot-switch audio pops on embedded audio on V1 buss
- With embedded SoftSwitch™ option, SoftSwitch™ is performed on all 4 audio groups
- · Switch line is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- Front panel or remote control panel versions available
- Second control panel can be ordered for either version
- Parallel GPI and RS-232 serial control
- Programmable source input names available on the front panel


  Optional video and participant and particip
- Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power supplies
- Field upgradeable firmware as new features become available

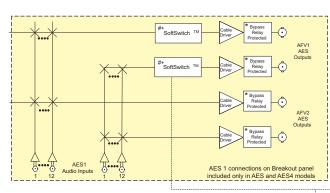

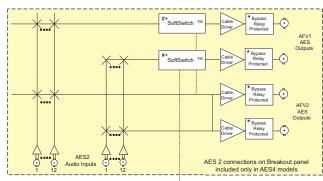

- Relay Bypass available with bypass option
- # Clean video switching and 'popless' AES switching available with SoftSwitch ™ version
- + Clean video switching and 'popless' AES and embedded audio switching available with Embedded SoftSwitch™ version


Refer to www.evertz.com for more detailed information

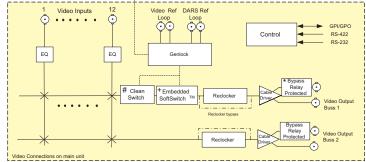

# X-1202H, X-1202H-AES, X-1202H-AES4

#### 12x2 HDTV Router with Dual or Quad 12x2 AES Audio

#### ▶X-1202H Rear Panel



#### ▶X-1202 Audio AES Breakout Panel



(Qty 1 with AES option, Qty 2 with AES4 option, Note: the bypass relay is optional)

#### ▶ Specifications

HD Video Inputs:

SMPTE 292M (1.5Gb/s) Standard:

SMPTE 259M with line synchronizer, reclocker and embedded SoftSwitch™

turned off

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A Equalization: Automatic 100m @ 1.485Gb/s with

Belden 1694A (or equivalent) (50m on inputs 1 and 12 with +HPB

option) > 15dB up to 1.5Gb/s

Return Loss: Input Timing (On +HSS and +HES Optioned Routers):

Input Range: Measured with respect to the

Genlock reference

 $\pm 1/2$  line when Course phase = 1,

Fine phase = 0 Auto timer for HD Video only

**HD Video Outputs:** 

Same as input Number of Outputs: 2 per buss, 2 busses

Inputs 1 & 12 bypass protected with

+HBP option

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal

Overshoot: < 10% of amplitude  $> 15 \mathrm{dB}$  up to  $1 \mathrm{Gb/s}$ ,  $> 12 \mathrm{dB}$  up to Return Loss:

1.5Gb/s Jitter: < 0. 2UI

Output Timing (On +HSS and +HES Optioned Routers)

Output Phase: Measured with respect to the Genlock

reference

Adjustable 1 line to a full frame of delay - set by Coarse phase parameter. The active video content will align to the nearest line only Output phasing for HD Video only

AES Audio Inputs (AES & AES4 versions only):

Standard: +B option: AES3-2003 balanced

+U option: SMPTE 276M single ended AES Number of Inputs: 12 per buss, 2 or 4 busses optional

Connector (On breakout panel(s) provided): +B option: Removable terminal strips +U option: BNC per IEC 61169-8 Annex A

Signal Level: B option: 2-7V p-p ±10% +U option: 1V p-p ±10%

AES Audio Outputs (AES & AES4 versions only):

Standard: Same as input

Number of Outputs: 2 per buss, 2 or 4 busses optional

Connector: Same as input

Signal Level: +B option: 2V p-p nominal

+U option: 1V p-p nominal From Video Genlock Reference Reference:

DARS reference available with +HSS or +HES options

Video Reference:

Menu selectable - depends on video Type:

format HD Tri-level Sync

NTSC or PAL Color Black 1V p-p Composite Bi-level sync (525i/59.94

or 625i/50) 300 mV 2 BNC per IEC 61169-8 Annex A

Connectors: High impedance loop through

DARS Reference (On +HSS and +HES Optioned Routers):

Digital Audio Signal with 48kHz Type:

sample rate

Standard: SMPTE 276M single ended AES 2 BNC per IEC 61169-8 Annex A Connector: Termination: High impedance loop through Signal Level:

Freq. Lock Range: ±100ppm from nominal

GPI Control Port:

Number of Inputs: 14 opto-isolated, programmable

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Rating: 1A at 30V DC

Serial Remote Control:

RS-232 or RS422, programmable Standard:

baud rate

9-pin female "D" Connector:

GVG Ten XL ASCII, master or slave Protocol:

or remote control panel

Physical:

1.75" (45mm) Height: Width: 19" (483mm) Depth: 18.75" (477mm) Weight: 8lbs (3.5kg)

Electrical:

Safety:

EMI/RFI:

Auto ranging 100-240V AC 50/60Hz Voltage

40W

250 V, 1 amp time delay Fuse Rating:

ETL Listed

Complies with EU safety directives Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

X-1202H 12X2 HDTV video router

X-1202H-AES 12x2 HDTV video router with 2 (12x2) AES busses (includes 1 AES

X-1202H-AES4 12x2 HDTV video router with 4 (12x2) AES busses (includes 2 AES

breakout panels)

Ordering Options

+HSS SoftSwitch™ Option Embedded SoftSwitch™ Option +HES +HBF Bypass Relay Protection Redundant Power Supply

Rack Mount Remote Control Panel (replaces front control panel)

(Must specify +B or +U version when ordering AES or AES4)

+B Balanced AES Audio Breakout Panel +Ū Unbalanced AES Audio Breakout Panel

X-1202H-PANEL X-1202ABO

X-1202ABOB X-1202ABOB-BP

Balanced AES Audio Breakout Panel (for all 1202 series routers) Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1202 series routers) X-1202ABO-BP

Unbalanced AES (with Bypass Relays) Audio Breakout Panel (for

Additional Remote Control Panel (works in addition to front control panel)

Unbalanced AES Audio Breakout Panel (for all 1202 series routers)

all 1202 series routers)









#### 4x1 SDI Router with Quad AES Audio



The X-0401S SDTV four input routing switcher provides a convenient, low cost way to route standard definition serial digital signals. The X-0401S router is used for 270, 360, 540Mb/s and DVB-ASI serial digital signals. The unit can also be used for SMPTE 310M (19.4Mb/s) signals with the reclocker turned off. When the unit is ordered with the Quad 4x1 AES router options the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mount remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 or RS-422 serial remote control port using industry standard switcher protocols.


#### SoftSwitch™ Features (X-0401S-AES4-SS)


Routers equipped with SoftSwitch™ have the following additional features. The video output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the video output. All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.

#### ▶ Features & Benefits

- Supports SMPTE 259M (270Mb/s, 360Mb/s, 540Mb/s) or DVB-ASI video signals
- Units support SMPTE 310M (19.4Mb/s) with reclocker turned off
- Units can be genlocked to an external source so that a "clean switch" can be achieved
- SoftSwitch™ equipped models eliminate hot-switch audio pop on AES outputs
   Auto timing of video inputs to perform a clean video switch on SoftSwitch™ &
- Auto timing of video inputs to perform a clean video switch on SoftSwitch™ & Embedded SoftSwitch™ versions
- Embedded SoftSwitch™ equipped versions eliminate hot-switch audio pops on embedded audio (all 4 audio groups)
- Switch point is fully controllable from the front panel


- Video input presence detection displayable on the front panel
- Front panel or Remote control panel versions available
- · Second control panel can be ordered for either version
- Programmable source input names available on the front panel
- Programmable parallel GPI control and tallies.
- · Serial remote control via GVG TEN-XL protocol (master or slave)
- Field upgradeable firmware as new features become available
- Optional video and audio input relay bypass for power failure bypass protection (Bypass verification test from front panel menu)
- Optional dual power supplies

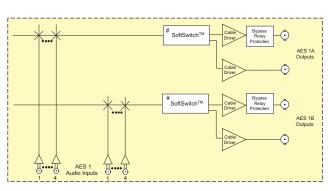

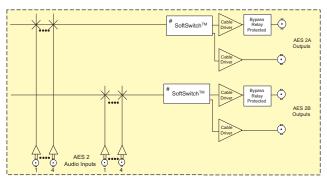


- Relay Bypass available with bypass option
- # Clean video switching and 'popless' AES switching available with Softswitch™ and Embedded Softswitch™ options

Refer to www.evertz.com for more detailed information

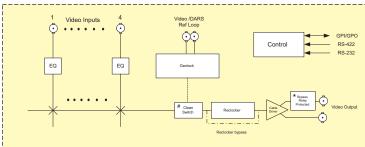

#### ▶X-0401S-AES4 Rear Panel



#### ▶Specifications

SD Video Inputs:

Standard: SMPTE Mode: SMPTE 259M (270Mb/s, 360Mb/s,

540Mb/s) and DVR-ASI ATSC Mode: SMPTE 310M with reclocker turned off

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A Automatic up to 250m @ 270Mb/s Equalization: with Belden 8281 (or equivalent) cable

Return Loss: > 15dB up to 540Mb/s

Input Timing (On X-0401S-AES4-SS Routers)

Input Range: Measured with respect to the Genlock

reference

 $\pm 1/2$  line when Course phase = 1,

Fine phase = 0

#### SD Video Outputs:

Same as Input Standard: Number of Outputs: 2 per buss, 1 buss

Input 1 bypass protected with +BP

option

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset:  $0V \pm 0.5V$ Rise and Fall Time: 950ps nominal < 10% of amplitude Overshoot: Return Loss: > 15 dB up to 540Mb/s

.litter < 0.2UI

Output Timing (On X0401S-AES4-SS Routers)

Output Phase: Measured with respect to the Genlock

reference

Adjustable 1 line to a full frame of delay - set by Coarse phase parameter. The active video content will align to

the nearest line

AES Audio Inputs (AES4 versions only):

SMPTE 276M single ended AES Standards: Number of Inputs: 4 per buss, 4 busses BNC per IEC 61169-8 Annex A Connector:

Signal Level: 1V p-p ±10%

AES Audio Outputs (AES4 versions only): SMPTE 276M single ended AES Standards

Number of Outputs: 2 per buss, 4 busses

Input 1 bypass protected with +BP option Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p

Reference: From Video Reference On SoftSwitch™ model, menu

selectable to Video or DARS

#### Video Reference:

Menu selectable - depends on video format Type: NTSC or PAL Color Black 1V p-p

Composite Bi-level sync (525i/59.94 or 625i/50) 300mV

2 BNC per IEC 61169-8 Annex A Connectors: Termination

Standard models: High impedance loop through SoftSwitch™ model: High impedance loop through or non-

looping or  $75\Omega$  non-looping (jumper selectable)

#### **DARS Reference**

(On X0401S-AES4-SS & X-0401S-AES4-ES Routers):

DARS reference requires jumper configuration inside the router Digital Audio Signal with 48khz

sample rate SMPTE 276M single ended AES Standard:

BNC per IEC 61169-8 Annex A Connector: Termination: Inactive or High impedance nonlooping or  $75\Omega$  non looping

(jumper selectable)

Signal Level: 1V p-p

Freq. Lock Range: ±100ppm from nominal

#### GPI Control Port:

Number of Inputs: 8 opto-isolated, programmable

functions

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Rating: 1A at 30V DC

#### Serial Remote Control:

RS-232 or RS-422, programmable Standard:

baud rate

9-pin female "D' Connector:

GVG Ten XL ASCII, master or slave Protocol: or remote control panel

#### Remote Control Panel Port:

RS-422, 9,600 baud rate Standard: Connector 6 pins on GPIO 25-pin female "D" Protocol:

Remote Control Panel

#### Physical:

Height: 1.75" (45mm) 19" (483mm) 7.75" (196mm) Width: Depth: Weight: 8lb. (3.5kg)

Electrical:

Auto ranging 100-240V AC, 50/60Hz Voltage:

40W

Fuse Rating 250V, 1 amp time delay

ETL Listed, complies with EU safety Safety: directives

EMI/RFI: Complies with FCC Part 15 Class A

regulations

Complies with EU EMC Directive

#### **>>>**Ordering Information

4x1 SDI video router

X-0401S-AES4 4x1 SDI video router with 4 (4x1) AES busses
X-0401S-AES4-SS 4x1 SDI video router with 4 (4x1) AES busses and SoftSwitch™ X-0401S-AES4

X-0401S-ATSC 4x1 SDI video router with 4 (4x1) AES busses (reclocked) **Ordering Options** 

+BP Optional bypass relay +2PS Redundant power supply

+RCP Rackmount remote control panel (replaces front control panel)

#### Accessories

X-0401S-PANEL

Additional Remote Control Panel (works in addition to front control





The X-1201S SDTV twelve input routing switcher provides a convenient, low cost way to route standard definition serial digital signals. The X-1201S routers are used for 270, 360, 540Mb/s and DVB-ASI serial digital signals. When the unit is ordered with the Dual 12x1 AES router or Quad 12x1 AES router options the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. The routers feature redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and is controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mount remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 or RS-422 serial remote control port using industry standard switcher protocols.

#### Optional SoftSwitch™ Features (+SS Option)


Routers equipped with the SoftSwitch™ option have the following additional features. The video output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the video output. All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.

#### Optional Embedded SoftSwitch™ Features (+ES Option)

Routers equipped with the Embedded SoftSwitch™ option have all the features of the SoftSwitch™ versions as well as the following additional features. The embedded audio on the Video 1 buss uses Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed. Embedded SoftSwitch™ is performed on all 4 audio groups.

#### ▶ Features & Benefits


- Supports SMPTE 259M (270Mb/s, 360Mb/s, 540Mb/s) video signals
- Units can be genlocked to an external source so that a "clean switch" can be achieved
- Autotiming of V1 buss inputs to perform a clean video switch when SoftSwitch™ or Embedded SoftSwitch™ option is installed
- Optional SoftSwitch™ technology eliminates hot-switch audio pops on AES outputs following V1 buss
- Optional Embedded SoftSwitch™ technology eliminates hot-switch audio pops on embedded audio on V1 buss
- With embedded SoftSwitch™ option, SoftSwitch™ is performed on all 4 audio groups
- · Switch line is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- Front panel or remote control panel versions available. Second control panel can be ordered for either version
- Parallel GPI and RS-232 serial control
- Programmable source input names available on the front panel
- Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power supplies
- Field upgradeable firmware as new features become available

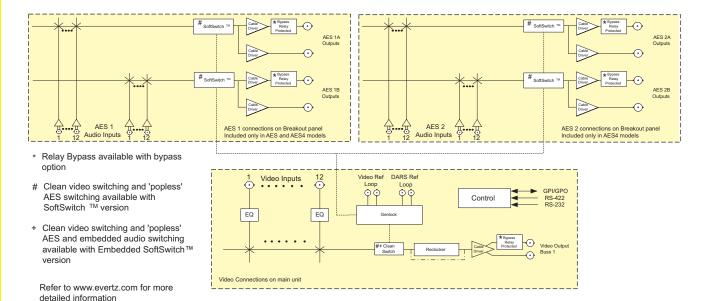

# X-1201S, X-1201S-AES, X-1201S-AES4

#### 12x1 SDI Router with Dual or Quad 12x1 AES Audio

#### ▶X-1201S Rear Panel



#### ▶X-1201 Audio AES Breakout Panel



(Qty 1 with AES option, Qty 2 with AES4 option, Note: the bypass relay is optional)

#### ▶Specifications

SDI Video Inputs: Standard:

SMPTE 259M (270Mb/s, 360Mb/s,

540Mb/s) and DVB-ASI

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector Equalization: Automatic up to 250m @ 270Mb/s with Belden 8281 (or equivalent)

cable

Return Loss: > 15 dB up to 540Mb/s
Input Timing (On +SS and +ES Optioned Routers) Measured with respect to the Input Range:

Genlock reference

±1/2 line when Course phase = 1,

Fine phase = 0

#### SDI Video Outputs:

Standard: Same as Input Number of Outputs:

2 per buss, 1 buss

Input 1 bypass protected with +BP

BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal <10% of amplitude Overshoot: > 15 dB up to 540Mb/s Return Loss:

< 0.2 UI Output Timing (On +SS and +ES Optioned Routers)

Output Phase: Measured with respect to the

Genlock reference Adjustable 1 line to a full frame of delay - set by Coarse phase parameter. The active video

content will align to the nearest line

#### AES Audio Inputs (AES & AES4 versions only):

Standard:

+B option: AES3-2003 balanced +U option: SMPTE 276M single ended AES Number of Inputs: 12 per buss, 2 or 4 busses optional Connector (On breakout panel(s) provided):

+B Removable terminal strips +U BNC per IEC 61169-8 Annex A Signal Level:

2-7V p-p ± 10% +U 1V p-p ± 10%

#### AES Audio Outputs (AES & AES4 versions only):

Standard: Same as input 2 per buss, 2 or 4 busses optional Number of Outputs:

Same as input Connector

Signal Level: 2V p-p nominal +B +U 1V p-p nominal

Reference: From Video Genlock Reference DARS reference available with

+SS or +ES options

Video Reference:

Menu selectable - depends on video Type: format

NTSC or PAL Color Black 1 V p-p

Composite Bi-level sync (525i/59.94 or 625i/50) 300 mV

2 BNC per IEC 61169-8 Annex A Connectors:

Termination: High impedance loop through

#### DARS Reference (On +SS and +ES Optioned Routers):

Type: Digital Audio Signal with 48kHz

sample rate

SMPTE 276M single ended AES Standard: Connector: 2 BNC per IEC 61169-8 Annex A Termination: High impedance loop through

Signal Level: 1V p-p

Freq. Lock Range: ± 100ppm from nominal

GPI Control Port:

14 opto-isolated, programmable Number of Inputs:

functions

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions 1A at 30VDC

Relay Max Rating:

#### Serial Remote Control:

RS-232 or RS422, programmable Standard:

baud rate 9-pin female "D"

Connector: GVG Ten XL ASCII, master or slave Protocol:

or remote control panel

Physical: Dimensions:

19"W x 1.75"H x 18.75"D

(483mm W x 45mm H x 477mm D)

8 lbs. (3.5Kg)

Weight Electrical: Voltage:

Auto ranging 100-240VAC 50/60 Hz

40 Watts

Fuse Rating: 250 V, 1 amp time delay

Safety: ETL Listed

Complies with EU safety directives EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

X-1201S-AES 12x1 SDI video router with 2(12x1) AES busses (includes 1 AES

breakout panel)

X-1201S-AES4 12x1 SDI video router with 4(12x1) AES busses (includes 2 AES

breakout panels)

#### **Ordering Options**

SoftSwitch™ Option +SS +ES Embedded SoftSwitch™ Option +BP Bypass Relay Protection +2PS Redundant Power Supply

Rack Mount Remote Control Panel (replaces front control panel)

Must specify +B or +U version when ordering AES or AES4 +B Balanced AES Audio Breakout Panel +U Unbalanced AES Audio Breakout Panel

# Accessories X-1201S-PANEL

X-1201ABO X-1201ABOB X-1201ABOB-BP Additional Remote Control Panel (works in addition to front control panel) Unbalanced AES Audio Breakout Panel (for all 1201 series routers) Balanced AES Audio Breakout Panel (for all 1201 series routers) Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1201 series routers)

X-1201ABO-BP

Unbalanced AES (with Bypass Relays) Audio Breakout Panel (For

all 1201 series routers)





The X-1202S SDTV twelve input routing switcher provides a convenient, low cost way to route standard definition serial digital signals. The X-1202S routers are used for 270, 360, 540Mb/s and DVB-ASI serial digital signals. When the unit is ordered with the Dual 12x2 AES router or Quad 12x2 AES router options the AES output busses can be used in an "audio follow video" mode, or can be broken away from the video buss. It features redundancy protection by providing dual power supply and bypass relay options.

The router electronics are housed in a 1RU rackmount frame and controlled from the built-in front panel controls. Each model can also be purchased with an optional rack mount remote control panel that replaces the built-in control panel or can be used as a second control panel. All units can also be controlled by contact closures on the GPI control port or through the RS-232 or RS-422 serial remote control port using industry standard switcher protocols.

#### Optional SoftSwitch™ Features (+SS Option)


Routers equipped with the SoftSwitch™ option have the following additional features. The Video 1 output has adjustable vertical timing with respect to the genlock input, and line synchronizers on the video inputs can accommodate differences in timing up to approximately ± one half line providing clean video switches on the V1 output. All the AES outputs will have a continuous AES carrier locked to either the video genlock or DARS reference (when the DARS reference is used, Z bit alignment of the AES outputs is also guaranteed). The AES outputs that follow the Video 1 buss use Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed on synchronous audio sources.


#### Optional Embedded SoftSwitch™ Features (+ES Option)

Routers equipped with the Embedded SoftSwitch™ option have all the features of the SoftSwitch™ versions as well as the following additional features. The embedded audio on the Video 1 buss uses Evertz® patent pending SoftSwitch™ technology to eliminate audible pops when switches are performed. Embedded SoftSwitch™ is performed on all 4 audio groups.

#### ▶ Features & Benefits


- Supports SMPTE 259M (270Mb/s, 360Mb/s, 540Mb/s) video signals
- Units can be genlocked to an external source so that a "clean switch" can be achieved
- Autotiming of V1 buss inputs to perform a clean video switch when SoftSwitch™ or Embedded SoftSwitch™ option is installed
- Optional SoftSwitch™ technology eliminates hot-switch audio pops on AES outputs following V1 buss
- Optional Embedded SoftSwitch™ technology eliminates hot-switch audio pops on embedded audio on V1 buss
- With embedded SoftSwitch™ option, SoftSwitch™ is performed on all 4 audio groups
- Switch line is fully controllable from the front panel
- Video input presence detection displayable on the front panel
- Front panel or remote control panel versions available
- Second control panel can be ordered for either version
- Parallel GPI and RS-232 serial control
- Programmable source input names available on the front panel
- Optional video and audio input relay bypass for power failure bypass protection
- Optional dual power supplies
- · Field upgradeable firmware as new features become available

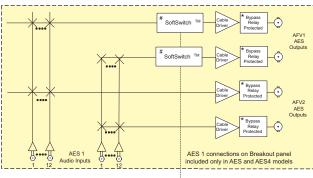

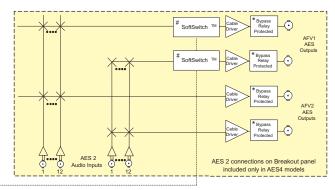

- Relay Bypass available with bypass option
- # Clean video switching and 'popless' AES switching available with SoftSwitch TM version
- Clean video switching and 'popless' AES and embedded audio switching available with Embedded SoftSwitch™ version


Refer to www.evertz.com for more detailed information

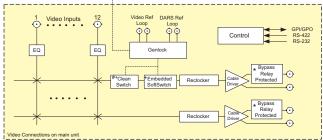

# X-1202S, X-1202S-AES, X-1202S-AES4

## 12x2 SDI Router with Dual or Quad 12x2 AES Audio

#### X-1202S Rear Panel



#### ▶X-1202 Audio AES Breakout Panel



(Qty 1 with AES option, Qty 2 with AES4 option, Note: the bypass relay is optional)

#### ▶Specifications

SDI Video Inputs:

Standard: SMPTE 259M (270Mb/s, 360Mb/s, 540Mb/s) and DVB-ASI

Number of Inputs: 12

Connector:

BNC per IEC 61169-8 Annex A Automatic up to 250m @ 270Mb/s with Belden 8281 (or equivalent) Equalization:

Return Loss: > 15dB up to 540Mb/s Input Timing (On +SS and +ES Optioned Routers) Input Range: Measured with respect to the Genlock

reference

 $\pm 1/2$  line when Course phase = 1,

Fine phase = 0

#### SDI Video Outputs

Same as Input Number of Outputs:

2 per buss, 2 busses Inputs 1 & 12 bypass protected with

+BP option

BNC per IEC 61169-8 Annex A Connector:

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 540Mb/s

< 0.2 UI Jitter:

Output Timing (On +SS and +ES Optioned Routers)

Output Phase:

Measured with respect to the Genlock reference Adjustable 1 line to a full frame of

delay - set by Coarse phase parameter. The active video content will align to the nearest line only

#### AES Audio Inputs (AES & AES4 versions only):

Standard: AES3-2003 balanced +B option:

+U option: SMPTE 276M single ended AES Number of Inputs: 12 per buss, 2 or 4 busses optional Connector (On breakout panel(s) provided):

Removable terminal strips +B option: +U option: BNC per IEC 61169-8 Annex A Signal Level:

+B option: 2-7V p-p ±10% +U option: 1V p-p ±10%

#### AES Audio Outputs (AES & AES4 versions only):

Standard: Same as input

Number of Outputs: 2 per buss, 2 or 4 busses optional Connector: Same as input

Signal Level:

+B option: 2V p-p nominal +U option: 1V p-p nominal

Reference: From Video General Reference

DARS reference available with +HSS

or +HES options Video Reference:

Type:

Menu selectable - depends on video format NTSC or PAL Color Black 1V p-p

Composite Bi-level sync (525i/59.94 or 625i/50) 300mV

Connectors: 2 BNC per IEC 61169-8 Annex A Termination: High impedance loop through

#### DARS Reference (On +SS and +ES Optioned Routers):

Digital Audio Signal with 48kHz Type:

sample rate SMPTE 276M

Standard: Termination: High impedance loop through Connector: 2 BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p

Freq. Lock Range: ±100ppm from nominal

#### **GPI Control Port**

Number of Inputs: 14 opto-isolated, programmable

functions

Number of Outputs: 4 sets of relay contacts, normally closed, programmable functions

Relay Max Rating: 1A at 30V DC

#### Serial Remote Control

Standard: RS-232 or RS422, programmable

baud rate 9-pin female "D

GVG Ten XL ASCII, master or slave Protocol:

or remote control panel

#### Physical

Connector:

Height: 1.75" (45mm) 19" (483mm) 18.75" (477mm) Width: Depth: Weight: 8lbs (3.5kg)

#### Electrical

EMI/RFI:

Auto ranging 100-240V AC 50/60Hz Voltage:

Fuse Rating: 250V, 1 amp time delay

Safety: ETL Listed

Complies with EU safety directives Complies with FCC Part 15 Class A

EU EMC Directive

#### **▶**▶▶Ordering Information

X-1202S X-1202S-AES 12x2 SDI video router

12x2 SDI video router with 2(12x2) AES busses (includes 1 AES

X-1202S-AES4

12x2 SDI video router with 4(12x2) AES busses (includes 2 AES breakout panels)

#### Ordering Options

+88 SoftSwitch™ Option

Embedded SoftSwitch™ Option +ES +BP Bypass Relay Protection Redundant Power Supply +2PS

+RCP Rack Mount Remote Control Panel (replaces front control panel) Must specify +B or +U version when ordering AES or AES4 Balanced AES Audio Breakout Panel +B Unbalanced AES Audio Breakout Panel

#### Accessories

X-1202H-PANEL X-1202ABO X-1202ABOB

X-1202ABOB-BP

X-1202ABO-BP

Additional Remote Control Panel (works in addition to front control panel) Unbalanced AES Audio Breakout Panel (for all 1202 series routers) Balanced AES Audio Breakout Panel (for all 1202 series routers) Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1202 series routers)

Unbalanced AES (with Bypass Relays) Audio Breakout Panel (For all 1202 series routers)



The design can also incorporate a digital or analog audio layer within the same

#### ▶ Features & Benefits

#### Configuration

The 1RU frame is available with 16 or 8 inputs and 1 or 2 outputs. It can be configured to accommodate single, mixed video or audio formats in the following configurations:

#### Single formats:

- High Definition Video (with embedded audio)
- Standard Definition Video (with embedded audio)
- · Analog Video

#### Mixed formats:

- · High definition video and four channel digital audio
- · High definition video and stereo analog audio
- · Standard definition video and four channel digital audio
- · Standard definition video and stereo analog audio
- · Analog video and four channel digital audio
- · Analog video and stereo analog audio

Note: The analog video module is also suitable for routing unbalanced digital audio signals.

#### Control

There are a number of control options for the monitoring routers:

Local Control Panels: The CP-1600A-LP or the CP-1601A-LP local panel can be fitted to the front of the router.

Note: The CP-1600A-LP is the only local panel that can be fitted to a Monitoring router which has the optional Frame Controller module fitted. The FU-0003 must be removed when any other local or passive remote panels are fitted.

Passive Remote Control Panels: The CP-1601A-P or the CP-1604-P passive remote control panel can be fitted to the Monitoring router. These panels are connected to the router via the Control parallel port. Only one passive remote control panel can be fitted to the Monitoring router.

Note: Passive remote control panels can not be fitted to a Monitoring router which has the optional Frame Controller module fitted.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the monitoring router. They connect via Q-Link and require the optional Frame Controller module to be fitted.

External third party control: The monitoring router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port. The optional Frame Controller module must be fitted.

#### Expansion

For solutions requiring more than 16 inputs, multiple Monitoring routers can be cascaded together building in to a system with over 256 inputs. Cascading the Q1601 provides a single output while the Q1602 provides two outputs. The optional Frame Controller module must be fitted to the master router in a cascaded system.

#### Power Supply

The Monitoring router is available as standard with an external power supply. An optional redundant power supply can also be fitted. A single non-redundant internal power supply can be fitted to the Monitoring router if required.

#### Digital Video (HD/SD)

- Terminating inputs with automatic cable equalization on each input
- · Reclocking outputs with fully automatic sample rate selection supporting:
  - HD: 1.485 and 1.485/1.001Gb/s sample rates (SMPTE 292M)
  - SD: 143, 177, 270 and 360Mb/s sample rates (SMPTE 259M)
- · Vertical interval switching for clean switching. Reverts to free running if the reference is not connected
- Support of Bi-level syncs (PAL/NTSC) for SD and Bi-level and Tri-level
- · Tri-level sync circuit auto-detects the HD standard
- Transparent to high definition and standard definition signals carrying embedded audio
- · Compatible with ASI transport streams, such as MPEG video
- · Automatic standards selection for complete standards independence

#### Analog Video

- Terminating DC coupled inputs, suitable for composite and component signals
- Vertical interval switching for clean switching. Reverts to free running if a signal is not present on Input 1
- · Suitable for unbalanced AES/EBU audio due to its wide analog bandwidth

#### Digital Audio (Balanced)

- Electronically balanced inputs and outputs to AES3-1992
- Two AES/EBU pairs

#### Analog Audio

- · Stereo analog audio
- · Electronically balanced inputs and outputs
- · Handles wind sped LTC

#### **Operational Features**

- · Deterministic switching
- · Joystick override, used for matching the color balanced of up to eight cameras
- Chop, used for rapidly switching between two sources, often used for calibration purposes



▶Specifications

Q1601 and Q1602:

Fixed at 16 Inputs: Outputs: Selectable, 1 or 2

Q0802-HD and Q1602-HD:

Selectable, 8 or 16 Inputs: Outputs: Fixed at 2

Standard Definition Video:

Inputs:

Signal level: 800mV p-p nominal Impedance:  $75\Omega$  terminating Return Loss to 5-270MHz:

18dB, 20dB typical

Cable Equalization at 270MHz

Belden 8281:

BBC PSF1/2: 300m min, 350m typical BBC PSF1/3: 200m min, 250m typical Connectors: BNC per IEC 61169-8 Annex A

Outputs:

Impedance: Return Loss to 5-270MHz:

18dB, 20dB typical 0 ±0.5V

DC on output:

BNC per IEC 61169-8 Annex A

Signal Path:

Rise/Fall Times: 0.6-0.9ns Path length: 9ns, spread 1ns

line 6/319 (625) & line 10/273 (525) 0.2 UI p-p with < 300m input cable Switching Line : Jitter:

Analog Video: Inputs:

Signal level: 1V p-p nominal, +6dB max.

Impedance:  $75\Omega$  terminating Return Loss to 5.5MHz:

40dB

Connectors: BNC per IEC 61169-8 Annex A

Outputs:

Impedance: 75Ω Return Loss to 5.5 MHz: 40dB DC on output: ±50mV

BNC per IEC 61169-8 Annex A Connectors:

Signal Path:

±0.1dB Insertion gain:

±0.2dB, to 5.5MHz -3dB, to 100MHz HF response: Diff Gain and Phase: 0.15%, 0.15 o (10-90% APL)

Timing spread at 3.58/4.43MHz: ±10 at any output

Crosstalk to 5.5MHz: -57dB Noise to 5.5 MHz: -70dB rms. Vertical Interval Switching: Input 1

High Definition Video:

Inputs:

Signal level: 800mV p-p nominal Impedance:  $75\Omega$  terminating Return Loss 5 MHz to 1.485GHz: better than 15dB Cable equalization at 1.485GHz: Belden 1694A: 100m typical Belden 8281

BBC PSF1/2: 70m typical

BNC per IEC 61169-8 Annex A Connectors:

Outputs:

Impedance: 75Ω Return Loss 5 MHz to 1.485GHz: better than 15dB

DC on output: 0 ±0.5V BNC per IEC 61169-8 Annex A Connectors:

Signal Path:

Rise/Fall Times: 270ps ±100ps Path length: 5ns typical

Switching Line: Lines 6/319 (625), lines 10/273 (525) & line 7

(HD Tri-level sync)

Digital Audio (Balanced):

Inputs:

32-96kHz Sample rates: Transformer coupled DC isolation on input:

±50V

0.2-5V p-p Signal level: 110Ω ±20% Impedance: D50 female

Outputs:

Transformer coupled Signal level: 2-7V p-p Impedance: 110Ω ±50 V DC isolation: Rise/fall time: 3.5-10ns

Conforms to ANSI S4.40 - 1992 Jitter:

Connectors: D15 female

Analog Audio:

Inputs:

0dBu nominal. +20dBu max. Signal level: Impedance:  $20\Omega$ 

D50 female

Outputs:

Impedance:  $40\Omega$  balanced DC on output: ±50mV Connectors: D15 female

Signal Path:

±0.1dB Insertion gain: Freq. Response 20Hz to 20kHz:

±0.25dB to 150kHz-3dB

Total Harmonic Distortion:

0.02%, 0.01% typical -10dBu to +20dBu and 20Hz to 20kHz

Crosstalk: -85dB 20Hz to 20kHz Noise (un-weighted): -90dB rms. 20Hz to 20kHz

Common Features:

Control: Remote passive panel:

D25 male, 50m (165 ft) max. cable length

With FU-0003 Option

Q-link to remote panels:

 $75\Omega$  video cable, 500m max cable length

With FU-0003 Option

Serial RS232/422: D9 female

Power:

External:

Auto ranging 100-240V AC 50/60Hz

Supply: Auto Power Consumption: 25W

Connections: Two pin bayonet locking

Redundant PSU:

Internal (Optional):


Supply:

HD/SD Auto ranging 100-240V AC 50/60Hz AV. 100-120V AC, 200-240V AC

Power Consumption: 25W

Physical:

1RU, 44mm (1.75" nom.) Height: Width: 19" rack mount 280mm (11") Depth: Weight: 3.7kg (8.2lb) Operating Temp 0-40°C Natural convection



Q-1601S 16x1 Serial Video Router Q-1601N 16x1 Analog Video Router 16x2 Serial Video Router Q-1602S Q-0802H 8x2 High Definition Video Router Q-1602H 16x2 High Definition Video Router Q-1602N 16x2 Analog Video Router

Note: H version routers do not support Standard Definition routing

**Ordering Options** 

+FU Frame controller for connection to other Quartz routers, for RS232-422 serial control and for cascading multiple 16x1 routers

Stereo Analog Audio option +AFSB Balanced Digital Audio option

+PSI Internal power supply Redundant external power supply +PSX

Control Panels

CAB-R0017-2 Q1601 & Q1602 Control Interconnect Cable (120mm) for cascading

Please refer to Control Panel section

#### SD Video & Embedded Audio Routers

The Q16-S and Q32-S series are standard definition digital video and embedded audio routers.

#### ▶ Features & Benefits

#### **Operational Features**

- · Deterministic switching
- The Q16-S and the Q32-S are available with reclocking or non-reclocking outputs
- Reclocking and non-reclocking SIMMs can be mixed within the same router
- · Diagnostic monitoring of internal temperature and power supply status
- · All modules are accessed from the front of the router

#### Configuration

The modular design of the Q16-S and Q32-S routers give them a high degree of flexibility, allowing them to be easily configured in square or non-square sizes.

The Q16-S is housed in a 1RU frame and switches 16 sources to 16 destinations. The input stage of the Q16-S is fixed at 16 while the output stage is fully configurable. Up to 16 individual output SIMMs can be added to the output stage of the router at anytime.

The Q32-S is housed in a 2RU frame and can switch up to 32 sources to 32 destinations. The input stage of the Q32-S is initially fixed at 16 with the ability to add a further 16 input SIMMs to the router at anytime. The output stage is fully configurable with up to 32 individual output SIMMs being added to the output stage of the router at anytime.

#### Control

Both the Q16-S and the Q32-S routers include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the Q32-S to increase the number of Q-Link and Serial ports. This option is not available for the Q16-S.

The Q16-S and Q32-S have a number of control options, they are:

#### Local Control Panels:

The CP-1600A-LP, can be fitted to the Q16-S (up to a maximum matrix size of 16x8). This option is not available for the Q32-S.

#### Passive Remote Control Panels:

The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q16-S and Q32-S router via a PI-1604 or PI-1608 parallel interface.

#### Remote Control Panel:

Any panel(s) from the entire range of Quartz remote control panels can be used with the Q16-S and Q32-S router connected via Q-Link.

#### External third party control:

The Q16-S and Q32-S router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port.

#### Expansion

The output stage of the Q16-S and the input and output stage of the Q32-S can expanded at any time by adding additional SIMMs. They can not be expanded beyond their frame size.


#### **Power Supply**

The power supplies for the Q16-S and the Q32-S are internal. The 2RU Q32-S frame can be fitted with an optional redundant power supply with separate AC power inlet and alarm output. This option is not available for the Q16-S.


#### Digital Video

- Terminating inputs with automatic cable equalization on each input
- Reclocking outputs with fully automatic sample rate selection supporting SD 143, 177, 270 and 360Mb/s sample rates (SMPTE 259M)
- Non-reclocking outputs for low cost and standards independence
- Vertical interval switching for clean switching. Reverts to free running if the reference is not connected
- Support of Bi-level syncs (PAL/NTSC)
- Transparent to standard definition signals carrying embedded audio
- · Compatible with ASI transport streams, such as MPEG video
- Automatic standards selection for complete standards independence

## ▶Q16-S Rear Panel



#### ▶Q32-S Rear Panel

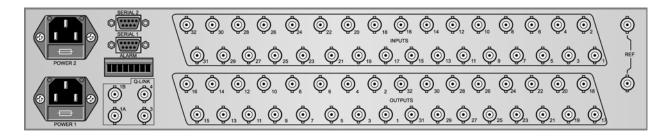

# Q16-S, Q32-S Standard Definition

## SD Video & Embedded Audio Routers

#### ▶Specifications

Configuration

Inputs Q16: Fixed at 16

Selectable, from 16 or 32 Q32: Outputs Selectable in blocks of 1 Q32: Selectable in blocks of 1

Standard Definition Video

Inputs:

Signal level: 800mV p-p nominal  $75\Omega$  terminating Impedance:

Return Loss, 5-270 MHz: 15dB, 16dB typical (for reclocking outputs)

Cable equalization at 270 MHz:

Belden 8281:

BBC PSF1/2: 250m min, 300m typical BBC PSF1/3:

150m min, 200m typical (for non-reclocking outputs)

Total Input plus Output Cable length supported up to 270MHz:

Belden 8281:

BBC PSF1/2: 100m min, 200m typical BBC PSF1/3: 60m min. 120m typical BNC per IEC 61169-8 Annex A Connectors:

Outputs

Signal level: 800mV p-p ±10%

Impedance: 75Ω Return Loss 5-270MHz: 15dB

DC offset: 0 ±0.5 V

BNC per IEC 61169-8 Annex A Connectors:

Signal Path

0.6 to 0.9ns Rise/fall times: Path length: 12ns, typical

0.2 UI p-p with < 300m input cable

Output jitter: Control

Q-link to remote panels:

1 as standard (additional 3 Q-links

+2PS

CI-0004

ontional)

Interconnect: 75Ω video cable, 500 maximum length Connector: BNC per IEC 61169-8 Annex A Serial RS232/422: 1 as standard (additional 1 serial port

optional) Connector:

D9 female

Switching Reference

Analog 625 or 525 black Reference inputs: 1V p-p ±3dB or 1-4V pulses Signal level: Impedance: 75 $\Omega$  (loop through)

Switching Line : Lines 6/319 (625) & lines 10/273 (525)

Power Supply:

Auto ranging 100 to 240V AC 50/60Hz

Power Consumption: Q16: 25W Q32: 50W

Redundant PSU: Optional with alarm output, Q32 only

Physical

Q16: 1RU, 1.75" nom (44mm) Height: Q32: 2RU, 3.5" nom. (88 mm)

Width: 19" (483mm) 19" nom (483mm) Depth: . Weight: Q16: 5.2kg (11.3lb) Q32: 6.6kg (14.5lb)

Operating Temp 0-40°C

Fan cooled. Air intake at the front, Ventilation:

exhaust at the sides.

#### >>> Ordering Information

Q16-1604S 16x4 Serial Video Router Q16-1608S 16x8 Serial Video Router 16x16 Serial Video Router Q16-1616S Q32-1616S 16x16 Serial Video Router 32x4 Serial Video Router 32x8 Serial Video Router Q32-3204S Q32-3208S Q32-3232S 32x32 Serial Video Router

**Ordering Options** 

AK-0002

1RU Rear frame support kit (Recommended to provide additional

support for 1RU frames

CI-0001 Sub-module that enables a second RS232/422 serial port

+R4 Reclocking option for Q16-1604 & Q32-3204 Reclocking option for Q16-1608 only +R8 +R16 Reclocking option for Q16-1616 & Q3216 +R32 Reclocking option for Q32-3232 only

For other configurations contact factory

Note: The following options are only available on Q32-S versions

Redundant power supply
Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports

and one RS232/422 port)













The Q16-N and Q32-N are analog video routers.

#### ▶Q16-N Rear Panel



#### ▶Q32-N Rear Panel

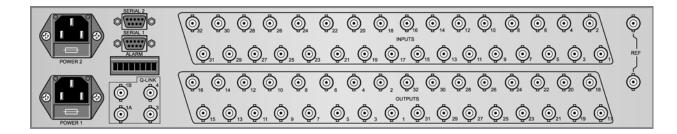

#### ▶ Features & Benefits

#### Configuration

The modular design of the Q-16N and Q-32N routers give them a high degree of flexibility, allowing them to be easily configured in square or non-square sizes.

The Q16-N is housed in a 1RU frame. The input stage of the Q16-N is fixed at 16 while the output stage can be set to 4, 8 or 16. The Q16-N can be upgraded by returning the router to the local service center.

The Q32-N is housed in a 2RU frame. The Q32-N is available in three fixed sizes - 16x16, 32x16 and 32x32. The Q32-N can be upgraded by returning the router to the local service center.

Both the Q16-N and the Q32-N routers include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the Q32-N to increase the number of Q-Link and Serial ports. This option in not available for the Q16-N.

The Q-16N and Q32-N have a number of control options, they are:

#### Local Control Panels:

The CP-1600A-LP can be fitted to the Q16-N. This option in not available for the Q32-N

#### Passive Remote Control Panels:

The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q16-N and Q32-N routers via a PI-1604 or PI-1608 parallel interface.

#### Remote Control Panel:

Any panel(s) from the entire range of Quartz remote control panels can be used with the Q16-N and Q32-N router connected via Q-Link.

#### External Third Party Control:

The Q16-N and Q32-N routers can be remotely controlled via an external third party control device such as an automation system, when connected to the router's serial port.

#### Expansion

The output stage of the Q16-N can be expanded from 4 to 8 or 16. The input or output stage of the Q32-N can be expanded from 16 to 32.

In both cases the router needs to be returned to the local service center for the upgrade. They cannot be expanded beyond their frame sizes.

The power supplies for the Q16-N and the Q32-N are internal. The 2RU Q32-N frame can be fitted with an optional redundant power supply with separate AC power inlet and alarm output. This option is not available for the Q16-N.

- · Terminated inputs for best possible signal performance
- DC restored inputs for composite signals ensures switching free from the picture disturbances often encountered in DC coupled only designs
- · Vertical interval switching for clean switching reverts to free running if no sync reference (video or pulse) with all all levels of the same route switching in the same field
- Frames can be stacked for parallel component analog video routers, or a single frame can be split to provide, for example, four separate 8x8 routers from a single 32x32 frame

#### Operational Features

- Diagnostic monitoring of temperature and PSU status
- · All modules are installed from the front for easy access for upgrades and maintenance not possible with some alternative designs
- · Built-in control system

#### **▶**Specifications

Configuration:

Q16 fixed at 16 Inputs:

Q32 Selectable, 16 or 32 Outputs: Q16 Selectable, 4, 8, 16 Q32 Selectable 4, 8, 16, or 32

Analog Video Inputs:

Signal level: 1V p-p nominal, +3dB max.

Impedance:  $75\Omega$  terminating

Return Loss to 5.5MHz: 40dB

Connectors: BNC per IEC 61169-8 Annex A

Analog Video Outputs:

Impedance: Return Loss to 5.5MHz: 40dB

DC on output: ±50mV

BNC per IEC 61169-8 Annex A

Signal Path:

Insertion gain: +0.1dB

HF response: 15kHz to 5.5MHz ±0.1dB to 30MHz

+0.2, -0.5dB to 100MHz -3dB

LF response, tilt at 50Hz: 0.5% 2T pulse, pulse/bar, bar slope 0.25%K Luma/Chroma inequalities:

±0.5% gain, ±5ns delay

Diff Gain and Phase: 0.1%, 0.1° (10-90% APL)

Luminance non-linearity: 0.2%

Path length, typical: 10ns Timing spread at 3.58/4.43MHz: ±1° at any output Crosstalk at 3.58/4.43MHz:

-57dB Noise to 5.5MHz: -70dB rms.

Control:

Q-link to remote panels:

1 as standard (additional 3 Q-links optional)  $75\Omega$  video cable 500m

max. length

Serial RS232/422: 1 as standard (additional serial

port optional) D9 female

Switching Reference:

1V p-p ±3dB or 1-4V pulses 525 or 625 line Signal level:

Impedance:  $75\Omega$  (loop through) Switching Line : Lines 6/319 (675) Lines 10/273 (525)

Power: Supply:

Auto ranging 100 to 240V AC

50/60Hz Power Consumption: 12W

Option with alarm output on 2U frame Backup:

Physical: Height:

Q16: 1RU, 44mm (1.75" nom.) Q32: 2RU, 88mm (3.5" nom.) Width: 19" (483mm) 19" nom (483mm) Depth: . Weight: Q16: 5.15kg Q32: 6.6kg

Operating Temp: Spec Maintained: 0-40°C 10-30°C

Ventilation: Natural convection

#### **▶** ► ► ► Ordering Information

16x4 to 16x16 in 1RU frame with single power supply.

Q16-1604N 16x4 Analog Video Router 16x8 Analog Video Router Q16-1608N Q16-1616N 16x16 Analog Video Router

16x16 to 32x32 in 2RU frame with option of redundant power supply.

16x16 Analog Video Router 32x16 Analog Video Router Q32-1616N Q32-3216N 32x32 Analog Video Router Q32-3232N

**Ordering Options** 

Redundant power supply (Q-32N versions only)
Rear frame support kit - Recommended for mobile applications +2PS

AK-0002 CI-0001 Sub-module that enables a second RS232/422 serial port CI-0004 Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports and one RS232/422 port)









The Q16-AES and Q32-AES routers provide asynchronous or synchronous AES/EBU digital audio switching with either balanced or unbalanced inputs and outputs.

The synchronous audio switching mode also supports a number of additional features such as Soft Switching, Wild Shuffling, Mono Mixing and Sample Rate Conversion.

#### ▶ Features & Benefits (Module Dependent)

- · Sample rate conversion (SRC)
- · Guaranteed click-free switching using "Soft Switching" technology
- Wild Shuffling
- Mono Audio Mix
- · Input and output gain adjustment
- Input sample rates of 32kHz, 44.1kHz, 48kHz and 96kHz
- Output sample rates of 48kHz or 96kHz in Soft Switch mode
- Output sample rates of 32kHz, 44.1kHz, 48kHz and 96kHz in Soft Switch bypass mode
- Digital silence on output when input source is lost
- · Reclocking on each input
- Supports switching of Dolby-E<sup>™</sup> and other data streams in Soft Switch bypass mode
- Transformer coupled inputs with DC protection
- Transformer coupled outputs with DC protection
- Frames may be stacked for multi-level systems
- Optional dual PSU for redundancy on the Q32
- · Diagnostic monitoring of internal temperature and PSU status
- Built-in control system

#### Configuration

Q16-ÅESB: The Q16-AES is housed in a 1RU and is only available in a single power supply configuration.

Asynchronous switching with balanced I/O: Available in two fixed sizes - 16x16 or 32x32.

Asynchronous switching with unbalanced I/O: Only available in one fixed size - 16x16.

Synchronous switching (+SS option): Can be added to any router configuration.

Q32-AESB: The Q32-AES is housed in a 2RU and is available in a redundant power supply configuration.

Asynchronous switching with balanced or unbalanced I/O: Available in two fixed sizes - 16x16 or 32x32.

Synchronous switching with balanced or unbalanced I/O (+SS option): Can be added to any router configuration.

#### Control

The AES routers include as standard, an internal Frame Controller module supporting a single Q-Link and RS 422/232 Serial port. The optional internal CI module can be fitted to the Q32-AES to increase the number of Q-Link and Serial ports. This option is not available for the Q16-AES.

The routers have a number of control options, they are:

Local Control Panels: The CP-1600A-LP can be fitted to the Q16-AES. This option is not available for the Q32-AES.

Passive Remote Control Panels: The AES router's passive remote control panels can be fitted to the Q16-AES and Q32-AES routers via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q16-AES and Q32-AES routers connected via Q-Link.

External Third Party Control: The Q16-AES and Q32-AES routers can be remotely controlled via an external third party control device such as an automation system, when connected to the router's serial port.

#### Expansion

The Q16-AES with unbalanced I/O cannot be expanded. The Q16-AES with balanced I/O can be expanded from 16x16 to 32x32. The input and output stage of the Q32-AES can be expanded at any time by adding additional SIMMs. The routers cannot be expanded beyond its frame size.

#### **Power Supply**

The power supplies for the Q16-AES and the Q32-AES are internal. The 2RU Q32-AES frame can be fitted with an optional redundant power supply with separate AC power inlet and alarm output. This option is not available for the Q16-AES.

#### **Digital Audio**

Asynchronous: A simple low cost crash switch router.

Synchronous (+SS option): Provides a clean switch between audio sources as long as they are all synchronized to a common studio reference. The synchronous operation will also align locked but misaligned digital audio signals to the router's reference. A number of extra features such as I/P & O/P Gain Control, Mono Mix, Soft Switching, Wild Shuffling and Sample Rate Conversion are included as standard.

Bypass: The Soft Switch or SRC circuit can be bypassed in order to allow Dolby- $E^{TM}$  and other AES and non-AES formats to be switched through the router. Dolby- $E^{TM}$  and other non-AES data can be routed through the Asynchronous router without being affected.

#### Operational Features (+SS Option only)

Sample Rate Conversion: Sample Rate Conversion (SRC) allows the router to accept input sample rates between 32kHz and 96kHz. These sample rates are then converted to the selected sample rate of the router, 48kHz or 96kHz, before being switched to the output. Output sample rates other than 48kHz or 96kHz can be handled by switching selected outputs into a mode that bypasses the Sample Rate Converters.

Soft Switch: Synchronization does not eliminate audible switching 'clicks' as the switch may take place when the difference in the source amplitudes is large. To avoid the fast transition caused by this large difference in source amplitudes, the router uses a programmable Crossfade to switch between the sources. The duration of the Crossfade can be set between 0 and 20 mSeconds. This guarantees a "click-free" switch every time. Crossfading is preferable to a 'V' fade as it avoids the dip in audio level resulting from a 'V' fade.


Wild Shuffling: All synchronized sources can be wild shuffled. Wild shuffling allows any input audio track to be selected and grouped together with any other audio track. This new audio stream can be routed to the required destination. This allows a 32x32 stereo router to become a 64x64 mono router.

Mono Audio Mix: Mono audio mix enables the router to mix together two selected mono audio tracks. The router combines the two audio tracks together to give a single mono mixed audio track which is then routed to the chosen destination. Output = 1/2 (Input A + Input B).


Gain Adjustment: The gain for each half of the stereo pair on both the input and the output can be individually controlled. The adjustment range +12dB to =34dB in increments of 0.002dB.



#### ▶Q16-AES Rear Panel



#### ▶Q32-AES Rear Panel

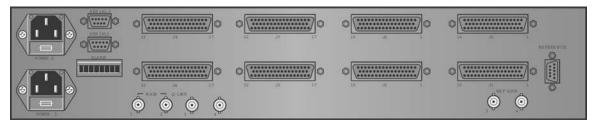

#### ▶Specifications

Configuration:

Inputs: Selectable 16 or 32 Outputs: Selectable 16 or 32 (depends on version)

Audio Inputs:

Sample Rates: 32kHz, 44.1kHz, 48kHz, 96kHz

Transformer Coupled DC on Input:

**Balanced Version (D-Type):** Standard: AES-2003 2-5V p-p Signal Level: Impedance 110Ω ±20%

D50 female, XLR Breakout Panel available Connectors:

Unbalanced Version (BNC):

Standard: SMPTE 276M 75Ω Impedance: Return Loss: 25dB, 0.1-6.0kHz

BNC per IEC 61169-8 Annex A

Audio Outputs:

Transformer Coupled DC Isolation: ±50V

Balanced Version (D-type):

Standard: AES-2003 Signal Level: 2-5V p-p 110Ω Impedance: Rise/Fall Time: 3.5-10ns

D50 female, XLR Breakout Panel available

Unbalanced Version (BNC):

Standard: SMPTE 276M Signal Level: 1.0V p-p ±50% Impedance: 750

25dB, 0.1-6.0kHz Return Loss:

Conforms to ANSI S4.40 - 1992 Jitter: Connectors: BNC per IEC 61169-8 Annex A

Control:

Q-Link to remote panels:

1 as standard (additional 3 Q-Links

options)  $75\Omega$  video cable 500m max, length

Serial RS232/422: 1 as standard (additional serial port

optional) D9 female

Power:

Auto ranging 100 to 240V AC 50/60Hz Supply

Power Consumption: Q16: 15W Q32: 15W

Backup: Optional with alarm output (Q32 only)

Physical:

Q16: 1RU, 1.75" nom (44mm) Height: Q32: 2RU, 3.5" nom (88mm) Width: 19" rack mount (483mm) 485mm (19" nom) Depth: Q16: 11.35lb (5.15kg) Q32: 14.55lb (6.6kg) Weight:

Operating Temp. 0-40°C 10-30°C Spec Maintained:

Ventilation: Natural convection







#### **>>>**Ordering Information

Each frame ships with a single power supply as standard. An optional redundant power supply is available on the Q32.

**Balanced Asynchronous** Q16-1616-AESB

16x16 Digital audio, 1RU Balanced 32x32 Digital audio, 1RU Balanced Q16-3232-AESB Q32-1616-AESB 16x16 Digital audio, 2RU Balanced Q32-3232-AESB 32x32 Digital audio, 2RU Balanced

16x16 Digital Audio, 1RU Unbalanced 16x16 Digital Audio, 2RU Unbalanced 32x32 Digital Audio, 2RU Unbalanced Q16-1616-AESU Q32-1616-AESU Q32-3232-AESU

The models listed below handle standard AES/EBU signals with balanced  $110\Omega$  inputs and outputs via D50 connectors or SMPTE/SPDIF signals with unbalanced 75Ω inputs and outputs via BNC connectors.

**Ordering Options** 

+2PS Redundant power supply (Q32 only) +SS Clean Switch between synchronous sources

CI-0001 RS232/RS422 Serial Card Modification to add second serial port to

monitoring routers CI-0004 Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports

and one RS232/422 port) AK-0002 1RU Rear Frame Support Kit Audio Connectors, D50 male (each) AK-0006 AK-0008 16 way XLR Breakout Panel, Male AK-0009 16 way XLR Breakout Panel, Female

#### ▶ Features & Benefits

- Output Crossover, which is available on mono routers configured as stereo provides the following extra features:
  - left and right channels can be reversed
  - left (or right) channel can be fed to both left and right outputs
- Handles timecode, even at spooling speeds
- Electronically balanced inputs with excellent common mode rejection
- · Electronically balanced outputs
- Frames may be stacked for use in multi-level systems
- XLR Breakout Panels are available to simplify installation
- · Diagnostic monitoring of temperature and PSU status
- · Built-in control system
- · All modules are installed from the front for easy access for upgrades and maintenance

#### Configuration

The design of the Q16-AA and Q32-AA router allows them to be configured in square or non-square sizes.

Q16-AA: The Q16-AA is housed in a 1RU frame and is only available in a non-redundant power supply configuration.

Q16-AA Mono: Available in four fixed sizes, 16x16, 32x8, 32x16 and 32x32.

Q16-AA Stereo: Available in three fixed sizes, 16x4, 16x8 and 16x16.

Q32-AA: The Q32-AA is housed in a 2RU frame and is available in a redundant power supply configuration.

Q32-AA Mono: Available in seven fixed sizes, 16x16, 32x8, 32x16, 32x32, (64x8, 64x16 and 64x32).

Q32-AA Stereo: Available in six fixed sizes, 16x4, 16x8, 16x16, 32x8, 32x16 and 32x32.

#### Control

Both the Q16-AA and the Q32-AA router include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the Q32-AA to increase the number of Q-Link and Serial ports. This option is not available for the Q16-AA.

The Q16-AA and Q32-AA have a number of control options, they are:

 $\it Local \ Control \ Panels: The \ CP-1600A-LP, can be fitted to the Q16-AA.$  This option is not available for the Q32-AA.

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q16-AA and Q32-AA router via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q16-AA and Q32-AA router connected via Q-link

External third party control: The Q16-AA and Q32-AA routers can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port.

#### Expansion

The input or output stage of the Q16-AA and the Q32-AA can be expanded from 16 to 32 depending upon the audio format of the router, mono or stereo. In all cases the router needs to be returned to the local service centre to be upgraded. The ROUTERS can not be expanded beyond THEIR frame size.


#### Power Supply

The power supplies for the Q16-AA and the Q32-AA are internal. The 2RU Q32-AA frame can be fitted with an optional redundant power supply with separate AC power inlet and alarm output. This option is not available for the Q16-AA.

#### ▶Q16-AA Rear Panel



#### ▶Q32-AA Rear Panel

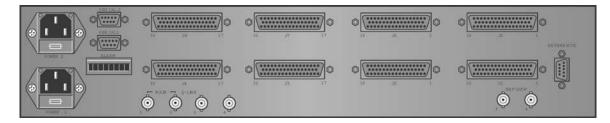

# **Q-Series Small Routers**

## Mono & Stereo Analog Audio Routers

#### ▶Specifications

Configuration:

Inputs:

Stereo: Q16: Fixed at 16 Q32: Selectable, 16 or 32 Mono: Q16: Selectable, 16 or 32 Q32: Selectable, 16 or 32 or 64

Outputs:

Q16: Selectable, 4, 8 or 16 Selectable, 4, 8, 16 or 32 Selectable, 8, 16 or 32 0.32Q16: Mono: Selectable, 8, 16, 32 or 64

Audio Inputs:

0dBu nominal, +24dBu max. Signal level:

Impedance: Common Mode Rejection

20Hz to 3kHz: -80dB, -100dB typical at 50/60Hz -60dB, -70dB typical at 20kHz 3kHz to 20kHz: Common Mode Level: +27dBu maximum, no signal Connectors: D50 female

Audio Outputs:

Impedance:  $40\Omega$  balanced DC on output: +50mV D50 female Connectors:

Signal Path:

Insertion gain: ±0.16 Frequency Response at: ±0.1dB 20Hz to 20kHz: ±0.25dB to 150kHz: -3dB Delay between two routes: 1µs Total Harmonic Distortion:

0.02%, 0.01% typical -10dBu to +20dBu and 20Hz to 20kHz

Crosstalk 20Hz to 20kHz: -80dB

Noise (un-weighted) 20Hz to 20kHz:

-85dB rms

Control:

Q-link to remote panels:

1 as standard (additional 3 Q-links optional)  $75\Omega$  video cable 500m

max. length

Serial RS232/422: 1 as standard (additional serial

port optional) D9 female

Power:

Auto ranging 100-240V, 50/60Hz Supply: Auto Power Consumption: Q16:

20W Q32: 40W

Optional with alarm output on 2RU frame

Backup Physical: Height:

Q16: 1RU, 44mm (1.75" nom.) Q32: 2RU, 88mm (3.5" nom.)

19" rack mount Width: 485mm (19" nom.) Depth: Weight: Q16: 5.2kg 6.6kg Q32:

Audio Connectors: D50 female multi-pin connectors each carrying 16 balanced signals

Operating Temp: 0-40°C Specification maintained: 10-30°C

Ventilation: Q16: Natural convection

Q32: Fan cooled. Intake at front

Exhaust at side

#### **▶** ▶ ▶ Ordering Information

Q16-1604-AAS 16x4 Dual Audio Route Q16-1608-AAS 16x8 Dual Audio Router Q16-1616-AAS 16x16 Dual Audio Router

Q16-1616-AAM 16x16 Mono or 8x8 Dual Audio Router Q16-3208-AAM 32x8 Mono or 16x4 Dual Audio Router 32x16 Mono or 16x8 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router Q16-3216-AAM Q16-3232-AAM Q32-1604-AAS

16x4 Dual Audio Router. 2RU frame, Dual channel Q32-1608-AAS 16x8 Dual Audio Router. 2RU frame, Dual channel Q32-1616-AAS 16x16 Dual Audio Router, 2RU frame, Dual channel 16x16 Mono or 8x8 Dual Audio Router Q32-1616-AAM

Q32-3208-AAM 32x8 Mono or 16x4 Dual Audio Router 32x16 Mono or 16x8 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router Q32-3216-AAM Q32-3232-AAM 32x8 Dual or 64x8 Mono Audio Router Q32-3208-AAS Q32-3216-AAS 32x16 Dual or 64x16 Mono Audio Router Q32-3232-AAS 32x32 Dual or 64x32 Mono Audio Router

Ordering Options

CI-0004

Redundant power supply (Q32 only)

CI-0001 RS232/RS422 Serial Card Modification to add second serial port to

monitoring routers

Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports

and one RS232/422 port)
1RU Rear Frame Support Kit, AK-0002 AK-0006 Audio Connectors, D50 male (each) AK-0008 16 way XLR Breakout Panel, Male AK-0009 16 way XLR Breakout Panel, Female













The Q32-PR and Q64-PR data routers provide port-to-port routing. Both models support a mix of RS422 and RS232 ports and are able to convert between the two standards. This means that the router can accept controlling devices in RS422, for example, whose ports are set as RS232 or a mixture of both.

It is designed to route the remote control signals between equipment, for example VTRs (normally controlled devices) and edit controllers (controlling devices) and can equally handle other devices such as PCs. The router can switch four wire signals, a transmitter pair and a receiver pair, through the matrix.

A route can be established between any two of the ports. For example, on a Q64-PR a maximum of 32 pairs of machines can be connected at one time.

Unlike traditional matrix based routers there is no limitation on the routing of controlling devices and controlled devices.

During direct dubbing between VTRs, one of the VTRs changes function to become a controlling device and is used to send commands to the other VTR which is still a controlled device. This is a problem for traditional matrix based routers where the ports are organized to support either controlling or controlled devices and are not able to change mode dynamically. By contrast the ports of the Quartz Port Data Router can adapt, manually or automatically, between the two modes, which simplifies the operation.

The router fully integrates with the standard Quartz control system to follow video & audio routers or can operate independently.

#### ▶ Features & Benefits

- Port-to-port routing for flexible operation
- Standard configurations of 16, 32, 48 and 64 port.
- Manual or automatic sensing of controlling and controlled devices
- Supports a mix of RS232 or RS422 signals and conversion between the two
- Supports Sony interface for detecting controlling or controlled devices
- · Optional redundant power supply with separate AC power inlet and alarm output
- · Built-in control system
- Built-in RS232/422 serial port for control purposes
- Front access plug-in modules for easy upgrades and maintenance
- · Diagnostic monitoring of temperature and PSU status

#### Configuration

The modular design of the Q32-PR and Q64-PR routers give them a high degree of flexibility, allowing them to be easily configured. The Q32-PR is housed in a 2RU frame and provides port-to-port routing for up to 32 devices. The number of ports are configured in steps of 2...

The Q64-PR is housed in a 3RU frame and provides port-to-port routing for up to 64 devices. The input and output stage of the Q64-PR is configurable in steps of 2. Individual I/O SIMMs can be added to the router at anytime.

Both the Q32-PR and the Q64-PR router include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router.

The optional internal CI module can be fitted to both of the routers to increase the number of Q-Link and Serial ports.

The Q32-PR and Q64-PR have a number of control options, they are:

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q32-PR and Q64-PR router via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q32-PR and Q64-PR router connected via Q-Link.

External third party control: The Q32-PR and Q64-PR router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port.


#### Expansion

The input and output stage of the Q32-PR and Q64-PR can expanded at any time by adding additional SIMMs. They can not be expanded beyond their frame size.

#### **Power Supply**

The power supplies for the Q32-PR and Q64-PR are internal. Both routers can be fitted with an optional redundant power supply with separate AC power inlet and alarm output.

#### ▶Q32-PR Rear Panel

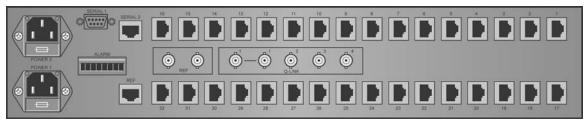

#### ▶Specifications

#### Configuration:

RS232 I/O ports: Selectable in blocks of 2

RS422 I/O ports: Selectable in blocks of 2

Note: RS232 and RS422 ports can be mixed in the same router.

#### Signal Inputs:

Type Accepts signals to RS422A

0.2-7V p-p Signal level: **RJ-45** Connectors:

Signal Outputs:

Connectors:

Conforms to RS422A (STD) RS232

RJ-45

optional 2-7V p-p Signal level: Impedance: 110Ω

#### Control:

Q-link to remote panels: 1 as standard (additional 3 Q-links

with CI-0004 option)

Serial RS232/422: 1 as standard (additional port with CI-0001 or CI-0004 option) D9 female

Power: Supply

Power Backup:

Auto ranging 100 to 240V AC 50/60Hz

Optional with alarm output

#### Physical:

Height: Q32:

2RU = 88mm (3.5" nom.) Ω64 3RU = 132mm (5.25" nom.)

Width: 19" rack mount Depth: 485mm (19" nom.)

. Weight:

Q32: 4.4kg Q64: 6.6ka Signal Connectors: RJ45

Operating Temp: 0-40°C

Ventilation: Natural convection

#### **▶** ▶ ▶ Ordering Information

Up to 32 ports, supporting RS422, in a single 2RU frame with single power supply as standard.

Q32-16PR 16 Port Data Router Q32-32PR 32 Port Data Router

Up to 64 ports, supporting RS422, in a single 3RU frame with single power supply as standard.

16 Port Data Router Q64-16PR Q64-32PR 32 Port Data Router 064-48PB 48 Port Data Router Q64-64PR 64 Port Data Router

Ordering Options +2PS

Redundant power supply

CI-0001 Sub-module that enables a second RS232/422 serial port CI-0004 Sub-module that enables three additional Q-Links and one extra RS232/422 serial port

QPR-RS232 RS232 output (per 2 ports)

96

The Q16-RR and Q32-RR relay routing switcher has been designed to route signals which cannot be handled by normal video or audio routers, either because the signal is bi-directional, or has incompatible levels.

The 16x8 1RU unit is supplied complete with power supply and the standard Quartz controller. A 2RU frame is available if a 16x16 matrix is required and/or a redundant power supply. The inputs must be wired together externally.

#### ▶ Features & Benefits

- Two pole model used for two wire signals, such as balanced bi-directional audio
- Four pole model used for four wire signals, such as RS422 control
- With external wiring, frames may be stacked for larger numbers of inputs and outputs
- · Suitable for telephone signals with ringing
- · Relay contacts default to open condition in the absence of power
- Front access plug-in modules for easy maintenance and upgrades
- RS232/422 Serial Interface for remote control
- D50 multi-pole for signal connectors
- · Diagnostic monitoring of temperature and PSU status
- · Built-in control systems

#### Configuration

The Q16-RR is housed in a 1RU frame and switches 16 sources to 8 destinations. The input and output stage of the Q16-RR is fixed.

The Q32-RR is housed in a 2RU frame and can switch up to 16 sources to 16 destinations. The input and output stage of the Q32-RR is fixed.

Both the Q16-RR and the Q32-RR router include, as standard, an internal Frame Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the Q32-RR to increase the number of Q-Link and Serial ports. This option is not available for the Q16-RR.

The Q16-RR and Q32-RR have a number of control options, they are:

Local Control Panels: The CP-1600A-LP, can be fitted to the Q16-RR. This option is not available for the Q32-RR.

Passive Remote Control Panels: The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the Q16-RR and Q32-RR router via a PI-1604 or PI-1608 parallel to interface.

Remote Control Panel: Any panel(s) from the entire range of Quartz remote control panels can be used with the Q16-RR and Q32-RR router connected via Q-Link.

External third party control: The Q16-RR and Q32-RR router can be remotely controlled via an external third party control device, such as an automation system, when connected to the router's serial port.


#### Expansion

Both the Q16-RR and the Q32-RR can not be expanded.


#### Power Supply

The power supplies for the Q16-RR and the Q32-RR are internal. The 2RU Q32-RR frame can be fitted with an optional redundant power supply with separate AC power inlet and alarm output. This option is not available for the Q16-RR.

#### ▶Q16-RR Rear Panel



#### ▶Q32-RR Rear Panel

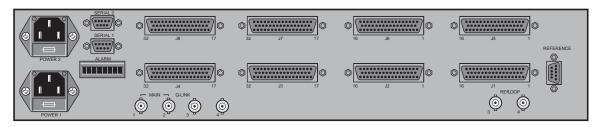

#### ▶Specifications

Configuration:

Fixed at 16 Inputs: Outputs: Selectable, 8 or 16

#### Relay Contacts:

Gold over silver palladium Contact resistance:  $1\Omega$  max. Operate/Release time: 1Ω max Contact rating:

0.5A @ 24V DC 0.15A @ 100V rms. AC

100V AC/DC

Service Life: Typically 1.0 x 106 at low load

0.5 x 106 at full load

Control:

Q-link to remote panels: 1 as standard (additional 3 Q-links on

Q32 with CI-0004 option) 75 $\Omega$  video cable 500m max. length

Serial RS232/422: 1 as standard (additional port on Q32 with CI-0001 or CI-0004 option)

D9 female

Power:

Auto ranging 100 to 240V AC 50/60Hz Supply:

Consumption 25W Power Backup:

Optional with alarm output

Physical:

Height: Q16: 1RU = 44mm (1.75" nom.) Q32: 2RU = 88mm (3.5" nom.) Depth: 485mm (19" nom.)

Weight

Q16: 5.5kg Q32: 6.7kg Width: 19" rack mount

Signal Connectors: D50 multi-pole connectors

Operating Temp:

Ventilation Natural convection

#### >>> Ordering Information

Each frame ships with a single power supply as standard.

Q16-1608-RR+2P 16x8 Relay Router 2 pole Q32-1608-RR+2P 16x8 Relay Router 2 pole Q32-1616-RR+2P 16x16 Relay Router 2 pole

**Ordering Options** 

+4P +2PS

Redundant power supply (Q32 only) CI-0001 Sub-module that enables a second RS232/422 serial port

Note: only available on Q32 frames

CI-0004

AK-0006

AK-0008

AK-0009

Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports and one RS232/422 port) Note: only available on Q32 frames

AK-0002

Rear frame support kit for Q16, strongly recommended for mobile applications D50 mating connectors, all male type, one required for each group of 16 inputs or outputs

16 way XLR breakout panel, Male, 1RU. Includes 3m flying lead with D50

connector pre-wired for connection to Quartz relay routers 16 way XLR breakout panel, Female, 1RU. Includes 3m flying lead with

D50 connector pre-wired for connection to Quartz relay routers

#### Tally Data Routers

The TR-3200A Tally router is used in conjunction with a video or audio router. It routes tally inputs from, for example, a vision mixer and processes them according to the current settings of the main signal router.

The Tally router provides up to 32 tally outputs to feed tally or cue lights on cameras. called reverse tally, or Under Monitor Displays (UMDs), called forward tally. The TR-3200A supports serial tallies from a variety of vision mixers.

#### ▶ Features & Benefits

#### Configuration

The TR-3200A is housed in a 1RU frame

Four 16 input ports are used to read up to 64 tally inputs. They are processed by software in conjunction with the current matrix settings to provide 32 tally outputs to feed camera tally or cue lights using relay contacts; two wires are provided for each relay to ensure electrical isolation from the outside world and between individual relays.

#### Control

TR-3200A includes, as standard, an internal FU-0003 Controller module which supports a single Q-Link and Serial port on the rear of the router. The optional internal CI module can be fitted to the TR-3200A to increase the number of Q-Link and Serial ports.

The TR-3200A has a number of control options, they are:

Local Control Panels The CP-1600A-LP, can be fitted to the TR-3200A

Passive Remote Control Panels The CP-1601A-P and CP-1604-P passive remote control panels can be fitted to the TR-3200A router via a PI-1604 or PI-1608 parallel interface.

Remote Control Panel Any panel(s) from the entire range of Quartz remote control panels can be used with the TR-3200A router connected via Q-Link.


External third party control The TR-3200A router can be remotely controlled via an external third party control device, such as an automation system, when connected to the routers serial port.

#### Expansion

Two TR-3200A Tally routers can be used together to form a 64x64 tally router by looping the mixer tallies to both units.

#### Power Supply

The power supply for the TR-3200A is internal. A redundant power supply can not be fitted to the TR-3200A.



#### ▶ Specifications

Read Ports (Inputs):

< 0.8V for logic low

> 3.5V or open circuit for logic high D25 female

Connectors:

Four for inputs, each with 16 lines

#### Tally Ports (Outputs):

Normally open contacts

Gold over silver palladium Contact resistance:  $1\Omega$  max.

Operate/Release time:

10ms max.

Contact rating: 0.5A @ 24V, DC resistive load 0.15A @ 100V rms. AC

Service Life: 1.0x106 at low load

0.5x106 at full load

Connectors: D25 female

Four for outputs, each with 8 relays

#### Control:

Q-link to remote panels:

1 as standard (additional 3 Q-links with CI-0004 option) 75 $\Omega$  video

cable 500m max. length Serial RS232/422: 1 as standard (additional port

with CI-0001 or CI-0004 option)

#### Power:

100-132V. 180-240V. 50/60Hz Supply: Consumption:

15W

#### Physical:

Height: 1RU, 44mm (1.75" nom.) Width: 19" rack mount 11" (280mm) Depth: 2.5kg Weight: Operating Temp: 0-40°C Ventilation Natural: convection

#### **▶** ▶ ▶ Ordering Information

Please refer to Application Note AN-0010 for further information on the operation of the TR-3200A Tally Router.

TR-3200A 64x32 Tally Router, 1RU unit, relay tally outputs

**Ordering Options** 

AK-0005 Mating D25 Connectors, all male type, one required for each port,

eight needed for full system. Sub-module that enables a second RS232/422 serial port.

CI-0001 CI-0004 Multi Q-Link Card (Fits inside frame to add up to three Q-Link ports and

one RS232/422 port)

The CP-1000E control panel features assignable and dynamic LCD button technology. Each of the LCD buttons is capable of displaying a multiple character text string, graphics, different language characters or custom characters. The CP-1000E has 16 buttons offering 256 virtual buttons - allowing selection from up to 256 sources with just two key strokes.

The CP-1000E panel is ideal in applications where changes to sources and destinations are needed regularly e.g. OB trucks or other applications where you need to pre-configure panels to suit different or recurring tasks.

Alternatively, it can be configured with a menu structure to allow quick navigation through the system. When a menu button is pressed, some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this menu.

Individual panel settings can be saved in WinSetup with the display changing instantly to the new configuration as soon as the download is complete. The panels represent a radical departure in control panel design resulting in the most flexible control panel on the market today.

#### ▶ Features & Benefits

- · Flexible feature or menu driven configurations providing quick and simple access
- Easily reconfigured for regularly changing environments
- Each LCD display features a 32x24 dot matrix capable of supporting three rows of five character text or a graphic
- Each LCD illumination can be red, green or yellow with a two level programmable intensity providing unprecedented visual indication of the button status
- Fully programmable button operation user-definable via WinSetup configuration software
- · Button-per-source selection with Page mode NEXT and LAST buttons to select more sources
- · LOCK or ENABLE button to protect against unauthorized or accidental selection
- · Buttons can be programmed for breakaways or to give a menu structure to the panel
- Camera joystick override on any eight inputs, with momentary or latching action



#### **▶** Specifications

#### Control:

Q-link to remote panels

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels

Ethernet: 10/100 Base T

RJ45 connector

#### Power:

100-132V, 180-240V, 50/60Hz Supply: Consumption:

## Physical:

Height: 1RU, 44mm Width: 19" rack mount Depth: 130mm

1.85kg Weight: Operating Temp: 0-40°C

#### **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-1000E Intelligent Remote Panel, 1RU 16 buttons

**Ordering Options** 

CI-0003 RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

+S7 Serial Interface & Protocol









99

## Remote Control Panels

The CP-1600A is intended to be a cost effective panel for small systems. As with all Quartz panels, the buttons are individually programmable for functions such as source selection, destination selection, breakaways and locks, etc. The CP-1600A is typically used to control 16 sources and 16 destinations with four levels of breakaway and is neatly packaged in just 1RU of rack space. A version is also available as a local panel which fits onto the front of most standard Quartz 1RU router frames. The CP-1600A supports up to four levels of breakaway.

The CP-1601A is a simple 1RU panel intended as an entry level low cost panel for small systems. As with all Quartz panels the buttons are individually programmable for functions such as source selection, destination selection, breakaways and locks, etc. This ensures maximum flexibility of the system. The most common use is as a single destination 16 button-per-source input

#### ▶ Features & Benefits

- Fully programmable buttons to operate in a variety of modes, e.g. as 16x16 XY
- Button-per-source selection of 16 inputs
- · Lock or Enable button to protect against unauthorized or accidental selection
- Buttons can be programmed for breakaways
- · Push buttons with a quality action and red LED
- Slide-in designation strip for name legending
- · Camera joystick override on any eight inputs, with momentary or latching action

#### Additional CP-1600A Features

- XY panel, programmable to control from one through 16 destinations with breakaway
- · Single destination mode with breakaways
- Dual seven segment display shows current destination number
- · Four levels of breakaway available
- · Lock facility protects against accidental or unauthorized selections
- Chop mode for continuous toggle between any two sources

#### ▶CP-1600A













#### ▶CP-1601A



#### ▶Specifications

Q-link to remote panels

 $75\Omega$  video cable, 500m max. length

Serial RS232/422 (Optional):

Parallel (Joystick override):

D9 male, TTL levels

Power:

Supply: Power

100-132V. 180-240V. 50/60Hz

10W

Physical:

Height: Width:

19" rack mount

Depth:

130mm (5" nom.)

1RU, 44mm (1.75" nom.)

1.50kg (3.3lb) Weight:

Operating Temp: 0-40°C

#### **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-1600A CP-1600A-LP

Remote Mini XY Panel, BPS

Local Mini XY Panel, BPS. Supplied for use as a front panel on most 1RU frames CP-1601A

CP-1601A-LP

Remote Panel, multi-mode 16 BPS and Lock

CP-1601A-P

Local Passive Panel, 16 BPS and Lock Supplied for use as a front panel on Q1601, Q1602 or with PI-1604/08
Remote Passive Panel, 16 BPS and Lock (Has integral rack ears for

19" rack mounting, connects via D25 cable) Generally used with the Q1601 and PI-1604/08 Ordering Options CI-0003

+S7

RS232/422 Interface (Enables the serial port and is fitted internal to the panel)

Serial Interface & Protocol


The CP-1604 is a versatile programmable panel with 20 illuminated push buttons. A wide range of panel operations including XY and multi-destination may be configured using the WinSetup software.

Buttons can be individually configured for any combination of source, destination, breakaway or control function. For instance, this panel can be configured as a 16 button-per-source panel leaving four buttons for breakaways, lock, destinations,

#### ▶ Features & Benefits

- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- Buttons with high quality positive action
- All panels are fully programmable to operate in a number of modes
- Buttons can be programmed for breakaways

- · Program/Preview/Take mode can be programmed, emulating vision mixer operation, useful in transmission environments
- Optional Lock button protects against accidental or unauthorized selections
- Camera joystick override on any eight inputs, with momentary or latching action

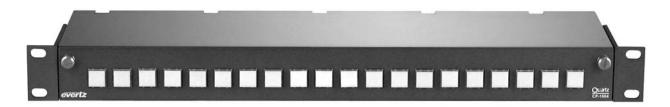

#### **▶**Specifications

#### Control:

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels

#### Power:

100-132V, 180-240V, 50/60Hz Supply

Power Consumption:

10W

#### Physical:

1RU, 44mm (1.75" nom.) Height: Width: 19" rack mount Depth: 130mm (5" nom.) 1.50kg (3.3lb) 0-40°C

Weight: Operating Temp:

#### >>> Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-1604 Remote Panel, multi-mode, 20 button-per-source

# Ordering Options CI-0003

+\$7

RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

Serial Interface & Protocol











#### Remote Control Panel

The CP-2024E features assignable and dynamic LCD button technology. Each of the LCD buttons is capable of displaying a multiple character text string, graphics, different language characters or custom characters. The CP-2024E panel has 32 buttons laid out with a keypad section in the style of a traditional XY panel.


The CP-2024E is ideal in applications where changes to sources and destinations are needed regularly e.g. OB trucks or other applications where you need to preconfigure panels to suit different or recurring tasks.

Alternatively, the panels can be configured with a menu structure to allow quick navigation through the system. When a menu button is pressed some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this menu.

Individual panel settings can be saved in WinSetup with the display changing instantly to the new configuration as soon as the download is complete. The panels represent a radical departure in control panels design resulting in the most flexible control panel on the market today.

#### ▶ Features & Benefits

- · Flexible feature or menu driven configurations providing quick and simple access
- Easily reconfigured for regularly changing environments
- Each LCD display features a 32x24 dot matrix capable of supporting three rows of five character text or a graphic
- · Each LCD illumination can be red, green or yellow with a two level programmable intensity providing unprecedented visual indication of the button status
- Fully programmable button operation user-definable via WinSetup configuration software
- · Button-per-source selection with Page mode NEXT and LAST buttons to select more sources
- · LOCK or ENABLE button to protect against unauthorized or accidental selection
- · Buttons can be programmed for breakaways or to give a menu structure to the panel
- · Camera joystick override on any eight inputs, with momentary or latching action

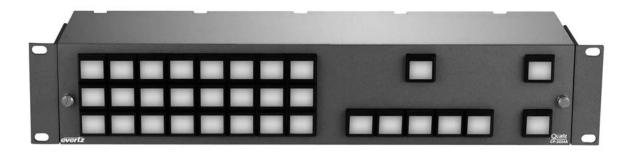

# ▶Specifications

Control:

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels

10/100 Base T

RJ45 connector

#### 100-132V. 180-240V. 50/60Hz

15W Consumption:

#### Physical:

2RU, 88mm Height: Width: 19" rack mount 130mm Depth: Weight: 3.70kg Operating Temp: 0-40°C

#### **>>>**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

Supply:

CP-2024E Intelligent Remote Panel, 2RU 24 buttons, keypad style

Ordering Options CI-0003

RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

+S7 Serial Interface & Protocol The CP-2032E features assignable and dynamic LCD button technology. Each of the LCD buttons is capable of displaying a multiple character text string, graphics, different language characters or custom characters. The CP-2032E panel has 32 buttons laid out in two 16 button rows.


These panels are ideal in applications where changes to sources and destinations are needed regularly e.g. OB trucks or other applications where you need to preconfigure panels to suit different or recurring tasks.

Alternatively, the panels can be configured with a menu structure to allow quick navigation through the system. When a menu button is pressed some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this menu.

Individual panel settings can be saved in WinSetup with the display changing instantly to the new configuration as soon as the download is complete. The panels represent a radical departure in control panels design resulting in the most flexible control panel on the market today.

#### ▶ Features & Benefits

- Flexible feature or menu driven configurations providing quick and simple access
- · Easily reconfigured for regularly changing environments
- Each LCD display features a 32x24 dot matrix capable of supporting three rows of five character text or a graphic
- Each LCD illumination can be red, green or yellow with a two level programmable intensity providing unprecedented visual indication of the button status
- Fully programmable button operation user-definable via WinSetup configuration software
- Button-per-source selection with Page mode NEXT and LAST buttons to select more sources
- LOCK or ENABLE button to protect against unauthorized or accidental selection
- Buttons can be programmed for breakaways or to give a menu structure to the panel
- · Camera joystick override on any eight inputs, with momentary or latching action

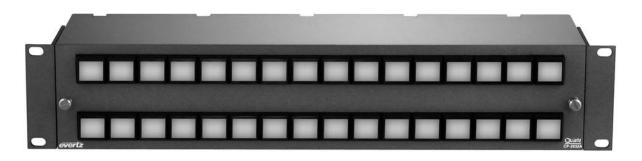

#### ▶Specifications

Control:

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female Parallel (Joystick override):

Ethernet:

D9 male, TTL levels 10/100 Base T

RJ45 connector

#### Power:

100-132V, 180-240V, 50/60Hz Supply:

## Physical:

2RU, 88mm Height: Width: 19" rack mount Depth: 130mm Weight: 3.70kg Operating Temp: 0-40°C

#### >>> Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-2032E Intelligent Remote Panel, 2RU 32 buttons

**Ordering Options** 

CI-0003 RS232/422 Interface

(Enables the serial port and is fitted inside the panel) Serial Interface & Protocol

+\$7











#### Remote Control Panel

The CP-2048E features assignable and dynamic LCD button technology. Each of the LCD buttons is capable of displaying a multiple character text string, graphics, different language characters or custom characters. The CP-2048E panel has 48 buttons arranged in three rows of 16.


These panels are ideal in applications where changes to sources and destinations are needed regularly e.g. OB trucks or other applications where you need to preconfigure panels to suit different or recurring tasks.

Alternatively, the panels can be configured with a menu structure to allow quick navigation through the system. When a menu button is pressed some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this menu.

Individual panel settings can be saved in WinSetup with the display changing instantly to the new configuration as soon as the download is complete. The panels represent a radical departure in control panels design resulting in the most flexible control panel on the market today.

#### ▶ Features & Benefits

- Flexible feature or menu driven configurations providing quick and simple access
- · Easily reconfigured for regularly changing environments
- Each LCD display features a 32x24 dot matrix capable of supporting three rows of five character text or a graphic
- Each LCD illumination can be red, green or yellow with a two level programmable intensity providing unprecedented visual indication of the button status
- Fully programmable button operation user-definable via WinSetup configuration software
- Button-per-source selection with Page mode NEXT and LAST buttons to select more sources
- · LOCK or ENABLE button to protect against unauthorized or accidental selection
- Buttons can be programmed for breakaways or to give a menu structure to the panel
- · Camera joystick override on any eight inputs, with momentary or latching action

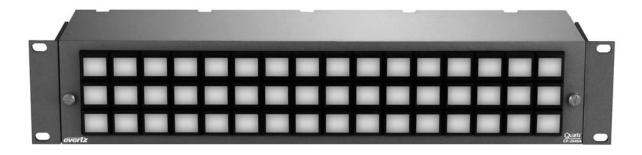

100-132V, 180-240V, 50/60Hz

15W

#### **▶** Specifications

#### Control:

Q-link to remote panels

75 $\Omega$  video cable 500m max, length Serial RS232/422 (Optional):

D9 female

Parallel (Joystick override):

D9 male, TTL levels Ethernet: 10/100 Base T

RJ45 connector

#### Physical:

Height: 2RU, 88mm 19" rack mount 130mm Width: Depth: 3.70kg . Weight: Operating Temp: 0-40°C

#### **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

Power:

Supply:

Consumption:

CP-2048E Intelligent Remote Panel, 2RU 48 buttons

**Ordering Options** 

CI-0003 RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

Serial Interface & Protocol +57

## Advanced System Control Panel

The CP-2200E remote control panel features two high resolution color LCD display's alongside an array of function assignable buttons and dynamic LCD buttons, all of which are fully programmable. The two LCD displays intelligently interact with the panel's buttons and rotary controls, updating automatically as different operation facilities are selected.

Each of the 12 LCD buttons are capable of displaying a multiple character text string or a graphical image. They can also be configured with a menu structure which allows quick navigation through the systems. When a menu button is pressed some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this new menu. The selection of a new menu can also be configured to change the graphical display of one or both the LCD screens.

The CP-2200E is the flagship panel of Evertz® advanced control system, allowing control of automated tielines and pathfinding, and advanced breakaway routing while still supporting basic routing concepts like levels and categories.

The CP-2200F panel incorporates advanced control of all of Evertz®'s SNMP enabled devices. Devices or certain controls of devices can be grouped and/or ganged together and associated with sources and destinations on routers so that when a particular source or destination is used the appropriate controls are loaded up for interfacing on the panels LCD screens. This allows simple but powerful interfaces to be built to control parameters and recall presets as well as integrate with router systems for SNMP equipment in your facility.

The CP-2200E enables users to have real-time control over an MVP® or VIP™ system. Get graphical visualizations of layouts prior to loading them, control what signal is routed to what multiviewer window, select an audio to be monitored etc.

The CP-2200E is a very sophisticated advanced panel that allows you to create a very powerful and very simple interface to your entire system so users have realtime control over signals, displays and their router destinations.

#### ▶ Features & Benefits

- · Flexible feature or menu driven configurations providing quick and simple access
- · Advanced SNMP interface
- · Advanced Evertz® Multiple view processor interface.
- Two high quality LCD displays which dynamically react with the panels buttons and rotary controls
- Easily reconfigured for regularly changing environments
- · Advanced control system interface
- Fully programmable buttons via the router configuration software



#### ▶Specifications

Control: Q-link:

75Ω video cable 500m max. length

BNC connector Dual 10/100 base T.RJ45 connector Ethernet:

Serial RS232/422: D9 female Power:

Supply: 100-132V, 180-240V, 50/60Hz Consumption:

20W

Physical:

Height: 2RU, 88mm Width: 19" rack mount Depth: 120mm 3.70kg

. Weiaht: Operating Temp: 0-40°C

#### **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-2200E Advanced System Control Panel, 2RU











# Advanced Display Remote Control Panel, 2RU

The CP-2402 is the latest panel to be introduced into Quartz's extensive range of remote and local router control panels. The CP-2402 is a versatile programmable panel with 29 illuminated pushbuttons and two display windows. The CP-2402 is available as a Remote Control Panel and can be used on any of the Quartz routers or as a local panel for the Topaz family of routers.

The CP-2402 is fully programmable and therefore the operation of the panel is entirely dependent upon its configuration. It can be configured in a number of different ways including XY and multi-destination. The CP-2402 is configured using the WinSetup software. Each button can be individually configured for any combination of source, destination, breakaway or control functions.

The physical button layout of the CP-2402 guides its configuration but does not restrict it. For example, the left hand block of 24 buttons can be programmed as sources. A number of these buttons can also be used for other functions such as level selection, lock etc. The two display windows can be used to show the current selected destination and the selected source. The two buttons located next to the display windows can be used to scroll up or down through the source or destination list. The take button confirms the selection.

#### ▶ Features & Benefits


- 1RU panel with internal power supply
- · 15mm LED illuminated square buttons suitable for film legends
- Buttons with high quality positive action
- · Fully programmable to operate in a number of modes

- Buttons can be programmed for breakaways, level selection etc.
- · Optional lock button protects against accidental or unauthorized selections
- · Camera joystick override on any eight inputs with momentary or latching action

#### ▶ CP-2402 Remote Control Panel



#### ▶ CP-2402-LP Local Control Panel for Topaz

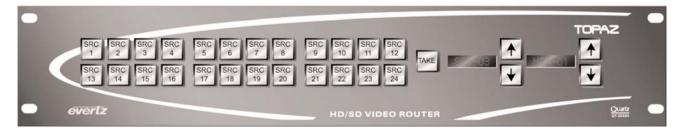

## ▶ Specifications

Control (Remote Panel Only)

Q-link Serial RS232/422 (Optional) Parallel - Joystick override

Power (Remote Panel Only):

90-132V, 180-264V, 50/60Hz Supply:

Power Consumption: 10W

Physical (Remote Panel Only):

1RU, 44mm Height: Width: 19" rack mount 130mm Weight: 1.55kg Operating Temperature: 0-40°C


## **▶▶▶Ordering Information**

CP-2402 CP-2402-LP Remote Control Panel Local Control Panel

The CP-3216-PR is a fully programmable SNMP-enabled video/audio control panel. The CP-3216-PR can provide a fully customized user interface through complete system hardware virtualization. The CP-3216-PROC is ideal for colour correction applications and can be used as a complete replacement for multiple DSU-CC color correctors and their associated control panels.

#### ▶ Features & Benefits

- · Optimized solution for audio/video proc applications
- Customized user interface through complete hardware virtualization
- Ideal for colour correction applications
- Complete replacement for multiple For-A DSU-CC panels/cards
- 32 x GPIs interface using DB15 connectors enabling virtual button pushes
- 16 scroll knobs with fully programmable link to module controls
- 32 x LCD buttons with programmable labelling/function/logical structure
- Fully SNMP enabled

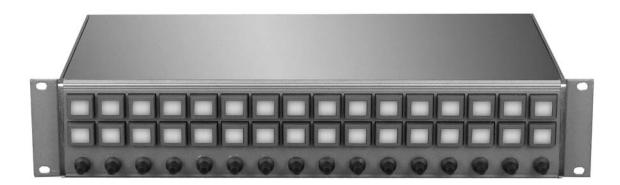

# **▶**Specifications

Control:

Note:

Dual 10/100 base T.RJ45 connector Ethernet:

Serial RS232/422: D9 female

Power:

Consumption:

Supply:

20 W

100 - 132V, 180 - 240V, 50/60Hz

Physical: Height: Width:

2RU, 88mm 19" rack mount 120mm

Depth: Weight: 3.70kg Operating Temp: 0 - 40°C

## **>>>**Ordering Information

CP-3216-PR: Programmable Audio/Video Proc Control Panel, 2RU

These part numbers refer to the hardware only. Precise operation is

determined by the configuration of the control panel

## Remote Panel with Keypad and Display

The CP-3200E is a keypad panel normally arranged to operate as an XY panel allowing control of any input or output, with up to four levels of breakaway. The CP-3200E is normally used as a master XY panel in engineering or MCR type applications where access to any input or output is required. The CP-3200E is suitable for any system from 16x4 and above.

Advanced programming control enables the CP-3200E also to be configured to control five destinations without breakaway or a single destination with five levels of breakaway.

#### ▶ Features & Benefits

- · XY mode with four levels of breakaway
- Five destination mode with a TAKE button for each destination but without
- · Single destination mode with five levels of breakaway
- 24 + 6 button keypad for source and destination names
- · High brightness vacuum fluorescent alphanumeric display with better viewing angles than LCD types
- · Source names can be up to seven characters long
- · Destination names can be up to eight characters long
- · In use displays for all levels plus preset
- · All buttons fully programmable for different functions such as LOCK

- · TAKE button optionally causes the source in use and preset displays to toggle
- Optional NEXT and LAST buttons to scroll through the available sources and destinations
- Optional CHOP button for continuous toggle between sources, for line-up purposes
- Optional Preview mode causes a destination to switch when a valid source name is entered in the preset display (Available on any or all destinations)
- · Camera joystick override on any eight inputs, with momentary or latching
- · Programmable display brightness with optional sleep mode



#### **▶** Specifications

#### Control:

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels 10/100 Base T Ethernet

RJ45 connector

#### Electrical

EMI/RFI:

Auto-ranging 100 - 240 Volts AC, Voltage 50/60 Hz

30W Power

Fuse Rating: 250 V, 1 amp, time delay

ETL Listed, complies with EU safety Safety:

Complies with FCC Part 15 Class A regulations

Complies with EU EMC directive

#### Physical

Size: (USE CORRECT SIZE/WEIGHT PER PANEL)

1 RU Panels width:19" standard rack width

Depth: 3 1/2"

Height: 1RU standard rack height Dimensions: (435mm x 89mm x 45mm)

2 RU Panels width:19" standard rack width

Depth: 3 1/2'

Height: 2RU standard rack height Dimensions:(435mm x 89mm x 89mm)

Weight:

1 RU Panels 3 lbs. (1.36 kg) 2 RU panels 4 lbs. (1.81 kg)

Temperature: 0 to 50° C (Operating)

#### **>>>**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-3200E Remote Panel with keypad and display

**Ordering Options** CI-0003

RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

+S7 Serial Interface & Protocol The CP-3201 has 40 illuminated push buttons and is ideal for systems with 32 sources leaving eight buttons to select destinations, breakaways and lock, etc.

Alternatively, it can be programmed with 16 source buttons and 16 destination buttons to provide an XY panel suitable for small systems using the WinSetup software.

#### ▶ Features & Benefits

- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- · Buttons with high quality positive action
- All panels are fully programmable to operate in a number of modes
- Split panels can be programmed in many ways, for instance, permitting two separate destinations to be controlled using two rows of source buttons
- · Buttons can be programmed for breakaways
- Program/Preview/Take mode can be programmed, emulating vision mixer operation, useful in transmission environments
- Optional Lock button protects against accidental or unauthorized selections
- Camera joystick override on any eight inputs, with momentary or latching action



#### ▶Specifications

#### Control:

Q-link to remote panels:

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels

Supply: Consumption: 100-132V, 180-240V, 50/60Hz 10W

#### Physical:

Height: 1RU, 44mm (1.75" nom.) Width: 19" rack mount 130mm (5" nom.) Depth: Weight: 3.4lb (1.55kg)

Operating Temp: 0-40°C

#### >>> Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-3201 CP-3201-P

Remote Panel, multi-mode, 40 Button-per-source Passive Panel, multi-mode, 40 Button-per-source (Has integral rack

ears for 19" rack mounting, connects via D25 cable. Generally used

with the PI-1604/08A)

#### **Ordering Options**

CI-0003 +S7

RS232/422 Interface (Enables the serial port and is fitted inside the panel)

Serial Interface & Protocol












#### Remote Control Panel

The CP-3208E is an eight destination control panel that can handle up to 32 sources. It is ideal in applications such as monitoring or live operational areas, where several destinations are to be controlled rapidly with a single button selection.

The status of each destination is visible at all times for increased operational confidence.

#### ▶ Features & Benefits

- Eight displays show the current source selected to each destination
- · High brightness, green LED displays with up to seven character names
- 32 buttons for source selection and eight TAKE buttons for the destinations
- TAKE button can optionally be cleared or retain the last source selection
- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- Optional LOCK button protects against accidental or unauthorized selections
- Optional Preview mode causes destination to switch when a source button has been selected but before a TAKE has been made (available on any or all destinations)
- Camera joystick override on any eight inputs, with momentary and latching action
- Optional VTR control buttons for <<, >>, > and STOP (requires CI-0003)

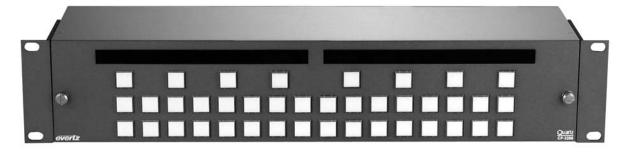

#### **▶** Specifications

Control:

Q-link to remote panels

 $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional): D9 female

Parallel (Joystick override):

D9 male, TTL levels

#### Power:

Supply: Consumption:

100-132V, 180-240V, 50/60Hz 10W

#### Physical:

Height: 2RU, 88mm (3.5" nom.) Width: 19" rack mount 130mm (5" nom.) Depth: Weight: 2.55kg (5.6lb)

Operating Temp: 0-40°C

## **>>>**Ordering Information

CP-3208E

Remote Panel, eight destination, 32 Button-per-source with source

display for each destination

**Ordering Options** 

CI-0003

RS232/422 Interface

(Enables the serial port and is fitted inside the panel) Serial Interface & Protocol


+\$7

The CP-6400E is an advanced XY panel ideal for larger applications above 64x64 but can be used with any Quartz router. It is typically used as a master panel to control any input or output, with up to eight levels of breakaway.

Its extra large keypad and eight character names provide great flexibility to name sources and destinations in larger systems. Flexible architecture permits any key to be programmed to provide any function.

#### ▶ Features & Benefits

- Eight large keypad with 32 buttons
- Elght character names on high brightness green LED displays
- · Programmable display brightness
- Up to eight levels of breakaway supported
- All buttons are fully programmable for different functions
- Present and in-use displays to help avoid false selections
- TAKE button optionally causes the source in use and preset displays to toggle, to reverse false selections
- Optional LOCK button protects against accidental or unauthorized selections
- Optional NEXT and LAST buttons to scan the available sources and destinations
- · Optional CHOP button for continuous toggle between sources, for line-up purposes
- Camera joystick override on any eight inputs, with momentary and latching action

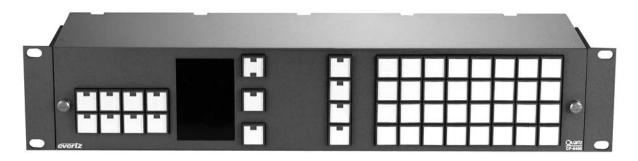

Size: (USE CORRECT SIZE/WEIGHT PER PANEL)

Depth: 3 1/2'

Depth: 3 1/2"

width:19" standard rack width

width:19" standard rack width

Height: 1RU standard rack height

Height: 2RU standard rack height

Dimensions:(435mm x 89mm x 45mm)

Dimensions:(435mm x 89mm x 89mm)

#### **▶** Specifications

Control:

Q-link to remote panels:  $75\Omega$  video cable 500m max. length

Serial RS232/422

D9 female (Optional):

(Joystick override): D9 male, TTL levels Ethernet: 10/100 Base T Ethernet:

RJ45 connector

Electrical

EMI/RFI:

Auto-ranging 100 - 240 Volts AC, Voltage:

50/60 Hz

30W Fuse Rating:

250 V, 1 amp, time delay ETL Listed, complies with EU safety Safety:

directives Complies with FCC Part 15 Class A

regulations

Complies with EU EMC directive

Weight:

Physical

1 RU Panels

2 RU Panels

1 RU Panels 3 lbs. (1.36 kg) 2 RU panels

4 lbs. (1.81 kg)

Temperature: 0 to 50° C (Operating)

#### **>>>**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-6400E Remote Display Panel, XY, keypad

Ordering Options CI-0003

RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

+87 Serial Interface & Protocol











## Remote Display Panel, Multi-Mode, 80 Button-per-source

The CP-6401E has 80 illuminated push buttons and is ideal for 64 input systems, needing selection of the source with a single button press.

Alternatively, it can be used as an XY panel for systems up to 32x32 using the WinSetup software.

#### ▶ Features & Benefits

- 15mm square buttons suitable for film legends with green LED illumination, uniform over whole legend surface
- · Buttons with high quality positive action
- · All panels are fully programmable to operate in a number of modes
- Split panels can be programmed in many ways, for instance, permitting two separate destinations to be controlled using two rows of source buttons
- · Buttons can be programmed for breakaways
- Program/Preview/Take mode can be programmed, emulating vision mixer operation, useful in transmission environments
- Optional Lock button protects against accidental or unauthorized selections
- · Camera joystick override on any eight inputs, with momentary or latching action



#### **▶**Specifications

#### Control:

Q-link to remote panels:  $75\Omega$  video cable 500m max. length D9 female

Serial RS232/422:

(Optional):

Parallel: D9 male, TTL levels (Joystick override):

10/100 Base T Ethernet:

RJ45 connector

Electrical

Auto-ranging 100 - 240 Volts AC, Voltage: 50/60 Hz

30W

Power: Fuse Rating: 250 V, 1 amp, time delay

ETL Listed, complies with EU safety Safety:

directives

EMI/RFI: Complies with FCC Part 15 Class A

regulations

Complies with EU EMC directive

Size: (USE CORRECT SIZE/WEIGHT PER PANEL)

1 RU Panels width:19" standard rack width Depth: 3 1/2"

Height: 1RU standard rack height

Dimensions:(435mm x 89mm x 45mm) width:19" standard rack width

Depth: 3 1/2"

Height: 2RU standard rack height

Dimensions:(435mm x 89mm x 89mm)

Weight:

2 RU Panels

1 RU Panels 3 lbs. (1.36 kg) 2 RU panels

4 lbs. (1.81 kg)

Temperature: 0 to 50° C (Operating)

#### **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-6401E Remote Display Panel, multi-mode, 80 button-per-source

Ordering Options

CI-0003 RS232/422 Interface

(Enables the serial port and is fitted inside the panel)

+S7 Serial Interface & Protocol

#### Remote Control Panels

A selection of multi-destination panels are available for the control of multiple sources to two, four, six or eight destinations. Up to eight levels of breakaway are supported. The LED displays give visible readout of the current source status. The large keypad and eight character names provide great flexibility to name sources and destinations in larger systems. Flexible architecture permits any key to be programmed to provide any function.

The CP-6408F also has a display mode where the preset window becomes the current destination and the source control panels windows are then each associated with up to eight levels.

#### ▶ Features & Benefits

- 24 button keypad
- Four different models, supporting two, four, six or eight destinations
- TAKE button for each destination
- · In use display for each destination for easy identification of status
- · Eight character names on high brightness green LED displays
- · Programmable display brightness
- · Up to eight levels of breakaway supported
- · All buttons are fully programmable for different functions

- · Preset and in use displays to help avoid false selections
- · Optional LOCK button protects against accidental or unauthorized selections
- Optional NEXT and LAST buttons to scan the available sources and destinations
- · Optional CHOP button for continuous toggle between sources, for line-up purposes
- · Camera joystick override on any eight inputs, with momentary and latching action



#### ▶ Specifications

Control:

Q-link to remote panels:  $75\Omega$  video cable 500m max. length

Serial RS232/422 (Optional):

D9 female Parallel

(Joystick override): D9 male, TTL levels

Ethernet: 10/100 Base T

RJ45 connector

Electrical

Auto-ranging 100 - 240 Volts AC, Voltage:

50/60 Hz 30W

Power: Fuse Rating: 250 V, 1 amp, time delay

Safety: ETL Listed, complies with EU safety

FMI/RFI Complies with FCC Part 15 Class A

regulations

Complies with EU EMC directive

#### Physical

Size: (USE CORRECT SIZE/WEIGHT PER PANEL)

1 RU Panels width:19" standard rack width

Depth: 3 1/2"

Height: 1RU standard rack height

Dimensions:(435mm x 89mm x 45mm)

width:19" standard rack width

Depth: 3 1/2"

Height: 2RU standard rack height

Dimensions: (435mm x 89mm x 89mm)

Weight: 1 RU Panels 2 RU panels

2 RU Panels

3 lbs. (1.36 kg) 4 lbs. (1.81 kg)

0 to 50° C (Operating) Temperature:

#### >>> Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-6402E Remote Panel, two destinations, keypad with displays CP-6404E Remote Panel, four destinations, keypad with displays CP-6406E Remote Panel, six destinations, keypad with displays CP-6408E Remote Panel, eight destinations, keypad with displays

#### Ordering Options

CI-0003 RS232/422 Interface

(Enables the serial port and is fitted internal to the panel)

+87 Serial Interface & Protocol



## System Controllers

The Quartz Parallel Interface is used to provide interfaces between Quartz routers and equipment requiring parallel rather than serial control e.g. Edit Controllers and custom control panels. The interface is a compact 1RU high 19" rack-mountable unit.

There are two models available supporting four or eight panel ports. The PI-1604A supports four ports and the PI-1608A eight. These units include a serial port as standard and optionally, on the PI-1608A, a second Q-Link and a second serial port.

A typical application of the Parallel Interface is to connect to custom control panels. All Quartz systems use serial communications between the matrix frames and the control panels via a single standard video coaxial cable, called the Q-Link. However, there are times when the standard panels will not fit into a desk or the buttons must be integrated into a common panel with the controls of third party equipment. The Quartz Parallel Interface is designed to meet this requirement


The other main application offers a low cost solution where several panels are needed in the same area. Here, variants of the front panels of standard panels CP-1601A and CP-1604 are used without their normal cases. They are connected to the Parallel Interface by multi-core or ribbon cable. This is especially useful in situations where space behind the panel mounting surface is strictly limited, for instance in horizontal desks where a standard panel limits knee room.

Each port has 16 lines with read/write capability. Each line can read a button push and/or drive a lamp or LED wired to the button in the traditional button-per-source fashion. Each port also carries power for illumination. Alternatively an external source of power may be used.


#### ▶ Features & Benefits

- · Supports custom button-per-source panels
- Supports XY panel operation
- Fully programmable to support for example destination 'hold down' mode (sometimes called two finger enable)
- Supports buttons with LED or 24V bulb status illumination
- · Reads GPI signals
- · Interfaces to VTR edit controllers with BCD or binary data format
- · Joystick override function is supported
- Drives external relavs
- Optional second Q-Link port on PI-1608A
- Serial port as standard, plus an optional second port on PI-1608A
- An optional local panel fits to the front of the PI-1604A
- Power supply provides 24V power for lamps or LEDs
- External Power Supply may be used to drive lamps, LEDs or relays

#### ▶PI-1604A Rear Panel



#### ▶PI-1608A Rear Panel



#### ▶ Specifications

Parallel Ports:

Input: < 0.8V for logic low

> 3.5V or open circuit for logic high Output Current sink: With internal power supply 50mA each output, 500mA total per unit.

With external power supply 75mA per output, +24V max

Output low Voltage: 1.0V typical

Control:

 $75\Omega$  video cable 500m max. length Q-link

Serial RS232/422:

Power:

Supply: 100-132V, 180-240V, 50/60Hz

Consumption: 15W

Physical:

Height: 1RU, 44mm Width: 19" rack mount 220mm

Depth: Weight: PI-1604 2.25ka PI-1608: 2.5kg

Connectors:

D25 female Four on PI-1604A Eight on PI-1608A

Operating Temp: 0-40°C

#### **>>>**Ordering Information

PI-1604A Parallel Interface, 4 ports - 1RU unit, each port supports 16 lines, used for custom panels or with CP-1601A-P or CP-3201-P. New A model supports an RS232/RS422 serial port

PI-1608A

Parallel Interface, 8 ports - 1RU unit, each port supports 16 lines, used for custom panels or with CP-1601A-P or CP-3201-P. New A model supports one Q-Link and one RS232/RS422 serial port as standard and a second port of each if optional CI-0004 fitted

Ordering Options

CI-0004

Multi Q-Link Card - Fits inside frame to add up to three Q-Link ports and one RS232/422 port. A jumper link selects RS232 or RS422. Works with later FU-0003 controllers only, contact factory for details. Connectors, D25 male (each), option - Used for connections to Parallel/Remote Interface

AK-0005

Control Panels

\*Please refer to the Control Panel section



System Controllers


All Quartz routers are equipped with at least one Q-Link port and one RS232/422 serial port as standard, and many have the option for more. Quartz has developed a range of serial interfaces and software protocols to connect to third party equipment such as automation systems, vision mixers, editors, under monitor displays and DVEs.

Plug-in Communication Interfaces, called CI-000x, which fit inside routers or control panels and can be supplied with the initial system or installed later.

#### CI-000x Serial Interfaces


CI-0001 RS232/422 Serial Interface Card

Enables a second serial port on routers equipped with a second D9 connector.

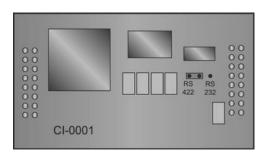

#### CI-0004 Multi Q-Link Card

Adds one more serial port plus three more Q-Link ports, depending on the number of physical ports fitted to the frame.

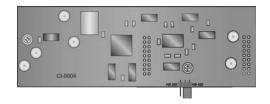

Stand-alone Interfaces, called SI-000x are 1RU rack-mount mains-powered units.

#### SI-000x Serial Interfaces

SI-0001 Serial Interface Adapter

Adds an extra RS232/422 serial port to a system when there are no spare ports available on the frame(s) or control panel(s). A 1RU rack mounting unit with a Q-Link port and integral power supply. Often used as a platform to handle a third party protocol.



#### SI-0004 Q-Link Isolator/Repeater

The SI-0004 provides an opto-isolated connection between two sections of Q-Link which eliminates the induced mains hum or earth loops, etc.



The SI-0004 also buffers the primary (incoming) Q-Link signal and passes it through an optically coupled interface to provide a fully isolated secondary Q-Link feed which can then handle a further 500m length of cable. In addition, an RS232/422 port is available on the secondary side of the interface, but this cannot be used at the same time as the secondary Q-Link. The unit fits in a 1RU frame with a single feed of AC power to provide DC power to both halves of the electrical isolated By connecting the RS232/422 port to standard third party fibre-optic interfaces it is possible to use two SI-0004 Isolator/Repeaters to extend the Q-Link messaging over very long distances.

In outside broadcast applications the internal Q-Link can be vulnerable to damage when taken outside the truck. The SI-0004 can be used to isolate and protect the internal section of the Q-link from faults on the external section.

#### ▶ Specifications

Connectivity:

Main Q-Link: SI-0001 x1, SI-0003 x1 Main RS232/422: SI-0001 x1 SI-0004 x1 isolated Extra Q-Links:

Or extra RS232/422: SI-0004 x1

Physical:

SI-0001 - 130mm, SI-0004-130mm Depth: Weight: SI-0001 - 1.25kg, SI-0004-1.25kg

#### Common to all:

Operating Temp.: 0-40°C 1RU, 44mm (1.75" nom.) Height:

Common to all: Supply:

100-132V, 180-240V, 50/60Hz Consumption:

#### **>>>**Ordering Information

CI-0001 RS232/422 Serial Interface Card RS232/422 Serial Card Mod CI-0001-1 CI-0003 RS232/422 Control Panel Serial Card CI-0004 Multi Q-Link Card

SI-0001 SI-0004 Serial Interface Adapter Q-Link Isolator/Repeater

Please specify the protocol required

The EQX Server represents the best in class technology for Modern Broadcast Facility Routing and Control. Built on solid, proven algorithms drawn from all industries, it provide a very flexible Router Control Solution capable of managing 10's of thousands of routes where they are packetized, TDM'd, or straight router crosspoints across single or multi-layer tieline routing.


All the while delivering on Hi-Availability and Reliability. Essential for mission critical broadcast environments.

#### ▶ Features & Benefits

- · Infinitaly configurable and flexible Element, and signal naming solution
- Multi-server clustered platform support
- Web based configuration
- · Direct Router Configuration
- · Main and Redundant ethernet networks
- Modeling Support for all Evertz Routing Platform
- Unlimited source/destination naming\*

- · Advanced path finding, multi-level costed tieline support
- Intuitive Control Panel Configuration
- Source and destination inclusions/exclusions
- Live reporting system tieline usage, hardware status and more
- Drag'n drop router hardware configuration



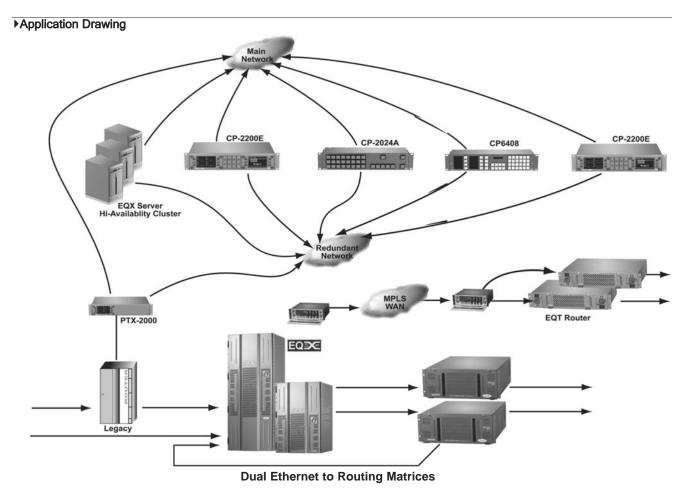

#### **>>>**Ordering Information

EQX Server EQX Server-R: Large Scale Facility Wide Router Control
Option allows the user to add +N number of redundant servers which
will automatically negotiate a new master in the event of a failure

Note: Computing hardware supplied by customer

\*This capability is not available on any other router control system. Call factory for further information

# 2RU Qlink Serial Ethernet Protocol Translation & 3rd Party Controller from Control System DCO

To facilitate interoperability with legacy 3rd party controllers, the EQX Server Solution offer the PTX-2000. Built on a robust RTOS system, the PTX-2000 allows for rapid addition and augmentation for third party support on a platform that can be tested under 1000's of scenarios to ensure robustness and stability.

The PTX2000 features a onboard LCD screen to allow for local status updates right from the front panel.

Together the EQX server and PTX-2000 enable you to build a robust, physically diverse system. Whether your system is all located in a single building, or across many campuses across many continents, the EQX SERVER solution provides the scalability and reliability to effectively design, commission, run and manage your present and future needs based on a superior flexible/scalable system architecture. A system that is simple for the EQX Server Solution to handle.





# ▶Specifications

Q-LINK:

Number: Connector: 4 single or 2 looped (jumper selectable)  $75\Omega$  video cable 500m max. length

Serial Ports:

Number of Ports: Connector: 4 RS-232/422



#### 1RU 8x8 and 16x16 RF Routers

The XRF1A is an RF signal routing matrix for L-Band and IF satellite communications signals. Housed in a compact 1RU chassis and available in 8x8 or 16x16 matrix sizes, the XRF1A is a full-featured routing matrix with automatic or manual gain control and RF power meters on each input channel, as well as optional LNB power supplies. Advanced capabilities, such as salvos allow multiple matrix path changes with the push of a button.


The XRF1A features a built-in local control panel and optional remote control panel for crosspoint control and system configuration. Additionally, this flexible routing matrix can be controlled, configured and monitored via serial control and/or SNMP control over Ethernet using Evertz® X-NCP2 panel, VistaLINK® or other third party control software.

The XRE1A is scalable to 16x16 (with the 8x8 model) or 32x32 (with the 16x16 model) by connecting multiple frames in conjunction with Evertz® SRF series passive RF splitters/combiners, which provide matrix expansion without compromising system reliability.

#### ▶ Features & Benefits

- Future proof with 40-2250MHz operation
- 70/140MHz IF, L-Band, stacked L-Band and off-air DTV all in one platform
- · Passes all modulation formats
- · Passcode protection for configuration parameters and destination locks
- Up to 8 programmable salvos
- · Built-in control panel option
- Internal redundant power supply option
- LNB power generation option with short circuit protection
- · Non-blocking, fan-out configuration
- · Automatic or manual gain control on all input channels

- External system expansion capability up to 32x32 using additional frames and Evertz® SRF series passive splitters/combiners
- · RF power monitoring on all input channels
- · Adjustable output level in AGC mode
- · Matrix crosspoint control using local control panel, X-NCP2 remote control panel, VistaLINK®, or 3rd party control software
- · System configuration, alarm monitoring, event logging, and email notification available through VistaLINK® or 3rd party control software

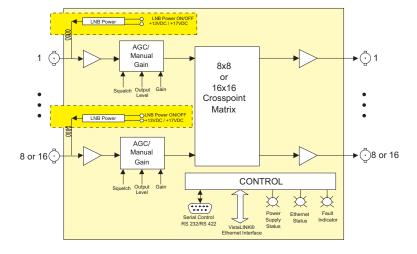

## ▶ Specifications

Matrix Sizes:

8x8 or 16x16

75 $\Omega$  (50 $\Omega$  BNC optional) Impedance: Connector Type: BNC per IEC 61169-8 Annex A

(F-type connector optional)

Gain Range (Manual):

-10 to +12dB in 1dB steps

-20 to -50dBm 40-2250MHz Output AGC Level: Bandwidth:

RF Specifications -L-Band (850 to 2250MHz\*):

Freq Response: ±1.5dB over bandwidth ±0.5dB over any 36MHz channel

> 60dB input to output

Isolation > 70dB output to output, and input to input

RF Input Power: -10 to -70dBm Max RF Output Power:

-10dBm

Noise Figure: 6dB (1500MHz, Gain = +12dB) typ 15dB (1500MHz, Gain = 0dB) typ

Return Loss: > 13dB (input), >15dB (output)

LNB Bias (-LNB Version):

+13VDC/+17VDC ±5% (selectable) Voltage: Max. Current: 400mA (overload protected)

RF Specifications - IF (40 to 200MHz\*): Frequency Response: ±0.5dB over 50-90MHz and 120-160MHz

> 60dB input to output

> 70dB output to output and input to input

RF Input Power: -15 to -70dBm

Max RF Output Power: -10dBm

Return Loss: > 13dB (input), > 15dB (output)

Communication and Control:

Serial: RS232/RS422 selectable Ethernet

SNMP over IEEE 802.3/U (10/100

BaseTx) RJ45 connector Control:

Local front panel, XNCP2 Network control panel, VistaLINK® or third party SNMP or serial interface

#### Electrical:

Max Power Consumption:

. Auto ranging 100 to 250 V AC, 50/60Hz AC Input: 40 Watts max. w/o LNB power option

175 Watts max. with LNB power option Connector IEC 60320 - 1 per power supply

Compliance:

Safety:

CSA Listed to CSA C22.2 No. 60065-03,

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

Directive 93/68/EEC

Complies with FCC part 15, Class A

Complies with EU EMC directive 89/336/EEC

Physical: Dimensions

EMC:

19"W x 1.75"H x 18.75"D (483mm x 45mm x 477mm) Approx. 9.5lbs. (4.3kg) with 2 power Weight:

supplies, -LNB version

\* All specifications over specified bandwidth unless noted

#### **▶▶▶**Ordering Information

(Sample Systems) Contact Evertz® sales for other matrix sizes up to 512x512

XRF1A-8x8 1RU 8x8 RF Router

1RU 8x8 RF Router with LNB power supply XRF1A-8x8-LNB 1RU 16x16 RF Router

XRF1A-16x16-LNB 1RU 16x16 RF Router with LNB power supply

PKGXRF1A-32x32 32x32 RF Routing System

**Ordering Options** 

Redundant power supply +2PS +LCP Local Control Panel

Contact Evertz<sup>®</sup> sales for 50Ω BNC and F-Type connector options

The XRF6 is a modular RF signal matrix for routing and monitoring L-band and IF signals within a satellite communications facility. Built on a modular architecture, all active components are hot-swappable and front-loading, ensuring ease of maintenance and matrix expansion. Advanced features such as automatic gain control, salvo operations, monitoring, and alarm reporting of critical signal parameters such as input signal presence and signal level provide flexible RF signal management.

The XRF6 is offered with the X-NCP2 remote control panel option for crosspoint control and system configuration. Additionally, this flexible routing matrix can be controlled, configured, and monitored via serial control and/or SNMP control over Ethernet, using Evertz® VistaLINK® or other monitoring and control software.


The XRF6L houses up to a 64x64 routing matrix within a 6RU chassis while the XRF6S houses up to 32x64 in a single 6RU chassis. Matrix sizes are scaleable in increments of 16 inputs and outputs. External expansion to 512x512 is available with the addition of multiple frames and Evertz® SRF series passive splitters/combiners. Input cards and output cards can be added independently for non-square matrix sizes. High reliability is ensured by low component count per signal path, optional dual power supplies, and redundant system controllers.



#### ▶ Features & Benefits

- Future proof with 40-2250MHz operation
- 70/140MHz IF, L-Band, stacked L-Band and off-air DTV all in one platform
- Passes all modulation formats
- · Modular design; all cards are front-loading and hot-swappable
- · Passcode protection for configuration parameters and destination locks
- Up to 8 programmable salvos
- External system expansion capability up to 512x512
- Redundant power supply and frame controller options
- Non-blocking, fan-out configuration

- · Automatic or manual gain control on all input channels
- RF power monitoring on all input channels
- Adjustable output level in AGC mode
- Matrix crosspoint control using card-edge interface, X-NCP2 remote control panel, VistaLINK®, or 3rd party control software
- System configuration, alarm monitoring, event logging, and email notification available through VistaLINK® or 3rd party control software

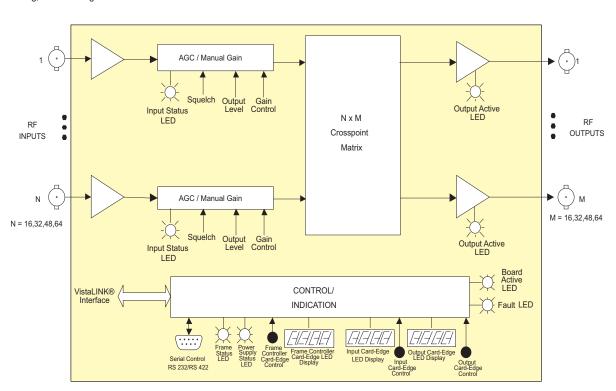









## 32x64, 64x64 RF Router

## **▶**Specifications

System: Matrix Sizes:

16x16 to 64x64 in a 6RU frame

512x512 maximum expanded system

System Expansion: Inputs or outputs are expandable in increments of 16

Expansion beyond 64x64 requires additional frames and external

splitting/combining  $75\Omega$  (50 $\Omega$  optional)

Impedance: Connector Type:

BNC per IEC 61169-8 Annex A (SMA, F-type optional) Gain Range (manual gain mode):

-6 to +20dB in 1dB steps Output AGC level: -20 to -50dBm 40 to 2250MHz Bandwidth:

L-Band (850 to 2250MHz\*): RF Specifications -

Freq Response: ±1.5dB over the passband ±0.5dB over any 36 MHz channel > 60dB input to output

Isolation: > 70dB output to output and input to

RF Input Power: -10 to -70dBm

Max RF Output Power:

-10dBm Innut P1dB

+2dBm (1500MHz) typ +12dBm (1500MHz) typ OIP3: Noise Figure:

6dB (1500MHz, Gain = +20dB) typ 20dB (1500MHz, Gain = 0dB) typ

Return Loss: > 15dB (input and output) RF Specifications - IF (40 to 200MHz\*): Frequency Response: ± 0.5dB over 50-90MHz and 120-60MHz

Isolation:

> 60dB input to output

> 70dB output to output and input to

RF Input Power: -15 to -70dBm Max RF Output Power:

-10dBm -4dBm (70MHz) typ Input P1dB: OIP3: +10dBm (70MHz) typ

Return Loss: > 13dB (input), > 15dB (output)

Communication & Control:

Serial: RS232/RS422 selectable - Female

9-pin D connector SNMP over IEEE 802.3/U (10/100

Ethernet: BaseTx) RJ45 connector

X-NCP2 Network Control Panel, VistaLINK®, or third party SNMP or

serial interface

Electrical:

Control:

AC Input: Max Power Auto ranging, 100 to 240V AC, 50/60Hz

350W (Fully loaded frame) Consumption: Connector: IEC 60320 - 1 per power supply Compliance:

Safety: CSA Listed to CSA C22.2 No. 60065-03,

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage Directive 93/68/EEC

Complies with FCC part 15, class A

Complies with EU EMC directive 89/336/EEC

Physical:

EMC:

10.5"H x 19"W x 20.5"D (266mm) x (483mm) x (520mm) Dimensions:

Module Capacity: 4 input slots, 4 output slots Weight:

Approx. 17.4lbs (7.9kg) with 2 power supplies, no slots occupied Approx. 32lbs (14.5kg) with 2 power

supplies all slots occupied

\* All specifications over specified bandwidth unless noted

#### >>> Ordering Information

(Base Systems) Contact Evertz® sales for other matrix sizes up to 512x512

16x16 RF Routing System 16x16 RF Routing System PKGXRF6L-16x16: PKGXRF6S-16x16:

Ordering Options XRF6-PS

Redundant power supply X-NCP2 Router control panel

XRF6L-FC Redundant frame controller for XRF6L XRF6S-FC Redundant frame controller for XRF6S


Contact Evertz® sales for  $50\Omega$  BNC, SMA and F-Type connector options



The X-3232-EO is a VistaLINK® -capable electrical/optical router for digital electrical or optical signals with rates up to 3Gb/s. It can accept signals on any of its 16 optical or 16 electrical inputs and route them to any number of its 16 optical or 16 electrical outputs. The X-3232-EO is ideal for signal regeneration, routing and wavelength management in your optical system. The optical outputs are available in 1310nm or CWDM wavelengths. The X-3232-EO is housed is a 2RU frame




#### ▶X-3232 Block Diagram

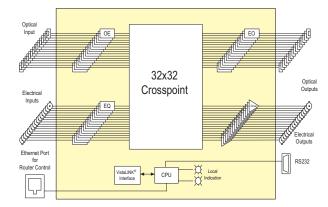

#### ▶ Features & Benefits

- 16 fiber optic inputs and outputs
- 16 coaxial inputs and outputs
- · Provides optical regeneration routing and wavelength management
- · Data rate independent to 3Gb/s
- · Handles Video, Audio, Datacom and Telecom signals
- · Fully non-blocking architecture
- · Broadcast mode capability (any input to any number of outputs)
- · Allows EO/OE conversion in one platform

- · Provides ADD, DROP and MUX capabilities
- · Accepts any input wavelength (1270nm to 1610nm)
- Outputs available with 1310nm or CWDM (ITU G.694.2)
- · SNMP monitoring and remote router control via model XNCP2 control panel or VistaLINK®
- · Compatible with single-mode or multi-mode fiber optic cable
- Compact 2RU size

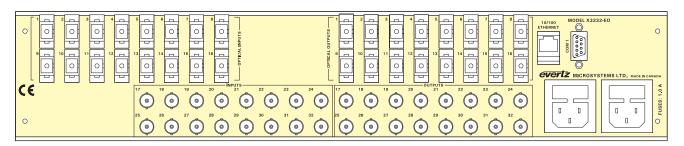

#### ▶ Specifications

Optical Input:

Number of Inputs: 16 Connector:

SC/PC, ST/PC, FC/PC Female housing

Operating Wavelength: 1270nm-1610nm

Maximum Input Power: -1dBm

Optical Sensitivity: -21dBm

#### Optical Output:

Number of Outputs: 16

Connector: SC/PC, ST/PC, FC/PC Female housing

Return Loss: Output Wavelength:

X-3232-EO13: 1310nm

X-3232-EOCWDM: 1270nm-1610nm (16 wavelengths,

20nm spacing)

Output Power:

X-3232-EO13: -7dBm X-3232-EOCWDM: 0dBm

#### Electrical Input:

Standard:

Any scrambled, 8b/10b or similarly encoded signal from 155Mb/s to

3.125Gb/s

Number of Inputs: 16

BNC per IEC 61169-8 Annex A Connector:

Return Loss: > 12dB

Signal Level: 800mV nominal

#### Electrical Output:

Standard:

Any scrambled, 8b/10b or similarly encoded signal from 155Mb/s to

3.125Gb/s

Number of Outputs: Connector: BNC per IEC 61169-8 Annex A

Return Loss: > 12dB 800mV nominal Signal Level: DC Offset: 0V ±0.5V

Communication and Control:
Serial: RS232/422, DB9 Male Ethernet: IEEE 802.3/U (10/100 BaseTx)

RJ45 connector

#### Compliance:

Electrical Safety: ETL Listed

Complies with CE Low voltage Directive Laser Safety Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive EMI/RFI:

#### Physical:

Dimensions: 19"W x 3.5"H x 18"D

(483mm W x 90mm H x 457mm D)

Weight: 8lbs (3.5kg)

#### Electrical: Voltage:

Auto-ranging 100-240V AC 50/60Hz 40 W Fuse Rating

250V, 1 amp time delay

## **>>>**Ordering Information

X-3232-EO13 32x32 Electrical/Optical Router with 16 1310nm optical and electrical X-3232-EOCWDM

32x32 Electrical/Optical Router with 16 CWDM (1270nm-1610nm)

optical and electrical outputs

**Ordering Options** 

Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Connector Suffix

+SC SC/PC +ST ST/PC +FC


The X-3232G Series is a VistaLINK® -capable cross-point matrix for routing DVI/RGBHV digital signals using the Evertz® Graphics Link protocol (G-LINK). The system is comprised of 3 elements. Input source devices which generate or convert baseband signals to G-LINK, Core Cross-point matrix for switching G-LINK signals, edge output devices for converting from G-LINK to DVI/RGBHV, or ingesting G-LINK directly.

Input devices include: Evertz® MVP® Multi-viewers, modular 7767VIP series, 1RU 9767VIP series multi-viewers, and 7707RGBT DVI/RGBHV to G-LINK converter. Output devices include: Evertz® MVP® with G-LINK inputs, VIP™ series with G-LINK inputs, 7707RGBR modular G-LINK to DVI/RGBHV converter, and 2430GDAC small form factor G-LINK to DVI/RGBHV converters.

The following versions of 2RU G-LINK router models are available:

X-1616G 16x16 G-LINK Router - 16 Electrical Inputs, 16 Electrical Outputs X-1616G-F 16x16 G-LINK Router - 16 Electrical Inputs, 16 Fiber Outputs X-3232G 32x32 G-LINK Router - 32 Electrical Inputs, 32 Electrical Outputs X-3216G-F 32x32 G-LINK Router - 32 Electrical Inputs, 16 Fiber Outputs


The G-LINK optical outputs are available at 1310nm. For applications requiring 32x32 optical inputs and outputs the X-3232G can be coupled with the 3000MWP-OE-5 and 3000MWP-EO-5 high density optical to electrical and electrical to optical converters house within the 3000FR.

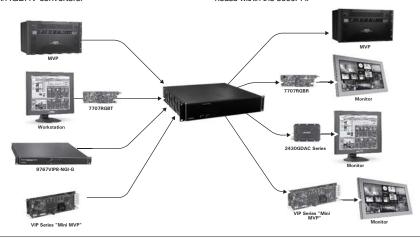

#### ▶ Features & Benefits

- · Fully non-blocking architecture
- Broadcast mode capability (any input to any number of outputs)
- Allows EO/OE conversion in one platform
- · Provides ADD, DROP and MUX capabilities

- SNMP monitoring and remote router control via model 9000NCP control panel
- · Compatible with single-mode or multi-mode fiber optic cable
- · Compact 2RU size

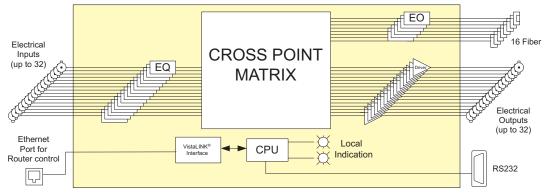

#### ▶ Specifications

Optical Input:

Number of Inputs: Up to 32 using 3000OE-5

Connector: SC/PC, ST/PC, FC/PC Female housing

Operating Wavelength: 1270nm-1610nm Maximum Input Power: -1dBm Optical Sensitivity: -18dBm

Optical Output:

Number of Outputs: Up to 16 native within the device,

expandable to 32 using 3000EO-5 SC/PC, ST/PC, FC/PC Female housing Connector:

> 14dB Return Loss:

Output Wavelength: 1310nm Output Power: -7dBm

Electrical Input:

Standard: G-LINK 8b/10b or similarly encoded

signal Number of Inputs: Up to 32 depending on configuration Connector: BNC per IEC 61169-8 Annex A

Return Loss: > 12dB

Signal Level 800mV nominal

Electrical Output:

G-LINK 8b/10b or similarly encoded Standard: signal

Number of Outputs: Up to to 32 depending on configuration

Connector: BNC per IEC 61169-8 Annex A Return Loss: > 12dB

Signal Level 800mV nominal DC Offset: 0V ±0.5V

Communication and Control:

RS232/422, DB9 Male Serial:

Ethernet: IEEE 802.3/U (10/100 BaseTx) RJ45

connector Physical:

19"W x 3.5"H x 18"D Dimensions: (483mm W x 90mm H x 457mm D)

Weight: 8lbs (3.5kg)

Electrical:

EMI/RFI:

Auto ranging 110 + 240 Volts AC, Voltage: 50/60Hz 40W

250 V, 1 amp time delay Fuse Rating:

ETL Listed, complies with EU safety Safety:

directives Laser Safety Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11 IEC 60825-1

Complies with FCC Part 15 Class A

regulations

Complies with EU EMC Directive

#### **▶** ► ► ► Ordering Information

16x16 G-LINK Router, 16 Electrical inputs, 16 Electrical outputs 16x16 G-LINK Router, 16 Electrical inputs, 16 Fiber outputs 32x32 G-LINK Router, 32 Electrical inputs, 32 Electrical outputs X-1616G X-1616G-F X-3216G-F 32x16 G-LINK Router, 32 Electrical inputs, 16 Fiber outputs

**Ordering Options** Fiber Connector must be specified at time of order (Eg: Model +SC)

Connector Suffix


SC/PC +ST ST/PC +FC FC/PC



The X-0808-OO & X-1616-OO are VistaLINK® -capable optical routers for digital optical signals with rates up to 3Gb/s. The X-0808-OO & X-1616-OO can accept signals on any of the 8 or 16 optical inputs and route them to any number of the 8 or 16 optical outputs. The X-0808-OO & X-1616-OO are ideal for signal regeneration, routing and wavelength management in any optical


The optical outputs are available in 1310nm or CWDM wavelengths. The X-0808-OO and X-1616-OO are housed in a 2RU frame.



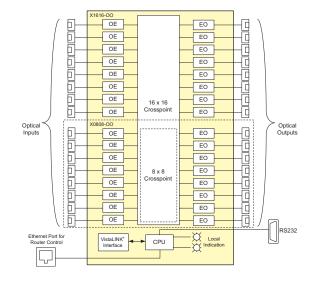

#### ▶ Features & Benefits

- · 8 or 16 fiber optic inputs and outputs
- · Provides optical regeneration (amplification, reshaping), routing and wavelength management
- Data rate independent to 3Gb/s
- · Handles Video, Audio, Datacom and Telecom signals
- · Fully non-blocking architecture
- · Broadcast mode capability (any input to any number of outputs)
- · Accepts any input wavelength (1270nm to 1610nm)
- Outputs available with 1310nm or CWDM (ITU G.694.2)
- SNMP monitoring and remote router control via Model XNCP2
- Compatible with single-mode or multi-mode fiber optic cable
- Compact 2RU size

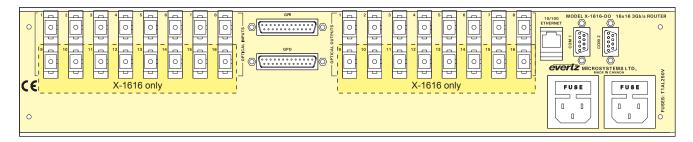

#### ▶ Specifications

Optical Input:

Number of Inputs: 8 (X-0808-OO), 16 (X-1616-OO) SC/PC, ST/PC, FC/PC Female housing Connector:

Operating Wavelength: 1270nm-1610nm

Maximum Input Power: -1dBm Optical Sensitivity: -18dBm

Optical Output:

Number of Outputs: 8 (X-0808-OO), 16 (X-1616-OO)
Connector: SC/PC, ST/PC, FC/PC Female housing

Return Loss: > 14dB Output Wavelength

1310nm Standard:

CWDM: 1270nm-1610nm (8 or 16 wavelengths,

20nm spacing)

Output Power:

-7dBm 1310nm: CWDM: 0dBm

#### Communication and Control:

RS232/422, DB9 Male Serial: IEEE 802.3/U (10/100 BaseTx) Ethernet:

RJ45 connector

Compliance:

Electrical Safety: ETL Listed

Complies with CE Low voltage Directive Laser Safety:

Class 1 laser product Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive EMI/RFI:

Physical:

Weight:

19"W x 3.5"H x 18"D Dimensions

(483mm W x 90mm H x 457mm D)

8lbs (3.5kg)

## >>> Ordering Information

X-0808-OO13 8x8 Optical Router with 8 1310nm optical outputs X-0808-OOCWDM 8x8 Optical Router with 8 CWDM (1470nm-1610nm) optical outputs 16x16 Optical Router with 16 1310nm optical outputs 16x16 Optical Router with 16 CWDM (1270nm-1610nm) optical outputs X-1616-0013 X-1616-OOCWDM

Ordering Options Fiber Connector must be specified at time of order

Electrical:

Fuse Rating:

Voltage:

Auto-ranging 100-240V AC 50/60Hz

250V, 1 amp time delay

Eg: Model +SC

Connector Suffix

+SC SC/PC +ST ST/PC FC/PC











The 7760AVM2 series of video and audio monitoring cards perform a number of quality control and monitoring functions associated with a modern high definition and standard definition serial digital television facility. They perform audio and ancillary data (for HD) or vertical blanking interval (VBI) data (for SDI) demultiplexing from the incoming digital video, analyze the data and display key information about the data on the output video. The outputs are either analog and/or digital video with analog or digital audio.

The 7760AVM2 series modules are available in SD-only versions (7760AVM2-A and 7760AVM2-B) and a combination HD/SD version (7760AVM2-HD).

The 7760AVM2 series modules can be ordered with a 7760AVM-BHP Bulkhead Breakout Panel. This panel is an accessory that provides a convenient way of connecting the audio and GPIO signals into the high-density DB-15 connectors on the rear of the modules. This panel is available for five or ten 7760AVM2s and includes 3ft cables to connect to the 7760AVM2 modules.

The 7760AVM2 series modules occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as Evertz® VistaLINK® PRO locally or remotely.

#### ▶ Features & Benefits


- One group (4 channels of audio) is demultiplexed from the incoming digital video and VU/PPM level Indicators are keyed as bar graphs in over the picture
- · 4 analog audio outputs available for content monitoring
- · Analog audio output levels are adjustable
- Analog audio outputs can be set so both are mono mix of the selected channel pair
- Decodes Line 21 XDS packets from SD signals and displays network name, call letters, program name and time of day
- Decodes Widescreen Signaling (WSS), Video Indexing, Active Format Description (AFD), subtitles, and teletext for monitoring
- Displays program rating (V-Chip)
- Decodes CEA-608 closed captions from SD signals and displays on screen
- Decodes vertical interval time code (VITC) from SD signals and "burns" the time code into the picture
- A comprehensive on-screen display is available to configure the various features of the module
- Flexible configuration of the text and audio bar graph information displays
- An extensive list of error conditions can be monitored and fault conditions can be configured from these conditions
- On-screen messages can be triggered by the configured fault conditions
- Two GPI inputs are available to modify the display characteristics
- GPO output to indicate user-definable fault conditions
- Audio and GPI/Os are available on a high density DB15 connector
- 7760AVM-BHP bulkhead panel is available to facilitate wiring to the high density DB15 connector (up to 10 AVM2 modules can be wired using each bulkhead panel)
- RS-232 Data logging port to log fault conditions
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

#### Features (7760AVM2-A and 7760AVM2-B versions only)

- One 270Mb/s SDI 525i/59.94 or 625i/50 video input
- · One re-clocked SDI video output
- One SDI video output with superimposed monitoring information (-B version only)
- Composite analog output video with superimposed monitoring information (-A version only)
- Decodes PESA format Source ID (8 characters) or Evertz® format VITC Source ID (5 or 9 characters) from SDI signals and burns the ID into the picture


#### Features (7760AVM2-HD version only)

- One auto sensing video input supports 1080i/60, 1080i/59.94, 1080i/50, 720p/60, 720p/59.94, 720p/50, 525i/59.94 or 625i/50
- · One re-clocked HD or SD video output (same as input)
- One HD or SD (same as input) video output with superimposed monitoring information
- Decodes SMPTE 12M-2 Ancillary time code (ATC) from HD signals or vertical interval time code (VITC) from SD signals and "burns" the time code into the picture
- Optionally decodes PESA format Source ID (8 characters) or Evertz® format VITC Source ID from SDI signals, or Evertz® format ATC Source ID from HD signals and burns the ID into the picture (with +SID option)
- Decodes CEA-708 closed captions from HD signals and displays on screen

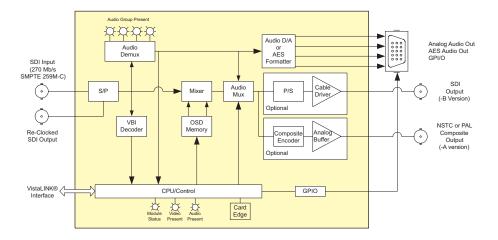















# 7760AVM2, 7760AVM2-HD

## HD/SD Video & Audio Monitoring / Conversion

## ▶Specifications

Serial Video Digital Input:

Auto detect or menu selectable SMPTE 292M (1.5Gb/s): 1080i/60,

1080i/59.94, 1080i/50, 720p/60, 720p/59.94 and 720p/50 - 7760AVM2-HD only SMPTE 259M-C (270Mb/s):

525i/59.94 or 625i/50

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Input Equalization: Automatic to 200m @ 270Mb/s with

Belden 8281 or equivalent cable Automatic to 115m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss:

SD Standards: > 15 dB up to 270Mb/s HD Standards: > 15 dB up to 1.5Gb/s

Serial Video Digital Output:

Standard: Same as input

Number of Outputs: 1 Reclocked (all models) 1 Monitored (7760AVM2-B and

7760AVM2-HD)

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time:

470ps nominal SD Standards: HD Standards: 200ps nominal < 10% of amplitude

Analog Video Output (7760AVM2-A only): Standard: NSTC, SMPTE 170M; PAL, ITU-R

BT.1700

Number of Outputs: 1

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal DC Offset: 0V ±0.1V Return Loss: > 35dB up to 5MHz Frequency Response: 0.8dB to 4MHz

Differential Phase: < 0.9° (< 0.6° typical) < 0.9% (< 0.5% typical) Differential Gain: SNR: > 56dB to 5MHz (shallow ramp)

Analog Audio Outputs:

Number of Outputs: 4

Balanced Analog Audio Female High Density DB-15 Connectors:

Output Impedance:  $33\Omega$ Sampling Frequency:

Signal Level: 0dB FS ⇒8 to 24dBu (user settable)

NOTE: High impedance loads only

Not good for low impedance loads (i.e.

600W) Frequency Response: 50Hz to 20kHz ±0.20dB

> 85dB (50Hz to 20kHz) THD+N 65dB @ 1kHz, 0dB FS, typical

**AES Audio Outputs:** Number of Outputs: 2

Standard:

SMPTE 276M compatible, single ended synchronous or asynchronous

AES

Connectors: High-density female DB-15

Resolution: 24 hits Sampling Rate: 48kHz Impedance: 75Ω unbalanced Audio Bar Graphs:

Number of Graphs: 4 (1 group)

AES/EBU, DIN, BBC and Nordic N9 Ballistics:

General Purpose Interface I/O (GPI/GPO):

Number of Inputs: 2 (behavior is assigned via on-screen menu items)

Number of Outputs: 1 (behavior is programmable via on-screen menu items)

Opto-isolated, active low with internal Type:

pull-ups to +5V

Connector: Female High Density DB-15

Signal Level: +5V nominal

Data Logging Serial Port: Standard: RS-232

Female High Density DB-15 Connector Baud Rate:

Format: 8-bits, no parity, 2 stop bits and no

flow control

Physical: Number of slots:

Electrical:

Voltage: +12V DC 12W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

## **>>>**Ordering Information

7760AVM2-A to B SDI Video & Audio Monitor/Conversion with On-Screen Display

(Single Slot) with Teletext subtitle decoder HD Video & Audio Monitoring

7760AVM2-HD **Ordering Options** 

Rear Plate must be specified at time of order

Eg: Model +3RU

+SID Source ID Decoder option for 7760AVM2-HD

Rear Plate Suffix

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU +SA Standalone Enclosure Rear Plate

7760AVM-BHP-10

7760AVM-BHP-5 Bulkhead Breakout panel for 5 AVMs includes 5 WPAVMIO-1-0-3F

Bulkhead Breakout panel for 10 AVMs includes 10 WPAVMIO-1-0-3F

VistaLINK® Frame Controller

7700FC 9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

Monitoring & Multi-Viewers - Discrete Channel Monitoring

# SDI Video & Audio Monitoring / Conversion (Without On-screen Display)

The 7760AVM-I ite Audio/Video Monitor provides a convenient and low cost solution for composite analog monitoring of a 270Mb/s serial digital video signal, and provides analog conversion of 1 group of embedded or external AES audio\*

The digital component video is converted to analog composite (NTSC/PAL-B). Closed captioning can be keyed onto the output composite video.

SMPTE 272M allows for up to four groups of AES audio (4 channels per group) to be embedded within a serial digital signal. The 7760AVM-Lite can de-multiplex one group and convert all 4 channels to low impedance balanced analog audio through 24-bit DACs. In addition, the same audio is available simultaneously as  $75\Omega$  unbalanced digital AES on the 7760 AVM-Lite A.


\*The 7760AVM-Lite B allows for monitoring of external or embedded AES audio but does not supply de-multiplexed AES audio out.

#### ▶ Features & Benefits

- 1 Reclocked SDI output
- Composite analog (NTSC/PAL-B) output
- 4 Balanced analog audio outputs
- · 2 AES digital audio outputs or inputs
- 1 General purpose output to indicate the loss of video and/or audio
- · Built-in closed caption decoder with on/off control via dip switch and GPI
- Audio group selection via card edge DIP switches
- · Selectable analog audio output levels
- · Audio channel swapping selection via card edge DIP switches
- · Selectable NTSC pedestal on/off

#### Card Edge LEDs

- Module Status
- · Local Fault
- Video Signal Presence
- Audio groups present in input video
- · Selected audio group presence

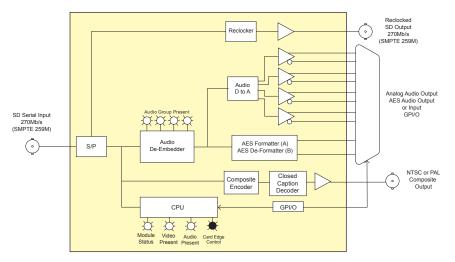





#### ▶ Specifications

#### Serial Video Input:

Standard: SMPTE 259M-C 525 or 625 line

component

BNC per IEC 61169-8 Annex A Connector: Automatic 200m @ 270 Mb/s with Equalization: Belden 8281 (or equivalent)

> 15dB up to 270Mb/s Return Loss:

#### Serial Video Output:

Standard: Same as input

BNC per IEC 61169-8 Annex A Connector

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time 470ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 270Mb/s

Wide Band Jitter: < 0.2 UI

#### **AES Audio Inputs:**

Number of Inputs: 2 on version B

SMPTE 276M, single ended AES Standard: Female High Density DB-15 Connectors:

Resolution: Sampling Rate: 48kHz 75Ω unbalanced Impedance:

#### **AES Audio Outputs:**

Number of Outputs: 2 on version A
Standard: SMPTE 276M, single ended AES

Connectors Female High Density DB-15

Resolution 48kHz

Sampling Rate: Impedance:  $75\Omega$  unbalanced

#### Analog Video Output:

NTSC, (SMPTE 170M) or PAL-B, Type:

(ITU 624-4)

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal DC Offset: 0V ±0.1V Return Loss: > 35dB up to 5MHz Frequency Resp: 0.8dB to 4MHz Differential Phase: < 0.9° (typical < 0.5%) Differential Gain: < 0.9% (typical < 0.5%) > 56dB to 5MHz (shallow ramp)

Processing Delay:

## Analog Audio Outputs:

Number of Outputs: 4

Balanced analog audio Type: Connector: Female High Density DB-15 Output Impedance:  $33\Omega$ 

Sampling Frequency: 48kHz

0dB FS => 20dBu, 22dBu, 24dBu Signal Level:

NOTE: High impedance loads only (> 10kΩ) Not good for low impedance loads

(i.e. 600Ω)

50Hz to 20kHz ±0.20dB Frequency Resp.: SNR: > 85dB (50Hz to 20kHz) THD+N 65dB @ 1kHz, 0dBFS, typical

Resolution: 24-bit

#### Electrical: Voltage:

+12V DC Power:

EMI/RFI:

Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of Slots:

#### **▶▶▶**Ordering Information

7760AVM-Lite (= A or B

X SDI Video & Audio Monitoring/Conversion

(A - AES Output), (B - AES Input)

**Ordering Options** 

Rear Plate must be specified at time of order

Eq: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure





+1RU Standalone Enclosure Rear Plate The 7760VMS-HD is a Video Monitoring tool for two 1.5Gb/s HDTV serial digital video signals. The 7760VMS-HD has a HDTV split-screen output from two input signals and also provides a monitoring downconverted split screen. The 7760VMS-HD accepts all the popular international SMPTE 292M video formats. This module is useful in mobile broadcast vehicles and broadcast plants to compare primary and secondary video feeds.

This 7700 series module provides 3 reclocked primary outputs and 1 reclocked secondary output. The 7760VMS-HD occupies two card slots in the 3RU frame which will hold up to 7 modules, or 1 slot in the 1RU frame which will hold up to 3

#### ▶ Features & Benefits

- Two Serial digital 1.5Gb/s HD inputs per SMPTE 292M
- 3 Reclocked DA outputs from input 1 and 1 Reclocked DA output from input 2
- Mixer takes left half of input 1 and right half of input 2 and keys them together to form the HD Program Output
- Monitoring downconverter for SDI monitoring of split signal
- · Occupies two card slots in the 3RU frame, which will hold up to 7 modules or the 1RU frame, which will hold up to three modules
- · Card edge LEDs indicate module health, video present
- Tally output on Frame Status bus upon loss of input signals
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

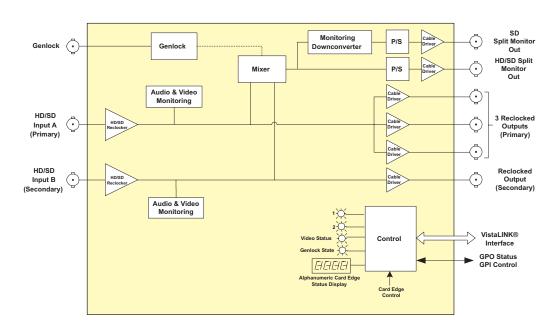

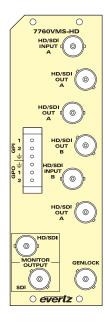

#### **▶**Specifications

Serial Video Inputs:

1.485Gb/s SMPTE 292M - auto-detects Standard:

standard SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M 2 BNC per IEC 61169-8 Annex A

Connector: Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: > 20dB up to 270MHz

> 12dB up to 1.5GHz

#### Reclocked Serial Video Outputs:

Standard: Same as input

Number of Outputs: 3 outputs from input A, 1 output from

input B, reclocked

BNC per IEC 61169-8 Annex A Connector: Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time 200ps nominal for HD Overshoot < 10% of amplitude > 20dB up to 270MHz, Return Loss

> 15dB at 1.5Gb/s Jitter: < 0.16 UI

#### Downconverted Serial Video Output:

SMPTE 259M-C (270Mb/s) Standard:

Number of Outputs:

BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal Overshoot:

< 10% of amplitude > 15dB at 270Mb/s Return Loss:

< 0.2 UI

#### Genlock Input:

NTSC or PAL Color Black 1V p-p Type: Connector: BNC per IEC 61169-8 Annex A Termination: High impedance or internal  $75\Omega$ 

termination (jumper selectable)

## **GPIO Control Port:**

Opto-isolated, active low with internal Type: pull-ups to +5 or +12V (jumper settable)

6 pins removable terminal block Connector:

Signal Level: Closure to ground

#### Electrical:

+12V DC Voltage:

14W EMI/RFI Complies with FCC regulations for

Class A devices

Complies with EU EMC directive

#### Physical:

7700 frame mounting: Number of slots: 7701 frame mounting: Number of slots:

#### **>>>**Ordering Information

7760VMS-HD **HD Video Monitoring Splitter Ordering Options** Rear Plate must be specified at time of order Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Accessories 7700FC 9000NCP 9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

# 7761AVM2-DC, 7761AVM2-SDC, 7761AVM2-SDC-S

# Dual Channel Video & Analog Audio Monitoring

The 7761AVM2-DC Dual Channel Composite Video & Analog Audio and 7761AVM2-SDC Dual S-Video & Analog Audio monitoring cards perform a number of video, audio and vertical blanking interval (VBI) data analysis, quality control and monitoring functions similar to that of the 7760AVM line of audio/video monitoring cards. Incoming composite analog video or S-video is analyzed and key information about the signal is displayed on the output video. Both 7761AVM2-DC and 7761AVM2-SDC cards have two independent, composite analog video outputs.


The 7761AVM2-DC and 7761AVM2-SDC are configurable both locally, through a card-edge push-button toggle with an on-screen display menu, and remotely through the SNMP communication channel - known as VistaLINK®.

VistaLINK® offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP), giving the flexibility to manage operations, including signal monitoring and module configuration, from SNMP capable control systems (Manager or NMS).

#### ▶ Features & Benefits

- Two independent, composite analog (NTSC/PAL) video inputs (7761AVM2-DC)
- Two independent, S-Video inputs (7761AVM2-SDC) for direct connection to satellite IRDs for improved picture display quality
- Dual S-video output version (coming soon)
- · One group (4 balanced audio inputs) per video input channel is analyzed and VU/PPM level indicators are keyed as bar graphs in over the video output
- Decodes vertical interval time code (VITC), VBI Source ID and Closed Captioning into the picture
- Provides peak video (Average Picture Level) and black level status and fault monitoring
- · A comprehensive on-screen display (OSD) is available to configure the various features of the module
- · Flexible configuration of the text and audio bar graph information displays
- · An extensive list of error conditions can be monitored and fault conditions can be configured from these conditions

- On-screen messages can be triggered by the configured fault conditions
- Two independent composite analog (NTSC/PAL) video outputs
- Video output "black-out" option while maintaining audio, video and data parameter monitoring
- Two GPI inputs per video input are available to modify the display characteristics
- · GPO output per video output is available to indicate user-definable fault
- · Audio and GPI/Os are available on a female DB-25 connector
- RS-232 data logging port to log fault conditions
- 7761AVM-DC-BHP-15 Bulkhead Breakout Panel is available to facilitate wiring to the DB-25 connector (Up to 15 7761AVM2-DC or 7761AVM2-SDC cards can be wired per 3RU bulkhead panel)
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C or 350FR frame with 7700FC VistaLINK® Frame Controller

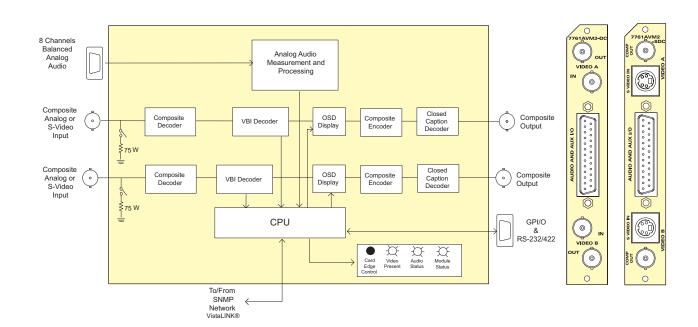



# 7761AVM2-DC, 7761AVM2-SDC, 7761AVM2-SDC-S

## Dual Channel Video & Analog Audio Monitoring

#### ▶Specifications

Analog Video Input:

NTSC (SMPTE 170M), PAL (ITU-R Standard:

BT. 1700)

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

1V nominal Signal Level: DC Offset: Input Impedance:  $75\Omega$ 

> 40dB up to 5MHz Return Loss:

S-Video Input (7761AVM2-SDC):

Number of Inputs:

IEC 933-5 (4-pin mini-DIN) Y: 1.0V p-p, C: 0.286V p-p Connector: Signal Level:

Input Impedance:

Analog Audio Input:

Number of Inputs: 8 (4 balanced inputs per video input

Female DB-25 Connector:

20kΩ minimum (differential) Input Impedance:

Sampling Frequency:48kHz Peak Signal and Common Mode Level

30dBu

Analog Video Output:

NTSC (SMPTE 170M) PAL (ITU-R Standard:

BT. 1700)

Number of Outputs: 2

Connector: BNC per IEC 61169-8 Annex A

1V nominal Signal Level: DC Offset: 0V ±0.1V

Return Loss: > 35dB up to 5MHz Frequency Response: 0.8dB to 4MHz Differential Phase: < 0.9°(< 0.6° typical) Differential Gain: < 0.9% (< 0.5% typical) SNR: > 56dB to 5MHz (shallow ramp)

Audio Bar Graphs:

Connector:

Number of Graphs: 4 (1 group) per video input channel, 2

Ballistics: DIN, BBC and Nordic N9

General Purpose In/Out:

Number of Inputs: 1 or 2 (configurable) per video input Number of Outputs: 1 or 2 (configurable) per video output Opto-isolated, active low with internal Type:

pull-ups to +5V Female DB-25

+5V nominal (high), 0V (low) Signal Level:

#### Data Logging Serial Port:

RS-232 Standard: Connector Female DB-25 Baud Rate:

Format: 8 bits, no parity, 2 stop bits and no flow control

Electrical:

+12V DC Voltage: 13W Power:

EMI/RFI: Complies with FCC Part 15 class A

EU EMC Directive

Physical:

Number of slots:

#### >>> Ordering Information

Dual Channel Video & Analog Audio Monitoring Dual S-Video & Analog Audio Monitoring

7761AVM2-SDC-S Dual S-Video & Analog Audio Monitoring with Dual S-Video Outputs

**Ordering Options** Rear Plate must be specified at time of order

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Accessories

7761AVM-BHP-15 Bulkhead Breakout Panel for 15x7761AVM-DC cards

(includes 15x3ft cables)

WA7761AVMBHP3F Breakout cable (3ft) for 7761AVM-DC models

7700FC VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

Enclosures

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR

Standalone enclosure









Monitoring & Multi-Viewers - Discrete Channel Monitoring

# BHP, MKT, AVM Series

#### **Breakout Panels**

Bulkhead Breakout Panels (BHP) provide a convenient way of connecting audio and auxiliary input and output signals to the VIPTM module. BHPs may be outfitted with BNCs and/or terminal strips, extending AES, GPI/O, Tx/Rx, Analog Audio and GND connections as described below.

BHPs occupy 1/2RU, 1RU or 2RU of rack space and are designed for mounting at the rear of the rack panel. BHPs are included with specific line item order options as defined below:


## ▶7760AVM-BHP-5 & 7760AVM-BHP-10

The 7760AVM-BHP Bulkhead Breakout Panel can be used to connect up to five or ten 7760AVM2 modules. Each of the ten sets of connectors on the breakout panel is fitted with two BNCs for audio in or out, two six position terminal strips for the 4 channels of analog audio, and one six position terminal strip for the GPI I/O and RS-232 signals.




#### ▶7761AVM-4A-BHP-7

The 7761AVM-4A-BHP Bulkhead Breakout Panel is available to facilitate wiring to the DB-25 connector. This 3RU panel allows for convenient audio, GPI/O and RS-232 connections for up to fifteen 7761AVM-DC modules.

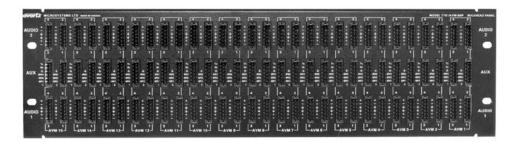

#### ▶7767BHP-AUX (included with every VIP4 or VIP12 module)

The 7767BHP-AUX is outfitted with eight terminal blocks and provides connectivity for GPI (20), GPI (8), LTC, serial RS-232/422 and one group AES outputs. The 7767BHP-AUX is included with every VIP4, VIP8 and VIP12 module.

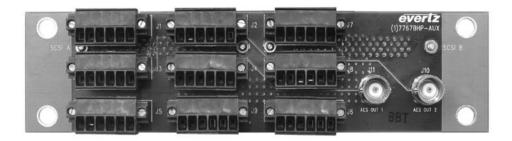

#### ▶7767BHP-BAUX (included with 7767VIP-AI-B)

The 7767BHP-BAUX provides terminal blocks for mappable balanced analog audio inputs to the VIP™ module. In addition, this breakout panel is also outfitted with the complete set of GPI (20), GPO (8), LTC differential inputs, serial ports (RS-232/RS-422) and one group AES outputs. It is possible to provide up to 4 unbalanced AES/EBU inputs per video input channel on the VIP™. This breakout panel replaces the 7767BHP-AUX.





#### ▶7767BHP-UAUX (included with 7767VIP-AI-U)

The 7767BHP-UAUX provides unbalanced AES/EBU inputs via BNCs to the VIP™ module. It is possible to provide up to 4 unbalanced AES/EBU inputs per video input channel on the VIP™. In addition, this breakout panel is also outfitted with the complete set of GPI(20), GPI (8), LTC differential inputs one serial port (RS-232/RS-422) and one group AES output. This breakout panel replaces the 7767BHP-AUX.



#### ▶3000MKT-AUX

For mounting convenience, a BHP mounting kit (3000MKT-AUX) is available with mounting hardware. It is shown in the picture above with two mounted AUX-BHPs.



## **▶** ▶ ▶ Ordering Information

7760AVM-BHP-5 Bulkhead Breakout Panel for 5x7760AVMs (includes 5x3ft cables) Bulkhead Breakout Panel for 10x7760AVMs (includes 10x3ft cables) Optional Cables: WPAVMIO-1-0-1F (1ft Adapter Cable) 7760AVM-BHP-10

WPAVMIO-1-0-3F (3ft Adapter Cable) WPAVMIO-1-0-6F (6ft Adapter Cable)

7761AVM-DC-BHP-15 Bulkhead Breakout Panel for 15x7761AVM-DCs (includes 15x3ft cables)

7767BHP-UAUX **Bulkhead Breakout Panel** 7767BHP-BAUX **Bulkhead Breakout Panel** 

7767VIP-AI-U Discrete unbalanced AES/EBU audio input (4 AES per video input)

support with breakout panel
Discrete balanced analog audio input support with breakout panel 7767VIP-AI-BAL 3000MKT-AUX

Dual BHP-AUX auxiliary GPI/O and serial break-out panel rad

mounting kit

Note: If additional breakout panels are required, contact factory for ordering information.

















The 7700FR-C, 7701FR & S7701FR Multiframes are ideal solutions to today's vast digital video and audio processing and distribution requirements. They provide flexibility to handle the high-speed requirements of HDTV as well as Analog and SDTV. The Multiframes support extraction of the modules from the front without compromising performance even at 1.5Gb/s. Hot extraction is supported on various types of interfaces including VIDEO, AUDIO and FIBER.

The 7700FR-C Multiframes are 3RU frames designed to house up to 15 single slot modules, the 7701FR Multiframe is a 1RU frame designed to house up to 3 single or dual slot modules both in various combinations and configurations, and the S7701FR Multiframe is a single frame designed to house 1 single slot module or dual slot module.





S7701FR with Rackmount Tray

#### Features & Benefits

- · Power supply and cooling fan are front extractable
- Houses up to 15 front loading processing modules with I/O for the 7700FR-C and 3 for the 7701FR
- · Each slot has individually configurable inputs and outputs
- Monitoring window for verifying modules status and power supply status
- 7700FR-C can house a 7700FC VistaLINK® Frame Controller in slot 1 which will allow for remote control and monitoring of VistaLINK® -capable products via SNMP over TCP/IP
- Frame status contact closure/open on power supply failure, fan failures and user-selectable module alarms
- · High-speed bussing and control system provided for modular applications
- · A relay based contact closure is provided with common, ground, normally open and normally closed contacts
- · No recabling required when hot swapping modules
- Optional redundant power supply for the 3RU 7700FR-C and 1RU 7701FR
- 7700FR-C may be ordered with 48V DC power supplies

#### Single Module Standalone Enclosure

- Powered by an external 12V DC adapter (included)
- · Supports both single slot and dual slot modules
- Optional rack mount panel mounts 3 S7701FR enclosures in 1RU rack space

#### ▶ Specifications

## Electrical:

Power Supply Configuration:

7700FR-C Dual, redundant, separate AC inlets 7700FR-C-48VDC: Dual, redundant, separate DC inlets on terminal strips

7701FR: Standard single, optional external

redundant

S7701FR: External power supply adapter

Voltage: 7700FR-C:

Auto ranging, 100 to 240V AC, 50/60Hz 36V to 60V DC

7700FR-C-48VDC:

Auto ranging, 100 to 240V AC, 50/60Hz S7701FR: 12V DC Nominal

Auto ranging, 100 to 240V AC power

adapter included

Maximum Operating Current:

2.9A (@120V AC), 1.8A (@240V AC) 7700FR-C:

7700FR-C-48VDC: 5.2A (@48V DC)

Maximum Power Consumption:

250W 7700FR: 7700FR-C-48VDC: 250W 7701FR 100W S7701FR:

#### Maximum Module Load: 7700FR:

200W (13.3W per slot) 7700FR-C48VDC: 200W (13.3W per slot) 7701FR: 80W (26W per slot)

7700FR-C: 4 amp, 250V time delay 5x20mm - line and neutral 7700FR-C-48VDC: 10 amp, 250V time delay 5x20mm 7701FR: 2 amp, 250V time delay 5x20mm - line and neutra

S7701FR: Internal self resetting fuse

Certification:

CSA Listed Safety

Complies with EU Safety Directive FMC: Complies with FCC part 15, Class A Complies with EU EMC Directives

#### Front Panel Indicators

PSU status LED, Local Error/Failure Tally Output: 4-pin terminal, relay N/O, N/C for

status/fault alarm

Physical: 7700FR-C:

19"W x 5.25"H x 14.5"D (483mm W x 133mm H x 368mm D)

7700FR-C-48VDC: 19"W x 5.25"H x 14.5"D

(483mm W x 133mm H x 368mm D)

7701FR 19"W x 1 75"H x 14 5"D (483mm W x 45mm H x 368mm D)

S7701FR: 5"W x 1.75"H x 14.5"D

(127mm W x 45mm H x 368mm D)

Temperature: 0-40°C

Module Capacity: 7700FR-0

15 single slot modules 7700FR-C-48VDC: 15 single slot modules 3 single or dual slot modules S7701FR: 1 single or dual slot module

Weight:

7700FR-C: 32lbs (14.5kg) Full

17.4lbs (8kg) Empty 32lbs (14.5kg) Full 7700FR-C-48VDC: 17.4lbs (8kg) Empty 10lbs (4.5kg) Full 7701FR:

7lbs (3.1kg) Empty S7701FR: 1.3lbs (.58kg)

#### >>> Ordering Information

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules with AC

7700FR-CR 3RU Multiframe which holds up to 15 single slot modules without

power supply 7700FR-C-48VDC 3RU Multiframe which holds up to 15 single slot modules with 48DC

7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone frame which holds 1 single slot or 1 dual slot module with

S7702FR Standalone frame which holds 1-3 slot module with power supply

#### Ordering Options and Accessories for 7700FR-C & 7700FR-C-48-VDC Frames

Redundant power supply for 7700FR-C +48PS Redundant power supply for 7700FR-C-48V DC 7700PS Additional power supply for 7700FR

7700PS-48VDC 7700RS-15

Additional power supply for 7700FR-C-48V DC Rear support kit 15" for 7700 Frame

For 7701FR Frame

+PSX

Optional external redundant power supply for 7701FR when ordered

7701PSX Optional external power supply for 7701FR for existing hardware

Internal power supply for 7701FR (replacement or spare orders only) 7701PS

For S7701FR Frame

S7701P

Rear connector plate for Standalone frame (price applies when ordered separately; discounted when ordered with module) S7701FR-RP Rackmount panel mounts 3XS7701FR enclosures in 1RU rack space

Note: Some 7700 series modules cannot be accommodated in the 1RU standalone enclosure. See individual product brochure or contact factory

The 7700R-SC System Controller handles the management of the routers as well as providing additional redundancy features. With its Ethernet networking and comprehensive interface connections the 7700R-SC provides an expandable platform to manage future communication and interface requirements for very large routing systems.

The 7700R-SC is a 2 slot module and fits within the 7700FR 3RU frame. By using a real-time operating system the 7700R-SC has been specifically designed to avoid slow operation and slow boot-up time normally associated with PC based solutions.

SNMP monitoring support via VLPRO, along with with Ethernet connectivity to WinSetup allow efficient monitoring and configuration of the 7700R-SC system controller.


#### ▶ Features & Benefits

- Single controller module, or two for redundancy, with automatic and manual changeover. Supports hot swap and changeover with total transparency
- Fast boot-up time
- Panels can be re-configured without disturbing the rest of the system
- · NVRAM for crosspoint status storage
- Four Q-Link ports as standard, allows for small groups of panels on each link providing protection against one link being damaged and maintaining high speed
- · Four serial ports as standard

- · Ability to change the Q-Links from 4 single ports to 2 looped ports by jumper selection
- · WinSetup can be used to configure for RS232 or RS422 and choose the protocol type on a port-by-port basis
- Ethernet port supporting TCP/IP protocol for configuration file downloading and router control. A separate port for each controller connects providing the ultimate in protection if one controller fails
- · Fully supports Quartz WinSetup and WinControl software
- Support of the SNMP remote monitoring protocol

| Supported 3rd Party Router Protocols |
|--------------------------------------|
| Quartz                               |
| Evertz® MVP®                         |
| Evertz® VistaLINK® PRO               |
| Pro-Bel                              |
| Omnibus                              |
| Grass Valley                         |
| Thomson                              |
| Sony                                 |
| Philips                              |
| Leitch                               |
| Snell & Wilcox                       |
| Utah Scientific                      |
| VikinX                               |
| TSL                                  |
| Nvision                              |
| BTS                                  |
| Pesa                                 |
| Ensemble                             |

| Supported 3rd Party Automation Protocols |
|--|
| BFE Studio and Medien Systeme GmbH       |
| Broadcast Solutions GmbH                 |
| Crispin                                  |
| DNF Controls                             |
| EVS Broadcast Equipment                  |
| Florical                                 |
| Grass Valley                             |
| Harris Broadcast Comm Division           |
| Novus                                    |
| OmniBus Systems Limited                  |
| Pro-Bel                                  |
| Philips                                  |
| Siemens                                  |
| Sundance                                 |
| Tanderg Television                       |



### ▶Specifications

Q-LINK: Number

4 single or 2 looped (jumper selectable) Connector:  $75\Omega$  video cable 500m max. length

Serial Ports:

Number of Ports: 4 RS-232/422 Connector: DB25

#### **▶▶▶** Ordering Information

Each System Controller ships with a single processor and power supply as standard

7700R-SC System Controller, single processor



Controller provides a 10Base-T/100Base-TX Ethernet port, and communication is facilitated through the use of Simple Network Management Protocol (SNMP).

The 7700FC VistaLINK® Frame Controller handles all SNMP communications between the frame (7700FR-C) and the network manager (NMS), and serves as a gateway to individual cards in the frame. The 7700FC VistaLINK® Frame Controller also provides an RS-232 serial port interface for customer configurations.


#### ▶ Features & Benefits

• Complies with IEEE 802.3 100Base-TX and 10Base-T Ethernet standards

The 7700FC VistaLINK® Frame Controller card provides a single point of access to

communicate with VistaLINK® -capable modules. The 7700FC VistaLINK® Frame

- 100Mb/s Fast Ethernet or 10Mb/s Ethernet data transfer, selected by auto-negotiation
- Full-duplex or half-duplex operation, selected by auto-negotiation
- RJ-45 connector for network cable connection
- RS-232 serial control port for configuration
- · Card edge LEDs indicate module fault, microprocessor state, activity and link status
- · Rear panel LEDs indicate Ethernet link, activity and speed
- · Supports "ftp" upgrades for frame-wide firmware upgrades (product specific)
- Includes VistaLINK® PRO (VLPRO-C) module software configuration tool
- Provides frame/chassis status information through VistaLINK® including power supply status, frame status, card insertion/removal counters, 7700FC software version number and LED control

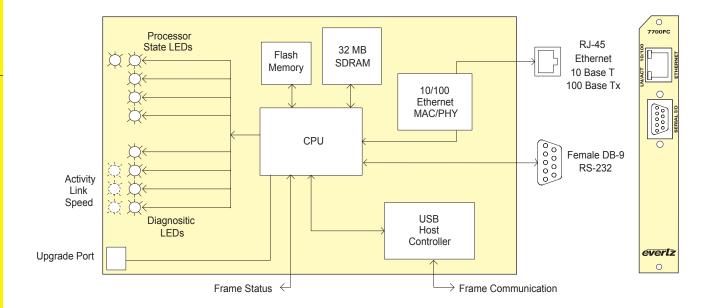

## ▶ Specifications

Ethernet:

Connector:

Network Type:

Fast Ethernet 100 Base-TX IEEE 802.3u standard for 100Mb/s baseband CSMA/CD local area

network

Ethernet 10 Base-T IEEE 802.3 standard for 10Mb/s baseband CSMA/CD local area network

RJ-45

Serial I/O:

Standard: RS-232 Female DB-9 Connector

57,600 Baud Rate:

Format: 8 bits, no parity, 2 stop bits, no flow

control

Electrical: Voltage:

+12V DC 7W

Power: EMI/RFI: Complies with FCC Part 15. Class A

EU EMC directive

#### **>>>**Ordering Information

VistaLINK® Frame Controller **Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Ea: Model +SC +3RU

Rear Plate Suffix

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Number of slots:

Physical:



3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules



## VistaLINK® General Purpose Interface Module

The 7700GPI VistaLINK® General Purpose Interface module links third-party equipment and Evertz® VistaLINK® Network Management System (NMS). Thirdparty equipment with fault alarming capabilities through General Purpose Interface outputs (GPOs) can communicate fault alarm conditions to the VistaLINK® application software through this GPO to SNMP translator, thereby extending fault monitoring capabilities across the broadcast network.


Equipped with a Linear Time Code (LTC) input, the 7700GPI module can synchronize logged fault alarms within the VistaLINK® application software with the facility clock for accurate alarm acknowledgement and record-keeping. In addition, it is possible to label each GPI input for easier notification. The label follows the fault message (trap) through to the VistaLINK® PRO server and onto email/pager notifications (if enabled).

The GPI module is also equipped with three NC/NO GPI outputs (GPO) and can be utilized to relay a "message" from the VistaLINK® system to connected gear. Configuration changes or additional fault alarming are possible through this

VistaLINK® offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP) giving the flexibility to manage operations, including signal monitoring and module configuration from SNMPcapable control systems (Manager or NMS).

#### ▶ Features & Benefits

- 20 opto-isolated General Purpose Interface inputs (GPI)
- · Enabled GPI inputs/alerts translated and reported to Network Management System (NMS) user interface via SNMP
- Selectable +5V or +12V supply for driving GPI over longer cable runs
- 3 relay closure General Purpose Interface outputs (GPO)
- GPI/GPO easily accessed through pin-headers (2x6 Phoenix Terminal Blocks) on rear plate
- 1 LTC input for module synchronization of fault alarms to facility time
- Modular, conveniently fits into 7700FR-C 3RU frame
- · Module status LED and 20 GPI LEDs for simple GPI input diagnostics
- · Frame status trigger
- Jumper-configurable RS-232/RS-422 input serial COM port for serial protocol interface translation
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C or 350FR frame with 7700FC VistaLINK® Frame Controller

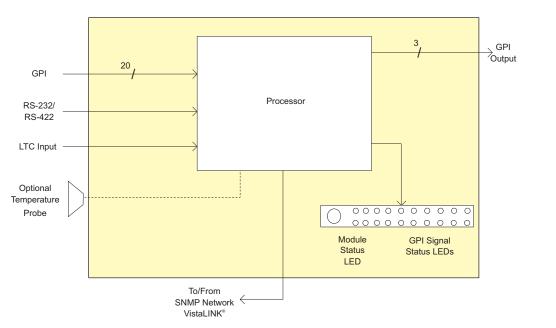



#### ▶Specifications

#### General Purpose Interface Input:

Number of Inputs: 20

Opto-isolated, active low with jumper Type:

selectable +5V or +12V supplied

Phoenix Terminal Block (2x6) Connector: Signal Level: Jumper selectable +5V or +12V

## General Purpose Interface Output:

Number of Outputs: 3

"Dry Contact" relay closure Type: 2 pins per output on Phoenix Connector Terminal Block (2x6)

Signal Level: Normally closed and normally open LTC Input:

Number of Inputs: 1 (± pair) Type: Balanced

Level: 100mV p-p

Connector: Phoenix Terminal Block pins (2x6)

#### Data Input Serial Port:

Number of Ports: 1 RS-232 or 1 RS-422 (jumper

selectable)

Connector: Phoenix Terminal Block pins (2x6) Baud Rate:

Up to 1Mbaud

Electrical: Voltage:

+12V DC 6W Power:

EMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

#### Physical:

Number of slots 1

#### **>>>**Ordering Information

7700GPI VistaLINK® General Purpose Interface Module Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe **Enclosures** 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules



#### Universal Protocol Translator

The 7700PTX Universal Protocol Translator module provides the ability for Evertz<sup>®</sup> VistaLINK® and MVP® software to interface directly to third party UMD devices and

The 7700PTX communicates with the router and UMD protocols either via one of four serial ports or using a built in Ethernet port. All ports - both serial and Ethernet - are bi-directional allowing the device complete flexibility for communication. The 7700PTX is equipped with 20 general purpose inputs and 8 general purpose outputs that can be used to connect to third party devices for the purpose of alarming or tally. A single LTC port allows the 7700PTX to connect to external time of day references.

The following protocols are supported by the specified version of 7700PTX card: 7700PTX-MVP Image Video, TSL, Leitch UDT5700, and GPI/O protocol support

7700PTX-SX Miranda PressMaster protocol support 7700PTX-XY Leitch XY Integrator protocol support

7700PTX-CTP Contribution Tally Protocol support (GVG Switcher, Ross

Switcher)

7700PTX-10XL GVG 10XL protocol support for router control 7700PTX-D28 Datatek D2800 protocol support for router control 7700PTX-D20 Datatek D2000 protocol support for router control 7700PTX-RCL Router Control Language protocol (GVG Encore) for router

7700PTX-NV Nvision router and server protocol support for router control 7700PTX-VMSI VMSI protocol support (GVG Jupiter) for router control Andromeda UMD/tally protocol support (GVG ASCII plus) 7700PTX-AP 7700PTX-PESA Pesa CPU link protocol No. 1 support for router control 7700PTX-QUTZ Quartz router switcher remote control protocol type 1 support

for router control


7700PTX-PB Pro-Bel UMD interface supports SW-P-04 (UMD) & SW-P-06

(Encapsulation)

7700PTX-MVS Sony MVS series switcher interface for tally 7700PTX-STP Sony DVS series switcher interface for tally Note: For other protocols not listed here please contact the factory

#### ▶ Features & Benefits

- · 4 serial ports RS232/422 selectable
- 20 opto-isolated General Purpose inputs (GPI)
- Selectable +5V or +12V supply for driving GPI over longer cable runs
- 8 relay closure General Purpose Interface outputs (GPO)
- GPI/GPO easily accessed through pin-headers (2x6 Phoenix Terminal Blocks) on rear plate
- 1 LTC input for module synchronization of fault alarms to facility time (feature not available at time of printing)
- Modular, conveniently fits into 7700FR-C 3RU frame
- · Module status LED and 20 GPI LEDs for simple GPI input diagnostics
- · Frame status trigger
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO)

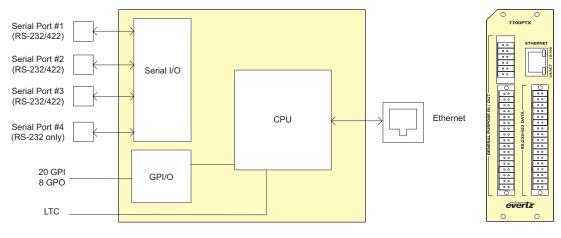

## ▶ Specifications

## General Purpose Interface Input:

Number of Inputs:

Opto-isolated, active low with jumper Type

selectable +5V or +12V supplied

voltage

Phoenix Terminal Block Connector:

Signal Level: Jumper selectable +5V or +12V

#### General Purpose Interface Output:

Number of Outputs: 8

Type: "Dry Contact" relay closure Connector 2 pins per output on Phoenix

Terminal Block Signal Level: Normally closed and normally open LTC Input:

Number of Inputs: 1 (± pair) Balanced Type:

0.2 to 4V p-p balanced or unbalanced Level:

Connector: Phoenix Terminal Block pins

#### Data Input Serial Port:

4 RS-232 or 3 RS-422 Number of Ports: Connector: Phoenix Terminal Block pins

Baud Rate Up to 1Mbaud Electrical:

Voltage: +12V DC Power: < 6W

ETL Listed, complies with EU safety Safety:

directives

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots: 2

#### >>> Ordering Information

7700PTX-MVF PTX which drives UMDs 7700PTX-SX PTX which interfaces with Miranda Press Station 7700PTX-XY PTX which interfaces with Leitch-XY integrator 7700PTX-CTP PTX which interfaces with Ross switcher 7700PTX-10XL PTX which controls 10XL-based routers 7700PTX-D28 PTX which controls Datatek D-2800 based router 7700PTX-D20 PTX which controls Datatek D-2000 based router 7700PTX-RCL PTX which controls GVC RCL based router PTX which controls NVISION based router 7700PTX-NV 7700PTX-VMSI PTS which controls VMSI based router 7700PTX-AP PTX which controls UMD/tally based router 7700PTX-PESA PTX which controls Pesa protocol based router 7700PTS-QUTZ PTX which controls Quartz based router

7700PTX-PB Pro-Bel UMD interface supports SW-P-04 (UMD) & SW-P-06 (Encapsulation)

7700PTX-MVS Sony MVS series switcher interface for tally 7700PTX-STP Sony DVS series switcher interface for tally Note: For other protocols not listed here please contact the factory.

Rear Plate must be specified at time of order Ordering Options

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate +SA

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

## VistaLINK® Third Party Interface Modules

The 7700TPI VistaLINK® module links third-party equipment and Evertz® VistaLINK® Network Management System (NMS). Third-party equipment with fault alarming capabilities via General Purpose Outputs (GPO), serial RS-232/422/485 connection, or Ethernet can communicate fault alarm conditions to the VistaLINK® application software through the 7700TPI to SNMP translator, thereby extending fault monitoring capabilities across the broadcast network.

The 7700TPI comes equipped with 4 RS-232/422/485 serial ports and 1, 10/100Mb Ethernet port. These ports can also be utilized to communicate and provide remote control to third-party equipment.


The 7700TPI module is also equipped with 8 General Purpose Outputs (GPO) and can be utilized to relay a state level from the VistaLINK® system to connected gear. Configuration changes or additional fault alarming are also possible through this


The 7700TPI module fits conveniently into Evertz® universally installed 7700FR-C frame and provides a cost-effective and space-efficient third-party interface (TPI) solution.

VistaLINK® offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP) giving the flexibility to manage operations, including signal monitoring and module configuration from SNMP -capable control systems (Manager or NMS).

#### ▶ Features & Benefits

- 20 opto-isolated General Purpose Inputs (GPI)
- Enabled GPI alerts translated and reported to Network Management System (NMS) user interface via SNMP
- Selectable +5V or +12V supply for driving GPI over longer cable runs
- 8 relay closure General Purpose Outputs (GPO)
- 4 serial ports RS-232/422 selectable
- GPI/GPO/Serial connections easily accessed through pin-headers (Phoenix Terminal Blocks) on rear plate
- Modular, conveniently fits into 7700FR-C 3RU frame
- · Module status LED and simple GPI input diagnostics
- Frame status trigger
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C or 350FR frame with 7700FC VistaLINK® Frame Controller

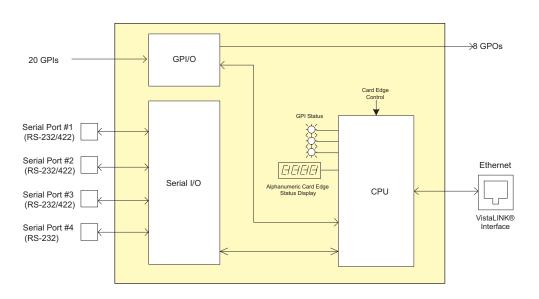

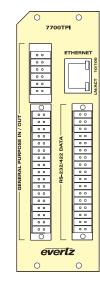

### ▶Specifications

General Purpose Inputs: Number of Inputs:

Type: Opto-isolated, active low with jumper

selectable +5V or +12V supplied

voltage Phoenix Terminal Block Connector:

Signal Level: Jumper selectable +5V or +12V

General Purpose Outputs: Number of Outputs: 8

"Dry Contact" relay closure Type:

Connector 2 pins per output on Phoenix

Terminal Block

Signal Level: Normally Closed and Normally Open Data Input Serial Port:

4 RS-232 or 3 RS-422 Number of Ports: Connector: Phoenix Terminal Block pins Baud Rate: User selectable, up to 115,200 bps

Electrical:

+12V DC Voltage:

Power: < 6W Safety:

ETL Listed, complies with EU safety directives

Complies with FCC Part 15, Class A EMI/RFI: EU EMC Directive

Physical: Number of slots

## **>>>**Ordering Information

VistaLINK® Third Party Interface 7700TPI-TRI2CD1 Emergency Alert System Trilithic to CODI Protocol Translator

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules

















The 1RU 9000NCP VistaLINK® Network Control Panel (NCP) is a low-powered, rack mounted control panel interfacing to VistaLINK® -capable frames and modules, allowing for real-time selection and configuration control of enabled parameters.


The 9000NCP connects to the network via Ethernet and communicates via Simple Network Management Protocol (SNMP).

In its simplest network configuration, the 9000NCP can be directly connected to a single frame's 7700FC VistaLINK® Frame Controller via a cross-over network cable.

The 9000NCP is used to control a subset of an enabled module's full parameter set. Specifically "proc amp" functions such as video & audio level adjustments and gain control are adjustable through the 9000NCP.

## ▶ Features & Benefits

- · Low power, rack-mountable and compact 1RU control panel
- Single, 4-line, 24 alphanumeric digit per line vacuum fluorescent display (VFD) featuring very high brightness and widest viewing angles
- 16 (8+Shift Key) illuminated, tactile and full-size quick-access pushbuttons with position and selector rotary control (shaft encoder)
- Built-in Simple Network Management Protocol (SNMP) communication interface over Ethernet connection
- Operational configuration control of key VistaLINK® -capable product parameters (visit www.Evertz®.com for updated list of modules and parameters)
- Quick access preset button, frame and card labels, and configuration privileges control available via VistaLINK®

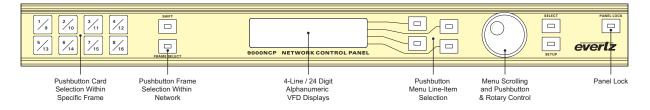

#### ▶ Specifications

## Serial I/O (COM1):

Ethernet Input/Output:

Standard:

Connector:

Standard: RS-232 Connector Female dB-9 Baud Rate: 57,600

Format: 8 bits, no parity, 2 stop bits, no hardware flow control (COM2 not

(100BaseTx)

1 RJ45

available)

IEEE 802.3 (10BaseT), IEEE 8002.3u

10 Base T:

328ft/100m (2 pairs) 100 Base Tx: UTP category 5 cable up to

328ft/100m (2 pairs)

Electrical:

Voltage: +12V DC

Cable Requirements:

Auto ranging, 100 to 240V AC, power

UTP category 3, 4 or 5 cable up to

adapter provided

Power: EMI/RFI:

Complies with FCC Part 15, class A

EU EMC Directive

### Physical

Dimensions: 19"W x 4.75"D x 1.75"H (483mm x 111mm x 45mm)

3lbs (1.36kg) Weight: Temperature:

0-50°C (Operating)

## **▶** ► ► ► Ordering Information

9000NCP VistaLINK® Network Control Panel (1RU)
















The 2RU 9000NCP2 VistaLINK® Network Control Panel (NCP) is a lowpowered, rack mounted control panel interfacing to VistaLINK® -capable frames and modules, allowing for real-time selection and configuration control of enabled parameters.

The 9000NCP2 NCP connects to the network via Ethernet and communicates via Simple Network Management Protocol (SNMP).

In its simplest network configuration, the NCP2 can be directly connected to a single frame via the frame controller using a cross-over network cable. In advanced systems, multiple NCPs can be connected within the same network, each capable of configuring all addressable parameters in every networked frame, or limited to a certain, user-defined set of frames, cards or parameters. With Evertz® VistaLINK® PRO server running on the same network, NCP units are further enabled with custom labels, preset quick-access configuration buttons and masking/privilege control.

#### ▶ Features & Benefits

- · Low power, rack-mountable, 2RU control panel
- Two, 4-line, 24 alphanumeric digit per line vacuum fluorescent display (VFD) featuring very high brightness and widest viewing angles
- · 44 illuminated, tactile and full-size quick access pushbuttons with four position and selector rotary controls (shaft encoders)
- Provides convenient and fast configuration access for up to 4 simultaneous proc controls via split-screen display feature
- Built-in Simple Network Management Protocol (SNMP) communication interface over Ethernet connection
- Operational configuration control of key VistaLINK® -capable product parameters (visit www.Evertz®.com for updated list of modules and parameters)
- · Quick access preset button, frame and card labels, and configuration privileges control available via VistaLINK®

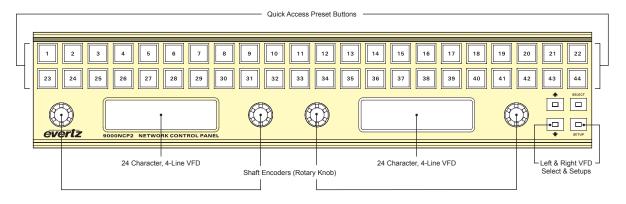

## ▶Specifications

#### Serial I/O (COM1):

Standard: RS-232 FemaledB-9 Connector: 57,600 Baud Rate:

Format:

available)

8 bits, no parity, 2 stop bits, no hardware flow control (COM2 not

### Physical:

Electrical:

Voltage

Power:

EMI/RFI:

Dimensions:

19" W x 4.375" D x 3.5" H (483mm x 111mm x 89mm) 9000NCP2 - 4lbs (1.81kg) Weight: Temperature: 0-50°C (Operating)

+12V DC

adapter provided

**EU EMC Directive** 

Auto ranging, 100 to 240V AC, power

Complies with FCC Part 15, Class A

### Ethernet Input/Output:

Standard: IEEE 802.3 (10BaseT), IEEE 8002.3u (100BaseTx)

Connector: 1 RJ45

Cable Requirements

UTP category 3, 4 or 5 cable up to 328ft/100m (2 pairs) 10 Base T:

100 Base Tx: UTP category 5 cable up to

328ft/100m (2 pairs)

#### **>>>**Ordering Information

9000NCP-2 VistaLINK® Network Control Panel (2RU)

## Advanced System Control Panel, 2RU

The CP-2200E remote control panel features two high resolution color LCD display's alongside an array of function assignable buttons and dynamic LCD buttons, all of which are fully programmable. The two LCD displays intelligently interact with the panel's buttons and rotary controls, updating automatically as different operation facilities are selected.

Each of the 12 LCD buttons are capable of displaying a multiple character text string or a graphical image. They can also be configured with a menu structure which allows quick navigation through the systems. When a menu button is pressed some or all of the buttons change their function and legend. Their operation is then defined by the configuration setup for this new menu. The selection of a new menu can also be configured to change the graphical display of one or both the LCD screens.

The CP-2200E is the flagship panel of Evertz® advanced control system, allowing control of automated tielines and pathfinding, and advanced breakaway routing while still supporting basic routing concepts like levels and categories.

The CP-2200F panel incorporates advanced control of all of Evertz®'s SNMP enabled devices. Devices or certain controls of devices can be grouped and/or ganged together and associated with sources and destinations on routers so that when a particular source or destination is used the appropriate controls are loaded up for interfacing on the panels LCD screens. This allows simple but powerful interfaces to be built to control parameters and recall presets as well as integrate with router systems for SNMP equipment in your facility.

The CP-2200E enables users to have real-time control over an MVP® or VIP™ system. Get graphical visualizations of layouts prior to loading them, control what signal is routed to what multiviewer window, select an audio to be monitored etc.

The CP-2200E is a very sophisticated advanced panel that allows you to create a very powerful and very simple interface to your entire system so users have realtime control over signals, displays and their router destinations.

#### ▶ Features & Benefits

- · Flexible feature or menu driven configurations providing quick and simple access
- · Advanced SNMP interface
- · Advanced Evertz® Multiple view processor interface.
- Two high quality LCD displays which dynamically react with the panels buttons and rotary controls
- · Easily reconfigured for regularly changing environments
- · Advanced control system interface
- Fully programmable buttons via the router configuration software



## ▶Specifications

Control: Q-link:

75Ω video cable 500m max. length

Ethernet: Dual 10/100 base T.RJ45 connector

Serial RS232/422: D9 female Power: Supply

100-132V, 180-240V, 50/60Hz Consumption: 20W

Physical:

Height: 2RU, 88mm Width: 19" rack mount Depth: 120mm . Weiaht: 3.70kg Operating Temp: 0-40°C


## **▶▶▶**Ordering Information

Note: These part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-2200E Advanced System Control Panel, 2RU The CP-3216-PR is a fully programmable SNMP-enabled video/audio control panel. The CP-3216-PR can provide a fully customized user interface through complete system hardware virtualization. The CP-3216-PROC is ideal for colour correction applications and can be used as a complete replacement for multiple DSU-CC color correctors and their associated control panels.

#### ▶ Features & Benefits

- · Optimized solution for audio/video proc applications
- Customized user interface through complete hardware virtualization
- Ideal for colour correction applications
- Complete replacement for multiple For-A DSU-CC panels/cards
- 32 x GPIs interface using DB15 connectors enabling virtual button pushes
- 16 scroll knobs with fully programmable link to module controls
- 32 x LCD buttons with programmable labelling/function/logical structure
- Fully SNMP enabled

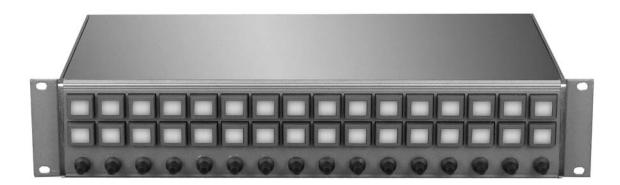

## **▶**Specifications

Control:

Dual 10/100 base T.RJ45 connector Ethernet:

Serial RS232/422: D9 female

Power:

Supply: Consumption:

100 - 132V, 180 - 240V, 50/60Hz

Physical: Height: 2RU, 88mm Width: 19" rack mount Depth: 120mm

Weight: 3.70kg 0 - 40°C Operating Temp:

## **>>>**Ordering Information

CP-3216-PR: Programmable Audio/Video Proc Control Panel, 2RU

Note: These part numbers refer to the hardware only. Precise operation is

determined by the configuration of the control panel

The 7700R2x2 series modules are bypass protection routers for high definition 1.5Gb/s or standard definition 270Mb/s serial digital video signals. These modules have two SD/HD compatible inputs signals (program and back-up) that support all popular SMPTE 292M video formats as well as 525/625 line SMPTE 259M-C video formats. These modules also provide three re-clocked primary outputs, and one re-clocked backup output. Based on a programmable set of input signal monitors, the main program or the back-up input signals can be automatically routed to the primary program outputs to ensure the delivery of a valid program output in the case of an input signal fault. Switching can also be controlled and monitored through the use of module GPIOs, card edge controls or remotely using either network control panels (9000NCP, 9000NCP2) or VistaLINK® PRO. The program output is bypass relay protected and provides protection on the program path. If the module is removed from the enclosure or power to the module is lost, the program path is maintained.

The 7700R2X2-HES incorporates Evertz® proprietary SoftSwitch™ technology with full audio proc for clean video and "popless" embedded audio switching. Line synchronizers on the video inputs can accommodate differences in timing of up to  $\pm 1/2$  a line on the video inputs. The 7700RD2X2-HD provides two monitoring downconverted outputs.

The 7700R2X2-HD and 7700R2X2-HES occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

The 7700R2x2-HD provides additional MPEG-2 feed redundancy switching. By providing automatic smart switching of the main signal to a back up signal, the 7700R2x2-HD offers protection to digital compressed signals. The user can customize all monitored and switching rules to meet Broadcast, Cable, Satellite and IPTV needs

#### ▶ Features & Benefits

- Support for HD and SD SDI inputs per SMPTE 292M and SMPTE 259M-C
- · Auto sensing of HD and SD input formats
- · Supports both 525i/59.94 or 625i/50 SD video formats
- Automatic change-over based on programmable input signal monitors
- Generation of three re-clocked program outputs and one preview output (HD if HD inputs are applied, SD if SD inputs are applied)
- · GPI control inputs for manual routing control
- GPO status outputs for reporting selector cross-point status
- Card edge menu control for configuration of operating modes
- Card edge LEDs for reporting signal presence, router state, module status
- Remote monitoring through NCP panels or VistaLINK® PRO
- · Bypass relay protection on program output
- Controllable switch point when a Genlock reference is provided

#### Additional features on 7700RD2X2-HD model only

- Program and preview monitoring SDI outputs (down-converted from HD if HD input applied, reclocked SD if SD input applied)
- Support for 16:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze aspect ratio conversions
- HD to SD color space conversion (ITU rec. 709 to ITU rec. 601)


#### Additional features on 7700R2X2-HES model only

- Integrated SoftSwitch™ technology for clean video and "popless" embedded audio switching
- Dolby-E<sup>™</sup> compliant
- VistaLINK® -capable for offering remote monitoring, control, and configuration via SNMP

#### Additional Features on the 7700R2x2-HD only


- TR101290 monitoring bitrate measurement and component matching test on all inputs
- Smart configuration of error threshold and switching rules to avoid false switching
- Complete TS data rate measurement with user settable measurement windows
- Essential TS Monitoring including:
- TS Loss
- Sync Byte Error
- Bitrate Analysis
- PIDs List Monitoring
- Continuity CountPAT Monitoring

Note: VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame using the Model 9000NCP Network Control Panel or Evertz® VistaLINK® PRO or other third-party SNMP manager software.

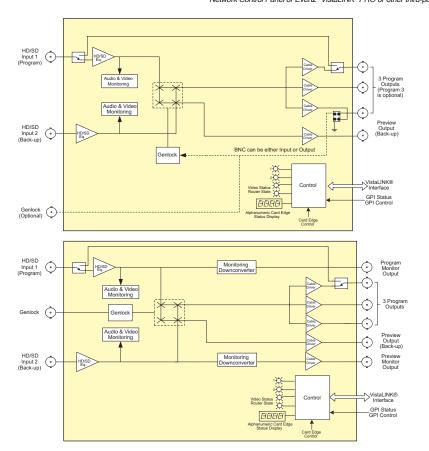

## 7700R2x2-HD, 7700R2x2-HES, 7700RD2x2-HD

## 2x2 HD/SD Modular Bypass Protection Routers

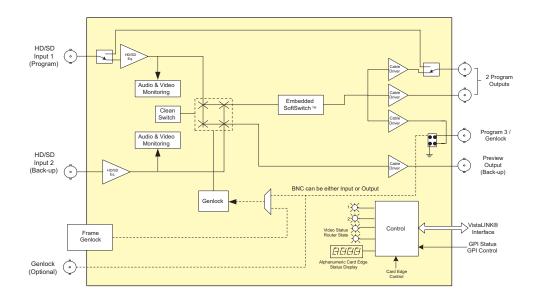

### ▶Specifications

Serial Video Input:

Standard: Auto-detects standard 1.485Gb/s

SMPTE 292M (1080i/59.94, 1080i/50, 720p/59.94, 720p/50)

SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M (HD or SD carrier) 270Mb/s SMPTE 259M-C (525i/59.94 or 625i/50)

(525i/59.94 or 625i/50) Connector: 2 BNC per IEC 61169-8 Annex A

Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: > 20dB up to 270MHz

Return Loss: > 20dB up to 270MHz > 12dB up to 1.5GHz

#### Reclocked Serial Video Router Outputs:

Standard: Same as input Number of Outputs: 3 Program outp

3 Program outputs reclocked, (1 output is bypass relay protected)

1 preview output

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal for HD

900ps nominal for SD Overshoot:: < 10% of amplitude

Return Loss: > 20dB up to 270MHz

> 15dB at 1.5Gb/s

Jitter: < 0.16 UI (HD) or < 0.10 UI (SD)

### Downconverted Serial Video Outputs (7700RD2x2-HD only):

Standard: SMPTE 259M-C, 270Mb/s
Number of Outputs: 1 Program 1 preview
Connector: BNC per IEC 61169-8 Annex A

 Signal Level:
 800mV nominal

 DC Offset:
 0V ±0.5V

 Rise and Fall Time:
 750ps nominal

 Overshoot:
 < 10% of amplitude</td>

 Return Loss:
 > 15dB at 270Mb/s

r: < 0.2 UI

Genlock Input:

Type: NTSC or PAL Color Black 1V p-p

HD Tri-level Sync

Connector: BNC per IEC 61169-8 Annex A Termination: High impedance or internal  $75\Omega$  (jumper

selectable

GPIO Control Port: Number of Inputs:

Number of Outputs: 2

Type: Opto-isolated, active low with internal pull-ups to +5 or +12V (jumper settable)

Connector: 6-pin removable terminal block Signal Level: Closure to ground

## Input to Output Processing Delay (HD input video on (7700RD2x2-HD only):

Downconverter Video Delay:

Approximately 1 to 2 frames depending on input video format,

processing mode

Electrical:

Voltage: +12V DC Power: 7700R2x2-HD: 10W 7700R2x2-HES: 10W 7700RD2x2-HD: 14W

EMI/RFI: Complies with FCC regulations for class

A devices

Complies with EU EMC directive

#### Physical:

Number of slots
7700 frame mounting:
7700R2x2-HD: 1
7700R2x2-HES: 1
7700RD2x2-HD: 2

**7701 frame mounting:** All versions: 1

## >>>Ordering Information

7700R2x2-HD 2x2 HD/SD Modular Bypass Protection Router

7700R2/2-HES 2x2 HD/SD Modular Bypass Protection Router with SoftSwitch™ 2x2 HD/SD Modular Bypass Protection Router with dual HD Downconverter

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Endosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure



The 7700R4x1-HD provides a convenient, low cost way to route high definition and standard definition serial digital signals. The 7700R4x1 can be used for 1.5Gb/s, 270Mb/s, 360Mb/s, 540Mb/s and DVB-ASI and 143Mb/s serial digital signals.

The module can also be used for SMPTE 310M (19.4Mb/s) signals with the internal reclocker turned off. The 7700R4x1-HD features auto-equalized inputs with two reclocked outputs. The 7700R4x1-HD is housed in the Evertz® 7700FR-C Multiframe which is available in a 3RU or a 1RU version.

## ▶ Features & Benefits


- Hot-swappable, front-loading modular 4x1 routing
- Full support for SMPTE 292M (1.5Gb/s), SMPTE 259M (270, 360, 143Mb/s) and SMPTE 344M (540Mb/s)
- · DVB-ASI compatible with all outputs maintaining polarity from input to output
- Non-reclocking mode for SMPTE 310M (19.4Mb/s)
- Features independent isolated outputs to ensure no cross-channel loading effects (no need to terminate unused outputs)
- · VistaLINK® -capable for remote monitoring, control and configuration via SNMP
- VistaLINK® is available when modules are used with the 3RU 7700FR-C and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- LEDs for signal presence and module health


#### Input

- SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s, 360Mb/s, 143Mb/s), SMPTE 344M (540Mb/s) and DVB-ASI
- SMPTE 310M (19.4Mb/s) non-reclocking mode
- Return Loss > 15dB up to 1.5Gb/s
- Automatic cable equalization up to 100m at 1.5Gb/s

#### Output

- 2 re-clocked outputs
- Return loss > 15dB up to 1.5Gb/s
- Wideband jitter < 0.2 UI

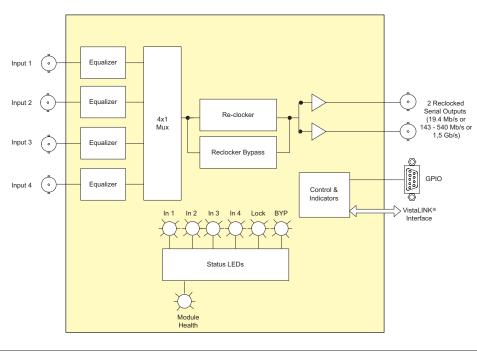



### ▶ Specifications

Serial Video Input:

SMPTE 292M, 259M, 344M, DVB-ASI

Stanuaru. In Non-Reclock Mode: SMPTE 310M Number of Inputs:

Connector:

1 BNC per IEC 61169-8 Annex A Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A (or equivalent)

Return Loss: > 15dB to 1.5Gb/s

Wideband jitter: < 0.2 UI

Serial Video Outputs:

Number of Outputs: 2 SMPTE 292M, 259M, 344M, DVB-ASI Standard:

In Non-Reclock Mode

SMPTE 310M Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude > 15dB to 1.5Gb/s Return Loss: Wideband jitter:

### General Purpose Inputs/Outputs:

Number of Inputs: Number of Outputs: 4

Opto-isolated, active low or high GPI: Internal pull-ups to +5 or +12V (jumper

settable)

GPO: Internal pull-ups to +3.3V Connector: Female High Density DB-15 Closure to ground Signal Level:

Physical:

Number of Slots:

Electrical:

Voltage: +12V DC Power 5W

FMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

### **▶** ► ► ► Ordering Information

HD/SD-SDI 4x1 Modular Router

Rear Plate must be specified at time of order **Ordering Options** 

Eq: Model + 3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot module 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



### Dual SD-SDI Smart Automatic Changeover

The 7700ACO2 is the industries leading smart automatic changeover (ACO) for standard definition 270Mb/s serial digital video signals.

#### This device provides:

- · Dual processing paths on a single module
- · Smart SD-SDI automatic protection switching of both paths
- Video and Audio Proc Amp Control
- Built in Trouble Slide per ACO
- Optional IntelliGain™ Audio Loudness Processing with Dynamic Audio Range Control

These modules have dual independent processing paths providing both high density and availability of SD-SDI video inputs signals (program and back-up). The 7700ACO2 incorporates Evertz®'s essential audio and video monitoring which is used to drive the real time automatic switch logic processor.

The 7700ACO2 can optionally be ordered with Evertz $^{\bowtie}$ s patented IntelliGain $^{\intercal}$ M Audio and Loudness Processor. The IntelliGain $^{\intercal}$ M audio processing engine provides a full compressor/limiter and loudness calculator that processes long-term trends in the audio content and uses a multi-minute time coefficient, which applies a smooth attack producing the final target loudness output.


#### ▶ Features & Benefits


#### Video Inputs and Outputs

- Smart Automatic changeover based on user programmable switch logic
- · Card edge menu control for configuration of operating modes and LEDs for reporting signal presence, router state, module status
- Remote monitoring via Evertz® control panels or VistaLINK® PRO.
- Bypass relay protection on main program output

#### IntelliGain Audio and Loudness Processor

- · Consistent audio loudness levels within a channel and/or program
- · Automatic detection and level adjust for loud commercials
- · Gain control within a program interval to preserve audio dynamic range
- Artifact-free transitions between program and commercials
- · Elimination of drastic volume changes during commercials and interstitials

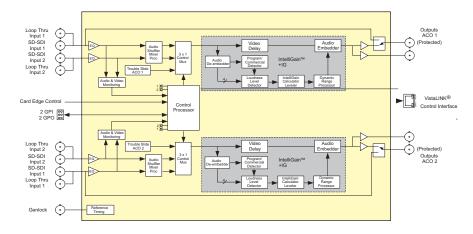





### **▶** Specifications

Serial Video Input:

270Mb/s SMPTE 259M-C (525i/59.94 Standard:

or 625i/50)

2 BNC per IEC 61169-8 Annex A Automatic to 300m @ 270Mb/s with Belden 8281 or equivalent cable Input Equalization:

Return Loss: > 20dB up to 270MHz Serial Video Output:

Standard: Same as input

Number of Outputs: 2 Smart switched program outputs (Input 1 is bypass relay protected)

Loop thru on Input A and Input B BNC per IEC 61169-8 Annex A

Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time 900ps nominal < 10% of amplitude Overshoot: Return Loss > 20dB up to 270MHz

Jitter: < 0.10 UI Electrical:

+12V DC Voltage: Power: 20W

EMI/RFI: Complies with FCC regulations for

class A devices

Complies with EU EMC directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7700ACO2 **Dual SD-SDI Smart Automatic Changeover** 

**Ordering Options** Rear Plate must be specified at time of order

+IG Integrated IntelliGain™ Audio and Loudness Processor Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C

S7701FR

+SA

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds uo to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

## HD/SD SDI 8 Channel AES & RS232/RS422 Auto Changeover


The Evertz® 7700ACO-HD HD/SDI Auto Changeover is designed to provide an HD/SD SDI video, multi channel AES audio and RS422/RS232 changeover in one device. The unit can be controlled via GPI, remotely via VistaLINK® PRO or set in auto changeover mode.


It is an all-in-one ACO package aimed towards protecting a complete channel (ie. protecting the video, 8 channels of discrete AES and associated control channel (RS232 or RS422). The unit features latching relays that maintain state through loss of power.

#### ▶ Features & Benefits

- · Auto detection of signal standard
- · Four modes of operation:
- Auto changeover two standalone auto changeovers
- Manual DIP switch control two independently controlled 2x1 switchers
- GPI Control two independently GPI controlled 2x1 switchers
- Tally output provided
- · Protection for 8 channels of AES
- · Control channels

- Protection (on HD (1.5Gb/s) or SD (270Mb/s)
- · Changeover conditions are based on signal presence of:
- HD/SDI (TRS timing, CRC and EDH)
- DVB-ASI (SMPTE sync word); Sync (H timing) and AES (sync word)
- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP
- $\bullet$  VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

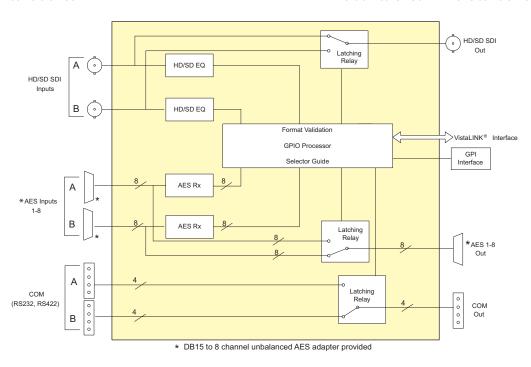

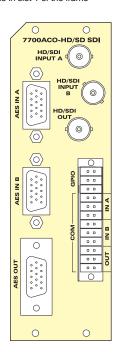

## ▶ Specifications

Serial Video Inputs

Standards:

SMPTE 292M (1.5Gb/s) SMPTE 259M-A, B, C, D (143 to 540Mb/s) or DVB-ASI

Connector 2 BNC per IEC 61169-8 Annex A Max Cable Length: 100m of Belden 1694A or equivalent cable combined input and output

Return Loss: 10dB up to 1.5Gb/s

Serial Video Output:

Number of Outputs: 1 passive relay output BNC per IEC 61169-8 Annex A Max Cable Length: 60m of Belden 1694A or equivalent cable combined input and output

DC Offset: 0V ±0.5V

Return Loss: 10dB up to 1.5Gb/s General Purpose Inputs and Outputs:

Type: Opto-isolated input with internal Inputs:

pull-up to +5V

Outputs: Normally 10k internal pull-up to +5V. Ground to rear panel when

relay is in active position. Screw down terminal blocks

Connector: Signal Level: +5V nominal

Communications and Control:

Serial Port: RS232/RS422 - 4 wire, terminal block Connector 4 pins on removable terminal block

AES Input:

Standard: SMPTE 276M

8 unbalanced AES Number of Inputs: Female High Density dB-15 Connector: (breakout cable to BNC provided)

Input Level: 1V p-p Input Impedance:  $75\Omega$ 

> 25dB 100kHz to 600MHz Return Loss:

Automatic to 1500m with Belden Equalization

1694A (or equivalent) @ 48kHz AES signal

AES Output:

Number of Outputs: 8 Unbalanced AES

Female High Density dB-15 Connector

(breakout cable to BNC provided)

Output Level: Output Impedance: 75\Omega

Return Loss > 25dB 100kHz to 6MHz

Physical:

Number of slots: 2

Electrical:

Voltage: +12V DC

6W Power:

EMI/RFI: Complies with FCC Part 15 Class A EU EMC Directive

## **>>>**Ordering Information

7700ACO-HD HD/SD SDI, 8 Channel AES & RS232/422 Auto Changeover

WPAES8-BNCM-6F AES Audio Breakout Cable

Enclosures 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure









## Dual HD/SD-SDI Smart Automatic Changeover

The 7700ACO2-HD is the industries leading smart automatic changeover (ACO) for high definition 1.5Gb/s or standard definition 270Mb/s serial digital video signals.

#### This device provides:

- · Dual processing paths on a single module
- · Smart HD/SD-SDI automatic protection switching of both paths
- Video and Audio Proc Amp Control
- Built in Trouble Slide per ACO
- Optional IntelliGain™ Audio Loudness Processing with Dynamic Audio Range Control

These modules have dual independent processing paths providing both high density and availability of any HD-SDI or SD-SDI video inputs signals (program and back-up). The 7700ACO2-HD incorporates Evertz®'s essential audio and video monitoring which is used to drive the real time automatic switch logic processor. The 7700ACO2-HD can optionally be ordered with Evertz®'s patented IntelliGain™ Audio and Loudness Processor. The IntelliGain™ audio processing engine provides a full compressor/limiter and loudness calculator that processes long-term trends in the audio content and uses a multi-minute time coefficient, which applies a smooth attack producing the final target loudness output.


#### ▶ Features & Benefits


#### Video Inputs and Outputs

- Auto sensing of HD and SD input formats
- Smart Automatic changeover based on user programmable switch logic
- · Card edge menu control for configuration of operating modes and LEDs for reporting signal presence, router state, module status
- Remote monitoring via Evertz® control panels or VistaLINK® PRO.
- · Bypass relay protection on main program output

#### IntelliGain Audio and Loudness Processor

- · Consistent audio loudness levels within a channel and/or program
- Automatic detection and level adjust for loud commercials
- · Gain control within a program interval to preserve audio dynamic range
- · Artifact-free transitions between program and commercials
- · Elimination of drastic volume changes during commercials and interstitials

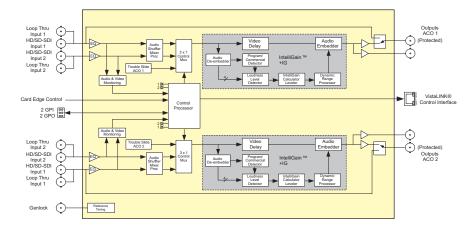





## ▶Specifications

Serial Video Input:

Auto-detects standard 1.485Gb/s SMPTE 292M (1080i/59.94, 1080i/50, 720p/59.94, 720p/50) SMPTE 260M,

SMPTE 274M, SMPTE 296M, SMPTE 349M (HD or SD carrier) 270Mb/s SMPTE 259M-C (525i/59.94 or 625i/50)

2 BNC per IEC 61169-8 Annex A Input Equalization: Automatic 100m @ 1.5Gb/s with Belden 1694A or Equivalent cable

> 20dB up to 270MHz Return Loss: > 12dB up to 1.5GHz

#### Reclocked Serial Video Output:

Number of Outputs: 2 Smart switched program outputs (Input 1 is bypass relay protected) Loop thru on Input A and Input B

Connector: BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal < 10% of amplitude > 20dB up to 270MHz Overshoot: Return Loss: > 15dB at 1.5Gb/s

Jitter < 0.16 UI (HD)

#### Electrical:

-Voltage: +12V DC 20W

Power: EMI/RFI: Complies with FCC regulations for

class A devices Complies with EU EMC directive

Physical: Number of slots

## **>>>**Ordering Information

7700ACO2-HD Dual HD/SD-SDI Smart Automatic Changeover

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

+IG Integrated IntelliGain™ Audio and Loudness Processor Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

## HD/SD-SDI Reclocking Distribution Amplifier with Loop Thru

The 7700HD series Distribution Amplifiers provide reliable distribution of your 1.5Gb/s HDTV and 270Mb/s Standard Definition serial digital signal. The 7700DA6-HD-L features one auto-equalized input with passive loop thru which allows for cascading of multiple DA cards.

The 7700DA6-HD-L features an auto-equalized input with 6 reclocked outputs. The DA has been designed to reclock at 1.5Gb/s and 270Mb/s. In non-reclocking mode it can be used as a SMPTE 310M or SMPTE 259M/292M distribution product.

The 7700DA6-L occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- Reclocking mode for SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s),
- DVB-ASI or HD/SD auto sensing
- Non-reclocking mode for SMPTE 310M (also SMPTE 259M, 292M)
- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC
- VistaLINK® Frame Controller module in slot 1 of the frame


#### Status LEDs:

- Signal presence
- · Module Health Status

- SMPTE 292M (1.5Gb/s) Reclocking mode
- SMPTE 259M (270Mb/s) DVB-ASI Reclocking mode
- SMPTE 310M Non-reclocking mode
- Auto equalization to 130m (Belden 1694A)

#### Output:

- · 6 reclocked outputs
- · 1 passive looping output
- Wideband jitter < 0.2 UI

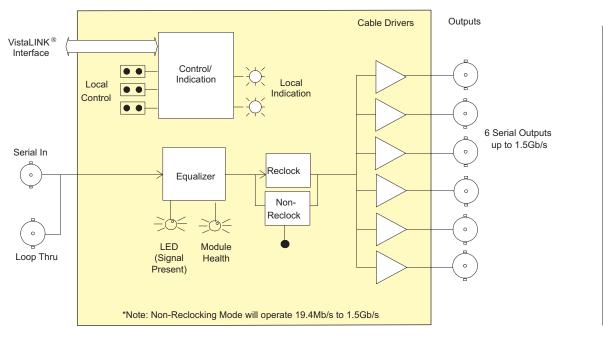

# 7700DA6 -HD-L 0 0 HD OUTPUT 0 0 0 0 0

### ▶ Specifications

### Serial Video Input

SMPTE 292M, SMPTE 259M-A, B, Standard: C, D, DVB-ASI or M2S SMPTE 310M (also SMPTE 259M,

Non-Reclock Mode: 292M)

1 BNC per IEC 61169-8 Annex A Connector: Automatic to 130m @ 1.5Gb/s with Equalization:

Belden 1694A (or equivalent)

Return Loss: > 15dB to 1.5Gb/s Serial Video Outputs

Number of Outputs: 6 Per Card Passive Loop Outputs:

SMPTE 292M, SMPTE 259M-A, B, Standard:

C, D, M2S, DVB-ASI

SMPTE 310M (also SMPTE 259M. Non-Reclock Mode: 292M)

Signal Level: 800mV nominal 0V ±0.5V

DC Offset: Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB to 1.5Gb/s

Wideband jitter: < 0.2 UI Physical

Number of Slots:

Electrical

Voltage: +12V DC Power: 5W

EMI/RFI Complies with FCC Part 15 Class A

EU EMC Directive

### **>>>**Ordering Information

HD/SD-SDI Reclocking Distribution Amplifier with Loop Thru 7700DA6-HD-L

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Enclosures: 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



0

/ 7700DA7-HD

HD OUTPUT

0

0

0

0

0

0

0

0

## HD/SD-SDI Reclocking Distribution Amplifier

The 7700 HD series Distribution Amplifiers provide reliable distribution of your 1.5Gb/s HDTV and 270Mb/s Standard Definition serial digital signal. The 7700DA7-HD features one auto-equalized input with seven reclocked outputs. It is housed in the Evertz® 7700FR-C Multiframe, which is available in either a 3RU or 1RU version.

The DA has been designed to reclock at 1.5Gb/s and 270Mb/s. In non-reclocking mode it can be used as a SMPTE 310M or SMPTE 259M/292M distribution product.

#### ▶ Features & Benefits

- Reclocking mode for SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s), DVB-ASI auto sensing
- Non-reclocking mode for SMPTE 310M (also SMPTE 259M, 292M)
- VistaLINK® control

#### Status LEDs


- · Signal presence
- Module Health Status

#### Input

- SMPTE 292M (1.5Gb/s) Reclocking mode
- SMPTE 259M (270Mb/s) DVB-ASI Reclocking mode
- SMPTE 310M Non-reclocking mode
- Auto equalization to 100m (Belden 1694A)

#### Output

- 7 reclocked outputs
- Wideband jitter < 0.2 UI

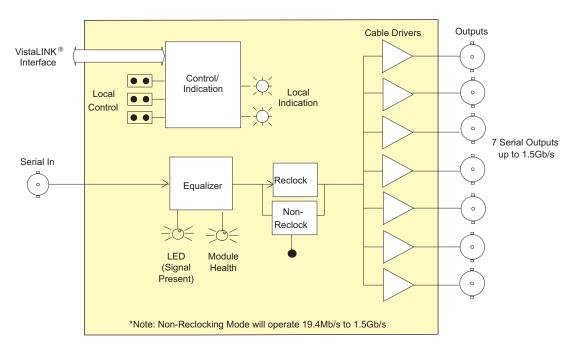

## ▶Specifications

Serial Video Input:

SMPTE 292M, SMPTE 259M-A, B, C, Standard:

D, DVB-ASI or M2S In Non-Reclock Mode

SMPTE 310M (also SMPTE 259M,

292M)

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 100m @ 1.5Gb/s with Equalization:

Belden 1694A (or equivalent) Return Loss: > 15dB to 1.5Gb/s.

Serial Video Outputs:

Number of Outputs: 7 Per Card

SMPTE 292M, SMPTE 259M-A, B, C, D Standard:

M2S, DVB-ASI

In Non-Reclock Mode: SMPTE 310M (also SMPTE 259M,

800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal < 10% of amplitude Overshoot: Return Loss: > 15dB to 1.5Gb/s

Wideband jitter: < 0.2 UI

### Physical:

Number of Slots:

Electrical:

Voltage: +12V DC 5W Power:

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

#### **>>>**Ordering Information

7700DA7-HD HD/SD-SDI Reclocking Distribution Amplifier (1x7)

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

## HD-SDI Reclocking Distribution Amplifier

The 7700 HD series Distribution Amplifiers provide reliable distribution of your 1.5Gb/s HDTV serial digital signal. The DAs feature one auto-equalized input with either four or eight reclocked outputs. The 7700 HD DAs are housed in the Evertz® Multiframe, which is available in either a 3RU or 1RU version. The DA has been designed to reclock at 1.5Gb/s. In non-reclocking mode it can also be used as a SMPTE 292M, SMPTE 310M, DVB-ASI, M2S or SMPTE 259M distribution product.

#### ▶ Features & Benefits

- Reclocking mode for SMPTE 292M (1.5Gb/s) signals
- Non-reclocking mode for SMPTE 292M, SMPTE 310M DA (nominal 19.4Mb/s), SMPTE 259M, DVB-ASI or M2S
- · Tally output upon loss of signal for quality monitoring

#### Status LEDs


- Signal presence
- Max. Equalization Warning
- · Module Health Status

#### Input

- SMPTE 292M (1.5Gb/s) Reclocking mode
- SMPTE 292M, SMPTE310M, SMPTE259M, M2S or DVB-ASI
- Non-reclocking mode
- Auto equalization to 100m (Belden 1694A)

#### Output

- 4 or 8 reclocked outputs
- Wideband jitter < 0.2 UI

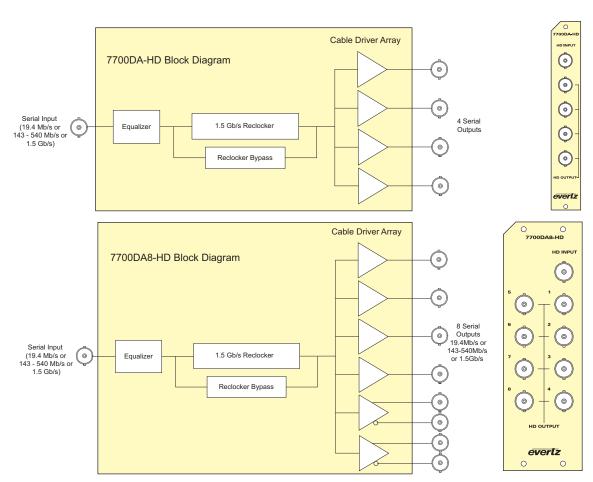

## ▶ Specifications

## Serial Video Input:

SMPTE 292M Standard:

In Non-Reclock Mode:

SMPTE 292M, SMPTE 310M, SMPTE 259M-A, B, C, D, DVB-ASI or

Connector: BNC per IEC 61169-8 Annex A Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A (or equivalent)

Return Loss: > 15dB to 1.0Gb/s, > 12db up to 1.5Gb/s Serial Video Outputs:

Number of Outputs: 4 or 8 per card SMPTE 292M Standard:

SMPTE 292M, SMPTE 310M, SMPTE 259M-A, B, C, D, M2S, DVB-ASI Non-Reclock Mode

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal < 10% of amplitude Overshoot: Return Loss: > 15dB to 1.0Gb/s

> 12db up to 1.5Gb/s Wideband iitter: < 0.2 UI

Physical:

Number of Slots: 1 (7700DA-HD) 2 (7700DA8-HD)

Electrical:

Voltage: Power: 5W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

## **>>>**Ordering Information

HD-SDI reclocking DA (1x4) 7700DA8-HD HD-SDI reclocking DA (1x8)

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix +3RU +1RU

+SA

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

## 3G/HD/SD-SDI Reclocking Distribution Amplifier

The 7700DA7-3G reclocking distribution amplifiers provide inexpensive distribution of your SMPTE 424M, SMPTE 292M and SMPTE 259M serial digital video signals at rates of 3Gb/s, 1.5Gb/s and 270Mb/s. The DA supports all other all other SMPTE 344M, SMPTE 259M, SMPTE 310M and DVB-ASI data rates in a non-reclocked mode (540Mb/s, 360Mb/s, 143Mbs/, 19.4Mb/s).

Ideal in applications where a large quantity of outputs is required, the DA features an auto-equalized input with seven isolated reclocked outputs.

The 7700DA7-3G occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module

#### ▶ Features & Benefits

- Normal reclocked mode for SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s) and SMPTE 259M (270Mb/s)
- Remote selectable non-reclocked mode for all other SMPTE344M, SMPTE 259M, SMPTE 310M and DVB-ASI data rates
- Fully hot-swappable from front of frame with no BNC disconnect required
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in the 7700FR frame with 7700FC VistaLINK® Frame Controller


#### Status LEDs:

- Detected Signal Rate LED's
- · Control Mode LED
- Module Health Status

- SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s) when reclocking
- SMPTE 344M (540Mb/s), SMPTE 259 (360Mb/s, 143Mb/s), SMPTE 310M when not reclocking
- Return Loss > 15dB to 1.5Gb/s and > 10dB up to 3Gb/s
- Auto equalization to 80m at 3Gb/s, 140m @ 1.5Gb/s and 350m @ 270Mb/s

#### Output:

- 7 reclocked outputs
- Wideband jitter < 0.2 UI

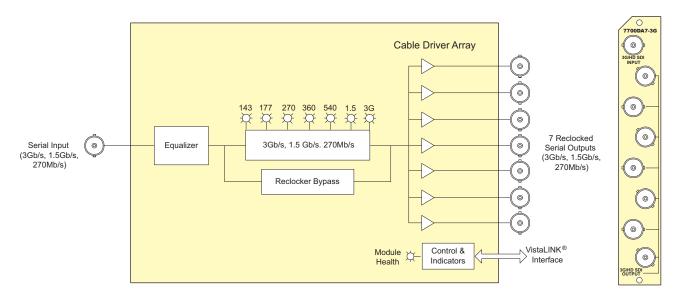

8 Reclocked

 $0V \pm 0.5V$ 

nominal

< 0.2 UI

1

BNC per IEC 61169-8 Annex A

150ps @ 3G/HD, 470ps SD

### **▶** Specifications

Serial Video Input:

Standards

Reclocked Mode: SMPTE 424M (3Gb/s)

SMPTE 292M (1.5Gbs) SMPTE 259M (270Mb/s)

Non Reclocked Mode:

SMPTE 344M (540Mb/s)

SMPTE 259M (360Mb/s, 143Mb/s) SMPTE 310M (19.4Mb/s), DVB-ASI

BNC per IEC 61169-8 Annex A

Connector: Equalization: Automatic to 80m @ 3Gb/s, 100m @

1.5Gb/s & 350m @ 270Mb/s

Return Loss: > 15dB up to 1.5Gb/s

> 10dB up to 3Gb/s

## Serial Video Output:

Number of Outputs:

Connector:

DC Offset: Rise and Fall Time:

Wideband Jitter:

Physical:

Number of Slots:

Electrical: Voltage:

Power:

EMI/RFI

Complies with FCC Part 15, Class A

**EU EMC Directive** 

+12V DC

5W

#### **>>>**Ordering Information

7700DA7-3G 3G/HD/SD-SDI Reclocking Distribution Amplifier

Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU Ordering Options

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Enclosures: 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure



The 7700VMDA Reclocking Distribution Amplifier provides inexpensive distribution and composite encoder monitoring of your SMPTE 259M (270MB/s) serial digital video signal. The 7700VMDA features an auto-equalized input with seven outputs that can be selected as either SDI or composite analog. The 7700VMDA-2Q has 2 channels, each with 3 selectable outputs, or it can be used as a single input DA with

The 7700VMDA and 7700VMDA-2Q occupy one card slot each and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules or a standalone enclosure which will hold 1 module.

## ▶ Features & Benefits

- Features independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller


- Supports SMPTE 259M-C (270Mb/s) video with embedded audio
- Return loss > 15dB up to 540Mb/s
- 300m auto equalization at 270Mb/s (Belden 8281)


#### Outputs

- · Selectable reclocked/composite encoder outputs
- Return loss > 15dB up to 540Mb/s
- Wideband jitter < 0.2 UI
- · Passes embedded audio to SDI output

#### Card Edge LEDs

- Signal presence
- Module Health Status

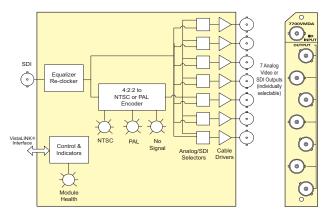

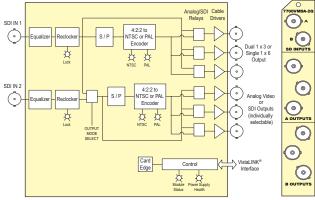

### ▶Specifications

#### Serial Video Input:

SMPTE 259M

Connector BNC per IEC 61169-8 Annex A Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 (or equivalent)

15dB up to 540Mb/s Return Loss: Embedded Audio: SMPTE 272M-A

#### Serial Video Output:

Number of Outputs: Up to 7 (jumper selectable)

(7700VMDA) 3 per channel (7700VMDA-2Q)

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V +0.5V Rise and Fall Time: 740ps nominal < 10% of amplitude Return Loss > 15dB up to 540Mb/s

Wideband Jitter: < 0.2 UI

#### Analog Video Output:

Number of Outputs: Up to 7 (jumper selectable)

(7700VMDA)

3 per channel (7700VMDA-2Q) NTSC, SMPTE 170M if input is

525i/59.94

PAL-B ITU 624-4 if input is 625i/50

BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p nominal DC Offset: Return Loss: > 35dB up to 5MHz

Physical:

Standards:

Connectors:

Number of Slots:

#### Electrical:

Voltage: +12V DC

Power: 6W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

### >>> Ordering Information

ideo Monitoring Reclocking DA, 1 channel, 7 outputs 7700VMDA-2Q Video Monitoring Reclocking DA, 2 channels, 3 outputs per channel

Ordering Options Rear Plate must be specified at time of order

Eq: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+1RU +SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules












7700 Series Modular - Reclocking Distribution Amplifiers

The 7700DA-DS3 Distribution Amplifier provides automatic coaxial cable equalization, reclocking and signal distribution of DS3 (44.736Mb/s), signals. The 7700DA-DS3 accepts a B3ZS-encoded Alternate Mark Inversion (AMI) input signal and provides four reclocked outputs.

The 7700DA-DS3 occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- Supports DS3 (44.736Mb/s)
- Accepts B3ZS-encoded AMI input signals
- Automatic cable equalization for up to 1000ft of high quality  $75\Omega$  cable
- · Signal reclocking and optional jitter attenuator
- · Output wave shaping for DS3 standards compliance
- High/Low output amplitude setting for long/short cable lengths
- · Loss of signal (LOS) detection/indication
- Outputs 1's pattern generation upon loss of input signal · Electrical output drive level control for enhanced distance
- Transformer coupled inputs/outputs
- Input/output transient protection

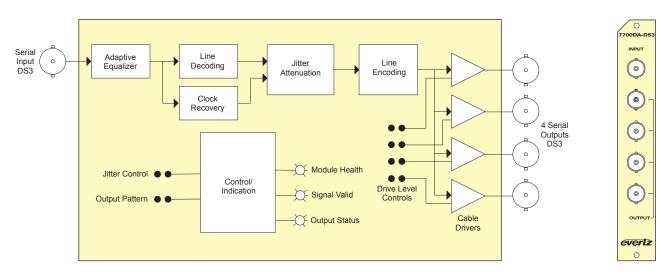

## **▶**Specifications

Inputs: Standard:

DS3 (44.7346Mb/s) Number of Inputs:

Connector: Isolated BNC per IEC 61169-8 Annex A

Automatic to 300m with Belden 8281 Equalization: or equivalent cable

>20dB up to 44Mb/s

Return Loss:

**Outputs:** Number of Outputs: 4 per card reclocked Connector: BNC per IEC 61169-8 Annex A

Waveform: Conforms to G.703 compliant masks

Return Loss > 18dB up to 44Mb/s

Physical:

Number of Slots:

#### **>>>**Ordering Information

7700DA-DS3 **DS3 Distribution Amplifier** 

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU +1RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate +SA

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

+12V DC

Complies with FCC Part 15, Class A

Complies with EU EMC Directive

Standalone enclosure

Electrical:

Voltage:

EMI/RFI:

The 7700DA-E3 Distribution Amplifier provides automatic coaxial cable


equalization, reclocking and signal distribution of DS3 (34.368Mb/s) signals. The 7700DA-E3 accepts a HDB3 encoded Alternate Mark Inversion (AMI) input signal and provides four reclocked outputs.

The 7700DA-E3 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- Supports E3 (34.368Mb/s)
- Accepts HDB3 AMI input signals
- Adaptive cable Equalization for up to 300m of high quality  $75\Omega$  cable
- · Signal reclocking and optional jitter attenuator

- · Output wave shaping for E3 standards compliance
- · Loss of signal (LOS) detection/indication
- Outputs 1s pattern generation upon loss of input signal

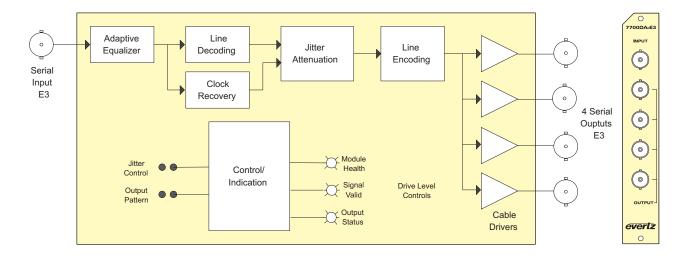

#### **▶** Specifications

Input: Standard:

Outputs:

E3 (34.368Mb/s HDB3)

Number of Inputs:

Isolated BNC per IEC 61169-8 Annex A Connector: Equalization:

Automatic to 300m with Belden 8281

or equivalent cable Return Loss: > 20dB up to 34Mb/s

Number of Outputs: 4 reclocked

BNC per IEC 61169-8 Annex A Connector: Waveform: Conforms to G.703 compliant masks

Return Loss: > 18dB up to 34Mb/s Electrical: Voltage:

+12V DC

Safety: ETL Listed, complies with EU low

voltage directive

Power: Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of Slots:

#### **>>>**Ordering Information

7700DA-E3

E3 Distribution Amplifier

**Ordering Options** 

Rear plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+1RU

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

The 700DA6-L is an inexpensive 1x6 SD-SDI Distribution Amplifier with passive loop thru which allows for cascading of multiple DA cards. It amplifies serial digital video signal at rates of 19.4Mb/s and 143Mb/s to 540Mb/s.

The 7700DA6-L features an auto-equalized input with 6 reclocked outputs. The 7700DA6-L has been designed for use as a SMPTE 310M (19.4Mb/s), DVB-ASI, M2S or SMPTE 259M distribution product. SMPTE 310M support is selected by setting a rate select jumper.

The 7700DA6-L occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits


- · Supports up to 540Mb/s operation
- DVB-ASI compatible
- Non reclocking mode for SMPTE 310M
- Features independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC
- VistaLINK® Frame Controller module in slot 1 of the frame
- Return loss > 15dB up to 540Mb/s
- 300m auto eq. at 270Mb/s (Belden 8281)
- 210m auto eq. at 540Mb/s (Belden 8281)

#### Outputs:

- 6 reclocked outputs
- 1 passive looping output
- Return loss > 15dB up to 540Mb/s
- Wideband jitter < 0.2 UI

#### Card Edge LEDs:

- · Signal presence
- · Module Health Status

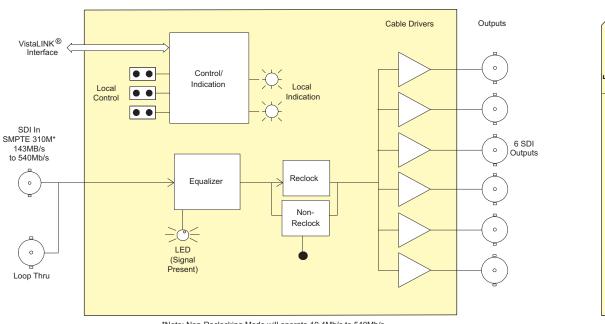

# 0 0 SDI OUTPUT 0 0 0 0 0 0

7700DA6-

\*Note: Non-Reclocking Mode will operate 19.4Mb/s to 540Mb/s

## ▶ Specifications

Serial Video Input:

SMPTE 259M A, B, C, D, DVB-Standard: ASI, M2S, SMPTE 310M

(19.4Mb/s jumper selected)

Connector: BNC per IEC 61169-8 Annex A Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 (or equivalent)

> 15dB up to 540Mb/s Return Loss:

Serial Video Output:

Reclocked Outputs: Passive Looping Outputs: 1

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ± 0.5V Rise and Fall Time: 740ps nominal

Overshoot: <10% of amplitude Return Loss: >15 dB up to 540Mb/s

Wideband Jitter: <0.2 UI Physical:

Number of Slots: 1

Electrical:

Voltage: +12V DC Power 6 Watts

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **▶** ► ► ► Ordering Information

7700DA6-L SD-SDI Reclocking Distribution Amplifier with Loop Thru

**Ordering Options** Rear plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU

+1RU

+SA Standalone Enclosure Rear Plate

Enclosures: 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









## 143-540Mb/s & DV-ASI Reclocking, SMPTE 310M Non-reclocking Distribution Amplifier

The 7700 series Distribution Amplifier provides inexpensive distribution of your serial digital video signal at rates of 19.4Mb/s and 143Mb/s to 540Mb/s. The 7700DA7 features an auto-equalized input with seven reclocked outputs.

It has been designed for use as a SMPTE 310M (19.4Mb/s), DVB-ASI, M2S or SMPTE 259M distribution product. SMPTE 310M support is selected by setting a rate select jumper.

The 7700DA7 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- · Supports up to 540Mb/s operation
- · DVB-ASI compatible
- Non-reclocking mode for SMPTE 310M
- Features independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- $\bullet$  VistaLINK  $\!\!^\circ$  -capable offering remote monitoring, control and configuration capabilities via SNMP
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

#### Input


- SMPTE 259M (143Mb/s to 540Mb/s), DVB-ASI, M2S, SMPTE 310M (19.4Mb/s) - Non-reclocking mode
- Return loss > 15dB up to 540Mb/s
- 300m auto equalization at 270Mb/s (Belden 8281)
- 210m auto equalization at 540Mb/s (Belden 8281)

#### Outputs

- · 7 reclocked outputs
- Return loss > 15dB up to 540Mb/s
- Wideband jitter < 0.2 UI</li>

#### Card Edge LEDs

- · Signal presence
- · Module Health Status

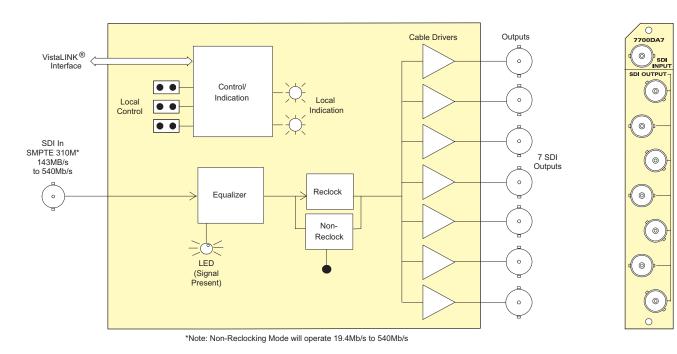

### **▶**Specifications

#### Serial Video Input:

SMPTE 259M A, B, C, D, DVB-ASI, Standard:

M2S, SMPTE 310M (19.4Mb/s -

jumper selected) BNC per IEC 61169-8 Annex A Connector Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 (or equivalent)

Return Loss: > 15dB up to 540Mb/s Serial Video Output:

Number of Outputs: 7

Connector: BNC per IEC 61169-8 Annex A 800mV nominal

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 740ps nominal

Overshoot: < 10% of amplitude > 15dB up to 540Mb/s Return Loss

Wideband Jitter: < 0.2 UI Physical:

Number of Slots:

Electrical:

+12V DC Voltage:

6W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

#### **>>>**Ordering Information

7700DA7 143-540Mb/s & DV-ASI Reclocking, SMPTE 310M Non-reclocking

Distribution Amplifier

Ordering Options

Eg: Model +3RU

Rear Plate must be specified at time of order

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules





## Auto Equalizing Unbalanced AES / EBU Distribution Amplifier (1x5)

The 7700DA-AESU is a five output reclocking and auto equalizing DA for  $75\Omega$ unbalanced AES signals. The DA will automatically equalize AES signals on Belden 1694A coax to 1500m. The DA will reclock data with sampling frequencies of 32kHz, 44.1kHz, 48kHz and 96kHz.


The 7700DA-AESU card edge LED indicators provide quick and accurate assessment of the incoming signal integrity. The 7700DA-AESU also provides a contact closure output that can be configured using on-board jumpers to assert when an input error condition exists.

The 7700DA-AESU occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

## ▶ Features & Benefits

- SMPTE 276M standard for AES audio on  $75\Omega$  coax
- Transformer coupled 75 $\Omega$  unbalanced input (selectable Hi-Z)
- · Data reclocking provides jitter reduction
- Automatic equalization

- EQ and reclock provide extended cable length compensation (> 1500m)
- Five  $75\Omega$  coax outputs
- Error LED indication for input PLL out of lock, parity error or biphase coding error
- External indication of input error condition using contact closure output

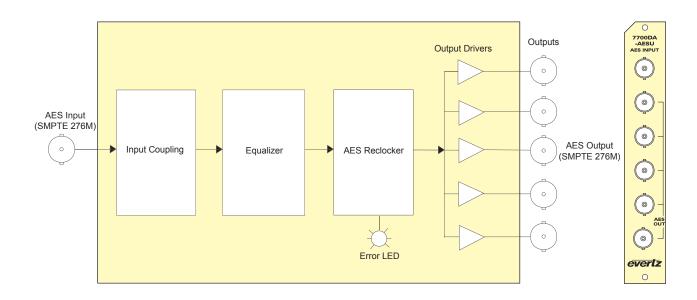

## ▶ Specifications

**AES Input:** 

Standard: SMPTE 276M

Number of Inputs: BNC per IEC 61169-8 Annex A Connector:

Input Level: 1V p-p Coupling: Transformer

Input Impedance: 75Ω (Selectable Hi-Z) Return Loss: > 25dB at 100kHz to 6MHz

Automatic to 1500m with Belden 1694A (or equivalent) @ 48kHz AES signal Equalization:

Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

## **AES Output:**

Number of Outputs: 5 per card reclocked

BNC per IEC 61169-8 Annex A Connector:

1V p-p Output Level: Output Impedance:  $75\Omega$ 

Return Loss: > 25dB 100kHz to 6MHz

#### Physical:

Number of Slots:

## Electrical:

Voltage: +12V DC

Power: 1.2W EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

## **▶▶▶Ordering Information**

7700DA-AESU Auto Equalizing Unbalanced AES/EBU Distribution Amplifier (1X5)

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

## Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 15 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure





## Auto Equalizing Balanced AES/EBU Distribution Amplifier

The 7700DA-AESB is a five output DA with auto equalizing input and reclocking for  $110\Omega$  balanced AES signals. The DA will automatically equalize AES signals on Belden 1800B cable when the drive signal is 7V p-p. The DA will reclock data with sampling frequencies of 32kHz, 44.1kHz, 48kHz and 96kHz.


The 7700DA-AESB card edge LED indicators provide quick and accurate assessment of the incoming signal integrity. The 7700DA-AESB also provides a contact closure output that can be configured using on-board jumpers to assert when an input error condition exists.

The 7700DA-AESB occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

## ▶ Features & Benefits

- AES3-1992 standard for AES audio on  $110\Omega$  twisted pair cable
- Transformer coupled  $110\Omega$  balanced input (selectable Hi-Z)
- Data reclocking provides jitter reduction
- · Automatic equalization

- EQ and reclock provide extended cable length compensation
- Five  $110\Omega$  balanced outputs
- Error LED indication for input PLL out of lock, parity error or biphase coding error
- · External indication of input error condition using contact closure output

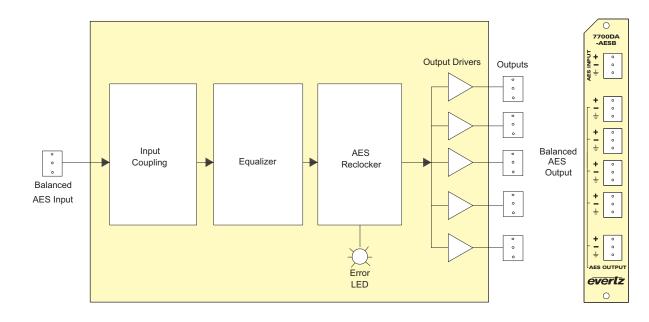

#### ▶ Specifications

AES Input:

Standard: AES3-1992

Connector: 3-pin removable terminal strip

Number of inputs: Input Level:

2 to 7V p-p Coupling: Transformer 110Ω (selectable Hi-Z) Input Impedance:

> 14dB 100kHz to 6MHz Return Loss:

Equalization: Automatic to 300m with Belden 1800B

(or equivalent) @ 48kHz AES signal Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

AES Output:

Number of Outputs: 5 per card Reclocked

3-pin removable terminal strip 5V p-p Connector: Output Level

Output Impedance:

Return Loss: 30dB 100kHz to 6MHz Electrical: Voltage:

+12V DC Power: 1.8W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of Slots:

## **>>>**Ordering Information

7700DA-AESB Auto Equalizing Balanced AES/EBU Distribution Amplifier

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



## Auto Equalizing Balanced AES/EBU Distribution Amplifier Over CAT5 Cable

The 7700DA-AES-RJ is an eight-output distribution amplifier with auto equalizing inputs and reclocking for  $110\Omega$  balanced AES signals. The DA will automatically equalize a single balanced AES signal delivered over standard CAT 5 type cables with RJ-45 head connector. The DA will reclock the data with sampling frequencies of 32kHz, 44.1kHz, 48kHz and 96kHz.


The 7700DA-AES-RJ modules are equipped with card edge LED indicators that are used to provide quick and accurate assessment of the incoming signal integrity.

The 7700DA-AES-RJ modules occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- AES3-1992 standard for AES audio on  $110\Omega$  twisted pair cable
- Transformer coupled 110 $\Omega$  balanced input (selectable Hi-Z)
- Data reclocking provides jitter reduction
- Automatic equalization

- Equalization and reclocking provides extended cable length compensation
- 8 110Ω balanced outputs
- · Error LED indication for input PLL out of lock, parity error or biphase coding error

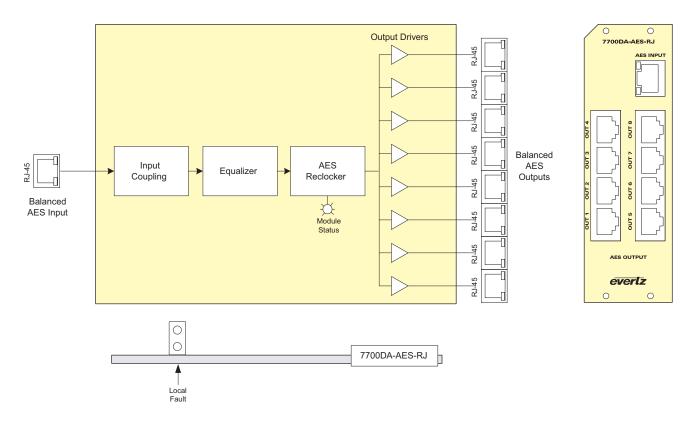

## ▶Specifications

AES Input:

Standard: AES3-1992 Number of Inputs: RJ-45 Connector: Input Level: 2 to 7V p-p Coupling: Transformer Input Impedance:  $110\Omega$ 

Equalization: Automatic to 300m with CAT5 (or equivalent) @ 48kHz AES signal

Sampling Frequency: 32kHz, 44.1kHz, 48kHz, and 96kHz

AES Outputs:

Number of Outputs: 8 reclocked Connector: **RJ-45** 5V p-p Output Level: Output Impedance: 110Ω

Electrical:

Voltage: +12V DC Safety: ETL Listed, complies with EU low

voltage directive

Complies with FCC Part 15, Class A EU EMC Directive EMI/RFI:

Physical:

Number of Slots: 2

### **>>>**Ordering Information

7700DA-AES-RJ Auto Equalizing Balanced AES/EBU Distribution Amplifier Over CAT5 Cable

Ordering Options Rear plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure

The 7700ADA6-EQ-L is an equalizing 1x6 Analog Distribution Amplifier. The 7700ADA6-EQ-L features one balanced equalized input, one passive looping output and six outputs. The module has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2Vp-p.

The 7700ADA6-EQ-L occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- · Passive loop thru
- Gain control
- High common mode range and common mode rejection ratio (CMRR)
- Jumper selectable AC or DC coupling
- Jumper selectable fast or slow back porch clamp
- DC level control when clamp is enabled
- Cable equalizer adjustment range: 0 to 300m of 8281 or 1694A
- · Consistent input impedance if card power is lost
- Module Status/Local Fault

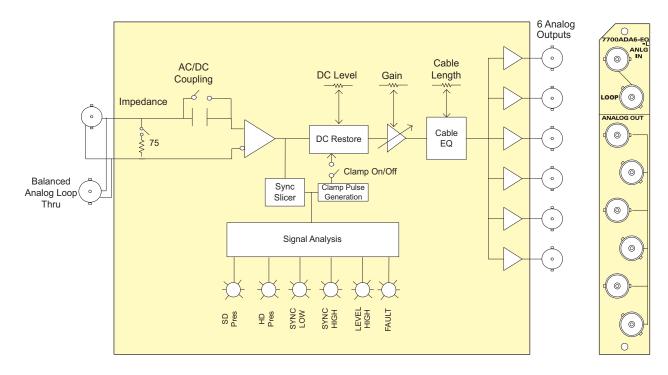

## ▶ Specifications

#### Analog Video Input:

Any analog video format, up to 2V p-p and 30MHz bandwidth Standards

Connector: BNC per IEC 61169-8 Annex A Common mode range

> 6V p-p

> 70dB to 1kHz

Signal amplitude: 2.5V p-p max 0 to 300m of Belden 8281 or 1694A Cable equalizer:

cable

Coupling: AC or DC (jumper selectable) Return loss: > 40dB to 10MHz, > 30dB to 30MHz

Clamp range: > ±600mV Fast clamp attenuation of 60Hz:

## Analog Video Outputs:

Passive Loop:

Number of Outputs: 6

BNC per IEC 61169-8 Annex A Connector:

Output impedance:  $75\Omega$ 

Gain control range: ±5dB DC level: < ±100mV (with DC Coupling active

and back porch clamp disabled)

< ±0.05dB no equalization (to 5.5MHz) < 0.17% 0 to 300m Freq. Response: Differential Gain:

Differential Phase: < 0.19° 0 to 300m C/L gain inequality: < ±0.1% for all cable lengths

< ±2ns

C/L Delay: > 42dB to 10MHz, > 32dB to 30MHz

Output isolation: Output return loss: > 40dB to 30MHz

Noise performance: < -78dB RMS NTC7 weighting < -70dB RMS 15kHz to 5.5MHz

## Electrical:

+12V DC Voltage: 1.2W Power:

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

Analog Video Distribution Amplifier with Cable Equalization and Loop

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules




The 7700ADA6-L is a 1x6 Analog Distribution Amplifier with passive loop thru. It amplifies composite analog for distribution of  $75\Omega$  analog video signals.

The 7700ADA6-L amplifier has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2Vp-p.

The 7700ADA6-L occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- · Passive loop thru
- Gain Control
- $75\Omega$  or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMMR)
- · Jumper selectable AC or DC coupling
- $\bullet$  Consistent input impedance if card power is lost
- Module Status/Local Fault

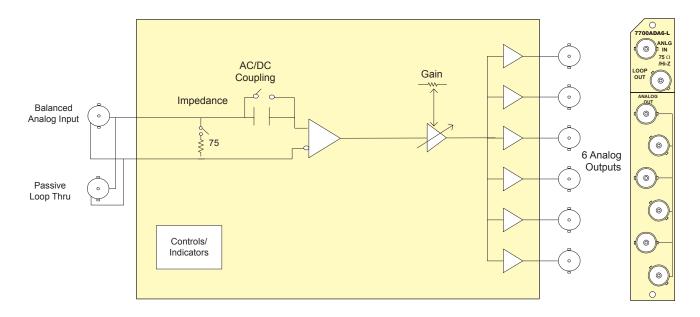

### ▶Specifications

#### Analog Video Input:

Standards: Any analog video format, up to 2Vp-p and 30MHz bandwidth BNC per IEC 61169-8 Annex A

Connector: Common mode range: >6Vp-p CMRR: > 70dB to 1kHz

Signal amplitude: 2.5Vp-p max

75Ω terminated, 35kW Hi-Z Impedance: (jumper selectable)

Coupling: AC or DC (jumper selectable) Return loss: >40dB to 10MHz, >30dB to 30MHz Analog Video Outputs:

Number of Outputs: 6 Per Card Connector: BNC per IEC 61169-8 Annex A

Output impedance: 750

Gain control range: ± 5dB DC level

(DC Coupling active): < ± 100mV <±0.05dB (to 5.5MHz)

Freq. Response: Differential Gain: <0.17 % < 0.19 deg Differential Phase: C/L gain inequality: C/L Delay: <±0.1%

<±2nsec Output isolation: 42dB to 10MHz, 32 dB to 30MHz

Output return loss: >40dB to 30MHz

<-78dB RMS NTC7 weighting, Noise performance: <-70dB RMS 15kHz to 5.5MHz Electrical: Voltage:

+12V DC 1.2 Watts

Power: EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of Slots: 1

### **>>>**Ordering Information

7700ADA6-L Analog Video Distribution Amplifier with Loop Thru

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules




The 7700ADA7 Analog Distribution Amplifier is a general purpose amplifier for distributing analog video signals. The 7700ADA7 features one balanced input with seven outputs. The 7700ADA7 amplifier has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2V p-p.

The 7700ADA7 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- $75\Omega$  or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMMR)
- Gain control
- Jumper selectable AC or DC coupling
- · Looping feature with external "T" connector

- · Consistent input impedance if card power is lost
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

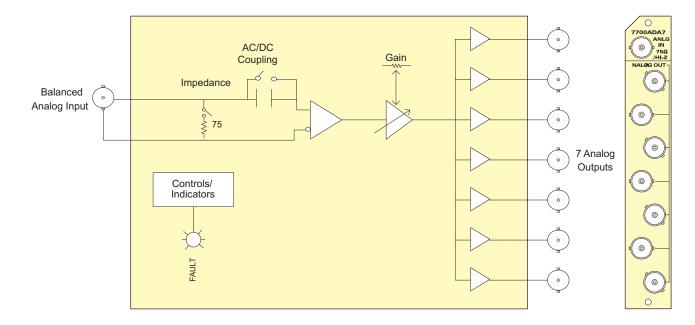

### ▶ Specifications

#### Analog Video Input:

Any analog video format, up to 2V p-p and 30MHz bandwidth

BNC per IEC 61169-8 Annex A Connector:

Common mode range:

> 6V p-p CMRR: > 70dB to 1kHz Signal amplitude: 2.5V p-p max

Impedance:  $75\Omega$  terminated,  $35k\Omega$  Hi-Z (jumper

selectable)

AC or DC (jumper selectable) Couplina: > 40dB to 10MHz, > 30dB to 30MHz Return loss:

Analog Video Outputs:

Number of Outputs: 7 per card

BNC per IEC 61169-8 Annex A Connector:

Output impedance:  $75\Omega$ Gain control range: ±5dB DC level (DC Coupling active):

< ±100mV Freq. Response: < ±0.05dB (to 5.5MHz)

Differential Gain: < 0.17% Differential Phase: < 0.19° C/L gain inequality: < ±0.1%

C/L Delay: < ±2nsec Output isolation: 42dB to 10MHz, 32dB to 30MHz

Output return loss: > 40dB to 30MHz Noise performance: < -78dB RMS NTC7 weighting, < -70dB RMS 15kHz to 5.5MHz

## Physical:

Electrical:

Voltage:

EMI/RFI:

Power.

Number of Slots:

#### >>> Ordering Information

7700ADA7 Analog Video Distribution Amplifier (1x7)

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU +1RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

+12V DC

EU EMC Directive

Complies with FCC Part 15, Class A,

4 6W




The 7700ADA7-EQ Equalizing Analog Distribution Amplifier is a general purpose amplifier for distributing analog video signals. The 7700ADA7-EQ features one balanced equalized input with seven outputs. It has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2V p-p.

The 7700ADA7-EQ occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- $75\Omega$  or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMMR)
- · Jumper selectable AC or DC coupling
- · Jumper selectable fast or slow back porch clamp
- DC level control when clamp is enabled
- Cable equalizer adjustment range: 0 to 300m of 8281 or 1694A
- Looping feature with external "T" connector and external termination
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C

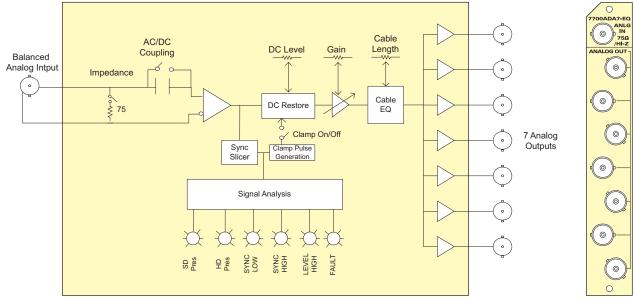

## ▶ Specifications

### Analog Video Input:

Any analog video format, up to 2V p-p Standards

and 30MHz bandwidth

BNC input per IEC 61169-8 Annex A Connector:

Common mode range:

> 6V p-p CMRR: > 70dB to 1kHz Signal amplitude:

2.5V p-p max 0 to 300m of Belden 8281 or 1694A Cable equalizer:

cable

Impedance: 75Ω terminated, 35kΩ Hi-Z (jumper selectable)
AC or DC (jumper selectable)

Coupling: > 40dB to 10MHz, > 30dB to 30MHz

Clamp range:  $> \pm 600$ mV Fast clamp attenuation of 60Hz:

### Analog Video Outputs:

Number of Outputs: 7

Connector: BNC per IEC 61169-8 Annex A

Output impedance:  $75\Omega$ 

Gain control range: ±5dB

DC level: < ±100mV (with DC Coupling active

and back porch clamp disabled)

DC level Control range: < ±200mV (with back porch clamp

enabled)

Freq. Response: < ±0.05dB no equalization (to 5.5MHz)

< ±0.09dB for 5 to 100m Belden 8281

or 1694A (to 5.5MHz)

< ±0.15dB for 100 to 300m Belden

8281 or 1694A (to 5.5MHz) Differential Gain: < 0.17% 0 to 300m < 0.19° 0 to 300m

C/L gain inequality: < ±0.1% for all cablelengths < +2nsec

Differential Phase:

C/L Delay: > 42dB to 10MHz, > 32dB to 30MHz Output isolation:


> 40dB to 30MHz Output return loss:

Noise performance: < -78dB RMS NTC7 weighting

< -70dB RMS 15kHz to 5.5MHz

· Consistent input impedance if card power is lost

frame and a 7700FC VistaLINK® Frame Controller



#### Electrical: Voltage:

+12V DC 5W

#### Physical:

Number of slots: 1

### **>>>**Ordering Information

7700ADA7-EQ Analog Video Equalizing Distribution Amplifier (1x7)

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



## **Dual Analog Audio Distribution Amplifier**

The 7700ADA-AUD Dual Analog Audio distribution amplifier is a general purpose amplifier for distributing analog audio signals. It can be operated as two independent 4 output amplifiers for stereo signals, or as a single amplifier with 8 outputs where higher fanout is required.


The 7700ADA-AUD can be operated with either differential or single ended inputs and offers a wide range of gain adjustment to handle a wide variety of input signals.

#### ▶ Features & Benefits

- · Differential and single ended input (automatic single ended to differential conversion)
- Configurable for stereo (2-1x4) or mono (1x8)
- · High impedance input
- · Low impedance outputs
- Wide gain adjustment range
- · High common mode range and common mode rejection ratio (CMRR)
- · Very high SNR
- Very low THD+N

#### Card Edge LEDs

· Module status/Local fault

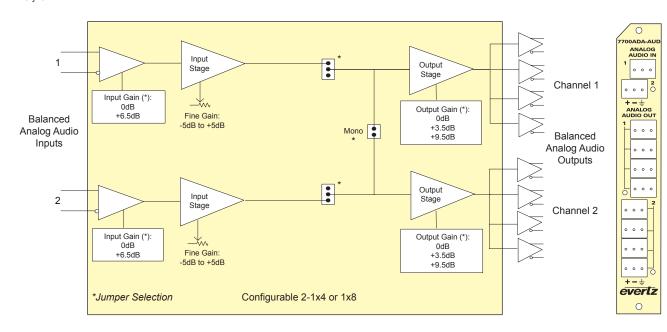

## ▶Specifications

#### Analog Audio Input:

Standards Number of inputs Connectors: Input step gain:

Any analog audio signal 2 (Balanced or Single ended) 3-pin removable terminal strips 0dB or +6.5dB (configurable with

jumpers) -6.5dB to +9.5dB (card edge pot Fine gain control: adjustable)

Max input level: 0dB input gain: +6.5dB input gain:

+34dBu +28dBu

 $15k\Omega$ 

-87dBu (0dB input gain), -91dBu (+6.5dB input gain jumper setup)

Common mode rejection:

> 115dB @ 60Hz, 90dB @ 20kHz (tested with +28dBu CM input)

Common mode range: 0dB input gain:

+6.5dB input gain:

> ±22V +6.5dB input gain: > ±7V Input impedance: 0dB input gain: 33kΩ

Analog Audio Outputs:

Number of Outputs: Stereo Mode 4 outputs each on left and right

channels Mono Mode: 8 outputs

Connectors: 3-pin removable terminal strips Output step gain: 0, 3.5 or 9.5dB (configurable with jumpers)

Max output level: +28dBu across hi-impedance load +24dBm into 600Ω load

Output impedance:  $66\Omega$ 

Frequency Response: ±0.02dB 20Hz to 20kHz Stereo phase mismatch:

< 1° @ 20kHz SNR:

0dB input gain: 115dB +6.5dB input gain: 119dB

THD+ Noise: 0.001% 20Hz to 20kHz @ 28dBu.

unweighted RMS, Hi-Z load 0.01% with  $600\Omega$  up to 24dBm

Intermodulation Distortion:

0.001% - SMPTE @ 18dBu > 115dB @ 1kHz, > 93dB @ 20kHz Stereo crosstalk: Output Isolation: > 110dB @ 1kHz, 100dB @ 20kHz

Electrical:

Voltage: +12V DC Power: 12W

EMI/RFI: Complies with FCC Part 15, Class A,

EU EMC Directive

Physical:

Number of Slots:

## **>>>**Ordering Information

7700ADA-AUD Balanced Analog Audio Distribution Amplifier (Configurable 1x8 or 2-1x4)

**Ordering Options** Rear Plate must be specified at time of order Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



## Dual Analog Audio Distribution with Mono Mix


The 7700ADA-AUD-MM Balanced Analog Audio Distribution Amplifier with Mono Mix is a general purpose amplifier for distributing analog audio signals and providing a mono mix output of the stereo inputs. It can be operated with either differential or single ended inputs and offers a wide range of gain adjustment to handle a wide variety of input signals.


The 7700ADA-AUD-MM occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules or a 350FR portable frame which will hold up to 7 modules.

#### ▶ Features & Benefits

- · Differential and single ended inputs (automatic single ended to differential conversion)
- · High impedance inputs
- · Low impedance outputs
- Wide gain adjustment range

- High common mode range and common mode rejection ratio
- Very high SNR and very low THD+N
- · Mono Mix of the stereo input
- Module Status/Local Fault

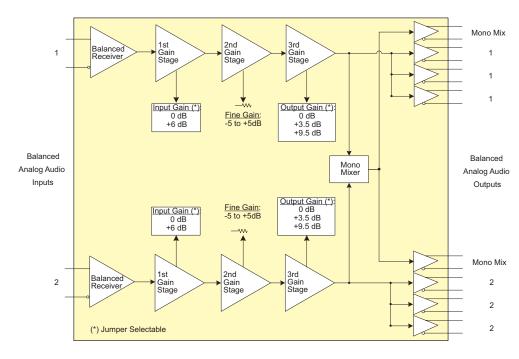



#### ▶Specifications

Analog Audio Inputs:

Standard: Any analog audio signal 2 (Balanced or Single ended) Number of Inputs: Connector: 3-pin removable terminal strips

Maximum Input Level: 0dB Input Gain: +33dBu +6dB Input Gain: +28dBu

-87dBu (0dB input gain), -91dBu Noise Floor:

(+6dB input gain jumper setup)

Common Mode Rejection:

> 90dB @ 60Hz, 60dB @ 20kHz

(tested with +28 dBu CM input)

Common Mode Range: 0dB Input Gain: > ±22V +6dB Input Gain: > ±7V Input Impedance: 0dB Input Gain +6dB Input Gain 15kΩ

## Analog Audio Outputs:

Number of Outputs: Distribution

Amplified Outputs: 3 outputs each of left and right

channels

Mono Mix Outputs: 2 outputs total

Connectors 3-pin removable terminal strips

Maximum Output Level:

+28dBu across hi-impedance load

+24dBm into 600Ω load

Output Impedance:  $66\Omega$ Frequency Response

±0.02dB 20Hz to 20kHz

Stereo Phase Mismatch: < 1° @ 20kHz

SNR:

0dB Input Gain: 115dB +6dB Input Gain: 119dB

0.001% 20Hz to 20kHz @ 28dBu, THD+ Noise

unweighted RMS

Intermodulation Distortion:

0.001% - SMPTE @ 18dBu

Stereo Crosstalk: >115dB @ 1kHz, >93dB @ 20kHz

#### Available Gains:

Input Step Gain: 0dB or +6dB (configurable with jumpers) Fine Gain Control: -5 to +5dB (card edge pot adjustable) Output Step Gain: 0, 3.5 or 9.5dB (configurable with

jumpers)

Electrical:

+12V DC Voltage:

12W Power:

EMI/RFI: Complies with FCC regulations for

class A devices Complies with EU EMC directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7700ADA-AUD-MM Dual Analog Audio Distribution Amplifier with Mono Mix

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules








The 7700ADA-ETSI High Amplitude Distribution Amplifier is a general purpose amplifier with an equalizing function for distributing a wide range of digital and analog signals. It has been designed to distribute pulses and signals up to ±3.5V ITU-T G.703 E12 (Physical/electrical characteristics of hierarchical digital interface at 2048kb/s) signals. The 7700ADA-ETSI features one balanced equalized input with four outputs.


The 7700ADA-FTSI occupies one card slot and can be housed in a 1RU frame. which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- 75Ω input impedance
- Distribute signals up to ±3.5V to 30MHz
- · High common mode range and common mode rejection ratio (CMRR)
- ±5.5dB Gain control range

- · Jumper selectable AC or DC coupling
- Cable equalizer adjustment range: 0 to 300m of Belden 8281 or 1694A
- · Consistent input impedance if card power is lost

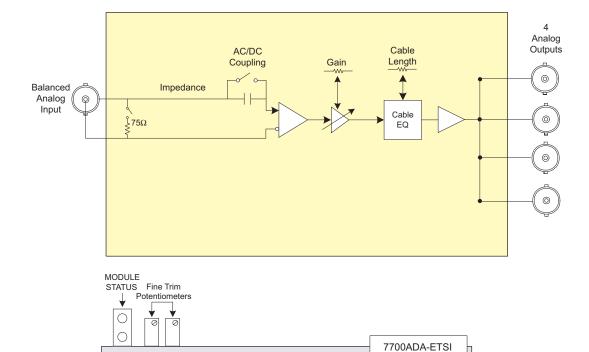



### ▶Specifications

Inputs:

CMRR:

Any analog waveform up to ±3.5V

and 30MHz bandwidth 1 BNC per IEC 61169-8 Annex A Connector:

Common mode range:

> 6V p-p > 60dB to 1kHz

Signal amplitude: Up to ±3.5V Cable equalizer: 0 to 300m of Belden 8281 or 1694A

Impedance: AC or DC (jumper selectable) > 40dB to 10MHz, > 25dB to 30MHz Coupling: Return loss:

Outputs:

Number of Outputs: 4 Per Card

Connector: BNC per IEC 61169-8 Annex A Output impedance: 75Ω

Gain control range: ±6dB

Differential Gain:

Freq. Response: < ±0.05dB no equalization (to

5.5MHz)

< ±0.09dB for 5 to 100m Belden 8281

or 1694A (to 5.5Mhz)

< ±0.15dB for 100 to 300m Belden 8281 or 1694A (to 5.5Mhz) < 0.25% 0 to 300m (for single load)

Differential Phase: < 0.19° 0 to 300m

C/L gain inequality: < +/-0.1% for all cable lengths

C/L Delay: < +/-2nsec

Output isolation:

7700ADA-ETSI

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+1RU +SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

+12V DC

2.5W

Standalone Enclosure


Electrical:

Voltage:

Physical:

Number of slots:

Power:

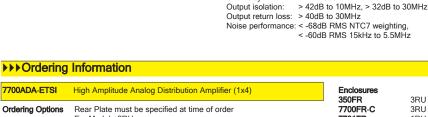







With full 10-bit processing, the 7710ARC and 7710ARC-F convert any input aspect ratio to any output aspect ratio maintaining excellent image quality. The 7710ARC series supports input side Wide Screen Signaling (WSS) and Active Format Description (AFD) to automatically steer aspect ratio conversion.


The 7710ARC has a second program input that can be used for seamless switching between two input sources. The 7710ARC-F accepts a FILL input and can key that content into un-used portions of the output raster (ie.side panels typically generated when converting 4:3 to 16:9). The module also supports WSS and AFD insertion capability on the output side, along with transparent handling of other HANC and VANC from the input to the output.

#### ▶ Features & Benefits


- Converts any input aspect ratio to any output aspect ratio, with standard support for 16:9 letterbox, 14:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze aspect ratio conversions
- Flexible ARC control: manual configuration or slave to incoming AFD or WSS
- Second program input for seamless switching between two sources (7710ARC)
- FILL input for keying into un-used portions of output raster (7710ARC-F)
- · Motion adaptive de-interlacer for exceptional vertical resolution
- High quality 10-bit video processing
- · Variable vertical blanking to pass custom VANC data
- Full VANC and HANC transfer from input to output
- 10 user presets for storing custom module configurations

- · Reference input allows for phasing of output video
- · GPI input to recall module configuration
- On-screen display used to configure the operating modes
- Card Edge LEDs for signal presence, input and output modes, module status
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO, 9000NCP2 or 9000NCP Network Control Panel) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

#### ▶7710ARC

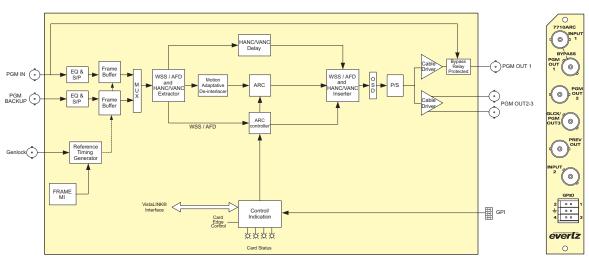

#### ▶7710ARC-F

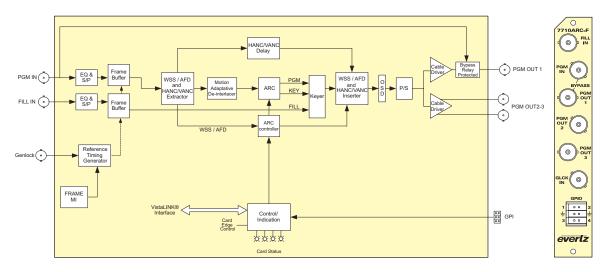

# 7710ARC, 7710ARC-F

#### SD Aspect Ratio Converter with Fill Input and Keying

#### **▶**Specifications

#### Serial Video Input:

SMPTE 259M Standard:

Connectors: 2 BNC per IEC 61169-8 Annex A Input Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 (or equivalent ) cable

> 15dB up to 270MHz Return Loss:

#### Serial Video Outputs:

SMPTE 259M Standard: Number of Outputs: 3 Per module

Connector: BNC per IEC 61169-8 Annex A 800mV nominal

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal Overshoot: < 10% of amplitude > 15dB up to 270MHz Return Loss:

< 0.2 UI

#### Genlock Input:

Standards NTSC, PAL, black or tri-level autodetect Number of Inputs:

Connectors: BNC per IEC 61169-8 Annex A Hi-Z or  $75\Omega$  (jumper configurable) > 40dB up to 10MHz Impedance: Return Loss:

#### GPI Inputs/Outputs:

4 (configurable as inputs or outputs) Number: Opto-isolated, active low with internal Type:

pull-ups to +5 or +12V (jumper settable) Connector: 6-pin removable terminal block

Signal Level: Closure to ground Function:

Inputs:

User Preset select

#### Electrical:

Voltage: +12V DC Power:

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### Physical:

Number of Slots:

7700 frame mounting: 7701 frame mounting: 2

#### **▶** ► ► Ordering Information

SD Aspect Ratio Converted

7710ARC-F SD Aspect Ratio Converter with Fill Input and Keying

Rear Plate must be specified at time of order Ordering Options:

Eg. Model +3RU

#### Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

# Accessories: 7700FC 9000NCP

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

Enclosures: 350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3 single or dual slot modules 7701FR S7701FR













The 7710DCDA-HD is a reclocking high definition serial digital video distribution amplifier and a high quality downconverter for 1.5Gb/s HDTV signals. It can also function as a monitoring distribution amplifier for standard definition (480i) 270Mb/s signals. It provides 4 reclocked DA outputs and 3 downconverted SDI or composite and NTSC/PAL outputs (selectable). It accepts all the popular international SMPTE 292M video formats. When the 7710DCDA-HD downconverts 1080p/23.98sF input video to 525i/59.94 with a 3:2 pulldown, the 3:2 pulldown cadence can be free running or locked to embedded SMPTE 12M-2 time code.

The 7710DCDA-HD has color space conversion from ITU rec. 709 to ITU rec. 601, and will provide various downconverted formats such as 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze. It supports Widescreen Signaling (WSS) on the output to handle various aspect ratios of program material.

Full 10-bit processing is provided throughout the signal path to achieve excellent downconversion quality. The module allows for selectable horizontal and vertical filters to control picture sharpness. It also de-embeds two groups of audio, and re-embeds the audio on the SDI output in time with the video. All parameters may be controlled by use of the on-screen display menu.


The 7710DCDA-HD has a closed caption monitoring capability that decodes CEA-608 or CEA-708 captions that have been encoded into the VANC data space of an HD video input, or CEA-608 captions from an SD video input.

The 7710DCDA-HD provides card edge LEDs to indicate signal present and audio groups present. The 7710DCDA-HD occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- Serial digital 1.5Gb/s HD input per SMPTE 292M
- Supports most international standards including 1080i/60, 1080i/59.94, 1080i/50, 1080p/24, 1080p/23.98, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 480p/60, and 480p/59.94
- Will also accept 270Mb/s SD (480i) input SDI per SMPTE 259M in a pass-through mode - auto senses HD or SD inputs
- 4 Reclocked DA outputs (HD if HD inputs applied, SD if SD inputs applied)
- 3 Selectable SDI or Composite Outputs (downconverted from HD if HD input applied, from reclocked SD if SD input applied)
- High quality HD ⇒ SD downconversion
- Supports 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze aspect ratio conversions
- 1080p/23.98sF conversion to 525i/59.94 with 3:2 pulldown sequence
- HD to SD color space conversion (ITU rec. 709 to ITU rec. 601)

- On-screen display used to configure the operating modes
- De-embeds Audio from HD video and embeds into standard definition SDI video (2 groups)
- Moves ANC data (e.g. captioning, timecode) from HD video to standard definition SDI video
- Decodes and displays CEA-608 or CEA-708 captions from incoming video
- On-screen aspect ratio marker
- Support for Widescreen Signaling (WSS) on output
- Card Edge LEDs for signal presence, equalization warning, audio groups present, module status
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

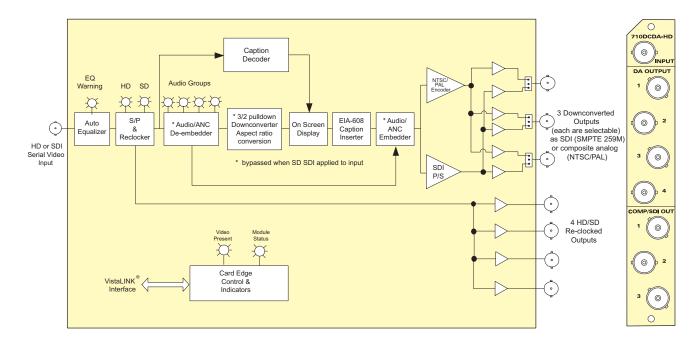

Just less than 1 to 2 frames depending

on input video format, processing

mode and phase setting, ie: with

1080i/59.94 input the delay is < 1

time with the output picture

Audio is delayed and re-embedded in

Complies with FCC Part 15, Class A

#### HD Downconverter & Distribution Amplifier

Frame delay

+12V DC

EU EMC Directive

10W

Input to Output Processing Delay:

#### ▶Specifications

Serial Video Input:

SMPTE 259M - Pass-through mode Standard:

SMPTE 292M (1.5Gb/s), SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M 1080i/60, 1080i/50 1080p/30sF, 1080p/25sF, 1080p/24sF, 1035i/60, 720p/60, 480p/60 and the 1/1.001 divisor versions where applicable software selectable or

autodetect

Connector: BNC per IEC 61169-8 Annex A Input Equalization:

Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable Return Loss: > 15dB up to 1.5GHz

Reclocked Serial Video DA Outputs:

Same as input (SMPTE 259M or Standard:

SMPTE 292M) Number of Outputs: 4 per card reclocked

BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal for HD 750ps nominal for SD

< 10% of amplitude Overshoot: Return Loss: > 15dB up to 1.0GHz > 10dB up to 1.5GHz

Jitter: < 0.2 UI

#### Downconverted Serial Video Outputs:

SMPTE 259M-C (270Mb/s) Standard: Number of Outputs: Up to 3 per card (jumper selectable) Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal < 10% of amplitude > 15dB at 270Mb/s

Return Loss: < 0.2 UI Jitter:

Overshoot:

#### Downconverted Composite Analog Video Outputs:

Analog composite NTSC (SMPTE 170M) Standards: or Analog composite PAL (ITU-R BT.470)

Up to 3 per card (jumper selectable) BNC per IEC 61169-8 Annex A Connectors:

Signal Level: 1V p-p nominal DC Offset: 0V ±0.1V Return Loss: > 35dB up to 5MHz Frequency Response: 0.2dB to 4MHz Differential Phase: < 0.5°(< 0.3° typical) < 0.8% (< 0.5% typical) Differential Gain: SNR: > 78dB to 5MHz (shallow ramp)

Impedance: 75Ω

#### Number of Outputs:

Physical: Number of slots:

Video Delay:

Audio Delay:

Electrical:

Voltage:

Power: EMI/RFI:

#### **>>>**Ordering Information

HD downconverter and Distribution Amplifier (4 HD reclocked 1.5Gb/s, selectable 3 SD SDI outputs or 3 composite analog outputs) 7710DCDA-HD

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU

+1RU

Standalone Enclosure Rear Plate +SA

Accessories

7700FC VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel **Enclosures** 350FR 7700FR-C

7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

3RU Portable Multiframe which holds up to 7 single slot modules












The 7710UC-KF Key and Fill upconverter is re-configurable to provide high quality upconversion of your standard definition key and fill signals to common 1.5Gb/s high definition (SMPTE 292M) video formats.

The 7710UC-KF occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module. The units also provide card edge LEDs to indicate signal present and genlock present.

#### ▶ Features & Benefits

- High quality SD ⇒ HD upconversion
- Supports standard aspect ratio conversions plus all user-definable
- Supports all necessary color space conversions (ITU rec. 601 to ITU rec.709) for fill channel
- Full video processing functions, GBR gain YCrCb gain and offset and hue adjustment for fill channel
- Reference input allows for phasing of output video

- Module supports min. delay or variable delay for video output with out reference
- · Module supports video output referenced to genlock with variable delay
- Output on-screen display used (OSD) to configure the operation of the device
- $\bullet$  VistaLINK  $\!\!^{\circ}$  -capable for remote monitoring and control via SNMP (using VistaLINK® PRO, 9000NCP2 or 9000NCP Network Control Panel) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

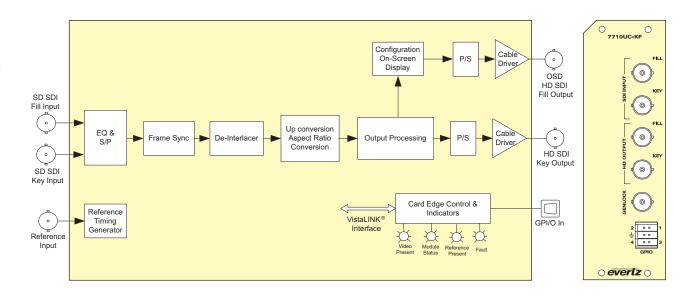

#### ▶ Specifications

Standards 270Mb/s SMPTE 259M

Number of Inputs: 1 Key, 1 Fill

Connector BNC per IEC 61169-8 Annex A Input Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 or equivalent cable

Return Loss: > 15dB up to 540Mb/s

#### Serial Digital Outputs:

1.485Gb/s SMPTE 292M Standard:

Number of Outputs: 1 Key, 1 Fill

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot < 10% of amplitude > 15dB at 1.5GHz Return Loss:

Genlock Input:

HD Tri-Level sync, NTSC or PAL Color Type:

Black 1V p-p

BNC per IEC 61169-8 Annex A Connector: Termination:

75 $\Omega$  (jumper selectable)

#### General Purpose Inputs and Outputs:

Number: 4 (configurable as inputs or outputs) Opto-isolated, active low with internal Type:

pull-ups to +5 or +12V (jumper settable) 6-pin removable terminal block

Connector: Signal Level: Closure to around

Function:

EMI/RFI:

Electrical:

Voltage:

Physical: Number of slots: 7700 frame mounting: 2 7701 frame mounting: 1

+12V DC

EU EMC Directive

Complies with FCC Part 15, Class A

20W

1 fill, 1 key Inputs: Outputs 1 fill, 1 key

#### **▶▶▶** Ordering Information

7710UC-KF HD Key/Fill Upconverter

Ordering Options Rear Plate must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+SA

+3RU +1RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Accessories 7700FC 9000NCP 9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone enclosure











#### HD Noise Reducer with Image Enhancement

The 7710NR-HD Noise Reducer with Image Enhancement provides high quality and cost effective noise reduction for HD video signals. The 7710NR-HD is ideal for use in television production facilities, mobile broadcast vehicles, production and post-production facilities.

The 7710NR-HD allows the user to remove random Gaussian noise, impulsive noise, and other temporal varying artifacts.


The 7710NR-HD uses proprietary noise reduction processing that consists of five distinct filters and a complex motion adaptive algorithm to combine and control the filtered results based on two motion sensors.


The 7710NR-HD also provides user-adjustable image enhancements to sharpen image details.

#### ▶ Features & Benefits

- One 1.5Gb/s HD input (per SMPTE 292M)
- Full 10-bit I/O processing
- Gaussian, impulsive and temporal artifact noise reduction
- · Image enhancements user-adjustable
- · User presets to store noise reducer and image enhancement settings
- · Split-screen comparison mode

- · Transparent handlings of embedded audio, VANC data, and closed captioning
- On-screen display for card configuration
- · Card edge control and LEDs for video and audio presence and module status
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

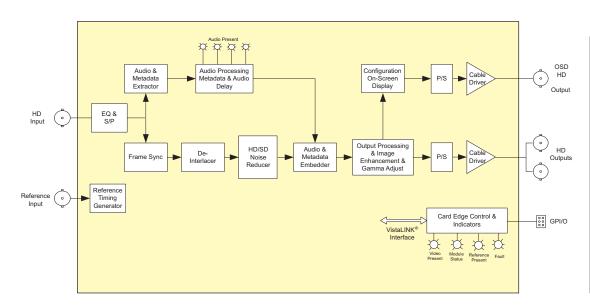



#### ▶ Specifications

Serial Video Input:

SMPTE 292M 1.485Gb/s, auto detects Standard:

standard

1 BNC per IEC 61169-8 Annex A Connector Input Equalization: Automatic to 100m @ 1.5Gb/s with

Belden 1694A or equivalent cable

On-Screen Display Video Output:

Standard: Same as input Number of outputs: 1 per module

1 BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal

DC Offset: 0V +0.5V Noise Reduced Video Outputs:

Standard: Same as input Number of outputs: 2 per module

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal

DC Offset: 0V +0.5V

General Purpose Inputs and Outputs:

Number of inputs: 4 per module (configurable as inputs or

outputs)

Standard: Opto-isolated, active low with internal

pull-ups to +5V or +12V (jumper

settable)

Connector: 6-pin removable terminal block

Signal Level: Closure to ground Function Inputs

User presets for noise reducer and

image enhancement settings

Electrical:

+12V DC Voltage: Power: 25W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

7700 frame mounting: 7701 frame mounting: 2

#### **>>>**Ordering Information

7710NR-HD HD Noise Reducer with Image Enhancement Rear Plate must be specified at time of order

**Ordering Options** Eq. Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RH

1RU rear plate for use with 7701FR Multiframe +1RU

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



# 7710XC-HD, 7710XC-AES4-HD

#### HD Cross Converter with VANC and Embedded Audio Support


The 7710XC-HD High Definition Format Translator/Cross Converter provides high quality conversion of your high definition (SMPTE 292M) signals to other common 1.5Gb/s high definition (SMPTE 292M) video formats. The 7710XC-HD has 10-bit processing, and 2 HD Serial Digital outputs and 1 OSD output, plus external genlock.


The 7710XC-AES4-HD accepts 2 groups of SMPTE 299M embedded audio on the input or external AES audio and re-embeds them into the serial video output and provides 4 AES audio output mirroring the embedder. The re-embedded audio is compliant to SMPTE 299M with delay adjust and has the appropriate delay added to compensate for video delay incurred by the conversion process. The audio is also available as 4 unbalanced AES outputs.


The units also transports the closed caption and time code information from input to output performing all necessary HD to HD translations and time code recalculations. All 7710XC-HD series modules occupy 2 card slots in the 3RU frame, which will hold up to 15 modules as well as a 3RU portable frame that will hold up to 7 modules. The modules are also available for the 1RU frame, which will hold up to 3 modules. The units also provide card edge LEDs to indicate signal present, genlock present and audio groups present.

#### ▶ Features & Benefits

- · High quality HD to HD cross conversion
- · Support all necessary color space conversions
- · Full video proc functions, GBR gain YCrCb gain and offset, hue adjustment and RGB color limiter
- Reference input allows for phasing of output video
- Module supports min. delay or variable delay for video output without reference
- · Module supports video output referenced to genlock with variable delay
- Output on-screen display used to configure the operating modes
- De-embeds Audio from HD video input and embeds into HD video output (2 groups)
- Supports re-timed external 4 AES inputs and outputs (7710XC-AES4-HD only)
- Moves RP-188 VITC and LTC from HD input to HD output, recalculated for frame rate changes
- Moves HD closed captions from HD input to HD output
- $\bullet$  VistaLINK  $\!\!^\circ$  -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

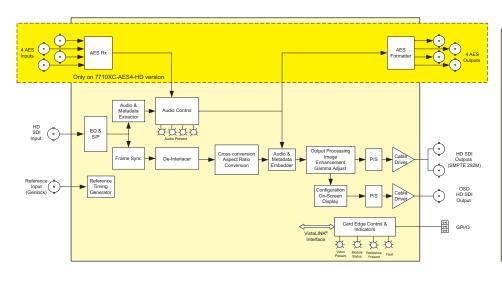





# 7710XC-HD, 7710XC-AES4-HD

#### HD Cross Converter with VANC and Embedded Audio Support

#### **▶**Specifications

**HD-SDI Video Inputs:** 

1.485Gb/s SMPTE 292M - menu Standard:

selectable

SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: > 10dB up to 1.5Gb/s

HD-SDI Serial Video Outputs:

1.5Gb/s SMPTE 292M Standard:

Number of Outputs: 3 Per Card

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal 0V +0.5V DC Offset: Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude Return Loss: > 10dB at 1.5GHz

AES Audio Inputs (-AES4 version only): Number of Inputs:

SMPTE 276M, single ended Standard:

synchronous or asynchronous AES BNC per IEC 61169-8 Annex A

Connector: Resolution: 24 bits Sampling Rate: 48kHz 75Ω

Impedance: Signal Level: 1V p-p nominal

AES Audio Output (-AES4 version only):

Number of Outputs:

SMPTE 276M, single-ended Standard:

synchronous AES

BNC per IEC 61169-8 Annex A Connectors:

Resolution: 24 bits Sampling Rate: 48kHz 75Ω Impedance:

Signal Level: 1V p-p nominal

General Purpose Inputs and Outputs:

Number: 4 (configurable as inputs or outputs) Type: Opto-isolated, active low with internal pull-ups to +5 or +12V (jumper settable)

Connector: 6-pin removable terminal block

Signal Level: Closure to ground

Function: Inputs:

Outputs:

User Preset select, fade or cut for

keyer, fade to black Tally (key on air)

Genlock Input:

HD Tri-Level sync, NTSC or PAL Type:

Color Black 1V p-p

Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

Electrical:

Voltage: +12V DC 26W

Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots: 7700 frame mounting: 2 7701 frame mounting: 1

#### **>>>**Ordering Information

HD Cross Converter with VANC and Embedded Audio support 7710XC-AES4-HD HD Cross Converter with VANC, Embedded Audio and discrete AES support

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU rear plate for use with 7701FR Multiframe

Enclosures 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules









The 7710XUC-HD and 7710XUC-AES4-HD High Definition Format Up/Cross Converters are universal any formt in and format out conversion cards. These modules provide high quality up-conversion of your standard definition signals with noise reduction or high quality HD to HD cross-conversions. The modules also do high definition to standard definition down-conversion with detail enhancement and gamma correction. Evertz® proprietary noise reduction and detail enhancements technologies ensure superior image quality whether up-converting, cross converting or down-converting.

The 7710XUDC-AES4-HD High Definition Format Up/Down/Cross Converter is similar to the 7710XUC-HD but provides simultaneous cross and down-conversion. The 7710XUDC series also have the added capability to read and write AFD data from the incoming video signal and onto the out-going video. Fully adaptive AFD (processing done in conjunction with VLPRO)

All the modules accept 2 groups of embedded audio on the input and re-embed them into the serial video outputs. The "-AES4" versions also accept 4 external discrete unbalanced AES inputs and provide 4 AES outputs with the same audio that is being embedded. In the case of the 7710XUDC-AES4-HD, the 4 AES outputs with the same audio are embedded on the output SD video signals, since they share one common audio processor. The 7710XUC-AES4-HD has a separate audio processor for the 4 AES outputs.

The re-embedded audio normally has the appropriate delay added to compensate for video delay incurred by the conversion process. An additional audio delay adjustment can also be made for lip sync correction.


The units also transfer the closed caption and time code information from input to output performing all necessary HD to SD and SD to HD translation and time code recalculations.


#### ▶ Features & Benefits


- · Any format in to any format out
- High quality HD to HD cross conversion
- · High quality SD to HD upconversion with Noise Reduction
- High quality HD to SD downconversion (simultaneous cross and down conversion with 7710XUDC-AES4-HD)
- · Reads and writes AFD codes from incoming video and on outgoing video (7710XUDC), Fully adaptive AFD processing using VLPRO
- Image Enhancement for HD and SD
- · Supports standard aspect ratio conversions plus all user definable
- Support all necessary color space conversions (ITU rec. 601 to ITU rec. 709) and SMPTE 240M (for 1035i)
- Full video processing functions: RGB gain, YCrCb gain and offset, hue adjustment, RGB gamma correction, and RGB color limited

- · Reference input allows for phasing of output video
- · Supports video output referenced to genlock with variable delay
- · Minimum delay or variable delay for video output without reference
- Output on screen display (OSD) for configuration
- De-embeds Audio from video input and embeds into video output (2 groups)
- · Supports external 4 AES inputs and outputs (-AES4 versions)
- Moves VITC time code and Line 21 captions from the SD video into the HD video ancillary data
- Moves RP-188 VITC and LTC from HD input to HD output, recalculated for frame rate changes
- · Moves HD closed captions from HD input to HD output


#### ▶7710XUC-HD

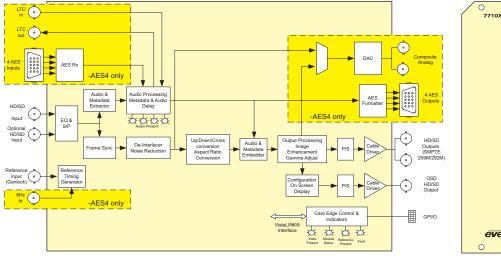






#### ▶7710XUDC-AEAS4-HD

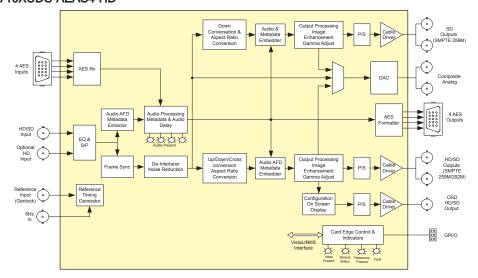

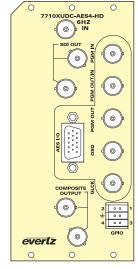

# 7710XUC-HD, 7710XUC-AES4-HD, 7710XUDC-AES4-HD

#### HD Up / Down / Cross Converters (with Optional External AES)

| MODEL#   | Input | Outputs                        |      | Conversion   |  |
|--|-------|--------------------------------|------|--|--|
| WODEL#   |       | PGM                            | OSD  | Conversion   |  |
| 7710XUC-HD<br>HD Format Up/Cross Converter                             | HD    | 2 HD                           | 1 HD | 1080 ⇔ 720   |  |
|  |       | 2 SD                           | 1 SD | 1080/720 ⇒ 525/625                                 |  |
|  | SD    | 2 HD                           | 1 HD | 525/625 ⇒ 1080/720                                 |  |
|  |       | 2 SD                           | 1 SD | 525/625 ⇔ 525/625 (ARC)                            |  |
| 7710XUC-AES4-HD<br>HD Format Up/Down/Cross Converter with external AES | HD    | 2 HD                           | 1 HD | 1080 ⇔ 720   |  |
|  |       | 2 SD                           | 1 SD | 1080/720 ⇒ 525/625                                 |  |
|  | SD    | 2 HD                           | 1 HD | 525/625 ⇒ 1080/720                                 |  |
|  |       | 2 SD                           | 1 SD | 525/625 ⇔ 525/625 (ARC)                            |  |
| 7710XUDC-AES4-HD HD Format Up/Down/Cross Converter with external AES   | HD    | 2 HD &<br>2 SD &<br>2 NTSC/PAL | 1 HD | 1080 ⇔ 720<br>&<br>1080/720 ⇒ 525/625              |  |
|  | SD    | 2 HD &<br>2 SD &<br>2 NTSC/PAL | 1 HD | 525/625 ⇔ 525/625 (ARC)<br>&<br>525/625 ⇒ 1080/720 |  |

#### ▶Specifications

Number of Inputs:

Serial Digital Video Inputs:

270Mb/s SMPTE 259M or 1 485Gb/s Standards:

SMPTE 292M - menu selectable SMPTE 260M, SMPTE 274M SMPTE 296M, SMPTE 349M 1 or 2 (optional based on PGM

IN/OUT configuration) BNC per IEC 61169-8 Annex A

Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss:

> 15dB up to 540Mb/s HD: > 15dB up to 1.5Gb/s

Serial Digital Video Outputs:

SMPTE 259M 270Mb/s or SMPTE 292M 1.485Gb/s Number of Outputs: 3 Per Card (or 2 based on PGM

IN/OUT configuration) 2 Per Card SD Only (7710XUDC-AES4-HD only) BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time

740ps nominal 200ps nominal HD: Overshoot: < 10% of amplitude

Return Loss:

Connector:

> 15dB at 540MHz HD: > 15dB at 1.5GHz

AES Audio Inputs (-AES4 models):

Number of Inputs:

SMPTE 276M, single-ended Standard:

synchronous or asynchronous AES DB15

Connector: Resolution: 24 bits Sampling Rate: 48kHz Impedance:

Signal Level: 1V p-p nominal

AES Audio Output (-AES4 models):

Number of Outputs SMPTE 276M, single-ended Standard:

synchronous AES Connectors: DB15 Resolution: 24 bits Sampling Rate: 48kHz

Impedance: 75Ω Signal Level: 1V p-p nominal

General Purpose Inputs and Outputs:

Number: 4 (configurable as inputs or outputs) Opto-isolated, active low with internal pull-ups to +5 or +12V (jumper settable)

Connector: 6-pin removable terminal block Signal Level:

Closure to ground

Genlock Input:

HD Tri-Level sync, NTSC or PAL Type:

Color Black 1V p-p Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

6Hz INPUT:

6Hz TTL Pulse Standard:

1 (only on "-AES4" versions) Number of Inputs: Connector: BNC per IEC 61169-8 Annex A Termination: 75Ω (jumper selectable)

LTC Input:

Standard: SMPTE 12M-1

Number of Inputs: 1 (7710XUC-AES4-HD only) BNC per IEC 61169-8 Annex A Connector: Termination: 75Ω (jumper selectable)

LTC Output:

SMPTE 12M-1 Standard:

1 (7710XUC-AES4-HD only) Number of Inputs: Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

Electrical: Voltage: Power:

+12V DC

26W (7710XUC-HD & 7710XUC-AES4-HD) 35W (7710XUDC-AES4-HD)

Complies with FCC Part 15, Class A EU EMC Directive EMI/RFI:

Physical:

Number of slots:

7700 frame mounting: 2 (7710XUC-HD & 7710XUC-AES4-HD)

3 (7710XUDC-AES4-HD)

7701 frame mounting: 1 (7710XUC-HD & 7710XUC-AES4-HD

#### **>>>**Ordering Information

7710XUC-HD HD Format Up/Cross Converter 7710XUC-AES4-HD

HD Format Up/Down/Cross Converter with external AES 7710XUDC-AES4-HD HD Format Up/Down/Cross Converter with external AES

**Ordering Options** Rear Plate must be specified at time of order

Ea: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Note: (Only for the 7710XUC-HD & 7710XUC-AES4-HD)

+1RU 1RU rear plate for use with 7701FR Multiframe

WPAES8-BNCM-6F Cable (included)

**Enclosures** 

350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules







signal path and integrates Evertz® proprietary detail enhancement and 3D pixel

adaptive noise reduction technologies. RGB gain/YCbCr gain and offset controls

keyer. The internal keyer is not enabled when operating with SD IN and SD OUT.

The 771UC-HD and the 7711UC-AES4-HD support multi-format SD/HD serial digital inputs and generate two HD serial digital outputs (1 with OSD overlays for card configuration). Inputs are auto-sensing and will "glitchlessly" switch between up-converting SD signals and passing through HD signals. An additional bidirectional BNC can be configured to supply an extra program input or an extra copy of the program output. With +F option, this extra BNC is used as a dedicated input BNC for HD FILL signals. When up-converting SD to HD, signals supplied to the HD FILL input can be keyed into the un-used portions of the output image raster (ie. side panels typically generated when converting 4:3 to 16:9) using the internal HD FILL inputs signal must be the same format as the target output video format and must be advanced relative to output video timing (< than 1 line). These modules can accept 2 groups of SMPTE 272M embedded audio on the input and re-embed them into the serial video output (audio delay tracks video delay). The 7711UC-HD and the 7711UC-AES4-HD transport closed caption and time code information from input to output with all necessary SD to HD translation and time code recalculations taking place.

The 7711UC-HD and 771UC-AES4-HD support the reading of AFD values from the incoming video signals and stamping of AFD values on the outgoing video. Fully adaptive AFD processing using VLPRO. The 7711UC-AES4-HD has the additional ability to stamp Dolby™ metadata on the outgoing video.


#### ▶ Features & Benefits


- High quality SD to HD up conversion
- Evertz® proprietary Noise Reduction and Image Enhancement


and RGB color limiting/legalization functions are also available


- Supports standard and user defined aspect ratio conversions
- Auto sensing SD/HD input with glitch-free output switching
- · Optional FILL input signal for keying into un-used portions of output image raster
- Supports all required color space conversions (rec. 601 to 709)
- Full video proc functions,for GBR gain, YCrCb gain/offset/hue
- RGB color limiter/legalizer
- · Reference input allows for phasing of output video
- · Min. delay or variable delay for video output without reference
- · Stamping of AFD codes on outgoing video signals and reading of AFD codes from incoming video


- Full adaptive AFD processing using VLPRO
- Dolby™ Metadata authoring (-AES4 version only)
- Supports external 4 AES inputs and outputs (-AES4 version only)
- · Output on screen display used to configure the operating modes
- · De-embeds 2 groups of audio from video input and embeds into video output with audio delay tracking video delay
- Moves VITC time code and Line 21 captions from the SD video into the HD video ancillary data
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

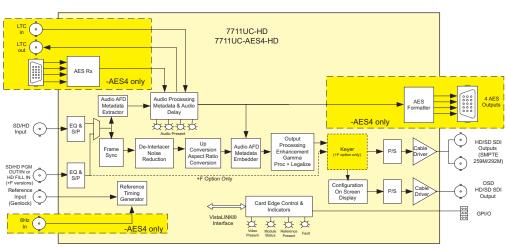



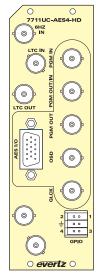





# 7711UC-HD, 7711UC-AES4-HD

#### HD Format Upconverter

#### **▶**Specifications

Number of Inputs:

Serial Digital Video Inputs:

Standards: 270Mb/s SMPTE 259M, menu selectable or auto detect

SMPTE 260M, SMPTE 274M 1 or 2 (optional based on PGM

IN/OUT configuration)
Connector: BNC per IEC 61169-8 Annex A
Input Equalization: Automatic to 300m @ 270Mb/s with

Belden 1694A or equivalent cable

Return Loss:

SD Standards: >15dB up to 270MHz

Serial Digital Video Outputs: Standard: 270Mb/s SMPTE 259M or 1.485Gb/s

SMPTE 292M Number of Outputs: 3 Per Card (or 2 based on PGM

IN/OUT configuration)
Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time:

SD Standards: 740ps nominal HD Standards: 200ps nominal Overshoot: < 10% of amplitude Return Loss:

HD Standards: > 10dB at 1.5GHz

Genlock Input:

Type: HD Tri-Level sync, NTSC or PAL

Color Black 1V p-p

Connector: BNC per IEC 61169-8 Annex A Termination:  $75\Omega$  (jumper selectable)

6Hz Input:

Standard: 6Hz TTL Pulse

Number of Inputs: 1 (7711UC-AES4-HD only) Connector: BNC per IEC 61169-8 Annex A Termination:  $75\Omega$  (jumper selectable)

LTC Input:

 Standard:
 SMPTE 12M-1

 Number of Inputs:
 1 (7711UC-AES4-HD only)

 Connector:
 BNC per IEC 61169-8 Annex A

 Termination:
 750 (jumper selectable)

LTC Output:

 Standard:
 SMPTE 12M-1

 Number of Inputs:
 1 (7711UC-AES4-HD only)

 Connector:
 BNC per IEC 61169-8 Annex A

 Termination:
 75Ω (jumper selectable)

**AES Audio Inputs:** 

Number of Inputs: 4 (only on "-AES4" version)
Standard: SMPTE 276M, single ended synchronous or asynchronous AES

**AES Audio Outputs:** 

Number of Outputs: 4 (only on "-AES4" version) Standard: SMPTE 276M, single ended

synchronous AES

 General Purpose Inputs and Outputs:

Number: 4 (configurable as inputs or outputs)
Type: Opto-isolated, active low with internal pull-ups to +5 or +12V (jumper

settable)

Connector: 6-pin removable terminal block

Signal Level: closure to ground

Function: Inputs:

User Preset select

Electrical:

Voltage: +12V DC Power: 25W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots: 7700 frame mounting: 2 7701 frame mounting:

#### **>>>**Ordering Information

7711UC-HD HD Upconverter (with Noise Reduction and Image Enhancement)
7711UC-AES4-HD HD Upconverter (with Noise Reduction and Image Enhancement)

and external AES

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

+F Fill Input Option

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

**+1RU** 1RU rear plate for use with 7701FR Multiframe

Enclosures
350FR 3RU
7700FR-C 3RU
7701FR 1RU

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules





#### Downconverter & Distribution Amplifier

The 7713HDC is a reclocking high definition serial digital video distribution amplifier and high quality downconverter for 1.5Gb/s HDTV signals. It incorporates Evertz® proprietary detail enhancement algorithms and gamma correction. It can also function as a monitoring distribution amplifier for standard definition 270Mb/s signals. The 7713HDC provides 4 reclocked DA outputs and 3 downconverted SDI or composite analog NTSC/PAL outputs (selectable).

The 7713HDC accepts all the popular international SMPTE 292M video formats. When the 7713HDC downconverts 1080p/23.98sF input video to 525i/59.94 with an embedded 3:2 pulldown sequence, the 3:2 pulldown cadence can be free running or locked to embedded SMPTE 12M-2 time code or an external 6Hz input.

The 7713HDC also de-embeds two groups of audio and re-embeds the audio on the SDI output in time with the video. It can also reassign audio channels within the groups. All parameters may be controlled by use of the on-screen display menu or through VistaLINK® PRO. The re-embedded audio has the appropriate delay added to compensate for video delay incurred by the conversion process, thus avoiding the need for external de-embedding and re-embedding of audio. An additional audio delay adjustment can also be made for lip sync correction.

The 7713HDC has color space conversion from ITU rec. 709 to ITU rec. 601, and will provide various downconverted formats such as 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze. The 7713HDC supports Widescreen Signaling (WSS) on the output to handle various aspect ratios of program material. It also provides on-screen 4:3 aspect ratio markers (or indicators).


The module also transfers the closed caption and timecode information from input to output performing all necessary HD to SD translation and time code recalculations


The 7713HDC provides card edge LEDs to indicate signal present and audio groups present. The 7713HDC occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- High quality HD ⇒ SD down conversions
- Evertz® proprietary detail enhancement algorithms
- · Supports standard aspect ratio conversions plus user-defined modes
- Supports most international standards including 1080i/60, 1080i/59.94, 1080i/50, 1080p/24, 1080p/23.98, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 480p/60 and 480p/59.94
- Will also accept 270Mb/s SD input per SMPTE 259M in a pass through mode - auto senses HD or SD input
- Supports all necessary color space conversions (ITU rec. 601 to ITU rec. 709)
- Full video processing functions gamma correction, GBR gain YCrCb gain and offset, hue adjustment and RGB color limiter
- · Reference input from card or 7700FR-G frame reference allows for phasing of output video
- Line buffer on input to allow clean switching between genlocked video sources that have a phase offset of ±1/4 line

- 1080p/23.98sF conversion to 525i/59.94 with 3:2 pulldown sequence time code or 6Hz reference
- · Output on-screen display used to configure the operating modes
- On-screen 4:3 aspect ratio marker
- De-embeds audio from HD video input and embeds into SD video output (2 groups)
- · Moves RP-188 VITC and LTC from HD input to SD output, recalculated for frame rate change
- · Support for widescreen signalling (WSS) on output
- Card Edge LEDs for signal presence, genlock presence, equalization warning, audio groups present and module status
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC Vistal INK® Frame Controller

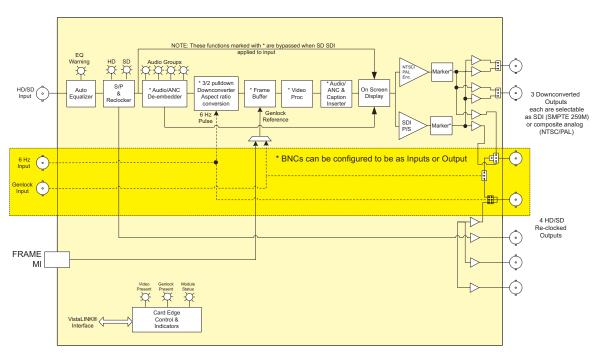





#### Downconverter & Distribution Amplifier

#### ▶Specifications

Serial Video Input:

SMPTE 259M (270Mb/s) - pass Standard:

through mode

SMPTE 292M (1.485Gb/s) - auto-

detects standard SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M

BNC per IEC 61169-8 Annex A Connector:

Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable Input Equalization:

Return Loss: > 15dB up to 1.5GHz

Reclocked Serial Video DA Outputs:

Standard: Same as input Number of Outputs: 4 reclocked

Connector: BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V

Rise and Fall Time: 200ps nominal for HD 750ps nominal for SD Overshoot: < 10% of amplitude

> 15dB at 1.5Gb/s Return Loss: Jitter: < 0.2 UI

Downconverted Serial Video Outputs:

SMPTE 259M-C (270Mb/s) Standard: Number of Outputs: : Up to 3 Per Card (jumper selectable) Connector: BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal
Overshoot: < 10% of amplitude Return Loss: > 15dB at 270Mb/s

Downconverted Composite Analog Video Outputs:
Standards: Analog composite NTSC (SMPTE 170M) or Analog composite PAL

(ITU-R BT.470)

Number of Outputs Up to 3 Per Card (jumper selectable) BNC per IEC 61169-8 Annex A 1V p-p nominal Connectors:

Signal Level: DC Offset: 0V ±0.1V > 35dB up to 5MHz 0.2dB to 4MHz Return Loss: Freq. Response: < 0.5° (< 0.3° typical) < 0.8% (< 0.5% typical) Differential Phase: Differential Gain:

SNR: > 78dB to 5MHz (shallow ramp)

Impedance:

Genlock Input:

NTSC or PAL Color Black 1V p-p Connector: BNC per IEC 61169-8 Annex A or Frame Genlock on 7700FR-G

frames (selectable)

Termination: High impedance or internal  $75\Omega$ termination (jumper selectable)

6HZ Input:

TTL level active high pulse 1/30 Type:

second wide

Connector: BNC per IEC 61169-8 Annex A Termination:  $500\Omega$  (jumper selectable)

Input to Output Processing Delay (HD Input Video):

Approximately 1 to 2 frames depending on input video format, Video Delay

processing mode and phase setting Audio is delayed and re-embedded in

Audio Delay: time with the output picture

Electrical:

Voltage: +12V DC Power: 10W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7713HDC High Quality Downconverter with Image Enhancement

**Ordering Options** Rear Plate must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

+SA

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

Enclosures

350FR 7700FR-C 7701FR S7701FR

Accessories 7700FC

9000NCP

9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

















#### High Quality Downconverter

The 7714HDC High Quality downconverter provides high quality downconversion of your high definition (SMPTE 292M) signals to standard definition (SMPTE 259M) signals. The 7714HDC incorporates Evertz® proprietary detail enhancement algorithms and gamma correction. The 7714HDC has up to 4 SD Serial Digital outputs or up to 2 composite analog video outputs. Of the 4 outputs, 2 have OSD output. The module supports low processing latency (down to 30 lines) for delay sensitive applications.

The 7714HDC has an external genlock input and allows for phasing of the output video. The 7714HDC accepts all the popular international SMPTE 292M video formats. When the 7714HDC downconverts 1080p/23.98sF input video to 525i/59.94 with an embedded 3:2 pulldown sequence, the 3:2 pulldown cadence can be free running or locked to embedded SMPTE 12M-2 time code or an external 6Hz input.

The module accepts 2 groups of embedded audio on the input and re-embeds them into the serial video outputs. As a standard feature, the 7714HDC also accepts 4 discrete unbalanced AES inputs and provides 4 AES outputs with the same audio that is being embedded. It can also reassign audio channels within the groups.

The re-embedded audio has the appropriate delay added to compensate for video delay incurred by the conversion process, thus avoiding the need for external de-embedding and re-embedding of audio. An additional audio delay adjustment can also be made for lip sync correction.

The 7714HDC also supports down-mixing of surround sound 5.1 PCM audio signals to stereo LtRt/LoRo audio for seamless integration into stereo audio infrastructure.

The 7714HDC has color space conversion from ITU rec. 709 to ITU rec. 601, and will provide various downconverted formats such as 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze. The 7714HDC supports Widescreen Signaling (WSS) on the output to handle various aspect ratios of program material. In addition the 7714HDC reads AFD values from the incoming video signal and can stamp AFD values on the outgoing video signal.


The module also transfers the closed caption and time code information from input to output performing all necessary HD to SD translation and time code recalculations.

The 7714HDC provides card edge LEDs to indicate signal present and audio groups present. The 7714HDC occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- High quality HD ⇒ SD down conversions
- · Evertz® proprietary detail enhancement algorithms
- · Input frame synchronizer
- · Reference input allows for phasing of output video
- · Low latency for delay sensitive applications (down to 30 lines)
- · Standard support for both embedded and discrete AES (4xAES)
- Supports standard aspect ratio conversions plus user defined modes
- Supports most international standards including 1080i/60, 1080i/59.94, 1080i/50, 1080p/24, 1080p/23.98, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 480p/60 and 480p/59.94
- Will also accept 270Mb/s SD input per SMPTE 259M in a pass-through mode - auto senses HD or SD input
- Support all necessary color space conversions (ITU rec. 601 to ITU rec.709)
- Full video processing functions gamma correction, GBR gain YCrCb gain and offset, hue adjustment and RGB color limiter
- $^{\circ}$  Line buffer on input to allow clean switching between genlocked video sources that have a phase offset of  $\pm 1/4$  line

- 1080p/23.98sF conversion to 525i/59.94 with 3:2 pulldown sequence time code or 6Hz reference
- Output on-screen display used to configure the operating modes
- De-embeds audio from HD video input and embeds into SD video output (2 groups)
- · Supports 4 retimed external AES input and outputs
- Surround sound (5.1 pcm) to stereo Lt/Rt or LoRo down-mixing
- Moves RP-188 VITC and LTC from HD input to SD output, recalculated for frame rate change
- Support for widescreen signalling (WSS) on output
- · Reads incoming AFD values and stamps outgoing AFD values
- · Fully adaptive AFD processing using VLPRO
- Card Edge LEDs for signal presence, genlock presence, equalization warning, audio groups present and module status
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

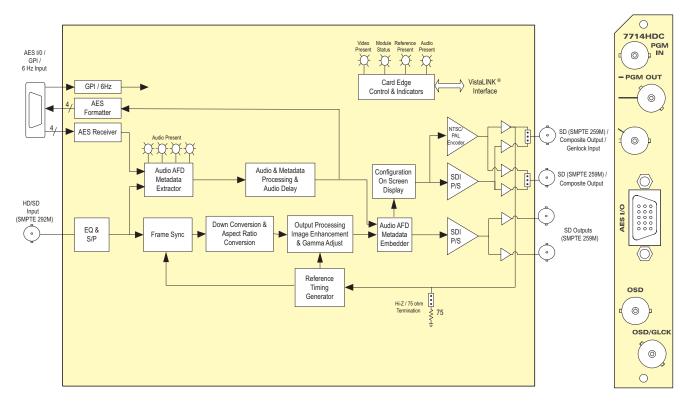

# 7700 Series Modular - HD Down/Up-converters & ARCs

#### ▶Specifications

Standard: SMPTE 259M (270Mb/s) or

SMPTE 292M (1.485Gb/s) SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Input Equalization: Automatic to 100m @ 1.5Gb/s with

Belden 1694A or equivalent cable

Return Loss:

Return Loss:

> 15dB up to 540Mb/s SD Standards: HD Standards: > 15dB up to 1.5Gb/s

Downconverted Serial Video Outputs:

Standard: Number of Outputs: 4 Per Card

Connector: BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 740ps nominal Overshoot:

270Mb/sec SMPTE 259M

< 10% of amplitude > 15dB at 540MHz

Downconverted Composite Analog Video Outputs: Standard: SMPTE 170M (NTSC), ITU-R BT470-6 (PAL)

Number of Outputs: 2

Freq. Response:

Connector: BNC per IEC 61169-8 Annex A

Signal Level 1V nominal Output Impedance: 75Ω DC Offset: 0V ±50mV Return Loss: > 45dB to 10MHz

< ±0.1dB to 4MHz (response will depend on selected filtering)

Differential Phase: < 0.5° (< 0.3° typical) Differential Gain: < 0.5% (< 0.3% typical)

SNR: > 75dB (black video, 100kHz to 5MHz)

Output level control range: ±10%

Black level control range: ±7.5 IRE

Chroma level control range: ±10%

Hue control range: ±15° (NTSC only)

Genlock Input:

HD Tri-Level sync, NTSC or PAL

Color Black 1V p-p BNC per IEC 61169-8 Annex A Connector:

Termination: 75Ω (jumper selectable) AES Audio Inputs & Outputs:

Number of Inputs: Number of Outputs:

SMPTE 276M, single ended Standard:

synchronous AES

DB15 or BNC per IEC 61169-8 Annex A Connectors:

Resolution: 24 bits Sampling Rate: 48kHz Impedance: 75Ω

1V p-p nominal Signal Level:

Input to Output Processing Delay (HD Input Video):

< 1 frames depending on input video format, processing mode and phase setting (down to 30 lines)

Audio Delay: Audio is delayed and re-embedded in

time with the output picture

Electrical:

Video Delay:

+12V DC

Voltage: Power: 10W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7714HDC High Quality Downconverter with Image Enhancement, Low Latency &

External AES

Ordering Options Rear Plate must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU

+1RU

+SA Standalone Enclosure Rear Plate

WPAES8-BNCM-6F Cable (included)

7700FC VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel

2RU VistaLINK® General Purpose Network Control Panel 9000NCP2

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR









provides digital conversion of 4 balanced analog audio channels and provides 2 unbalanced (or balanced from the 7720ADC-A4-B) AES/EBU channels out.


The sampling clock may free run at 48kHz or may be locked to either a DARS (Digital Audio Reference Signal) reference or composite video reference. Level control is provided via a card edge toggle switch. The input gain level can be read out from a card edge display for convenience.

The full scale digital signal can be calibrated to accommodate peak levels ranging from 8dBu to 27dBu with 0.5dB resolution.

The audio ADC features a card edge VU meter for quick confidence monitoring. Four separate level indicators are provided via bargraphs for quick validation of audio program material.

#### ▶ Features & Benefits

- · Auto detect composite video or DARS on the reference input
- 24-bit, high-quality analog to digital audio conversion
- · Support for 4 channels of analog audio (2 AES/EBU)
- Local card edge display and control of input gain
- OdBFS programmable from 8dBu to 27dBu
- A card edge display provides a 4 channel bargraph type level indicator display for confidence monitoring
- · Automatic DC removal
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

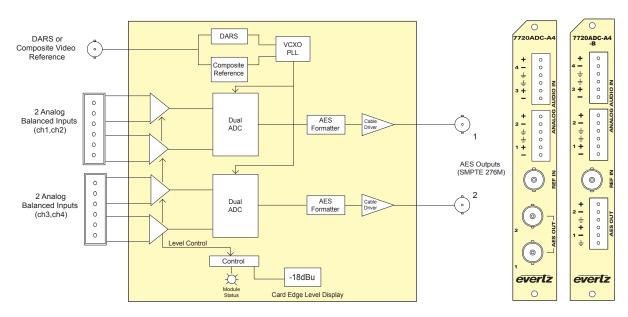

#### ▶Specifications

Analog Audio Input:

Number of Inputs:

Type: Balanced analog audio Connector: Removable terminal strip Input Impedance: 10kΩ minimum (differential)

Input Impedance:
Sampling Frequency:
48kHz (freerun or locked to the

0dB FS = 8dBu to 27dBu Signal Level:

(programmable via 0dB/+6dB jumper and card edge fine gain with -10dB

+10dB range)

Frequency Response:

±0.1dB (20Hz to 20kHz) 100dB with input at -1dB FS THD+N: < 0.001% (> 100dB) @ 20Hz to

20kHz, -1dB FS > 100dB @ 1kHz CMRR:

< -100dB @ 20Hz-20kHz Crosstalk:

Inter-channel Phase error: < 1°, 20Hz-20kHz Reference Input:

Standard: NTSC (SMPTE 170M), PAL (ITU624-4), DARS

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

Signal Level:

Max: 2V p-p video (composite only) Video:

Min: Sync level 150m (composite only) DARS: SMPTE 276M, 1V p-p

Frequency Lock Range

±100ppm from nominal

Input Impedance: High impedance Return Loss: > 25dB to 10MHz

(with external 75Ω termination)

**AES Audio Output:** 

Standard: SMPTE 276M single ended AES Number of Outputs:

BNC per IEC 61169-8 Annex A Connectors:

Resolution: 24-hits Sampling Rate: 48kHz  $75\Omega$  unbalanced Impedance: I/O Delay:

Electrical:

Voltage: +12V DC Power: 10W (nominal)

Complies with FCC Part 15, Class A EMI/RFI

EU EMC Directive

Physical:

Number of slots:

#### >>> Ordering Information

7720ADC-A4 7720ADC-A4-B Quad Analog Audio to Dual AES Converter

Quad Analog Audio to Dual Balanced AES Converter

**Ordering Options** 

Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Accessories 7700FC

VistaLINK® Frame Controller 9000NCP 9000NCP2

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 350FR 7700FR-C 7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

0 720DAC

000000

evertz

# 7720DAC-A4, 7720DAC-A4-B

#### Dual AES to Quad Analog Audio Converter with Unbalanced/Balanced AES Inputs


The 7720DAC-A4 is a high-quality, 24-bit, digital to analog audio converter which converts 2 AES/EBU digital signals to 4 balanced analog audio signals. The 7720DAC-A4 has two independent AES/EBU converters. The input sample rates supported are 44.1kHz and 48kHz. All analog audio output levels may be set individually from the front panel.

Level control is provided via a card edge toggle and the set gain level can be read out from a card edge display for convenience. The full scale digital signal can be calibrated to product analog peak levels ranging from 12dBu to 25dBu with 0.1dB resolution

The audio DAC features a card edge VU meter for quick confidence monitoring. Four separate level indicators are provided via bargraphs for quick validation of audio program material.

#### ▶ Features & Benefits

- · AES3/IEC-958 or AES3/SMPTE276/S/PDIF
- 24-bit, high-quality conversion
- 44.1 and 48kHz sampling rate
- 0dBFS programmable from 12dBu to 25dBu
- · Support for 4 channels of balanced analog audio (2 AES/EBU)
- · Clock recovery via VCXO for extra stable sample clock generation
- · A card edge display provides a 4 channel bargraph type level indicator display for confidence monitoring
- · Local card edge display for level setup
- Drives directly  $600\Omega$  loads
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel • VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

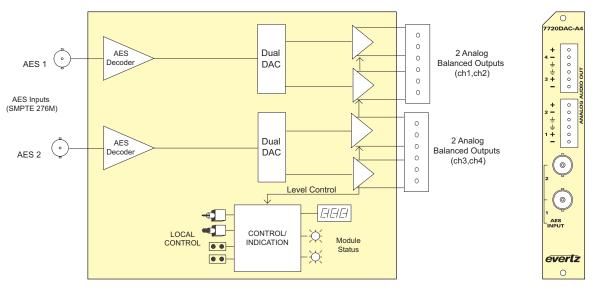

#### ▶Specifications

#### AES Audio Inputs (7720DAC-A4):

Number of inputs:

Standard: SMPTE 276M, AES3-2001 Connector: BNC per IEC 61169-8 Annex A Unbalanced, isolated ground Input type: 75Ω, -25dB return loss to 6MHz Impedance: 0.1V p-p to 2.5V p-p Accepted levels:

> 4000ft (with 1V p-p cable drive) 48kHz and 44.1kHz ±100ppm Cable distance: Sample rates:

#### AES Audio Inputs (7720DAC-A4-B):

Number of inputs:

AES3-1992 (ANSI S4.40-1992), IEC-Standard:

958 (except connectors) Connector: 3-pin removable terminal strip Input type: Balanced pair, shield, transformercoupled

> 400m @48kHz with 2 to 10V p-p Equalization: drive and Belden 1800B or equivalent shielded twisted pair cable

110Ω, ±10%

Impedance:

0.2V p-p to 10V p-p

Cable distance: > 1300ft (with 2V p-p to 7V p-p cable drive) Sample rates: 48kHz and 44.1kHz ±100ppm

Analog Audio Outputs:

Number of Outputs: 4 balanced

Connector: Two 6-pin removable terminal strips

Output Impedance:  $66\Omega$ Hi-Z or  $600\Omega$ Output Loads:

Peak Conversion Level

0dB FS =>12 to 25dBu (user settable) Frequency Response:

< ±0.05dB (20Hz to 20kHz)

Dynamic Range: 24 bits

THD+N: < 0.001% (> 100dB) @ 20Hz to 20kHz, @-1dB FS, unweighted 110dB (20Hz to 20kHz) Crosstalk:

DC Offset: < ±30mV > 110dB "A" weighted

Inter-Channel Phase Error

< ±1° (20Hz to 20kHz)

Digital to Analog Delay: 0.95ms

Electrical: Voltage: +12V DC Power:

Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical: Number of Slots:

#### **>>>**Ordering Information

7720DAC-A4 Dual AES to Quad Analog Audio Converter with unbalanced 7720DAC-A4-B Dual AES to Quad Analog Audio Converter with balanced

**AES** inputs

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Accessories 7700FC 9000NCP 9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



AES outputs. The 7720AM-AES4 performs channel swapping, over mixes, mix downs and on-air breakaways. All processing is at 24-bit resolution.

The 7720AM-AES4 provides eight channels of independent audio delay control making it ideal for retiming AES audio.


A non-PCM data mode is provided in order to pass Dolby-E™ or AC3™ data. In this mode, channel swapping and delay is supported (mixing is not) with the requirement that the inputs are 48kHz synchronous and locked (a reference is required to be used in this mode).

#### ▶ Features & Benefits

- 24-bit audio processing for high fidelity
- Flexible sample rate of 28kHz to 108kHz (will be resampled to 48kHz locked to reference on output)
- · Audio Sample Rate Converters can be disabled
- GPI control
- Dolby-E/AC3™ pass through mode
- · Card edge LEDs indicate: module fault, audio, genlock and DARS present
- · Maximum delay of 2.54 seconds with sample accuracy
- · Bypass relay outputs at the loss of power

#### Additional Features when controlled through VistaLINK®

- Provides 2:1 audio mixing capability, ideal for "ducking" audio or voiceovers
- · Can be used at the inputs of an audio console to expand inputs and add mixing capacity
- Reassignment of audio channels
- +12 to -12dB gain control on each mixer input in 0.25dB steps
- SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

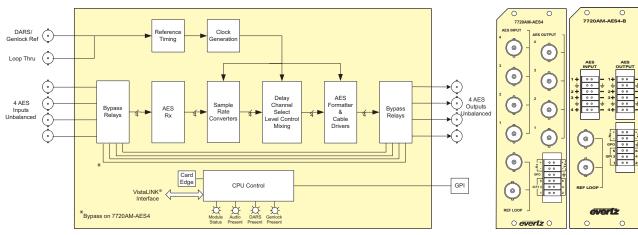

#### ▶Specifications

#### AES Audio Inputs and Outputs: Number of Inputs:

Number of Outputs: 4

SMPTE 276M, single ended Standard:

synchronous or asynchronous AES

Connectors: BNC per IEC 61169-8 Annex A Resolution: 24 hits

Sampling Rate: 48kHz

75Ω unbalanced Impedance

Signal Level: 1V p-p nominal

Genlock Input:

Type:

HD Tri-level syncs, NTSC or PAL Color

Black 1V p-p, or Composite bi-level sync (525i/59.94 or 625i/50) 300mV

BNC loop per IEC 61169-8 Annex A

75 $\Omega$  (jumper selectable) Termination:

DARS Reference:

Standard:

Digital Audio Signal with 48kHz Type:

SMPTE 276M-1995 single ended

AES, AES-11 BNC loop per IEC 61169-8 Annex A Connectors:

Termination: 75 $\Omega$  (jumper selectable) Input to Output Processing:

±12dB in 0.25dB steps Delay

Min. 7 samples with sample rate converters disabled

Min. 92 samples with sample rate

converters enabled

Adjustable to approximately 2.54

seconds

#### General Purpose In/Out:

Load user preset configurations GP Inputs GP Output: GPO1: Low when video input is

missing

Type: Opto-isolated, active low with internal pull-ups to +5V

8 pins on 12-pin removable terminal

block Signal Level +5V nominal

#### Data Logging Serial Port:

Connector

Standard RS 422 Connector


5 pins on 12-pin removable terminal

(not used at this time) Function:

· Performs voice overs, mix downs and on-air breakaways

• Continuous and independent channel delay adjustment up to 2.54 seconds

• VistaLINK® -capable offering remote control and configuration capabilities via

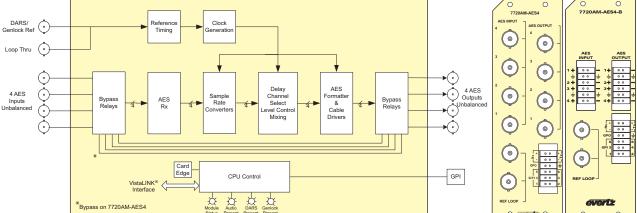

Voltage: +12V DC

Power 8W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

#### Physical:

Electrical:

7700 frame mounting: Number of slots: 7701 frame mounting: Number of slots:

#### **▶▶▶** Ordering Information

7720AM-AES4 Quad Analog Audio Mixer, Delay, Audio Swapper (Requires 7700FC

for full module control)

Quad Balanced Analog Audio Mixer, Delay, Audio Swapper

(Requires 7700FC for full module control)

Rear Plate must be specified at time of order Eg. Model +3RU

Rear Plate Suffix

7720AM-AES4-B

**Ordering Options** 

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Accessories 7700FC

VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel


Enclosures 350FR 7700FR-C 7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules







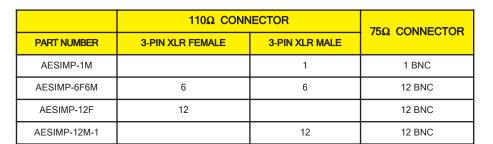

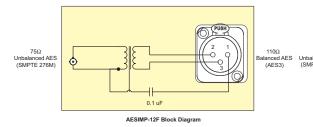

The AESIMP-12 series impedance converters allow transmission of AES/EBU

digital audio signals, with sampling rates ranging from 22kHz to 96kHz, over  $75\Omega$ 

coaxial cables. The conversion transformer changes a balanced  $110\Omega$ 

The AESIMP-12 series provides twelve XLR-3 type connectors (male or female) on the balanced side and BNC type connector on the unbalanced side. Two versions of the AESIMP-12 are available. The AESIMP-6F6M gives 6 converters in each

transmission line to an unbalanced 75 $\Omega$  transmission line.

direction. The AESIMP-1M is a single channel converter.

(SMPTE 276M) AESIMP-12M Block Diagram

The rack mounting ears may be reversed to orient the panel for the greatest ease

of installation. An identification strip holder is provided over the BNC connectors to

assist in labeling sources and/or destinations.

#### **▶**Specifications

#### **Number of Channels**

12 (1 on AESIMP-1M) Coupling Transformer 1.22:1

#### Unbalanced AES:

SMPTE 276M, single ended AES BNC per IEC 61169-8 Annex A Standard: Connectors: Signal Level: Approx. balanced level x 0.8,

5V p-p maximum Impedance:  $75\Omega$  unbalanced

#### Balanced AES:

AES3-1992 balanced AES Standard: 3-pin Male XLR (AESIMP-12M-1) or Connectors 3-pin Female XLR (AESIMP-12F) Signal Level: Approx. unbalanced level x 1.22, 5V p-p maximum

110Ω nced AES

(AES3)

110Ω balanced Impedance:

#### >>> Ordering Information

AESIMP\_1M In-line transformer with a single BNC to a single male XLR AESIMP-6F6M 6 Female and 6 Male XLR to BNC AES Impedance Matching Panel AESIMP-12E AESIMP-12M-1 12 Channel female XLR to BNC AES Impedance Matching Panel 12 Channel male XLR to BNC AES Impedance Matching Panel

7700 Series Modular - Embedders & De-embedders





|                 | Audio Outputs |             | Video 270Mb/s          |  |
|-----------------|---------------|-------------|------------------------|--|
| Model           | AES           | Analog      | SDI Re-clocked Outputs |  |
| 7720AD-A4-2     |               | 4           | 2                      |  |
| 7720AD-B-A4-LTC | 2 Balanced    | 3 +LTC or 4 |                        |  |
| 7720AD4         | 4 Unbalanced  |             | 2                      |  |
| 7720AD4-B       | 4 Balanced    |             | 1                      |  |


#### ▶ Features & Benefits


available in 4 different versions.


- Card edge LEDs indicating module status, video presence, selected audio group data is present
- · LED indication for the presence of each of the 4 audio groups within the input video
- · Audio group selection via card edge DIP switches
- · Audio channel swapping selection via card edge DIP switches (not on 7720AD-A4-2)
- · Analog audio output models have independent volume controls for each of the


audio channel outputs


- 7720AD-B-A4-LTC has 4 balanced audio outputs or 3 audio outputs and one VITC to LTC translator output - selection of VITC reader line
- With exception of the 7720AD-B-A4-LTC, all cards are VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

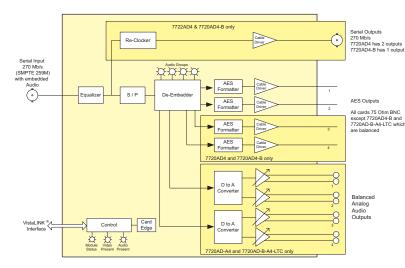









#### ▶ Specifications

#### Serial Video Input:

Standard: SMPTE 259MC - 525 & 625 component Connector 1 BNC per IEC 61169-8 Annex A Automatic 300m @ 270Mb/s with Equalization: Belden 8281 or equivalent cable Return Loss: > 15dB up to 540Mb/s

#### Reclocked Serial Video Outputs:

Same as input Number of Outputs: 1 on 7720AD4-B, 2 on 7720AD4

and 7720AD-A4-2 & 0 on

7720AD-B-A4-LTC BNC per IEC 61169-8 Annex A

Connectors: Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 700ps nominal Overshoot: < 10% of amplitude Return Loss > 15dB up to 270Mb/s

< 0.2 UI Wide Band Jitter:

7720AD4

7720AD4-B

#### Unbalanced AES Audio Outputs (Not on -B versions):

Standard: SMPTE 276M, single ended synchronous AES

2 on 7720AD-A4-2, 4 on 7720AD4 Number of Outputs:

BNC per IEC 61169-8 Annex A Connectors:

Sampling Rate: 48kHz

75Ω unbalanced Impedance:

Dynamic Range: 20-bit

# Balanced AES Audio Outputs (B-versions only): Standard: AES3-1992

Number of Outputs: 2 on 7720AD-B-A4-LTC

4 on 7720AD4-B Connector: Terminal strip Sampling Rate: 48kHz 110Ω Dynamic Range: 20-bit

#### Input to Output Processing Delay:

1.35ms (A4 versions) SDI to AES: 600us all other versions SDI to Analog: 2.25ms (A4 versions)

#### Analog Audio Outputs (A4 Versions Only):

Number of Outputs: 4

Type: Balanced analog audio Connector Terminal strip Output Impedance: 66Ω balanced

Sampling Frequency: 48kHz

0dB FS =>8 to 24dBu into 10kΩ loads Signal Level:

(user settable)

0dB FS =>8 to 22dBu into 600Ω loads (user settable)

Frequency Response: < ±0.1dB (20Hz to 20kHz)

THD+N: > 90dB RMS @ 1kHz, with 24dBu output

> 100dB RMS @ 20Hz to 20kHz, with 24dBu output

Crosstalk isolation: > 100dB RMS (20Hz to 20kHz)

#### Electrical:

+12V DC Voltage: Power:

EMI/RFI: Complies with FCC Part 15, Class A

**FU FMC Directive** 

Physical: Number of slots

#### **>>>**Ordering Information

7720AD-A4-2 SD-SDI AES Audio De-embedder with 4 balanced analog audio

7720AD-B-A4-LTC

SD-SDI AES Audio De-embedder with 2 balanced AES outputs, 4 balanced analog audio outputs and VITC to LTC Translate SD-SDI AES Audio De-embedder with 4 unbalanced AES outputs

SD-SDI AES Audio De-embedder with 4 balanced AES outputs (2 audio

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

#### Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

## 7721AD4-HD, 7721AD-A4-HD, 7721AD4-B-HD

#### HD-SDI AES Audio De-embedder

The 7721AD-HD series Audio De-Embedders extract embedded audio as specified by SMPTE 299M from a 1.5Gb/s serial HDTV video signal. The companion 7721AE4-HD Audio Embedder facilitates audio multiplexing at the source. The 7721AD-HD is available in 2 different versions.


SMPTE 299M allows for up to four groups (4 channels/group) to be embedded within a serial digital signal. The 7721AD4-HD can de-embed two audio groups onto four unbalanced AES outputs. The 7721AD-A4-HD can de-embed one audio group onto two unbalanced AES outputs and 4 balanced analog audio outputs

|              | Audio ( | Video 1.5Gb/s |                  |
|--------------|---------|---------------|------------------|
| Model        | AES     | Analog        | Redocked Outputs |
| 7721AD4-HD   | 4       |               | 2                |
| 7721AD-A4-HD | 2       | 4             |                  |
| 7721AD4-B-HD | 4       |               |                  |

#### ▶ Features & Benefits

- · Automatic detection of video input format
- Card edge LEDs indicating module status, video presence, selected audio group
- LED indication for the presence of each of the 4 audio groups within the input video
- Audio group selection via card edge DIP switches

- 7721AD-A4-HD has independent volume controls for each of the audio channel outputs
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in the 7700FR-C frame with a 7700FC VistaLINK® Frame Controller

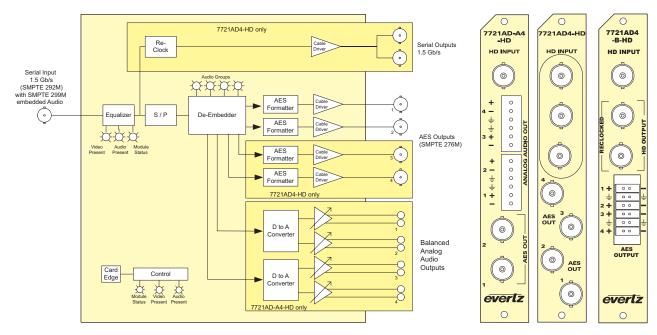

#### ▶Specifications

#### Serial Video Input:

SMPTE 292M, 1080i/60, 1080i/59.94,

1080i/50, 1080p/30(sF), 1080p/29.97(sF), 1080p/25(sF), 1080/24(sF), 1080/23.98(sF), 720p/60,

720p/59.94, 1035i/60, 1035i/59.94 Connector: BNC per IEC 61169-8 Annex A Automatic 100m @ 1.5Gb/s with Equalization:

Belden 1694A (or equivalent)

Return Loss: > 10dB up to 1.5Gb/s

#### Reclocked Serial Video Output (7721AD4-HD only): Same as input

Number of Outputs: 2

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal < 10% of amplitude Overshoot: > 10dB up to 1.5Gb/s Return Loss

Wide Band Jitter: < 0.2 UI

#### **AES Audio Output:**

Standard: SMPTE 276M, single-ended synchronous or asynchronous AES Number of Outputs: 4 on 7721AD4-HD & 7721AD4-B-HD

2 on 7721AD-A4-HD

Connector: BNC per IEC 61169-8 Annex A Sampling Rate: 48kHz

 $75\Omega$ Impedance:

Delay: 9 samples to approx. 3 seconds (user-adjustable)

Resolution: 24-bit

#### Analog Audio Output (7721AD-A4-HD Only):

Number of Outputs: 4

Type: Balanced analog audio Connector: Two 6-pin terminal strip

Output Impedance: 66Ω balanced Sampling Frequency: 48kHz

0dB FS =>8 to 24dBu into  $10k\Omega$  load Signal Level:

(user settable)

0dB FS =>8 to 22dBu into  $600\Omega$  load

Number of Slots:

Voltage: +12V DC Power: 8\//

Dynamic Range:

System Performance:

HD-SDI to AES:

De-embedding Latency:

THD+N:

Crosstalk:

Electrical:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

(7721AD4-HD)

Frequency Response: < ±0.1dB (20Hz to 20kHz)

output

> 90dB RMS @ 1kHz with 24dBu

1.35ms (7721AD-A4-HD), 600μs

> 90dB RMS (20Hz to 20kHz)

#### Physical:

(user settable)

#### **>>>**Ordering Information

7721AD-A4-HD HD-SDI Audio De-embedder with 2 unbalanced AES and 4 analog audio outputs

7721AD4-HD HD-SDI Audio De-embedder with 4 unbalanced AES outputs

(2 audio groups)

7721AD4-B-HD HD-SDI Audio De-embedder with 4 balanced AES outputs

(2 audio groups)

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA

Standalone Enclosure Rear Plate

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone enclosure





#### HD/SD 8 AES (16 Channel) Audio De-embedder

The 7721AD8-HD Audio De-embedder extracts embedded audio from all 4 groups of a 1.5Gb/s HD or a 270Mb/s SD video signal as specified in SMPTE 299M or 272M respectively. The module supports 24-bit AES audio de-embedding for HD and 20-bit audio de-embedding for SD. Up to 16 selected channels may be deembedded and directed to 8 AES outputs. In addition, a full 16x16 audio channel router is available for channel re-mapping.

The 7721AD8-HD is Dolby-E™ compliant and handles Dolby-E™ metadata. Metadata is optionally de-embedded from VANC and can be provided as an output for downstream devices like Dolby-E™ or Dolby AC-3™ Encoders.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

#### ▶ Features & Benefits

- · Audio de-embedding from 1.5Gb/s HD or 270Mb/s SD video
- · Automatic detection of input video standard
- Two 1.5Gb/s HD or 270Mb/s SD serial video outputs
- Supports 24-bit AES audio de-embedding for HD and 20-bit AES audio de-embedding for SD
- Flexible 16x16 audio channel routing for channel re-mapping Dolby-E<sup>™</sup> compliant with VANC decode and output of Dolby™ metadata
- · Card edge display for status and miniature bargraphs for audio peak levels
- · Card edge LEDs indicate video and audio signal presence and module fault
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

#### Inputs


• 1.5Gb/s HD or 270Mb/s SD serial video

#### Outputs

- Dolby<sup>™</sup> Metadata output (RS422/485)
- · 8 AES de-embedded outputs
- · 2 re-clocked HD/SD serial video outputs

#### Controls

- · Audio channel routing selection
- VANC decoder line, DID, and sDID

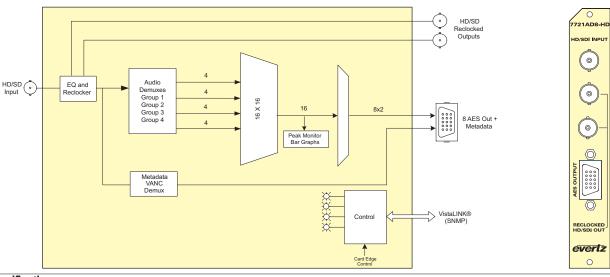

#### ▶ Specifications

#### Serial Video Input:

SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF, 1080p/29.97sF, 1080p/25sF 1080p/24sF, 1080p/23.98sF 720p/60, 720p/59.94), 1035i/60, 1035i/59.94, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98,

SMPTE 259M (270Mb/s), 525 or 625

1 BNC per IEC 61169-8 Annex A Connector:

#### Embedded Audio Input:

Standard:

SMPTF 299M - 24 hit 48kHz synchronous SMPTE 272M - 20 bit 48kHz

synchronous

Metadata Output:

Dolby-E™ Metadata (RS422) Type: BNC per IEC 61169-8 Annex A Connector (with DB15 to BNC 6ft breakout cable) Baud Rate:

Same as input

115,200 baud (as per Dolby-E™ usage)

#### Serial Video Outputs Re-clocked:

Standard:

Number of Outputs:

Connectors: BNC per IEC 61169-8 Annex A Return Loss: > 15dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI

#### AES Audio Outputs:

SMPTE 276M, single ended AES Standard:

Number of Outputs: 8

BNC per IEC 61169-8 Annex A Connector: (with DB15 to BNC 6ft breakout cable)

Sampling Rate: 48kHz  $75\Omega$  unbalanced Impedance: Resolution: Up to 24-bit

Signal Level: 1V p-p ±0.1V @ termination load

#### System Performance:

De-embedding Latency

0.2ms (HD), 0.7ms (SD)

Electrical:

+12V DC Voltage:

Power: 11W

FMI/RFI Complies with FCC Part 15. Class A

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7721AD8-HD HD/SD-SDI 8 AES (16 Channel) Audio De-embedder Rear Plate must be specified at time of order **Ordering Options** 

Eg: Model +3RU

Rear Plate Suffix +3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+SA

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



+1RU

Standalone Enclosure Rear Plate

#### HD/SD-SDI 8 Balanced AES (16 channel) Audio De-embedder

The 7721AD8-B-HD Audio De-embedder extracts embedded audio from all 4 groups of a 1.5Gb/s HD-SDI or a 270Mb/s SD-SDI video signal as specified in SMPTE 299M or 272M respectively. Up to 16 selected channels may be deembedded and directed to 8 AES outputs. In addition, a full 16x16 audio channel router is available for channel re-mapping.

The 7721AD8-B-HD is Dolby-E™ compliant and handles Dolby™ metadata. Metadata is optionally de-embedded from VANC and can be provided as an output for downstream devices like Dolby-E™ or Dolby™ Digital (AC-3) encoders.

Vistal INK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

#### ▶ Features & Benefits

- Audio de-embedding from 1.5Gb/s HD-SDI or 270Mb/s SD-SDI video input
- · Automatic detection of input video standard
- Dual 1.5Gb/s HD-SDI or 270Mb/s SD-SDI reclocked serial video outputs
- · Supports 24-bit AES audio de-embedding for HD-SDI and 20-bit AES audio eembedding for SD-SDI
- Flexible 16x16 audio channel routing for channel re-mapping Dolby-E™ compliant with VANC decode and output of Dolby™ metadata
- · Card edge display for status and miniature bar graphs for audio peak levels
- · Card edge LEDs indicate video and audio signal presence and module fault
- VistaLINK® -capable for remote monitoring and control via SNMP (using
- VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller


#### Inputs


• 1.5Gb/s HD-SDI or 270Mb/s SD-SDI serial video

#### Outputs

- Dolby<sup>™</sup> Metadata output (RS422/485)
- 8 Balanced AES de-embedded outputs
- Dual re-clocked HD/SD-SDI serial video outputs

- · Audio channel routing selection
- VANC Dolby<sup>™</sup> Metadata decoder line, DID, and sDID

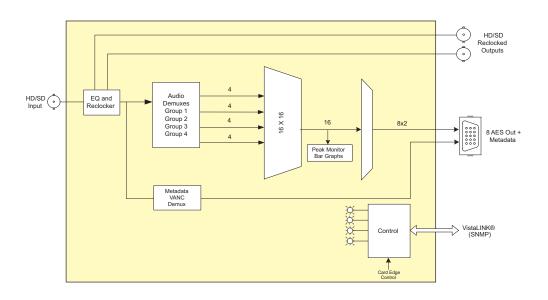



#### ▶ Specifications

#### Serial Video Input:

Standard SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF.

1080p/29.97sF, 1080p/25sF 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94), 1035i/60, 1035i/59.94,

1080p/30, 1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98, 720p/50 SMPTE 259M (270Mb/s), 525 or 625 1 BNC per IEC 61169-8 Annex A

Embedded Audio Output:

SMPTE 299M - 24 bit 48kHz synchronous Standard: SMPTE 272M - 20 bit 48kHz synchronous

Metadata Output:

Connector:

Dolby™ Metadata (RS422) BNC per IEC 61169-8 Annex A Connector: (with DB15 to BNC 6ft breakout cable)

Baud Rate: 115,200 baud (as per Dolby™ usage)

#### Serial Video Outputs Re-clocked:

Standard: Same as input

Number of Outputs: 2

Connectors: BNC per IEC 61169-8 Annex A

Return Loss > 15dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI

#### **AES Audio Outputs:**

Standard: SMPTE 276M, balanced AES Number of Outputs: 8

Connector Secure Terminal Block

Sampling Rate: 48kHz Impedance: 110W Balanced Resolution: Up to 24-bit

1V p-p ±0.1V @ termination load Signal Level:

#### System Performance:

De-embedding Latency: 0.2ms (HD-SDI), 0.7ms (SD-SDI)

#### Electrical:

Voltage: +12V DC

Power 11W EMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

#### Physical:

Number of slots:

#### **▶** ► ► Ordering Information

7721AD8-B-HD HD/SD-SDI 8 Balanced AES (16 Channel) Audio De-embedder

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg. Model +3RU +SC

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









The 7721AD8-3G Audio De-embedder extracts embedded audio from all 4 groups

Embedded Audio Input: Standard: SMPTE 299M - 24 bit 48kHz synchronous

SMPTE 272M - 20 bit 48kHz

synchronous

of a 3Gb/s, 1.5Gb/s HD or a 270Mb/s SD video signal as specified in SMPTE 299M or 272M respectively. The module supports 24-bit AES audio de-embedding for 3G/HD and 20-bit audio de-embedding for SD. Up to 16 selected channels may be de-embedded and directed to 8 AES outputs. In addition, a full 16x16 audio channel

The 7721AD8-3G is Dolby-E™ compliant and handles Dolby-E™ metadata. Metadata is optionally de-embedded from VANC and can be provided as an output for downstream devices like Dolby-E™ or Dolby AC3™ Encoders.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

#### ▶ Features & Benefits

- · Audio de-embedding from 2.97Gb/s, 1.5Gb/s HD or 270Mb/s SD video
- · Automatic detection of input video standard

router is available for channel re-mapping.

- Two 3Gb/s, 1.5Gb/s HD or 270Mb/s SD serial video outputs
- · Supports 24-bit AES audio de-embedding for HD and 20-bit AES audio de-embedding for SD
- Flexible 16x16 audio channel routing for channel re-mapping Dolby-E™ compliant with VANC decode and output of Dolby™ metadata
- · Card edge display for status and miniature bargraphs for audio peak levels
- · Card edge LEDs indicate video and audio signal presence and module fault
- · VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

#### Inputs


• 3Gb/s, 1.5Gb/s HD or 270Mb/s SD serial video

#### Outputs

- Dolby™ Metadata output (RS422/485)
- 8 AES de-embedded outputs
- 2 re-clocked HD/SD serial video outputs

#### Controls

- · Audio channel routing selection
- · VANC decoder line, DID, and sDID

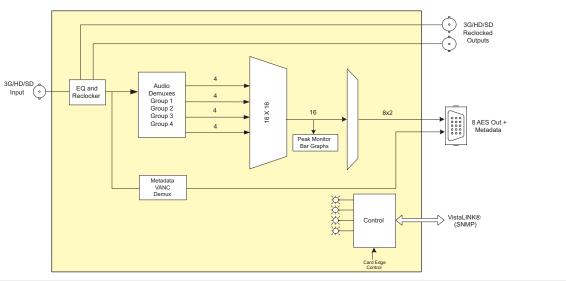

#### ▶Specifications

#### Serial Video Input:

Connector

SMPTE 424M (3Gb/s), (1080p/60,

1080p/59.94, 1080p/50) SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF,

1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94), 1035i/60, 1035i/59.94, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98, 720p/50

SMPTE 259M (270Mb/s), 525 or 625 line 1 BNC per IEC 61169-8 Annex A

Wide Band Jitter: **AES Audio Outputs:** 

Number of Outputs:

Metadata Output:

Type:

Connector:

Baud Rate

Standard:

Connectors:

Return Loss:

< 0.2 UI Standard: SMPTE 276M, single ended AES

Number of Outputs: 8

BNC per IEC 61169-8 Annex A Connector:

Same as input

> 15dB to 1.5Gb/s > 10dB to 2.97Gb/s

(with DB15 to BNC 6ft breakout cable)

Dolby-E™ Metadata (RS422)

BNC per IEC 61169-8 Annex A

BNC per IEC 61169-8 Annex A (with DB15 to BNC 6ft breakout cable)

. 115,200 baud (as per Dolby-E™ usage)

Sampling Rate: Impedance: 75 $\Omega$  unbalanced

Serial Video Outputs Re-clocked:

Resolution: Up to 24-bit

Signal Level 1V p-p ±0.1V @ termination load

#### System Performance:

De-embedding Latency:

0.2ms (HD), 0.7ms (SD)

0

721AD8-30

0

0

0

evertz 0

Electrical:

Voltage: +12V DC Power. 11W

EMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

#### **bbb**Ordering Information

7721AD8-3G 3G/HD/SD8 AES (16 Channel) Audio De-embedder

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules




The 7720AE4 Audio Embedder inserts AES audio signals into a 270Mb/s SDI video signal as specified in SMPTE 272M. The companion 7720AD4 Audio Deembedder facilitates audio demultiplexing at the destination.

SMPTE 272M allocates four groups of four audio channels that can be embedded into the SMPTE 259M bitstream. The 7720AE4 embeds up to 4 AES audio signals into two groups on the SDI outputs for discrete 5.1 audio applications. The 7720AE4 is Dolby E compliant when the sample rate converters are turned off.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as Evertz VistaLINK® PRO locally or remotely.

#### ▶ Features & Benefits

- · Automatic detection of 525 line and 625 line input
- · Bypass relay protection on one SDI output for power failures
- · 20-bit AES input and audio embedding
- · Individual audio group assignment for each group
- Group lock mode maintains phase relationship between the groups for 5.1 audio applications
- Sample rate conversion disable on AES inputs to permit Dolby E embedding
- Programmable audio delays (up to 7 frames in 1/2 video field increments using DIP switches or up to 1.3 sec in 1 sample increments with VistaLINK® control
- · Ancillary packet cleaning mode removes all audio before embedding
- · Ancillary packet reformatting mode left justifies and removes unused packets before embedding
  - Embeds audio on internally generated black or blue video when there is no video input
  - · Card edge LEDs indicate video and audio signal presence, and module fault
- VistaLINK® capable for remote monitoring and control via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

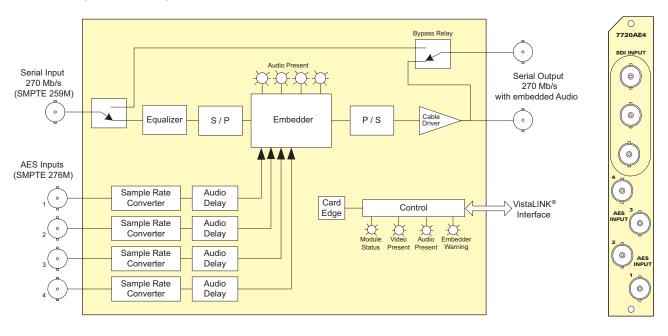

#### **▶** Specifications

Serial Video Input:

Standard SMPTE 259M-C (270Mb/s) 525 or

625 line component Connector 1 BNC per IEC 60169-8 Amendment 2

Automatic 210m @ 270Mb/s with Equalization:

Belden 8281 or equivalent cable Return Loss: > 15dB up to 540Mb/s

Serial Video Outputs with Embedded Audio:

Standard: Same as input

Number of Outputs: 2 (1 output bypass relay protected) Embedded Audio: SMPTE 272M - 20 bit 48kHz

synchronous

BNC per IEC 60169-8 Amendment 2 Connectors 800mV nominal

Eg: Model +3RU

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 540Mb/s

Wide Band Jitter: < 0.2 UI AES Audio Inputs:

Number of Inputs:

Standard: SMPTE 276M, single ended AES Connector: BNC per IEC 60169-8 Amendment 2 Resolution 20 bits

Sampling Rate: 32 to 96kHz synchronous or

asynchronous (48kHz synchronous

AES required when sample rate

converter is disabled) 75Ω unbalanced

Impedance: Signal Level: 1V p-p ±0.1V

#### System Performance

Embedding Latency: 1.3 to 3 ms

Audio Delay

DIP Switch Control:

Up to 7 frames, 1/2 frame increments (delay applied to all AES channels)

VistaLINK® or Serial Port Control:

Up to 1.35 seconds in 1 sample increments (independent control of delay for each channel)

Electrical:

Voltage: +12V DC

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

#### Physical:

7700 or 7701 frame mounting Number of slots:

#### **>>>**Ordering Information

7720AE4 SD-SDI 4 AES Audio Embedder **Ordering Options** Rear Plate must be specified at time of order

Rear Plate Suffix

3RU Rear Plate for use with 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Accessories 7700FC 9000NCP 9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules










SMPTE 299M allocates four groups of four audio pairs that can be embedded into the SMPTE 292M bitstream. The 7721AE4-HD embeds up to 4 AES audio signals into two groups on the HD-SDI outputs for discrete 5.1 audio applications. The 7721AE4-HD is Dolby E compliant when the sample rate converters are turned off.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as VistaLINK® PRO locally or remotely.

#### ▶ Features & Benefits

- · Automatic detection of video standard
- · Bypass relay protection on one SDI output for power failures
- · 24-bit AES inputs and audio embedding
- · Individual audio group assignment for each group
- Group lock mode maintains phase relationship between the groups for 5.1 audio applications
- · Sample rate conversion disable on AES inputs to permit Dolby E embedding
- Programmable audio delays (up to 7 frames in ½ video field increments using DIP switches or up to 1.3 seconds in 1 sample increments, with VistaLINK® control
- Ancillary packet cleaning mode removes all audio before embedding
- · Ancillary packet reformatting mode left justifies and removes unused packets
- Embeds audio on internally generated black or blue video when there is no video input
- · Card edge LEDs indicate video and audio signal presence, and module fault
- VistaLINK® capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK®

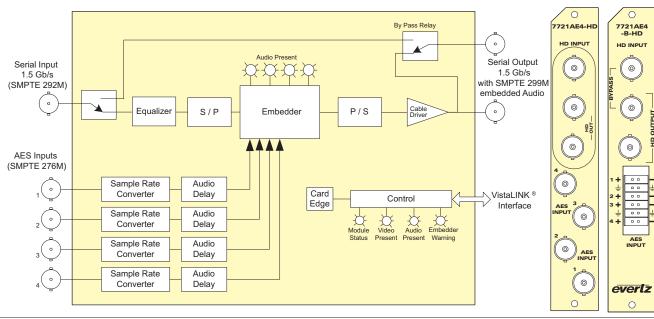

#### ▶Specifications

Serial Video Input:

Standard: SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF.

1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94)

1 BNC per IEC 60169-8 Amendment 2 Connector: Automatic 100m @ 1.5Gb/s with Equalization:

Belden 1694A or equivalent cable Return Loss: > 10dB up to 1.5Gb/s

Serial Video Outputs with Embedded Audio:

Same as input Number of Outputs: 2 (1 output bypass relay protected) Embedded Audio: SMPTE 299M - 24 bit 48kHz

synchronous

Connectors: BNC per IEC 60169-8 Amendment 2 Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

> 10dB up to 1.5Gb/s Return Loss: Wide Band Jitter: < 0.2 UI

**AES Audio Inputs:** Number of Inputs:

Standard: SMPTE 276M, single ended AES Connector: BNC per IEC 60169-8 Amendment 2 Resolution: 24 bits

Sampling Rate: 32 to 96kHz synchronous or

asynchronous

(48kHz synchronous AES required when sample rate converter is disabled)

Impedance:  $75\Omega$  unbalanced Signal Level: 1V p-p ±0.1V

#### System Performance:

Embedding Latency: 1.3 to 3ms Audio Delay

DIP Switch Control: Up to 7 frames, 1/2 frame increments (delay applied to all AES channels)

VistaLINK® or Serial Port Control:

Up to 1.35 seconds in 1 sample increments (independent control of delay for each channel)

Electrical: Voltage:

11 Watts

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

7700 or 7701 frame mounting: Number of slots:

#### **>>>**Ordering Information

7721AF4-HD 7721AE4-B-HD HD-SDI 4 AES Audio Embedder

HD-SDI 4 Balanced AES Audio Embedder

Ordering Options

Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU +1RU

3RU Rear Plate for use with 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Enclosures 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

# 7721AE8-HD, 7721AE8-B-HD

#### HD-SDI 4 AES Audio Embedder

The 7721AE8-HD Audio Embedder inserts 8 AES audio signals into 1.5Gb/s HD or 270Mb/s SD video signals as specified in SMPTE 299M or 272M respectively. The companion 7721AD8-HD Audio De-embedder facilitates audio demultiplexing at the destination.

The 7721AE8-HD embeds up to 8 AES audio signals into four groups on the HD/SD outputs enabling support for dual 5.1 audio applications. The module supports 24-bit AES audio embedding for HD and 20-bit audio embedding for SD. In addition, a full 16x16 audio channel router is available for channel re-mapping.


The 7721AF8-HD is Dolby compliant and automatically disables sample rate conversion on AES inputs to permit seamless Dolby embedding.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

#### ▶ Features & Benefits

- Audio embedding into 1.5Gb/s HD or 270Mb/s SD video
- · Automatic detection of input video standard
- Two 1.5Gb/s HD or 270Mb/s SD serial video outputs
- · By-pass relay protection for main program output
- Supports 24-bit AES audio embedding for HD and 20-bit AES audio embedding for SD
- Flexible 16x16 audio channel routing for channel re-mapping
- Dolby compliant with automatic sample rate conversion disable on AES inputs to permit seamless Dolby embedding
- Dolby<sup>™</sup> Metadata insertion via serial interface

- · Miniature bargraph display to monitor audio content activity
- Numerous signal monitoring aids
- · Ancillary packet cleaner removes any interfering audio groups prior to embedding
- · User control to force removal of additional audio groups
- Embeds audio on internally generated black or blue video when there is no video input
- · Card edge LEDs indicate video and audio signal presence and module fault
- · VistaLINK® capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

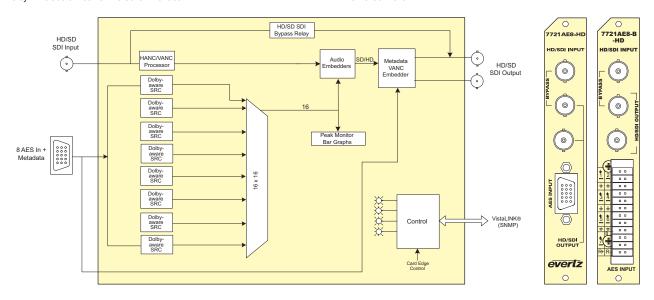

#### ▶Specifications

Serial Video Input:

Standard:

Connector:

SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF 1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94), 1035i/60, 1035i/59.94, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24 1080p/23.98, 720p/50

SMPTE 259M (270Mb/s), 525 or 625 line 1 BNC per IEC 60169-8 Amendment 2

Serial Video Outputs with Embedded Audio:

Standard: Same as input

Number of Outputs: 2 (1 output bypass relay protected) Embedded Audio: SMPTE 299M - 24-bit 48kHz synchronous/SMPTE 272M - 20-bit BNC per IEC 60169-8 Amendment 2

Connectors: 15dB to 1.5Gb/s

Return Loss:

Wideband Jitter: < 0.20 UI AES Audio Inputs:

Number of Inputs: Standard:

SMPTE 276M, single-ended AES Connector: BNC per IEC 60169-8 Amendment 2 (with DB15 to BNC 6ft Breakout

cable)

Resolution:

Sampling Rate: 48kHz synchronous or asynchronous (48kHz synchronous AES required

when sample rate converter is disabled)

Impedance:  $75\Omega$  unbalanced 100Ω balanced

1V p-p ±0.1V @ termination load Signal Level:

Metadata Input/Output:

Dolby-E Metadata Type: Standard: RS-422 115,200 baud Baud Rate

System Performance:

SRC THD+N: -140dB

Embedding Latency: 0.3ms (HD), 0.7ms (SD), 3ms

(with SRC)

Up to 1.35 seconds in 1 sample Audio Delay: increments (independent control

of delay for each channel)

Electrical:

Voltage: +12V DC Power:

Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical: 7700 or 7701 frame mounting:

Number of slots:

#### **>>>**Ordering Information

7721AE8-B-HD **Ordering Options** 

HD/SD-SDI 8 AES (16 Channel) Audio Embedder HD/SD-SDI 8 Balanced AES (16 Channel) Audio Embedder

Rear Plate must be specified at time of order Ea: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









The 7721AE-A4-HD Analog Audio Embedder performs A/D conversion on 4 balanced pairs of analog audio (as one audio group) and embeds them into a 1.5Gb/s serial HD input video signal or a 270Mb/s serial SD input video signal as specified by SMPTE 299M/272M. The companion 7721AD-A4-HD Audio Deembedder facilitates audio de-multiplexing at the destination.


The 7721AF-A4-HD occupies one card slot and can be housed in a 1RU frame. which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP enabled control systems such as Evertz® VistaLINK®

#### ▶ Features & Benefits

- · Automatic detection of video input format
- Supports 1.5Gb/s HD per SMPTE 292M, 270Mb/s SD per SMPTE 259M-C, and SDTi per SMPTE 305M
- Programmable audio delays (up to 5 frames or 84 milliseconds)
- · Selectable ancillary packet cleaning mode removes all audio before embedding
- · Individual audio channel assignment for embedded audio group
- · Audio mixer per audio channel to provide voice-over

- Upstream embedded Dolby-E<sup>™</sup> compatible (passed through)
- Monitoring headphone jack for audio input and embedded audio output
- · Comprehensive signal and card status monitoring via four-character card-edge display and LEDs
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

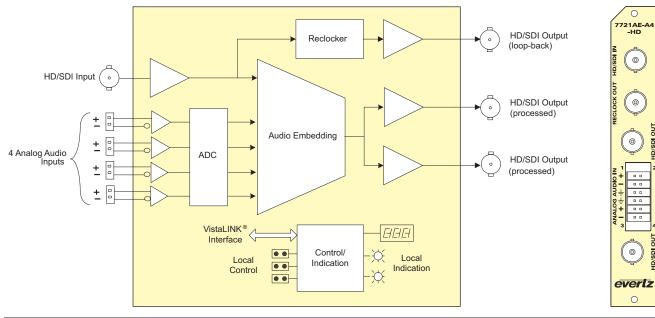

#### ▶Specifications

#### Serial Video Input:

Standard: Auto detect

1.5Gb/s SMPTE 292M or 270Mb/s SMPTE 259M-C, 525 or 625 line component, SMPTE 305M, (SDTi) 1 BNC per IEC 61169-8 Annex A

Connector: Automatic to 300m @ 270Mb/s with Equalization: Belden 1694A or equivalent cable,

110m @ 1.5Gb/s

> 15dB up to 1.5GHz Return Loss:

#### Serial Video Output:

Number of Outputs: 1 Reclocked Loopback

2 same as input with embedded audio BNC per IEC 61169-8 Annex A Connector:

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot:

Return Loss > 15dB at 270Mb/s Wide Band Jitter: < 0.2 UI

#### Analog Audio Inputs:

Number of Inputs:

Balanced analog audio Type: Connector: 12-pin removal terminal block Input impedance: High Impedance (> 20KΩ) ±0.1dB, 20Hz to 20kHz Frea. Response:

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1°

SNR (weighted): > 85dB with input @24dBu (nominal)

Max. Audio Input Level: Signal Quantization: 24 bits

#### Electrical:

Voltage: +12V DC 10W Power

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

Physical: Number of slots:

#### **>>>**Ordering Information

#### 7721AE-A4-HD HD/SD-SDI Analog Audio Embedder

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

The 7721AE-A4 Analog Audio Embedder performs A/D conversion on 4 balanced pairs of analog audio (as one audio group) and embeds them into a 270Mb/s serial SD input video signal as specified by SMPTE 272M. The companion 7720AD-A4 Audio De-embedder facilitates audio de-multiplexing at the destination.

The 7721AE-A4 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as Evertz® VistaLINK® PRO.

#### ▶ Features & Benefits


- · Automatic detection of video input format
- Supports 270Mb/s SD per SMPTE 59M-C, and SDTi per SMPTE 305M
- Programmable audio delays (up to 5 frames or 84 milliseconds)
- Selectable ancillary packet cleaning mode removes all audio before embedding
- · Individual audio channel assignment for embedded audio group
- · Audio mixer per audio channel to provide voice-over
- Upstream embedded Dolby-E<sup>™</sup> compatible (passed through)

• Monitoring headphone jack for audio input and embedded audio output

Physical:

Number of slots:

- · Comprehensive signal and card status monitoring via four-character card-edge display and LEDs
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

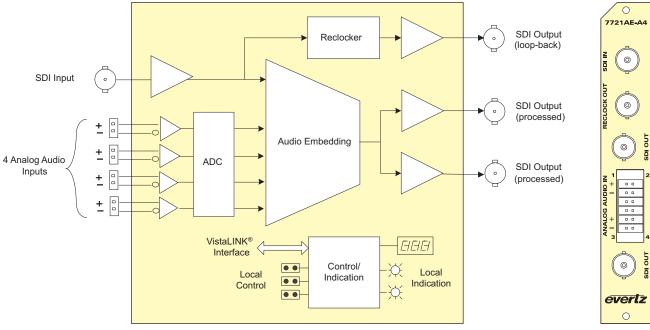

#### ▶Specifications

Serial Video Input:

Connector:

Equalization:

Standard: Auto detect

270Mb/s SMPTE 259M-C, 525 or 625 line component, SMPTE 305M, (SDTi) 1 BNC per IEC 61169-8 Annex A

Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable

> 15dB up to 270Mb/s Return Loss:

Serial Video Output:

Number of Outputs: 1 Reclocked Loopback

2 same as input with embedded audio BNC per IEC 61169-8 Annex A Connector: Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude

Return Loss: > 15dB at 270Mb/s

< 0.2 UI Wide Band Jitter:

#### Analog Audio Inputs:

Number of Inputs:

Balanced analog audio Type: 12-pin removal terminal block Connector: Input impedance: High Impedance (> 20kΩ) ±0.1dB, 20Hz to 20kHz Freq. Response: THD 20Hz-20kHz: < 0.005%

Channel Phase Diff.: ±1°

> 85dB with input @24dBu (nominal) SNR (weighted):

Max. Audio Input: Level: +24dBu Signal Quantization: 20 bits

Electrical:

Voltage: +12V DC 10W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

7721AF-A4 SD-SDI Analog Audio Embedder **Ordering Options** Rear must be specified at time of order Eg: Model +3RÜ

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure









# rertz/

The 7721AE8-3G Audio Embedder inserts 8 AES audio signals into 3Gb/s, 1.5Gb/s HD or 270Mb/s SD video signals as specified in SMPTE 299M or 272M respectively. The companion 7721AD8-3G Audio De-embedder facilitates audio demultiplexing at the destination.

The 7721AE8-3G embeds up to 8 AES audio signals into four groups on the 3G/HD/SD outputs enabling support for dual 5.1 audio applications. The module supports 24-bit AES audio embedding for 3G/HD and 20-bit audio embedding for SD. In addition, a full 16x16 audio channel router is available for channel remapping.


The 7721AE8-3G is Dolby compliant and automatically disables sample rate conversion on AES inputs to permit seamless Dolby embedding.


VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration locally or remotely.

#### ▶ Features & Benefits

- Audio embedding into 3Gb/s, 1.5Gb/s HD or 270Mb/s SD video
- · Automatic detection of input video standard
- Two 2.97Gb/s, 1.5Gb/s HD or 270Mb/s SD serial video outputs
- By-pass relay protection for main program output
- Supports 24-bit AES audio embedding for HD and 20-bit AES audio embedding for SD
- Flexible 16x16 audio channel routing for channel re-mapping
- Dolby compliant with automatic sample rate conversion disable on AES inputs to permit seamless Dolby embedding
- · Miniature bargraph display to monitor audio content activity

- Numerous signal monitoring aids
- Ancillary packet cleaner removes any interfering audio groups prior to embedding
- · User control to force removal of additional audio groups
- Embeds audio on internally generated black or blue video when there is no video input
- · Card edge LEDs indicate video and audio signal presence and module fault
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

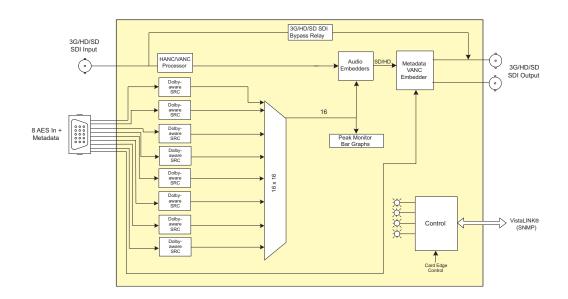



#### 3G/HD/SD-SDI 8 AES (16 Channel) Audio Embedder

#### **▶**Specifications

Serial Video Input:

SMPTE 424M (2.97Gb/s), (1080p/60, 1080p/59.94, 1080p/50) Standard:

SMPTE 292M (1.5Gb/s), (1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF, 1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94, 1080p/30,

1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98, 720p/50)

SMPTE 259M (270Mb/s), 525 or 625 line Connector: 1 BNC per IEC 61169-8 Annex A

Serial Video Outputs with Embedded Audio:

same as input Standard:

Number of Outputs: 2 (1 output bypass relay protected) Embedded Audio: SMPTE 299M - 24-bit 48kHz synchronous/SMPTE 272M - 20-bit

Connectors: BNC per IEC 61169-8 Annex A Return Loss:

>15dB to 1.5Gb/s >10dB to 3Gb/s Wideband Jitter: < 0.2 UI

**AES Audio Inputs:** 

Number of Inputs: SMPTE 276M, single-ended AES Embedding Latency: Standard:

BNC per IEC 61169-8 Annex A (with DB15 to BNC 6ft Breakout cable)

24 bits

Sampling Rate: 48kHz synchronous or asynchronous

(48kHz synchronous AES required when sample rate converter is disabled)

Impedance:  $75\Omega$  unbalanced

Signal Level: 1V p-p ±0.1V @ termination load

Metadata Input/Output:

Resolution:

Dolby-E™ Metadata Type: Standard: Baud Rate: 115.200 baud

System Performance: SRC THD+N: -

-140dB 0.3ms (HD), 0.7ms (SD), 3ms

(with SRC)

Up to 1.35 seconds in 1 sample increments (independent control of delay for each channel)

Electrical:

Audio Delay:

+12V DC Voltage: Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7721AE8-3G 3G/HD/SD-SDI 8 AES (16 Channel) Audio Embedder

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









#### ס

# (V<sub>L</sub>)







#### HD/SD-SDI Audio De-embedder & Dolby-E/AC-3 Decoder & Re-embedder

The 7720AD8-DD-HD Audio De-embedder and Dolby Decoder & Re-embedder extracts embedded audio from 4 specified groups as defined by SMPTE 299M from a 1.5Gb/s serial HDTV or as defined by SMPTE 272M from a 270Mb/s serial SDTV video signal.

One selected channel is processed by the on-card Dolby Decoder. If the channel contains Dolby E or Dolby Digital (AC-3), it will yield up to 8 additional discrete audio channels, 2 channels of stereo downmix and the associated Dolby-E metadata. Up to 16 selected channels may be optionally delayed up to 1.2 seconds and re-embedded into the output video and/or directed to AES outputs. Video output may be optionally delayed to help with lip sync. If PCM audio is embedded, the device acts as a simple 4 group audio de-embedder.

This device also handles the Dolby-E Metadata. Metadata is optionally embedded in VANC and can be provided as an output for downstream devices (i.e. Dolby Encoders, Multichannel Audio Tool, etc.). Metadata can be monitored using VistaLINK® and dial norm parameters can be modified.

For lip sync cohesion and ease of editing, Dolby-E data is organized in blocks with lengths matching the associated video frame. The decoder will match the beginning of each output block with the start of video, as provided with the genlock input. Additional delay can be dialed up by the user, up to 1.2 secs. The 8 AES inputs can be configured as a backup, in the event the primary is lost, or as a voice-over source.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as

#### ▶ Features & Benefits

- · Audio de-embedder and re-embedder for 4 groups of audio
- Dolby E/AC-3 decoding for selected audio source
- Dolby Metadata is embedded in HD VANC for downstream device decoding
- 8 AES inputs for backup, voice-over or Dolby E/AC3 content
- · Adjustable video delay to match Dolby decoder audio delay
- Automatic switchover to backup audio source on loss of selected Dolby stream
- Headphone jack for monitoring stereo down-mix or any input source
- Two full audio mixers with 16 output channels
- Card edge display
- VistaLINK® capable offering remote monitoring, control and configuration capabilities via SNMP. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

#### Inputs


- Program input supporting both HD (1.5Gb/s) and SD (270Mb/s)
- · Reference input supporting NTSCM, PAL-B and tri-level for meta data phasing
- 8 AES inputs for backup/voice-over source
- Metadata input


#### Outputs

- 2 processed HD outputs (1 protected with bypass relay)
- 8 AES de-embedded and processed outputs
- 1 DB-9 Dolby metadata (RS422/485) on same connector as input

#### Card Edge LEDs

- Module Status
- Video Signal presence
- Selected audio group presence
- Dolby decoder processing status
- · Genlock health/compatibility
- · AES signal presence

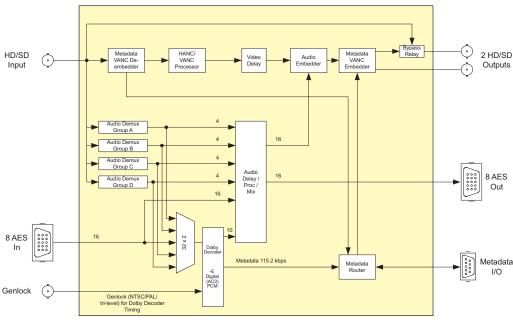

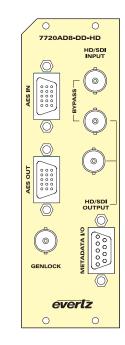

\*DB15 to 8 channel unbalanced AES adapter provided

#### HD/SD-SDI Audio De-embedder & Dolby-E/AC-3 Decoder & Re-embedder

#### **▶**Specifications

Serial Video Input:

SMPTE 292M, (1080i/60, 1080i/59.94, Standard:

1080i/50, 1080p/30 (sF), 1080p/29.97 (sF), 1080p/25 (sF), 1080p/24 (sF), 1080p/23.98 (sF),

720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94) SMPTE 259M-C (270Mb/s) 525 or

625 line component BNC per IEC 60169-8 Amendment 2 Connector:

Equalization:

HD. 115m @ 1.5Gb/s with Belden 1694A SD: 300m @ 270MB/s with Belden 1694A

Processed Serial Video Output:

Standard: Same as input or user controlled

Number of Outputs: 2

BNC per IEC 60169-8 Amendment 2 Connector: Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: Per standard < 10% of amplitude Overshoot:

Wide Band Jitter:

< 0.16 UI < 0.10 UI HD: SD:

Metadata I/O:

Dolby-E Metadata Type: FemaledB-9 Connector: Baud Rate: 115,200 baud

AES Audio Input:

Input Level:

Equalization:

SMPTE 276M Standard: Number of Inputs: 8 unbalanced Connector:

Female High Density dB-15 (breakout cable to BNC provided) 0.1 to 2.5V p-p (5V p-p tolerant)

Input Impedance: 75Ω Return Loss:

> 25dB 100kHz to 6MHz

Automatic to 1000m with Belden 1694A (or equivalent) @ 48kHz AES

signal

Sample Rate: 32kHz to 48kHz

**AES Audio Output:** 

SMPTE 276M, single-ended AES Standard:

Number of Outputs: 8 unbalanced

Female High Density dB-15 Connector: (breakout cable to BNC provided)

Sample Rate: 48kHz Impedance: 750 Up to 24-bit Resolution:

Genlock Input:

NTSC, PAL, black or any tri-level, all Type:

autodetect

Connector: 1 BNC per IEC 60169-8 Amendment 2 hi-Z or  $75\Omega$  (jumper configurable) > 40dB to 10MHz Impedance:

Return Loss:

System Performance:

AC3 Decode Delay: 32r Dolby-E Decode Delay: 32ms nominal

1 frame nominal

De-embedding Latency

600μs nominal

Additional Audio Delay 0 to maximum video delay +1 frame

Additional Video Delay:

0 to 12 frames (interlace) 0 to 28 frames (progressive)

Electrical:

+12V DC Voltage:

Power:

Complies with FCC Part 15 Class A, EMI/RFI:

**EU EMC Directive** 

Physical:

Number of Slots: 7700 frame mounting: 2 7701 frame mounting: 1

#### **>>>**Ordering Information

7720AD8-DD-HD HD/SD-SDI Audio De-embedder & Dolby-E/AC-3 Decoder & Re-embedder

Rear Plate must be specified at time of order **Ordering Options** 

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

WPAES8-BNCM-6F Cable (included)

**Enclosures** 

7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR









The 7721AE8-AC3E-HD Audio Embedder & Dolby Digital (AC-3) Encoder can insert up to 16 audio channels as 4 embedded audio groups into a 1.5Gb/s HD or a 270Mb/s SD video signal as specified by SMPTE 299M or 272M respectively.

This device provides:

- HD/SD-SDI video proc functions
- 16 channel audio demux & re-mux
- 16 channel audio proc
- Dolby Digital (AC-3) encode
- · Can automatically compensate for encoding delay

The on-board audio processor provides control to route, shuffle, mix and proc up to 16 selected channels. All channels can be additionally delayed up to 1.2 seconds. There are two on-board audio mixers. One mixer is dedicated for the AES and embedded audio processing, and the other mixer is dedicated to the input Dolby Digital (AC-3) encoder.

The on-board Dolby Digital (AC-3) Encoder can process up to six audio channels. The encoder will transform the 6 discrete channels into 2 channels containing Dolby Digital (AC-3) and the associated Dolby™ metadata. The encoder supports encoded bit ranges from 56 to 640 kbps and channel configurations from mone to 5.1-channel surround sound. Dolby™ Metadata can be ingested from an external source, extracted from the VANC, or authored directly on-board the module.


The final processed audio can be re-embedded as 4 embedded audio groups into the HD/SD-SDI output signal and additionally can be routed discretely to the AES outputs.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP -enabled control systems such as Evertz® VistaLINK® PRO locally or remotely.

#### ▶ Features & Benefits

- · Adjustable video delay to match Dolby encoder audio delay
- Dolby<sup>™</sup> metadata is sourced from VANC or external RS-422 port
- Dolby<sup>™</sup> metadata monitoring and processing (dialnorm adjustment) from any metadata input
- 8 AES inputs as well as 4 group de-embedder
- Two audio mixers, one for AES/embedded audio, another for Dolby Digital encoding
- Headphone jack (on card edge) for monitoring any input source
- · Reference input is not required for Dolby AC-3 encoding
- Card edge display

- Card edge LEDs for module status, video signal presence, selected audio group presence, Dolby Decoder status, Video Reference health/compatibility, and AES signal presence
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in the 3RU 7700FR-C frame with the 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

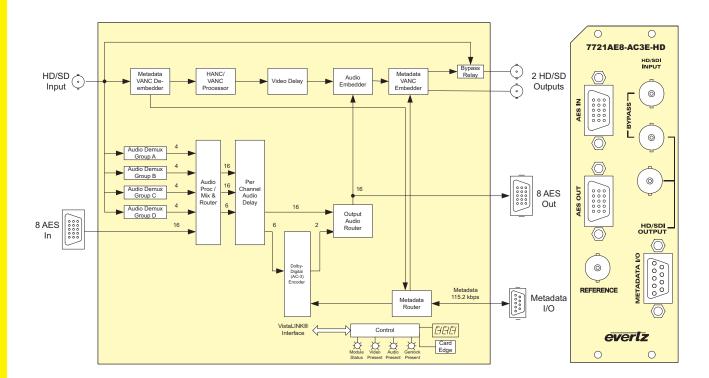

# HD/SD-SDI 8 AES Audio Embedder with Dolby Digital (AC-3) Encoder

# **▶**Specifications

Serial Video Input:

SMPTE 292M, 1080i/60, 1080i/59.94, 1080i/50, 1080p/30 (sF), 1080p/29.97 Standard:

(sF), 1080p/25 (sF), 1080p/24 (sF), 1080p/23.98 (sF), 720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94 SMPTE 259M-C (270Mb/s) 525 or

625 line component BNC per IEC 61169-8 Annex A Connector:

Equalization:

115m @ 1.5Gb/s with Belden 1694A 300m @ 270Mb/s with Belden 1694A

Processed Serial Video Output:

Standard: Same as input or user controlled

Number of Outputs:

BNC per IEC 61169-8 Appex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise/Fall Time: Per standard Overshoot: < 10% of amplitude

Wide Band Jitter:

HD: < 0.16 UI SD: < 0.10 LII Metadata I/O:

Dolby-E™ Metadata Type: Connector: Female dB-9 Baud Rate: 115,200 baud

**AES Audio Input:** 

SMPTE 276M Standard: Number of Inputs: 8 unbalanced

Female High Density dB-15 (breakout Connector:

cable to BNC provided) 0.1 to 2.5V p-p (5V p-p tolerant)

Input Level: Input Impedance:

> 25dB 100kHz to 6MHz Return Loss: Automatic to 1000m with Belden Equalization:

1694A (or equivalent) @ 48kHz AES signal

Sample Rate: 48kHz ±100ppm

**AES Audio Output:** 

Standard: SMPTE 276M, single ended AES Number of Outputs: 8 unbalanced Connector:

Female High Density dB-15 (breakout cable to BNC provided)

Sample Rate 48kHz 75Ω Impedance: Resolution: Up to 24-bit

### Genlock Input:

NTSC, PAL, black or any tri-level, all

auto detect

Connector: 1 BNC per IEC 61169-8 Annex A Impedance: Hi-Z or  $75\Omega$  (jumper configurable) Return Loss:

> 40dB to 10MHz

Electrical:

+12V DC Voltage: Power: 21W

EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

Number of Slots:

7700 frame mounting: 2 7701 frame mounting: 1

# **▶▶▶Ordering Information**

7721AE8-AC3E-HD HD/SD-SDI 8 AES Audio Embedder with Dolby Digital (AC-3)

Encoder

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

WPAES8-BNCM-6F cable (included)

7700FC VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

Enclosures

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

S7701FR Standalone enclosure









Eight channels can be processed by the on-card Dolby Encoder. The encoder will transform the 8 discrete channels into 2 channels containing Dolby-E™ and the associated Dolby-E™ metadata. The 2 channels of Dolby-E™ can be embedded into the video output or output to an AES. This device also handles the Dolby-E™ Metadata.


Metadata is optionally embedded in VANC and can be provided as an output for downstream devices (i.e. Dolby Encoders, Multichannel Audio Tool, etc.).


Up to 16 selected channels may be optionally delayed up to 1.2 seconds and embedded into the output video and/or directed to AES outputs. Video output may be optionally delayed to help with lip sync. For lip sync cohesion and ease of editing, Dolby-E™ data is organized in blocks with lengths matching the associated video frame. The encoder will match the beginning of each output block with the start of video, as provided with the genlock input. Up to 1.2 seconds of additional delay can be dialed up by the user.

### ▶ Features & Benefits

- Dolby-E™ encoding modes available: 5.1+2, 5.1+2x1, 2x4, 4+2x2, 4+2+2x1, 4+4x1, 4x2, 3x2+2x1, 2x2+4x2, 2x2+4x1, 2+6x1, 8x1, 5.1, 5+2, 5+2x1, 3x2, 2x2+2x1, 2+4x1, 6x1, 4, 2x2, 2+2x1, 4x1, 7.1, and 7.1 screen
- Dolby-E™ encoding frame rates of 23.98, 24, 25, 29.97, and 30 frame/sec
- External color-black reference not required for Dolby-E™ encoding
- Video reference input is still provided, and is compatible with bi-level and tri-level syncs
- · Adjustable video delay to match Dolby encoder audio delay
- Dolby™ metadata is sourced from VANC or external RS-422 port (metadata authoring will be available in future releases)
- Dolby™ metadata monitoring and processing (dial norm adjustment) of any metadata input

- 8 AES inputs as well as 4 group de-embedder
- Two audio mixers, one for AES/embedded audio, another for Dolby-E™ encoding
- · Headphone jack (on card edge) for monitoring any input source
- · Card edge display
- Card edge LEDs for module status, video signal presence, selected audio group presence, Dolby Decoder status, Video Reference health/compatibility, and AES signal presence
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in the 3RU 7700FR-C frame with the 7700FC VistaLINK® Frame Controller module in slot 1 of the frame.

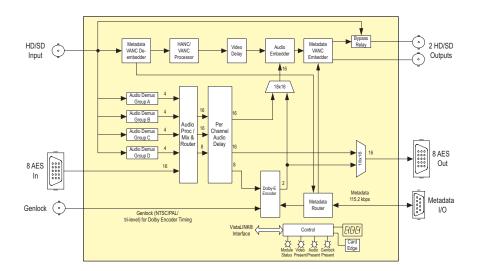









# HD/SD-SDI Audio Embedder & Dolby-E™ Encoder

# **▶** Specifications

Serial Video Input:

SMPTE 292M, 1080i/60, 1080i/59.94, 1080i/50, 1080p/30 (sF), 1080p/29.97 (sF), Standard:

1080p/25 (sF), 1080p/24 (sF), 1080p/23.98 (sF), 720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94 SMPTE 259M-C (270Mb/s) 525 or

625 line component BNC per IEC 61169-8 Annex A

Connector: Equalization:

115m @ 1.5Gb/s with Belden 1694A HD: 300m @ 270Mb/s with Belden 1694A

Processed Serial Video Output:

Same as input or user controlled Standard:

Number of Outputs:

BNC per IEC 61169-8 Annex A 800mV nominal Connector: Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: Per standard Overshoot: < 10% of amplitude

Wide Band Jitter:

< 0.16 UI SD: < 0.10 UI Metadata I/O:

Dolby-E™ Metadata Type: Connector: Female dB-9 Baud Rate: 115,200 baud

**AES Audio Input:** 

SMPTE 276M Standard: Number of Inputs: 8 unbalanced

Connector: Female High Density dB-15 (breakout cable to BNC provided) 0.1 to 2.5V p-p (5V p-p tolerant) Input Level:

Input Impedance:

Return Loss: > 25dB 100kHz to 6MHz Automatic to 1000m with Belden 1694A (or equivalent) @ 48kHz AES Equalization:

signal

48kHz ±100ppm Sample Rate:

**AES Audio Output:** 

SMPTE 276M, single ended AES

Number of Outputs:

8 unbalanced Female High Density dB-15 Connector: (breakout cable to BNC provided)

Sample Rate: 48kHz Impedance: Resolution: Up to 24-bit

Genlock Input:

NTSC, PAL, black or any tri-level, all Type:

autodetect

Connector: 1 BNC per IEC 61169-8 Annex A Impedance: Hi-Z or 75Ω (jumper configurable)

Return Loss: > 40dB to 10MHz

Electrical:

Voltage: +12V DC Power 21W

EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

Number of Slots:

7700 frame mounting: 2 7701 frame mounting: 1

### >>> Ordering Information

7721AE8-DEE-HD HD/SD-SDI Audio Embedder & Dolby-E™ Encoder

Rear Plate must be specified at time of order Ordering Options

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

WPAES8-BNCM-6F Cable (included)

Enclosures

350FR 7700FR-C 7701FR 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure









# HD/SD Quad Data Embedder

The 7721DF4-HD Quad Serial data embedder inserts 4 x RS-232 or RS422 serial data streams and GPI contact closure information into a 270Mb/s SD-SDI or 1.5Gb/s HD-SDI video signal. The RS-232/422 serial data and GPI information are first formatted into an AES audio signal, then embedded into the video stream according to SMPTE 272M-A for SD-SDI and SMPTE 292M for HD-SDI. A data error detection and correction scheme is also applied to maintain data integrity for the data deembedder at the receiver end. At the embedded packet layer, data packets resemble and have the same group DIDs as embedded audio packets. The data is packetized and inserted into the AES sub-frame according to SMPTE 337M.


Adding the +GPI option to the encoder (model 7721DE4-HD+GPI) allows the user to encode remote control contact closure information in VITC (SD) or SMPTE 12M-2 ATC (HD) user bits instead of encoding the GPI information into the AES embedded data stream. This feature allows the user to use the six parallel remote control inputs to set one of the six remote control user bit patterns. At the decoder end the model 7721DD4-HD+GPI Decoder module decodes the remote control user bits and outputs them on six open collector outputs.


### ▶ Features & Benefits

- · Automatic detection of SD-SDI or HD-SDI video input
- 4 x RS232/422 serial inputs with selectable baud rate
- · Parity selection: none, even or odd
- Support serial input with BREAK character according to SMPTE 207M
- Packetize data into sub-frame AES format according to SMPTE 337M
- Share the same group DIDs as for embedded audio, selectable from group 1 to 4
- · Group selection for mapping data into one of four Audio Groups
- · Redundant data transmission to allow data error detection and correction at the receiver end
- · Automatically remove the existing embedded packets when the conflict of group DID occurs
- · Six GPI inputs to embed simple control information into the video input
- · Card edge LEDs indicate video signal and data presence, cable equalization and module fault

### Additional Features with +GPI option installed

• Transmits remote control contact closure information in VITC or ATC user bits (instead of encoding the GPI information into AES data)

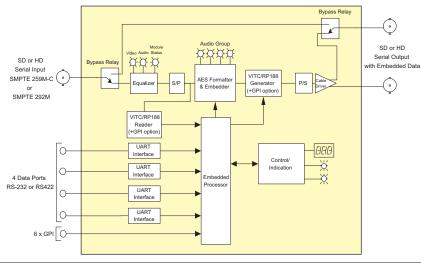



### ▶ Specifications

# Serial Video Input:

SMPTE 259M C, SMPTE 292M Standard: BNC per IEC 61169-8 Annex A Connector Equalization: Automatic 300m @ 270Mb/s,

100m @ 1.5Gb/s with Belden 1694A or equivalent cable

> 15dB up to 1.5Gb/s Return Loss:

### Serial Video Outputs with Embedded Data:

Number of Outputs: 2 outputs (1 with bypass relay protected) Standard: Same as input Connectors:

BNC per IEC 61169-8 Annex A 800mV nominal Signal Level:

0V ±0.5V Rise and Fall Time: 600ps nominal SD-SDI

200ps nominal HD-SDI

Overshoot: < 10% of amplitude

Return Loss > 15dB up to 1.5Gb/s (Relay Protected)

> 10dB up to 1.5Gb/s Wide Band Jitter: < 0.2 UI

### Data Input:

Format:

4 x RS-232 or RS-422 Terminal Block Standard:

Connector

110, 300, 600, 1200, 2400, 4800, 9600, Baud Rate

14400, 19200, 38400, 57600, or 115200 8 data bits, parity (none, even or

odd), 1 or 2 stop bits

General Purpose Inputs: Number of Inputs:

Normally open relay contact Type: Connector: Terminal Block

Internal pullup to +5V or +12V nominal Signal Level:

(jumper selectable)

# Time Code (+GPI OPTION ONLY): Ancillary Time Code Generator/Reader (ATC) - HD video standards only:

Standard:

SMPTE 12M-2 Generator Lines: VITC packets - Line 9, 571; LTC

packets - Line 10 as per 12M-2

Reader Line: . Autodetec

### Vertical Interval Time Code Generator/Reader (VITC) -SD video standards only:

Standard: SMPTE 12M-1, SMPTE 266M D-VITC Line Range

525i/59.94 10 to 21 625i/50: 6 to 22

Follows input VITC or user selectable Generator Lines

when no input VITC

Reader Line: Autodetect or user-selectable Embedding Delay:

Video I/O Delay Approximately 12ms

Delay Embedding Delay - Serial Ports:

1200µs ±20% (All Baud rates) Average latency:

Delay For Data Embedding - GPI Signals:

Average latency: 20μs ±10%

Delay For Time Code Embedding - GPI signals (+GPI option only): 1 frame plus GPI sampling delay

Encoding latency:

(GPI inputs sampled once pe

frame at beginning of field 1)

Electrical:

+12V DC Voltage: Power: 12W

FMI/RFI

Complies with FCC Part 15, Class A

EU EMC Directive

# **>>>**Ordering Information

7721DE4-HD HD/SD-SDI Quad Serial Data Embedder

Ordering Options Rear Plate must be specified at time of order

Eq: Model +3RU

+GPI **GPI** Option Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate +SA

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone enclosure



The 7721DD4-HD Quad Serial data de-embedder extracts 4 x RS-232 or RS422 serial data streams and GPI contact closure information from a 270Mb/s SD-SDI or 1.5Gb/s HD-SDI video signal. A data error detection and correction scheme is also applied to maintain data integrity on the output of the data de-embedder. At the embedded packet layer, data packets resemble and have the same group DIDs as embedded audio packets. The data is un-packetized and extracted from the AES sub-frame according to SMPTE 337M.


Adding the +GPI option to the decoder (model 7721DD4-HD+GPI) allows the user to decode remote control contact closure information from VITC (SD) or SMPTE 12M-2 ATC (HD) user bits instead of decoding the GPI information from the AES embedded data stream. This feature allows the user to use remote control user bit patterns to control the six GPO relay outputs. At the encoder end the 7721DE4-HD+GPI GPI Encoder module encodes the remote control user bits in VITC or SMPTF 12M-2 ATC

### ▶ Features & Benefits

- · Automatic detection of SD-SDI or HD-SDI video input
- 4 x RS232/422 serial outputs with selectable baud rate
- · Parity selection: none, even or odd
- Support serial output with BREAK character according to SMPTE 207M
- Packetize data into sub-frame AES format according to SMPTE 337M
- · Share the same group DIDs as for embedded audio, selectable from group 1 to 4
- · Group selection for extracting data from one of four Audio Groups
- · Redundant data transmission to allow data error detection and correction
- Six GPI outputs to embed simple control information into the video input
- Automatically remove the existing embedded packets when the conflict of group DID occurs
- Card edge LEDs indicate video signal and data presence, cable equalization and module fault

### Additional Features with +GPI option installed

• Decodes GPO relay contact closure information from VITC or ATC user bits (instead of decoding the GPI information from AES data)

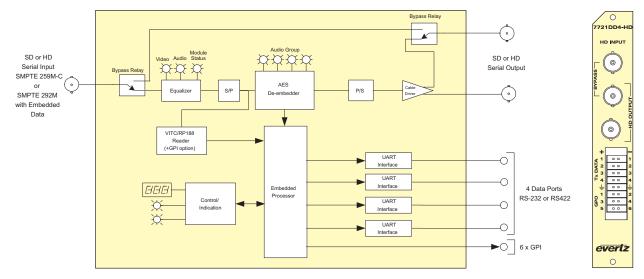

### **▶**Specifications

Serial Video Input:

SMPTE 259M C, SMPTE 292M Standard: BNC per IEC 61169-8 Annex A Connector Equalization: Automatic 300m @ 270Mb/s, 100m @ 1.5Gb/s with Belden 1694A

or equivalent cable

> 15dB up to 1.5Gb/s Return Loss:

### Serial Video Outputs with Embedded Data:

Number of Outputs: 2 outputs (1 with bypass relay protected) Standard: Same as input

BNC per IEC 61169-8 Annex A 800mV nominal Connectors: Signal Level:

0V ±0.5V

Rise and Fall Time: 600ps nominal SD-SDI 200ps nominal HD-SDI

Overshoot: < 10% of amplitude

Return Loss: > 15dB up to 1.5Gb/s (Relay Protected)

> 10dB up to 1.5Gb/s Wide Band Jitter: < 0.2 UI

Data Output:

4 x RS-232 or RS-422 Terminal Block Standard: Connector

110, 300, 600, 1200, 2400, 4800, 9600, Baud Rate:

14400, 19200, 38400, 57600, or 115200

Format: 8 data bits, parity (none, even or odd),

1 or 2 stop bits

#### General Purpose Outputs: Number of Inputs:

Normally open relay contact Type:

Connector: Terminal Block

Internal pullup to +5V or +12V Signal Level nominal (jumper selectable)

For other voltages up to 50V DC

remove jumper

Max Current:

# Time Code (+GPI OPTION ONLY):

Ancillary Time Code Generator/Reader (ATC) - HD video Standards only:

SMPTE 12M-2 Standard: Reader Line Autodetect

### Vertical Interval Time Code Generator/Reader (VITC) -SD video Standards only:

Standard: SMPTE 12M-1, SMPTE 266M D-VITC

Line Range

525i/59.94: 10 to 21 625i/50: 6 to 22

Reader Line: Autodetect or user selectable

# Embedding Delay:

Video I/O Delay: Approximately 12ms

Delay De-embedding Delay - Serial Ports: Average latency (µs): 1200 ±20% (All Baud rates)

Delay For Data De-embedding - GPO Outputs:

Average latency (μs): 1200 ±10%

Delay For Time Code Embedding - GPO Outputs (+GPI

Decoding latency: 1 frame

Electrical: Voltage:

Power: 12W

EMI/RFI: Complies with FCC Part 15, Class A

+12V DC

EU EMC Directive

Physical:

Number of slots: 1

# **bbb**Ordering Information

7721DD4-HD HD/SD-SDI Quad Serial Data De-embedder

**Ordering Options** Rear Plate must be specified at time of order (Eg: Model +3RU)

+GPI GPI option

### Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate +SA

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

# SDI D to A Component Analog Video Converter

The 7730DAC line of serial digital video to component analog converters are broadcast quality D to As with an extensive list of additional features. High quality digital to analog conversion of audio can be packaged with the video to create a D to A frame synchronizer with audio demux.

In addition, Evertz® fault monitoring processing will analyze and report video and audio problems via an On-Screen Display, or remotely via VistaLINK® SNMP.

### ▶ Features & Benefits

### D to A process

- 12-bit, over sampled video DACs
- SMPTE/EBU N10, Betacam, MII and NTSC specific standards supported
- Y, Pb, Pr or G, B, R output format
- · Selectable setup pedestal
- · Black level and gain controls of all components
- 300mV separate composite sync output


### The Features of all 7730DACs are

- SDI 525 or 625, 270Mb/s component digital video input
- One 270Mb/s re-clocked SDI output
- Four output BNCs for Y, Pb, Pr or G, B, R and composite sync
- One composite analog output on BNC for monitoring and control
- One frame video synchronizer (with +S option)
- Infinitely variable output phase (27MHz clock increments)
- Freeze modes: black, freeze, pass
- · Menu adjustable free running frequency
- VU/PPM bargraph level Indicators
- Decodes vertical interval time code (VITC), and "burns" the time code into the monitoring output picture
- A comprehensive on-screen display is available to configure the various features of the module


- · Flexible configuration of the text and audio bar graph information displays
- An extensive list of error conditions can be monitored and fault conditions can be configured from these conditions
- · On-screen messages can be triggered by the configured fault conditions
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

### The Features of "-A4" option are

- One group (4 channels) of synchronous 20-bit audio is de-multiplexed from the incoming digital video
- 2 unbalanced AES audio inputs (up to 48kHz, 24 bits) on BNC
- · User selects either the de-embedded audio or the input AES audio
- The selected audio is delayed equivalently to the video delay with the +S option
- 4 high quality 24 bit audio channels are output (analog) as balanced on 2 removable barrier strips
- Low impedance outputs (66 $\Omega$ )
- · Analog audio output levels are adjustable
- · Additional audio delay of up to 5 seconds
- Additional audio advance of up to 1 frame, depending on video delay
- · Loss of video modes: pass audio, mute audio

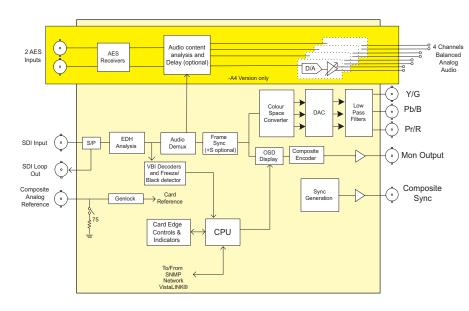



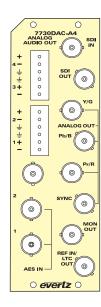





# 7730DAC, 7730DAC-A4

# SDI D to A Component Analog Video Converter

# ▶Specifications

Serial Video Input:

SMPTE 259M-C - 525 or 625 line Standard:

component

Number of Inputs: Number of Reclocked Outputs:1

BNC per IEC 61169-8 Annex A Connector:

Return Loss: > 15dB to 270MHz SMPTE 272M-A Embedded Audio:

Frequency Lock Range:

±75ppm from nominal

Analog Video Output:

Standards: SMPTE/EBU N10, Betacam, MII and

NTSC specific standards. GBR or YPbPr formats with or without setup

Number of outputs: 1

4 BNCs per IEC 61169-8 Annex A Connectors:

Video signal Level: 1V nominal Sync signal Level: 300mV nominal Output level control range:

> ±7.5% (All components)

Black level control range: ±10 IRE 75Ω Input Impedance:

Return loss: > 40dB to 10MHz

Reference Video Input:

Standard: NTSC, SMPTE 170M PAL, ITU624-4

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal Frequency Lock Range:

±75ppm from nominal

 $75\Omega$  or High impedance (jumper Input Impedance:

selectable) > 35dB to 10MHz

Return Loss:

**>>>**Ordering Information

Video Performance:

Frequency Response: < ±0.1dB (100kHz to 4.1MHz) Noise Floor: < -73dBms (15kHz to 5MHz)

Inter-channel Delay:< ±5ns Minimum Delay: 3us

Maximum Delay: 1 frame plus 3µs

Analog Audio Outputs (-A4 only):

Number of Outputs: 4

Balanced analog audio Type:

Connector: Two 6-pin removable terminal strips Output Impedance:  $66\Omega$  balanced

Sampling Frequency: 48kHz

0dBFS 

⇒ 12 to 25dBu (user-settable) Signal Level: Frequency Response < ±0.05dB (20Hz to 20kHz)

Dynamic range: 24 bits when AES inputs selected, 20 bits when embedded audio selected

< 0.001% (> 100dB) @ 1kHz, -1dBFS Crosstalk < -105dB (20Hz to 20kHz)

DC Offset: < ±30mV

SNR: > 110dB "A" Weighting

Inter-Channel Phase Error

< ±1° (20Hz to 20kHz)

AES Audio Inputs (-A4 only):

Number of Inputs:

Input Standard: SMPTE 276M, single-ended

synchronous or asynchronous PCM

Connector: BNC per IEC 61169-8 Annex A

Resolution: 24 bits when AES inputs selected, 20 bits when embedded audio is selected

32kHz to 48kHz when AES inputs

selected, Synchronous 48kHz when embedded audio is selected

S7701FR

Minimum I/O Delay: 3.5ms

Electrical:

Weight:

Standalone enclosure

Voltage: +12V DC

Power: 10W DAC + 7.5W (-A4 option) = 17.5W EMI/RFI: Complies with FCC Part 15, Class A

**FU FMC Directive** 

Physical:

7700 frame mounting:

Number of slots: 1 for non-audio versions 2 for audio versions (-A4)

Stand Alone Enclosure:

14" L x 4.5" W x 1.9" H Dimensions:

(355mm L x 114mm W x 48mm H)


Approx. 1.5lbs (0.7kg)











Rear Plate must be specified at time of order Ordering Options

+S Optional frame synchronizer

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU 1RU Rear Plate for use with 7701FR Multiframe

+1RU +SA Standalone Enclosure Rear Plate

# Component Analog Video to SDI Converter

The 7730ADC line of component analog video to serial digital converters are broadcast quality A to Ds with an extensive list of additional features. High quality analog to digital conversion of audio inputs can be packaged with the video to create an A to D frame synchronizer with audio embedder.

In addition, Evertz® fault monitoring processing will analyze and report video and audio problems via an On-Screen Display, or remotely via VistaLINK® SNMP. The 7730ADC (1 slot module) and the 7730ADC-A4 (2 slot module) are housed in the 7700FR-C (15 slots) or in the 7701FR Multiframe (houses 3 modules).

### ▶ Features & Benefits

### A to D process

- 10 bit, 54MHz sampling of input video
- Internal processing to maintain 10 bit digital video quality
- Y, Pb, Pr or G, B, R input support
- · Black level clamp on all components
- User-adjustable input video processing functions: black level control on all 3 components, gain control on all 3 components, inter-channel delay control in 18ns increments
- · Sync on green or separate sync input
- · 300mV or 4V separate sync support


### Features of all 7730ADCs are


- Three input BNCs for YPbPr or RGB input
- · One sync input BNC for separate sync
- Two SDI 525 or 625, 270Mb/s component digital video output Without OSD text or audio bargraphs
- One combination output that can either be an extra SDI output or composite analog video output
- When configured as a composite analog output it can either be a clean output (no OSD), or have the OSD text and bargraph graphics for monitoring
- EDH encoding on SDI output
- One combination input BNC that can either be an LTC input or a composite analog reference input (NTSC or PAL-B)
- 75 $\Omega$  or Hi-Z, jumper configurable input impedance
- One frame video synchronizer (with +S option)
- Infinitely variable output phase (27MHz clock increments)
- Freeze modes: black, freeze, pass

- · Menu adjustable free running frequency
- VU/PPM bargraph level Indicators
- Decodes vertical interval time code (VITC) and "burns" the time code into the OSD Monitoring output
- A comprehensive on-screen display is available to configure the various features of the module
- Flexible configuration of the text and audio bar graph information displays
- An extensive list of error conditions can be monitored and fault conditions can be configured from these conditions
- On-screen messages can be triggered by the configured fault conditions
- Fault conditions are reported via VistaLINK® SNMP
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

#### Features of -A4 option are

- 4 balanced analog audio inputs on 2 removable barrier strips
- High impedance inputs (user supplies termination resistors for other impedances)
- Analog audio input levels are adjustable
- Jumpers set coarse input levels, fine input levels are set by software control
- Audio delay equivalent video delay (with +S option)
- Additional audio delay of up to 5 seconds
- Audio advance of up to 1 frame less 3 microseconds
- One group (4 channels of audio) is multiplexed on the outgoing digital video
- 2 unbalanced AES audio outputs delayed equivalently to the video delay
- 75Ω coaxial (unbalanced) DARS reference input on BNC
- · Loss of video modes: pass audio, mute audio

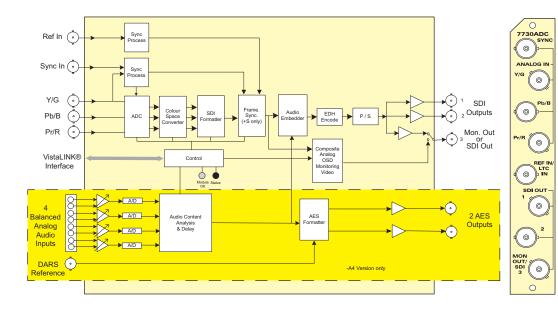

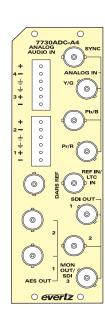







# 7730ADC, 7730ADC-A4

# Component Analog Video to SDI Converter

# ▶Specifications

Analog Video Input:

Y, Pb, Pr or G, B, R: SMPTE/EBU N10, Betacam™, MII, and other NTSC related

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal

Frequency Lock Range:

±75ppm from nominal

Input level control range ±15% Black level control range:

±5 IRE Input Impedance: 75Ω

> 30dB to 30MHz Return Loss:

Reference Video Input:

NTSC (SMPTE 170M), PAL (ITU624-4) Standard:

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal Frequency Lock Range:

±75ppm from nominal

Input Impedance:  $75\Omega$  or High impedance (jumper

selectable)

> 35dB to 10MHz Return Loss:

Analog Video Output:

NTSC (SMPTE 170M), PAL (ITU624-4) Standard:

Number of Outputs: 1

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal Output Impedance:  $75\Omega$ 

Return Loss: > 35dB to 10MHz Serial Video Output:

Standard: SMPTE 259M-C - 525 or 625 line

component

Number of Outputs: 3

Connector: BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude > 15dB to 270MHz Overshoot: Return Loss: Embedded Audio: SMPTE 272M-A

Video Performance (SDI outputs only):

Inter-channel Delay:< ±9ns Minimum Delay: 3µs

Maximum Delay: 1 frame plus 3µs

Analog Audio Input (-A4 only):

Number of Inputs:

Type: Balanced analog audio Connector: Removable terminal strip  $20k\Omega$  minimum (differential) Input Impedance: Sampling Freq:

Signal Level: 0dB FS ⇒ 18 or 24dBu (jumper selectable)

Level Control Range:±10dB

Frequency Response:

CMRR:

±0.1dB (20Hz to 20kHz) (broadcast quality)

SNR: 100dB with input at -0.5dBFS THD+N:

< 0.001% (> 100dB) @ 20Hz to 20kHz, -0.5dB FS (input video locked

to genlock video) > 100dB @ 1kHz

### AES Outputs (-A4 only):

Number of Outputs: 2 Output Standard: S

SMPTE 276M, single-ended

synchronous AES 48kHz BNC per IEC 61169-8 Annex A

Connectors: Resolution: 24 bits

Sampling Rate: Synchronous 48kHz User Bits:

Transferred to output in a non-realtime, non-block-contiguous manner

Minimum I/O Delay: 2.1ms Maximum I/O Delay: 5 seconds

Electrical:

+12V DC Voltage:

11W A DC +9W (-A4 option) Power:

= 20W total

EMI/RFI: Complies with FCC Part 15, class A EU EMC Directive

Physical:

7700 frame mounting:

Number of slots 1 for non-audio versions 2 for audio version (-A4)

Stand Alone Enclosure:

14" L x 4.5" W x 1.9" H Dimensions:

(355mm L x 114mm W x 48mm H)

Weight: Approx. 1.5lbs (0.7kg)

# >>> Ordering Information

7730ADC Component Analog Video to SDI Converter

Component Analog Video to SDI Converter with a four-channel 7730ADC-A4

Analog Audio Converter/Embedder

Rear Plate must be specified at time of order Ordering Options

Eg: Model +3RU

+S Optional frame synchronizer

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RLI Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure





In addition, Evertz® fault monitoring processing will analyze and report video and audio problems via an On-Screen Display, or remotely via VistaLINK® SNMP.

### ▶ Features & Benefits

### The Features of the A to D process

- 10 bit, 74.25MHz (/1.001) sampling of input video
- · Internal processing to maintain 10 bit digital video quality
- . Y, Pb, Pr or G, B, R input support
- · Black level clamp on all components
- · User-adjustable input video processing functions: black level control on all components, gain control on all components, inter-channel delay and picture position control in 13.5ns increments
- · Sync on green or separate sync input

### The Features of all 7730ADC-HDs are

- Three input BNCs for Y, Pb, Pr or G, B, R input
- · One sync input BNC for separate sync
- Two HD SDI 74.25 or 74.176Mb/s component digital video output without OSD text or audio bargraphs
- One combination output that can either be an extra HD SDI output or composite analog video output
- When configured as a composite analog output it will be a clean output (no picture), and have the OSD text and bargraph graphics for monitoring

- One line video synchronizer
- · Variable output phase (in clock increments)
- · Loss of video modes: black, pass
- · A comprehensive on-screen display is available to configure the various features of the module
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller

# The Features of "-A4" option are


- · 4 balanced analog audio inputs on 2 removable barrier strips
- High impedance inputs (user supplies termination resistors for other impedances)
- · Analog audio input levels are adjustable
- · Jumpers set coarse input levels, fine input levels are set by software control
- Audio delay of up to 5 seconds
- One group (4 channels of audio) is multiplexed on the outgoing digital video
- 2 unbalanced AES audio outputs delayed equivalently to the embedded audio delay
- 75 $\Omega$  coaxial (unbalanced) DARS reference input on BNC
- · Loss of video modes: pass audio, mute audio











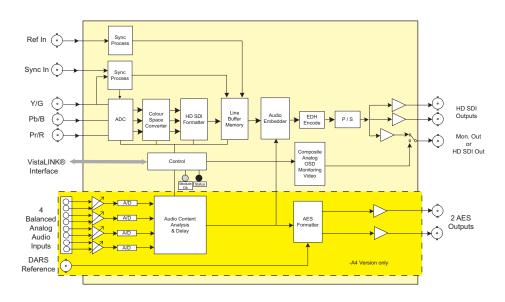





# 7730ADC-HD, 7730ADC-A4-HD

# HD Component Analog Video to HD SDI Converter

# ▶Specifications

Analog Video Input:

SMPTE 274M, 296M (analog), 1080i/59.94, 720p/59.94, 1080i/50

Input formats: GBR or YPbPr

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal

Freq. Lock Range: ±75ppm from nominal Input level control range:

> ±15%

Black level control range: > ±10 IRE Input Impedance: 75Ω

> 30dB to 30MHz Return Loss:

Reference Video Input:

Tri-level sync, analog SMPTE 274M, 296M NTSC (SMPTE 170M), PAL (ITU624-4) Standard:

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal Freq. Lock Range:

±75ppm from nominal Input Impedance:  $75\Omega$  or High impedance (jumper

selectable)

> 35dB to 10MHz Return Loss:

Monitoring Analog Video Output:

NTSC, SMPTE 170M PAL, ITU624-4 Standard:

Number of Outputs: 1

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal Output Impedance: 75Ω

Return Loss: > 30dB to 10MHz Serial Video Output:

SMPTE 292M (274M, 296M) Standard:

Number of Outputs: 2+1

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 180ps nominal < 10% of amplitude Overshoot: Return Loss: > 13dB to 1.5GHz Embedded Audio: SMPTE 299M

Video Performance (HD SDI outputs only):

Freq. Response: (Y, Pb, Pr input) < ±0.05dB to 30MHz Cb, Cr: < ±0.05dB to 15MHz

Inter-channel Delay: < ±5ns 0.5us Minimum Delay:

Maximum Delay: 1 line plus 0.5µs

Analog Audio Input(-A4 only):

Number of Inputs: Balanced analog audio Type:

Connector: Removable terminal strip Input Impedance: 20kΩ minimum (differential)

Sampling Frequency: 48kHz

Signal Level: 0dB FS => 18 or 24dBu (jumper selectable)

±10dB Level Control Range: Freq. Response:

±0.1dB (20Hz to 20kHz) (broadcast quality) SNR: 100dB with input at -0.5dBFS

THD+N: < 0.001% (> 100dB) @ 1kHz, -0.5dB FS (rev 2) < 0.001% (> 100dB) @ 20Hz

to 20kHz, -0.5dB FS (input video locked to genlock video)

CMRR: > 100dB @ 1kHz AES Outputs (-A4 only):

Number of Outputs: 2 Output Standard:

SMPTE 276M, single ended synchronous AES 48kHz Connectors: BNC per IEC 61169-8 Annex A

Resolution: 24 bits

Sampling Rate: Synchronous 48kHz

User Bits: Transferred to output in a non-realtime, non-block-contiguous manner

Minimum I/O Delav: 2.1ms Maximum I/O Delay: 5 seconds

Electrical: Voltage:

+12V DC

14W A DC + 9W (-A4 option) = 23W Power: EMI/RFI:

Complies with FCC Part 15, Class A

**FU FMC Directive** 

Physical:

2 for audio versions (-A4)

Stand Alone Enclosure:

14" L x 4.5" W x 1.9" H Dimensions:

(355mm L x 114mm W x 48mm H) Weight:

Approx. 1.5lbs (0.7kg)

# **▶** ► ► Ordering Information

7730ADC-A4-HD

HD Component Analog Video to HD SDI Converter

HD Component Analog Video to HD SDI Converter with a fourchannel Analog Audio converter/embedder

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure







The 7731DAC-HD is a professional quality digital to analog converter for HDTV.


The 7731DAC-HD supports all signal standards specified in SMPTE 274M and

Card edge control allows the user to select RGB. YPrPb or VGA outputs. Usercontrolled 4:3 alignment markers also allow for convenient framing of the video signal. The 7731DAC-HD is available in two versions to easily interface to standard broadcast monitors or VGA computer monitors.

### ▶ Features & Benefits

- Support for all SMPTE 274M and 296M video formats
- Full 10-bit Broadcast quality
- 4:4:4 Interpolated Component Output
- Card edge selectable YPrPb/RGB/VGA outputs
- GPI controllable 4:3 alignment markers

- · Optional rear connector plates for use with VGA computer monitors
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

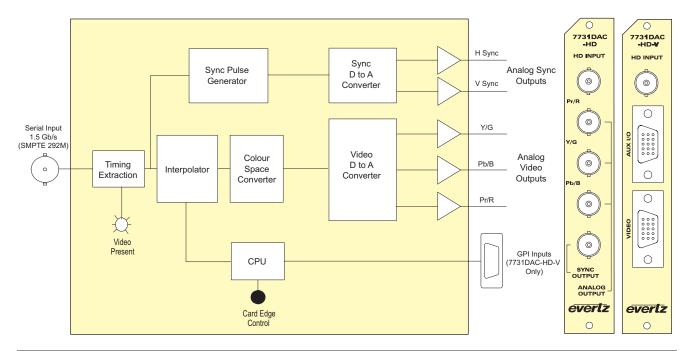

### ▶Specifications

Serial Video Input: SMPTE 292M Standard:

BNC per IEC 61169-8 Annex A Connector Equalization: Automatic 125m @ 1.5Gb/s with

Belden 1694A (or equivalent)

Analog Video Outputs:

DC Offset:

Standard: SMPTE 274M, 296M per nominal 1V p-p YPrPb/RGB or 0.7V p-p VGA Video: 300mV or 4V per nominal Sync:

Impedance: 75Ω

Connector: 4 BNC per IEC 61169-8 Annex A

(7731DAC-HD) Female High Density DB15

(7731DAC-HD-V) 0V ±0.1V

Connector: Signal Level:

Type:

Number of Inputs:

Electrical: +12V DC Voltage:

Power:

EMI/RFI: Complies with FCC Part 15, Class A

+5V nominal

General Purpose Inputs (7731DAC-HD-V only):

EU EMC Directive

pull-ups to V ext pin

Male High Density dB-15

Opto-isolated, active low with internal

May be internally jumped to +5V

Physical: Number of Slots:

### **>>>**Ordering Information

7731DAC-HD HDSDI to HD Component Analog or (optional VGA) Converter

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

VGA output

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

Accessories WPVGABNC5 VGA to BNC - 6' Monitor Adapter Cable

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

The 7736CF2 series of modules are broadcast quality component serial digital to composite analog video converters with an extensive list of advanced features. The 7736CE2-A4 and 7736CE2-A8 versions offer respectively four (two per encoding channel) or eight (four per encoding channel) high quality audio digital to analog converters that can be driven from discrete AES inputs or audio embedded within the video input signal. The module features a clean (asynchronous) and a fast (synchronous) input video lock modes to handle upstream switches. In addition, control of card is via an On-Screen Display or remotely via VistaLINK®.

### ▶ Features & Benefits

- · Two component serial digital inputs (525 or 625)
- · One composite analog video output per channel WITHOUT OSD text
- · Internal processing to maintain 10 bit digital video quality
- · 12 bit output video digital to analog conversion
- · One monitoring quality video output with OSD for card configuration
- · User adjustable output video processing functions: black level (brightness), gain (contrast), hue, and saturation
- User selectable luminance and chrominance filters for different applications (i.e. broadcast vs. studio)
- · User selectable horizontal blanking interval width (narrow or normal)
- One composite analog reference input (NTSC or PAL-B) on BNC  $75\Omega$  or Hi-Z, (jumper configurable) input impedance
- Video Frame synchronizer (with +S option)
- · Infinitely variable output phase
- · Freeze modes: black, freeze
- · Input video lock mode: clean or fast
- · Adjustable free running frequency. Both channels must be free running to be able to adjust frequency
- · A comprehensive on screen display for module config

### The Features of "-A4" and the "-A8" Options: 7736CE2-A4 (per video channel)


- One half group (2 channels) of synchronous 20-bit audio may be de-multiplexed from the incoming digital video
- 1 unbalanced (or balanced) AES audio input (up to 48kHz, 24 bits) on BNC (or terminal strip for balanced audio)
- 2 high quality 24 bit audio channels are converted to balanced analog on 2 removable barrier strips

### 7736CE2-A8 (per video channel)

- One full group (4 channels) of synchronous 20-bit audio may de-multiplexed from the incoming digital video
- 2 unbalanced AES audio input (48kHz, 24 bits) supplied via 15dB
- 4 high quality 24 bit audio channels are converted to balanced analog on 2 removable barrier strips

### 7736CE2-A4 and 7736CE2-A8

- User selects EITHER the de-embedded audio or the input AES audio
- · Audio delay tracks the video delay with the (+S option)
- Low impedance outputs (66 $\Omega$ )
- · Analog audio output levels are adjustable
- · Additional audio delay of up to 2.5 seconds
- Audio advance of up to 1 frame, depending on video delay
- · Loss of video modes: pass audio, mute audio

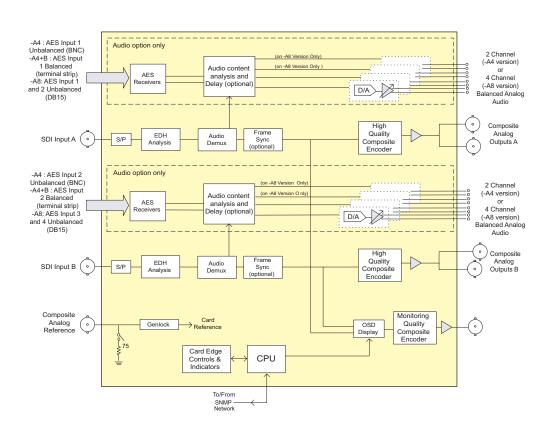












7700 Series Modular - Digital to Component Analog Converters







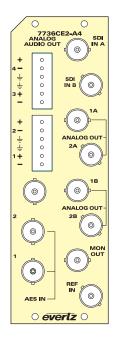

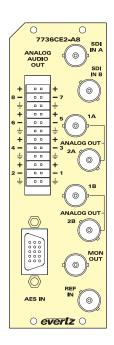

# ▶Specifications

# Serial Video Input:

SMPTE 259M-C - 525 or 625 line Standard: component

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector:

Return Loss: > 15dB to 270MHz Embedded Audio: SMPTE 272M-A Freq Lock Range: ±75ppm from nominal

Lock up time on a hot switch:

None or 7 frames (based on lock mode)

Analog Broadcast Video Output: Standard: NTSC, SMPTE 170M PAL, ITU624-4

Number of Inputs: 2 per input video

BNC per IEC 61169-8 Annex A Connector: Signal Level: 1V nominal

Output Impedance:  $75\Omega$ DC Offset: 0V ±50mV Return Loss:

> 45dB to 10MHz < ±0.1dB to 4MHz (response will Frea Response: depend on selected filtering)

Differential Phase: < 0.5° (< 0.3° typical) Differential Gain: < 0.5% (< 0.3% typical) > 75dB (both channels black video,

100kHz to 5MHz)

Output Level Control Range: ±10% Black Level Control Range: ±7.5 IRE

Chroma Level Control Range:

±10%

Hue control range: ±15° (NTSC only)

Minimum Delay:

Maximum Delay: 1 frame + 3µs (+S option only)

#### Reference Video Input:

NTSC, SMPTE 170M PAL, ITU624-4 Standard:

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A 1V nominal (0.5V to 1.5V) Signal Level:

Freq Lock Range: ±75ppm from nominal Input Impedance:  $75\Omega$  or High impedance (jumper

selectable) > 25dB to 10MHz Return Loss:

Max Subcarrier Jitter: Free-Running Frequency Control Range

> ±10ppm (> ±270Hz)

### Analog Monitoring Video Output:

Standard: NTSC. SMPTE 170M PAL. ITU624-4

Number of Outputs: 1

BNC per IEC 61169-8 Annex A Connector:

Signal Level: Output Impedance:  $75\Omega$ 

> 35dB to 10MHz Return Loss:

### Analog Audio Outputs (-A4 and -A8 only):

Number of Outputs: 4 (2 per video channel) 7736CE2-A4 8 (4 per video channel) 7736CE2-A8

Type: Balanced analog audio

Connector: Two 6-pin removable terminal strips

7736CE2-A4

Single 16 pin removable terminal strip, 7736CE2-A8

Output Impedance:  $66\Omega$  balanced

Sampling Frequency:48kHz

Signal Level: 0dBFS 

⇒ 12 to 25dBu (user-settable) Freq Response: < ±0.05dB (20Hz to 20kHz)

Dynamic range: 24 bits when AES inputs selected, 20 bits when embedded audio selected

THD+N: < 0.001% (> 100dB) @ 1kHz, -1dBFS

Crosstalk < -105dB (20Hz to 20kHz)

DC Offset: < ±30mV

> 110dB "A" Weighting SNR:

Inter-Channel Phase Error:

< ±1° (20Hz to 20kHz)

### Unbalanced AES Audio Inputs (-A4 and -A8 only):

2 for 7736CE2-A4 Number of Inputs: 4 for 7736CE2-A8

Input Standard: SMPTE 276M, single ended

synchronous or asynchronous PCM

BNC per IEC 61169-8 Annex A

(7736CE2A-4) 15dB (7736CE2A-A8)

Up to 24bits Resolution:

Input Sampling Rate: 32kHz to 48kHz Minimum I/O Delay: 3.5ms

### Balanced AES Audio Inputs (-A4 only):

Number of Inputs: 2

Connectors:

AES3-1992, balanced synchronous or Input Standard:

asynchronous PCM AES

One 6-pin removable terminal strip Connectors

Impedance: 1100 Up to 24 bits Resolution: Sampling Rate: 32kHz to 48kHz 2V to 7V p-p Input Level: Minimum I/O Delay: 3.5ms

### Electrical:

Voltage: +12V DC

10.2W (7736CE2) 17.75W (7736CE2-A4) Power:

18W (7736CE2-A8)

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

### Physical:

7700 frame mounting: 2 7701 frame mounting: 1



# **Dual Composite Encoder**

# **▶▶▶**Ordering Information

7736CE2 **Dual Composite Encoder** 

Dual Composite Encoder with 4 analog outputs 7736CE2-A8 Dual Composite Encoder with 8 analog outputs

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Optional Frame Synchronizer +S

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure









# **Dual Composite Decoder**

The 7736CD2 line of composite analog video to serial digital converters are dual broadcast quality video decoders. The 7736CD2-A4 and the 7736CD2-A8 versions offer four (two per decoded channel) or eight (four per decoded channel) high quality audio analog to digital converters. Faroudja 2D adaptive comb filtering technology has been chosen so as not to introduce moving artifacts from the decoding process. This makes it ideal for use in applications where the signal is destined to enter MPEG compressors. "The low level of moving artifacts reduces the bit-rate required to digitally encode the signal for a given picture quality level by up to 20%.

Traditional adaptive and non-adaptive 2D comb filters can introduce artifacts in areas of high detail. However, "by using adaptive processing incorporating Faroudja's patented H-logic and V-logic interpolation algorithms to control both the comb filter itself and the narrow and wide band chroma filters, these artifacts are substantially reduced not only on horizontal and vertical edges, but on diagonal edges too. In this way, the chroma filters reduce chroma noise without blurring the signal at sharp transitions in any direction".2

1, 2 Faroudja Laboratories Inc, FLI2000S Data Sheel

In addition, control of the card is via an On-Screen Display, or remotely via VistaLINK® SNMP.

### ▶ Features & Benefits

- One input BNC per channel.  $75\Omega$  or Hi-Z, (jumper configurable)
- Two SDI 525 or 625, 270 Mb/s digital video output per channel
- EDH encoding on SDI outputs
- · One composite analog video output with OSD text for card control
- One composite analog reference input (NTSC/PAL-B). 75 $\Omega$  or Hi-Z, input impedance. One time base for both channels
- Video frame synchronizer (with +S option)
- Infinitely variable output phase (27MHz clock increments)
- · Freeze modes: black, freeze
- · Adjustable free running frequency via OSD. Both channels must be freerunning to be able to adjust frequency
- · A comprehensive on-screen display for module config

### The Features of the Decoding Process

- 12 bit, 8fsc sampling of input video
- · Internal processing to maintain 10 bit digital video quality
- · Patented Faroudja adaptive 2D comb filtering technology
- · Mode for support of non-time base corrected signals
- · User configurable luma and chroma detail enhancement
- · User selectable noise reduction
- · Chroma AGC available, if desired
- · User adjustable input video processing functions: black level, gain, hue, and saturation (when chroma AGC is enabled)

### The Features of "-A4" and "-A8" Options

- · 4 balanced analog audio inputs (two stereo pair) on 2 removable barrier strips (7736CD2-A4)
- · 8 balanced analog audio inputs (four stereo pair) on terminal strips
- High impedance inputs (user terminated for other impedances)
- · Analog audio input levels are adjustable. Jumpers set coarse input levels, fine input levels are set by software control
- · Audio delay "tracks" video delay (with +S option)
- · Additional audio delay of up to 5 seconds
- · Audio advance of up to 1 frame less 2.5 microseconds
- 2 channels (1/2 group) of audio is multiplexed onto each of the outgoing digital video (7736CD2-A4)
- · 4 channels (one full group) of audio is multiplexed onto each of the outgoing digital video (7736CD2-A8)
- · 2 unbalanced AES audio outputs using BNC's (7736CD2-A4)
- 4 unbalanced AES audio outputs using 15dB connector (7736CD2-A8)

0

0

0

0

SDI OUT

0


0

SDI OUT

0

0

• 75 $\Omega$  coaxial (unbalanced) DARS reference input on BNC

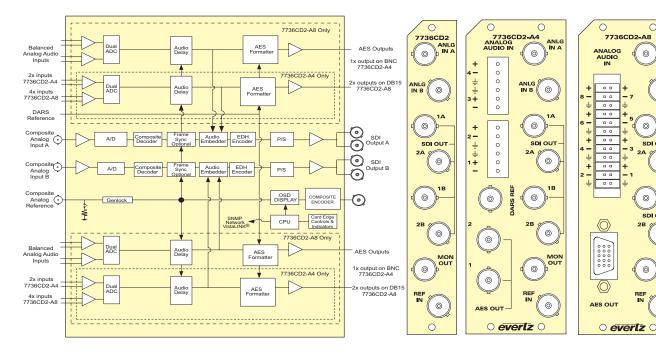











# **Dual Composite Decoder**

# ▶Specifications

Analog Video Input:

NTSC, SMPTE 170M PAL, ITU624-4 Standard:

Number of Inputs:

BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal Frequency Lock Range:

±75ppm from nominal

Input level control range: +4dB

Black level control range: ±5 IRE

Chroma level control range:

±20% (only available if chroma AGC

enabled)

±20° (NTSC only) Hue control range: Input Impedance:  $75\Omega$  or High impedance (jumper

selectable) > 35dB to 10MHz

Return Loss: Lock up time on a hot switch:

Between 15 and 45 frames (may be longer with noisy signals)

Reference Video Input:

NTSC. SMPTE 170M PAL. ITU624-4 Standard:

Number of Inputs: Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal

Frequency Lock Range: ±75ppm from nominal

Input Impedance:  $75\Omega$  or High impedance (jumper

selectable) Return Loss: > 25dB to 10MHz

Analog Monitoring Video Output:

NTSC, SMPTE 170M PAL, ITU624-4 Standard:

Number of Outputs: 1

BNC per IEC 61169-8 Annex A Connector: 1V nominal

Signal Level: Output Impedance:  $75\Omega$ 

> 35dB to 10MHz Return Loss:

Serial Video Output:

Embedded Audio:

SMPTE 259M-C - 525 or 625 line Standard:

component Number of Outputs: 4 (2 per channel)

Connector: BNC per IEC 61169-8 Annex A

SMPTE 272M-A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude > 15dB to 270MHz Overshoot: Return Loss: < 0.09 UI (all outputs) Jitter:

Decoder Performance (SDI outputs only):

Frequency Response: < ±0.1dB (100kHz to 4.2MHz)

Differential Gain: < ±0.5% typical < ±0.2° typical Differential Phase:

Noise Floor: < -57dB rms (black video, 15kHz to

5MHz)

< -60dB rms (VBI lines, black video,

15kHz to 5MHz) < ±0.5% < +9ns

C/L Delay: Minimum Delay: 3.25 lines Maximum Delay: 1 frame plus 3.25 lines

Inter-channel crosstalk:

C/L Gain:

Within noise floor measurement

Analog Audio Input (-A4 and -A8 only):

Number of Inputs: 4 (2 per video channel) 7736CD2-A4 8 (4 per video channel) 7736CD2-A8

Type: Balanced analog audio Connector: Removable terminal strip Input Impedance:  $20k\Omega$  minimum (differential)

Sampling Frequency: 48kHz Signal Level:

0dB FS ⇒ 18 or 24dBu (jumper selectable)

Level Control Range: ±10dB

Frequency Response: ±0.1dB (20Hz to 20kHz) (broadcast quality)

SNR: 105dB

THD+N < 0.001% (> 100dB) @ 1kHz, -0.5dB FS (rev 2) < 0.001% (> 100dB) @

20Hz to 20kHz, -0.5dB FS (input video locked to genlock video)

CMRR: > 100dB @ 1kHz AES Audio Outputs:

Number of Outputs: 2 (1 per channel) 7736CD2-A4 4 (2 per channel) 7736CD2-A8 Output Standard: SMPTE 276M, single ended synchronous AES

BNC per IEC 61169-8 Annex A for 7736CD2-A4 15dB for 7736CD2-A8

Resolution: 24 hits

Sampling Rate: synchr Minimum I/O Delay: 2.1ms synchronous 48kHz

Maximum I/O Delay:

2.5 seconds

Electrical:

Connectors:

Voltage: +12V DC 12W (7736CD2) Power: 21W (7736CD2-A4) 19W (7736CD2-A8)

FMI/RFI Complies with FCC Part 15, Class A

EU EMC directive

Physical:

7700 frame mounting: 2 7701 frame mounting:









# **>>>**Ordering Information

7736CD2 Dual Composite Decoder Dual Composite Decoder with 4 analog inputs 7736CD2-A4 7736CD2-A8 Dual Composite Decoder with 8 analog inputs

Rear Plate must be specified at time of order **Ordering Options** 

Eq: Model +3RU

Optional Frame Synchronizer

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate +SA

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure







The 7746FSF series SD Frame Synchronizers are designed to re-time a SMPTE259M (625i/50, 525i/59.94) input to a local sync signal. When necessary, frames are repeated or dropped to maintain synchronization. During the synchronizing process, the video delay varies from 3 lines through to 1 frame plus 3 lines. Additional delay can be added to the synchronizing process in 1 frame

The 7746FSE is currently available in two versions to suit various application requirements.

|              | Synchronizes |                         |              | AES Audio |         |
|--------------|--------------|-------------------------|--------------|-----------|---------|
| Model        | Video        | Embedded<br>Audio       | AES<br>Audio | Inputs    | Outputs |
| 7746FSE      | Yes          | Demux & mux 2<br>Groups | No           | -         | -       |
| 7746FS-EAES4 | Yes          | Demux & mux 2<br>Groups | 4            | 4         | 4       |

On the 7746FSF version the video and embedded audio is synchronized

On the 7746FS-EAES4 version, the user can choose to have either 2 groups from the upstream embedded audio or audio from the 4 AES inputs embedded on the output video and output as AES. Both versions can also pass all VANC data. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.

The frame synchronizers have the ability to adjust video parameters such as brightness, contrast, saturation and hue. The 7746FSE products can adjust audio parameters such as gain, mixing stereo pairs into monaural and reassignment of audio channels.

The card functions can be controlled from the card edge or through the VistaLINK®


### ▶ Features & Benefits

- Synchronizes 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- · Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats
- · Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input
- · Freeze on last good frame, or field, go to black on loss of video or pass input
- Synchronizes 2 groups of embedded audio and re-embeds 2 groups
- Audio Sample Rate Converters can be disabled for Dolby-E<sup>™</sup> support
- Independently adjustable audio levels on all channels
- · Ability to combine stereo pairs to monaural
- Reassignment of audio channels within the embedded groups
- Front panel LEDs indicate: module fault, video and audio present
- · Serial remote data logging
- Adjustable video black level (brightness), Y level (contrast) and chroma level (saturation), color (hue)
- AFD insertion

- · Maximum audio input to output delay equivalent to additional frames of video delay
- · Separate control of video and audio delay
- Audio Sample Rate Converters can be disabled
- · Independently adjustable audio levels on all channels
- · Ability to combine stereo pairs to monaural
- · Reassignment of audio channels
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

### Additional Features for -EAES4 versions

- · Synchronizes four external AES signals
- Synchronized audio is output as 4 AES signals
- · AES outputs bypass relay protected on power loss

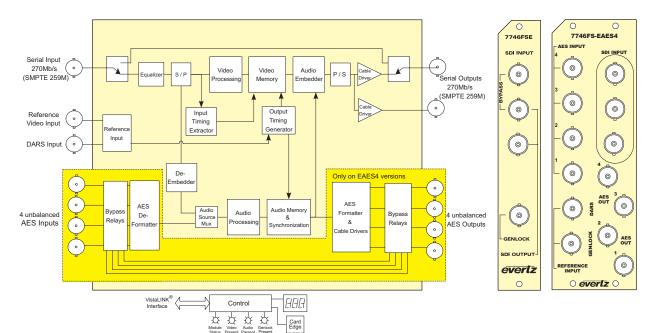

# 7746FSE, 7746FS-EAES4

# SD-SDI Frame Synchronizers

# **▶**Specifications

Serial Video Input:

SMPTE 259M-C 525i/59.94 or Standard:

625i/50

Connector: BNC per IEC 61169-8 Annex A Input Equalization: Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable

Return Loss: > 15dB up to 270MHz

Serial Video Outputs:

Number of Outputs: 2 (1 output is bypass relay protected)
Connectors: BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot:

Wide Band Jitter: < 0.10 UI

Genlock Input:

Type: NTSC or PAL Color Black 1V p-p, or

Composite bi-level sync (525i/59.94 or 625i/50) 300mV

BNC per IEC 61169-8 Annex A Connector:

75Ω (jumper selectable)

AES Audio Input and Output (7746FS-EAES4):

Number of Inputs: 4 Number of Outputs: 4

Standard: SMPTE 276M, single ended synchronous or asynchronous AES

Connectors: BNC per IEC 61169-8 Annex A Resolution: 24 bits

48kHz Sampling Rate: Impedance:  $75\Omega$  unbalanced Signal Level 1V p-p nominal

**Processing Functions:** 

Video:

Black Level: Luminance Gain: ±6dB Chrominance Gain: ±6dB Hue: Audio:

Gain:

Remapping: Any input or mono mix of any L/R pair

to any output

Input To Output Processing Delay:

Video Processing Delay: Minimum Delay Mode:

3 lines to 1 frame plus 3 lines

Additional Delay Mode:

Up to 12 frames of additional delay (1

frame increments)

Data Logging Serial Port:

Standard: RS 232

Connector: Software upgrade cable femaledB-9 Baud Rate:

8 bits, no parity, and 2 stop bits

Electrical:

+12V DC Voltage: Power: 7746FSE: 12W 7746FS-EAES4: 15.5W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Physical:
7700 frame mounting:
1 for 7746FSE 2 for 7746FS-EAES4

7701 frame mounting:

Number of slots: 1 for 7746FSF

1 for 7746FS-EAES4

### **▶** ► ► ► Ordering Information

7746FSE

7746FS-EAES4 SD-SDI Frame Synchronizer with discrete 4 AES Audio Processing

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

7700FC VistaLINK® Frame Controller 9000NCP

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel 9000NCP2

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR

1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure









The frame synchronizers are equipped with dual GPI for smart preset control and have the ability to adjust video parameters such as brightness, contrast, saturation and hue. They can also adjust audio parameters such as gain, mixing stereo pairs into monaural and reassignment of audio channels. The card functions can be controlled from the card edge or through the VistaLINK®


The 7746FSE-GPI can optionally be ordered with Evertz<sup>®</sup>s patented IntelliGain™ Audio and Loudness Processor. The IntelliGain™ audio processing engine provides a full compressor/limiter and loudness calculator that processes long-term trends in the audio content and uses a multi-minute time coefficient, which applies a smooth attack producing the final target loudness output.

### ▶ Features & Benefits

- 7746FSE-GPI Synchronizes 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- · Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats
- Program Video output bypass relay protected on power loss
- · Programmable output phase with respect to reference input
- Freeze on last good frame, or field, or go to black on loss of video or pass input
- · Synchronizes 2 groups of embedded audio and re-embeds 2 groups
- Front panel LEDs indicate: module fault, video and audio present
- Adjustable video black level (brightness), Y level (contrast), and chroma level (saturation)
- · Adjustable hue control for SD video standards
- Maximum audio input to output delay equivalent to additional frames of video
- · Synchronizes VANC/VBI data starting after switch line

### IntelliGain Audio and Loudness Processor

- · Consistent audio loudness levels within a channel and/or program
- · Automatic detection and level adjust for loud commercials
- · Gain control within a program interval to preserve audio dynamic range
- · Artifact-free transitions between program and commercials
- Elimination of drastic volume changes during commercials and interstitials

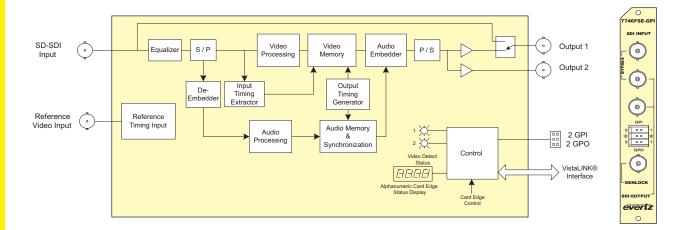

Complies with FCC regulations for

class A devices Complies with EU EMC directive

# SD-SDI and Frame Synchronizer with GPI

+12V DC

12W

Electrical:

Voltage:

Power:

EMI/RFI:

Physical:

Number of slots:

# **▶**Specifications

# Serial Video Input:

Auto-detects standard SMPTE 259M-C Standard:

(525i/59.94 or 625i/50)

2 BNC per IEC 61169-8 Annex A Input Equalization: Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable > 20dB up to 270MHz

Return Loss:

# Serial Video Outputs:

Standard: Same as input

Number of Outputs: 2 (1 is bypass relay protected)
Connector: BNC per IEC 61169-8 Annex A
Signal Level: 800mV nominal

DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal for SD < 10% of amplitude > 20dB up to 270MHz Overshoot: Return Loss: > 15dB at 1.5Gb/s

< 0.10 UI Jitter:

Genlock Input:

Standard

HD Tri-level Sync NTSC/PAL Color Black 1V p-p or Composite Bi-level sync (525i/59.94

or 625i/50) 300mV BNC per IEC 61169-8 Annex A 75Ω (jumper selectable)

Termination

### Processing Functions:

Video:

Connector

Black Level ±7% Luminance ±6dB Chroma ±6dB ±20° Hue Audio:

Gain ±24dB

Remapping Any input or mono mix of any L/R pair to any output

Input to Output Processing Delay: Video:

Minimum Mode Additional Mode

3 lines to 1 frame + 3 lines Up to 12 frames for interlaced formats (28 frames for progressive formats) of additional delay (1 frame

# **>>>**Ordering Information

Accessories

7746FSE-GPI SD-SDI Frame Synchronizer with GPI Rear Plate Suffix: +3RU

3RU Rear Plate for use with 7700FR-D Multiframe

Ordering Options Rear Plate must be specified at time of order

Eg: Model + 3RU

Enclosures: 7700FR-D

Integrated IntelliGain™ Audio and Loudness Processor

3RU Multiframe which holds up to 15 single slot modules









7700 Series Modular - Synchronizing, Delay & Keyer Products

The frame synchronizers are equipped with dual GPI for smart preset control and have the ability to adjust video parameters such as brightness, contrast and saturation. They can also adjust audio parameters such as gain, mixing stereo pairs into monaural and reassignment of audio channels. The card functions can be controlled from the card edge or through the VistaLINK® interface.

The 7746FSE-GPI-HD can optionally be ordered with Evertz®'s patented IntelliGain™ Audio and Loudness Processor. The IntelliGain™ audio processing engine provides a full compressor/limiter and loudness calculator that processes long-term trends in the audio content and uses a multi-minute time coefficient, which applies a smooth attack producing the final target loudness output.


### ▶ Features & Benefits

increments.

- 7746FSE-GPI-HD Synchronizes 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 480p/59.94, 525i/59.94 or 625i/50
- · Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats
- Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input
- Freeze on last good frame, or field, or go to black on loss of video or pass input
- Synchronizes 2 groups of embedded audio and re-embeds 2 groups
- Front panel LEDs indicate: module fault, video and audio present
- Adjustable video black level (brightness), Y level (contrast), and chroma level (saturation)
- Maximum audio input to output delay equivalent to additional frames of video delay
- · Synchronizes VANC/VBI data starting after switch line

### IntelliGain Audio and Loudness Processor

- Consistent audio loudness levels within a channel and/or program
- · Automatic detection and level adjust for loud commercials
- · Gain control within a program interval to preserve audio dynamic range
- · Artifact-free transitions between program and commercials
- Elimination of drastic volume changes during commercials and interstitials

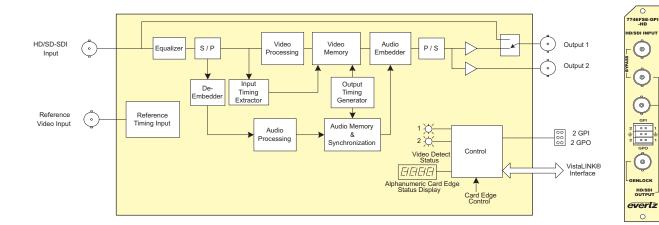





# 7746FSE-GPI-HD

Complies with FCC regulations for

class A devices Complies with EU EMC directive

HD/SD-SDI and Frame Synchronizer with GPI

+12V DC

12W

Electrical:

Voltage:

Power:

EMI/RFI:

Physical:

Number of slots:

# **▶**Specifications

Serial Video Input:

Auto-detects standard 1.485Gb/sec Standard:

SMPTE 292M (1080i/59.94, 1080i/50, 720p/59.94, 720p/50) SMPTE 260M, SMPTE 274M, SMPTE 296M, SMPTE 349M (HD or SD carrier) 270Mb/s SMPTE 259M-

C (525i/59.94 or 625i/50) 2 BNC per IEC 61169-8 Annex A Automatic to 100m @ 1.5Gb/s with Connector: Input Equalization: Belden 1694A or Equivalent cable

Automatic to 300m @ 270Mb/s with Belden 1694A or Equivalent cable

Return Loss: > 20dB up to 270MHz > 13dB up to 1.5GHz

Serial Video Outputs:

Same as input Standard:

Number of Outputs: 2 (1 is bypass relay protected)
Connector: BNC per IEC 61169-8 Annex A
Signal Level: 800mV nominal

0V ±0.5V Rise and Fall Time: 200ps nominal for HD 900ps nominal for SD

Overshoot: < 10% of amplitude > 20dB up to 270MHz > 15dB at 1.5Gb/s < 0.16 UI (HD) or < 0.10 UI (SD

Jitter:

Genlock Input:

HD Tri-level Sync Standard:

NTSC/PAL Color Black 1V p-p or Composite Bi-level sync (525i/59.94 or 625i/50) 300mV BNC per IEC 61169-8 Annex A

Connector: Termination: 75Ω (jumper selectable)

Processing Functions:

Video: Black Level: Luminance: ±6dB ±6dB Chroma: Audio:

±24dB

Remapping: Any input or mono mix of any L/R

pair to any output

Input to Output Processing Delay:

Video: Minimum Mode: 3 lines to 1 frame + 3 lines Additional Mode: Up to 12 frames for interlaced

formats (28 frames for progressive formats) of additional delay (1 frame

increments)

# **>>>**Ordering Information

7746FSE-GPI-HD HD/SD-SDI Frame Synchronizer with GPI

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model + 3RU

Accessories +IG Integrated IntelliGain™ Audio and Loudness Processor Rear Plate Suffix:

+3RU 3RU Rear Plate for use with 7700FR-D Multiframe

Enclosures:

7700FR-D 3RU Multiframe which holds up to 15 single slot modules







The 7746FSE-HD series HD/SD Frame Synchronizers are designed to re-time a SMPTE 292M (1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, or 480p/59.94) or SMPTE259M (625i/50, 525i/59.94) input to a local reference tri-level or composite sync signal. When necessary, frame repeated or dropped to maintain synchronization. During the synchronizing process the video delay varies from 3 lines through to 1 frame plus 3 lines. Additional delay can be added to the synchronizing process in 1 frame increments.

The 7746FSE-HD is available in two versions to suit various application requirements.

|                 | Synchronizes |                         |              | AES Audio |         |  |
|-----------------|--------------|-------------------------|--------------|-----------|---------|--|
| Model           | Video        | Embedded<br>Audio       | AES<br>Audio | Inputs    | Outputs |  |
| 7746FSE-HD      | Yes          | Demux & mux 2<br>Groups | No           | -         | -       |  |
| 7746FS-EAES4-HD | Yes          | Demux & mux 2<br>Groups | 4            | 4         | 4       |  |

On the 7746FSE-HD version the video and any embedded audio present is synchronized. On the 7746FS-EAES4-HD version, the user can choose to have either 2 groups from the upstream embedded audio or audio from the 4 AES inputs embedded on the output video and output as AES.

Both versions can also pass all VANC data. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.

The frame synchronizers have the ability to adjust video parameters such as brightness, contrast and saturation. Hue control is available for SD standards (525i/59.94 and 625i/50). They can also adjust audio parameters such as gain, mixing stereo pairs into monaural and reassignment of audio channels.

The card functions can be controlled from the card edge or through the VistaLINK®


### ▶ Features & Benefits

- Synchronizes 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 480p/59.94, 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats.
- Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input
- Freeze on last good frame, or field, go to black on loss of video or pass input
- Synchronizes 2 groups of embedded audio and re-embeds 2 groups
- · Front panel LEDs indicate: module fault, video and audio present
- · Front pariel LEDS indicate. Module fault, video and addio present
- Serial remote data logging
- Adjustable video black level (brightness), Y level (contrast) and chroma level (saturation)
- · Adjustable hue control for SD video standards
- Maximum audio input to output delay equivalent to additional frames of video delay

- · AFD insertion
- · Synchronizes VANC data starting after switch line
- Synchronizes SMPTE 12M-2 time codes
- · Separate control of video and audio delay
- · Audio Sample Rate Converters can be disabled for Dolby support
- Independently adjustable audio levels on all channels
- · Ability to combine stereo pairs to monaural
- · Reassignment of audio channels
- VistaLINK®-capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

### Additional Features for -EAES4 versions

- · Synchronizes four external AES signals
- · Synchronized audio is output as 4 AES signals
- AES outputs bypass relay protected on power loss

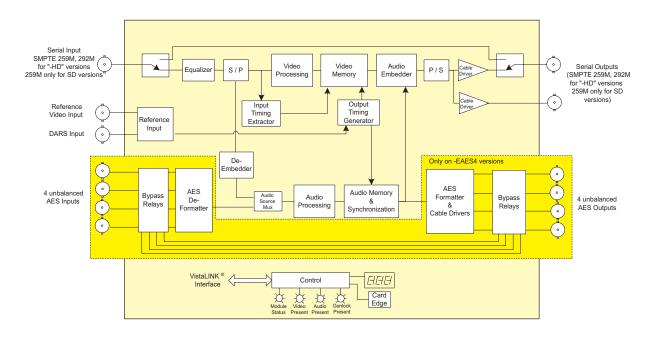



















### ▶Specifications Serial Video Input:

Standard: DIP switch selectable SMPTE 292M (1.485Gb/s) SMPTE 274M, SMPTE 296M, SMPTE 349M (270 Mb/s)

SMPTE 259M-C 525i/59 94 or 625i/50 BNC per IEC 61169-8 Annex A

Connector: Input Equalization:

Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable Automatic to 115m @ 1.5Gb/s with

HD: Belden 1694A or equivalent cable

Return Loss:

> 15dB up to 270MHz SD: HD: > 13dB up to 1.5GHz

### Serial Video Outputs:

Number of Outputs: 2 (1 output is bypass relay protected)
Connectors: BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 200ns nominal (HD) 900ps nominal (SD)

Overshoot: < 10% of amplitude < 0.16 UI (HD) or < 0.10 UI (SD) Wide Band Jitter:

Genlock Input:

HD Tri-level Sync

NTSC or PAL Color Black 1V p-p, or Composite bi-level sync (525i/59.94

or 625i/50) 300mV Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

### AES Audio Input and Output (7746FS-EAES4-HD):

0

0

0

0

0

0

REFERENCE

O evertz

7746FS-EAES4-HD

HD/SDI

INPUT

0

0

0

0

Number of Inputs: 4

Number of Outputs: 4

SMPTE 276M, single ended Standard: synchronous or asynchronous AES

Connectors: BNC per IEC 61169-8 Annex A Resolution: 24 hits

Sampling Rate: 48kHz Impedance:  $75\Omega$  unbalanced Signal Level: 1V p-p nominal

### **Processing Functions:**

0

7746FSE-HD

HD/SDI INPUT

0

0

0

0

GENLOCK HD/SDI

evertz 0

> Black Level: Luminance Gain: ±6dB Chrominance Gain: ±6dB ±20° (SD)

Hue: Audio: ±24dB Gain:

Any input or mono mix of any L/R pair Remapping: to any output

### Input To Output Processing Delay:

Video Processing Delay:

Minimum Delay Mode:

3 lines to 1 frame plus 3 lines

Additional Delay Mode:

Up to 12 frames for interlaced formats (28 frames for progressive formats) of additional delay (1 frame increments)

### Data Logging Serial Port:

Standard: RS 232

Connector Software upgrade cable female dB-9 Baud Rate: 115.200 Format: 8 bits, no parity, and 2 stop bits

Electrical:

0

+12V DC Voltage: 7746FSE-HD: 13 5W 7746FS-EAES4-HD: 15.5W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

7700 frame mounting:

Number of slots: 1 for 7746FSE-HD 2 for 7746FS-EAES4-HD

7701 frame mounting: Number of slots:

### **▶** ► ► ► Ordering Information

7746ESE-HD

HD/SD Frame Synchronizer

HD/SD Frame Synchronizer with 4 AES audio pairs and 7746FS-EAES4-HD

embedded audio processing & AES Support

**Ordering Options** 

Rear Plate must be specified at time of order

Eq: Model +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate 7700FC

Vistal INK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

7700 Series Modular - Synchronizing, Delay & Keyer Products

The 7746FS-EAES8-3G Frame Synchronizer is designed to re-time a SMPTE 424M (1920 x 1080p/50/60/59.94), SMPTE 292M (1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 1035i/59.94, 1035i/60, or 480p/59.94) or SMPTE259M (625i/50, 525i/59.94) input to a local reference tri-level or composite sync signal. When necessary, frames are repeated or dropped to maintain synchronization. During the synchronizing process the video delay varies from 3 lines through to 1 frame plus 3 lines. Additional delay can be added to the synchronizing process in 1 frame increments.

On the 7746FS-EAES8-3G, the user can choose to have 8 stereo pairs from 4 groups in the upstream embedded audio and from the 8 AES inputs embedded on


the output video and output as AES. The module can also pass all VANC data after switching line. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.


The frame synchronizers have the ability to adjust video parameters such as brightness, contrast and saturation. Hue control is available for SD standards (525i/59.94 and 625i/50). They can also adjust audio parameters such as gain, invert, two-channel mixing, and reassignment of audio channels. The embedder and AES outputs can individually choose between two independent audio mixers.

### ▶ Features & Benefits

- Synchronizes 1080p/59.94, 1080p/60, 1080p/50, 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 1035i/59.94, 1035i/60, 480p/59.94, 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats
- Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input
- Freeze on last good frame, or field, go to black on loss of video or pass input
- Synchronizes 4 groups of embedded audio and re-embeds 4 groups
- Front panel LEDs indicate: module fault, video and embedded group presence, and AES input presence
- Serial remote data logging
- Adjustable video black level (brightness), Y level (contrast) and chroma level (saturation)
- · Adjustable hue control for SD video standards
- Maximum audio input to output delay equivalent to additional frames of video delay
- Synchronizes VANC data starting after switch line

- Synchronizes SMPTE 12M-2 time codes
- · Separate control of video and audio delay
- Audio Sample Rate Converters can be disabled, or set to automatically detect non-PCM data (i.e. Dolby-E™) and disable on a per-input basis
- · Independently adjustable audio levels and inversion on all channels
- Ability to combine any two inputs to any output (including monoaural downmixes of all input stereo pairs)
- · Reassignment of audio channels
- · Synchronizes eight external AES signals
- · Synchronized audio is output as 8 AES signals
- AES and embedded outputs can choose from two independent mixers
- · AES outputs bypass relay protected on power loss
- De-embeds and embeds Dolby-E<sup>™</sup> metadata to and from video VANC space
- Metadata monitoring thru VistaLINK® and modification of dial norm "parameter"
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

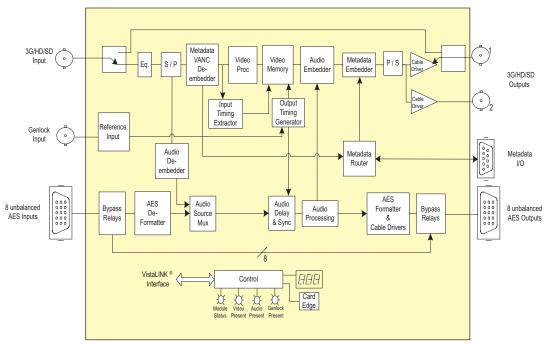

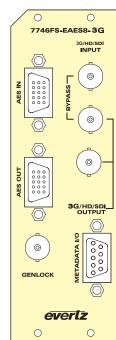










On the 7746FS-EAES8-HD, the user can choose to have 8 stereo pairs from 4 groups in the upstream embedded audio and from the 8 AES inputs embedded on the output video and output as AES. The module can also pass all VANC data after switching line. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.


The frame synchronizers have the ability to adjust video parameters such as brightness, contrast and saturation. Hue control is available for SD standards (525i/59.94 and 625i/50). They can also adjust audio parameters such as gain, invert, two-channel mixing, and reassignment of audio channels. The embedder and AES outputs can individually choose between two independent audio mixers.

### ▶ Features & Benefits

- Synchronizes 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 1035i/59.94, 1035i/60, 480p/59.94, 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats
- Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input
- Freeze on last good frame, or field, go to black on loss of video or pass input
- Synchronizes 4 groups of embedded audio and re-embeds 4 groups
- Front panel LEDs indicate: module fault, video and embedded group presence, and AES input presence
- Serial remote data logging
- Adjustable video black level (brightness), Y level (contrast) and chroma level (saturation)
- · Adjustable hue control for SD video standards
- Maximum audio input to output delay equivalent to additional frames of video delay
- Synchronizes VANC data starting after switch line
- Synchronizes SMPTE 12M-2 time codes

- · Separate control of video and audio delay
- Audio Sample Rate Converters can be disabled, or set to automatically detect non-PCM data (i.e. Dolby-E™) and disable on a per-input basis
- · Independently adjustable audio levels and inversion on all channels
- Ability to combine any two inputs to any output (including monoaural downmixes of all input stereo pairs)
- Provides 2:1 audio mixing capability, ideal for "ducking" audio or voiceovers
- Can be used at the inputs of an audio console to expand inputs and add mixing capacity
- · Performs voice overs, mix downs and on-air breakaways
- · Reassignment of audio channels
- Synchronizes eight external AES signals
- · Synchronized audio is output as 8 AES signals
- AES and embedded outputs can choose from two independent mixers
- · AES outputs bypass relay protected on power loss
- De-embeds and embeds Dolby-E<sup>™</sup> metadata to and from video VANC space
- · Metadata monitoring thru VistaLINK® and modification of dial norm "parameter"
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

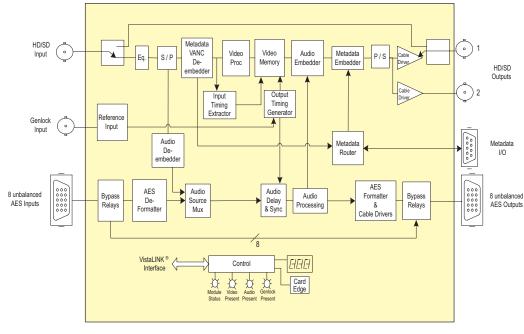

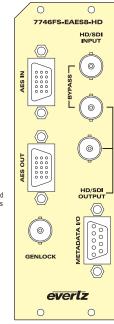

# 7746FS-EAES8-HD

# HD/SD-SDI Frame Synchronizer with Embedded Audio Processing & 8 AES Support

# ▶Specifications

Serial Video Input:

Auto detectable/user selectable Standard:

SMPTE 292M (1.5Gb/s), 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF 1080p/23.94, 720p/60, 720p/59.94, 1035i/59.94, 1035i/60 or 480p/59.94 SMPTE 259M-C (270Mb/s), 525 or 625 line component BNC per IEC 61169-8 Annex A

Connector: Input Equalization:

Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable Automatic to 125m @ 1.5Gb/s with HD:

Belden 1694A or equivalent cable

Return Loss:

> 15dB up to 270Mb/s SD: HD: > 15dB up to 1.5Gb/s

Serial Video Outputs:

Number of Outputs: 2 (1 output is bypass relay protected)
Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal (HD) or 740ps nominal (SD) Overshoot: < 10% of amplitude

< 0.16 UI (HD) or < 0.10 UI (SD) Wide Band Jitter:

Genlock Input:

HD Tri-level Sync NTSC or PAL Color Black 1V p-p, or Composite bi-level sync (525i/59.94

or 625i/50) 300 mV

Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

**AES Audio Input:** 

SMPTE 276M, single ended AES Standard: Number of Inputs:

8 unbalanced

Connector: Female High Density dB-15 (breakout cable to BNC provided)

0.1 to 2.5V p-p (5V p-p tolerant) Input Level: Input Impedance:

Return Loss: > 25dB 100kHz to 6MHz Equalization:

Automatic to 1000m with Belden 1694A (or equivalent) @ 48kHz AES

signal

32kHz to 48kHz Sample Rate:

AES Audio Output:

SMPTE 276M, single ended AES Standard:

115.200 baud

Number of Outputs: 8 unbalanced

Female High Density dB-15 (breakout Connector: cable to BNC provided)

Sample Rate: 48kHz Impedance: 75Ω Resolution: 24-bit

Metadata Input/Output:

Baud Rate:

Dolby-E™ Metadata Type: Standard: RS-422 Connector: Female dB-9

**Delay:** AC3 Decode Delay: 32ms nominal Dolby-E™ Decode Delay:

1 frame nominal De-embedding Latency:

600μs nominal

Additional Audio Delay:

0 to maximum video delay plus 1 frame

Additional Video Delay: 0 to 12 frames (interlace) 0 to 28 frames (progressive)

Data Logging Serial Port:

Standard: RS 232

Connector: Software upgrade cable female dB-9 Baud Rate:

115.200

8 bits, no parity, and 2 stop bits Format:

Electrical:

+12V DC Voltage: Power: 19W

EMI/RFI: Complies with FCC Part 15, Class A

**EU EMC Directive** 

Physical:

7700 frame mounting: 2 7701 frame mounting: 1

# **>>>**Ordering Information

7746FS-EAES8-HD HD/SD-SDI Frame Synchronizer with embedded audio processing &

8 AES Support

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

WPAES8-BNCM-6F Cable (included)

7700FC VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel 9000NCP 9000NCP2

Enclosures

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules











On the 7746FS-EAES8-DD-HD version, the user can choose to have 8 stereo pairs from 4 groups in the upstream embedded audio and from the 8 AES inputs embedded on the output video and output as AES. The module can also pass all VANC data after switching line. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.

The frame synchronizers have the ability to adjust video parameters such as brightness, contrast and saturation. Hue control is available for SD standards (525i/59.94 and 625i/50). They can also adjust audio parameters such as gain, invert, two-channel mixing, and reassignment of audio channels. The embedder and AES outputs can individually choose between two independent audio mixers.

One selected channel is processed by the on-card Dolby Decoder. If the channel contains Dolby- $E^{\text{TM}}$  or Dolby Digital (AC3), it may yield up to 8 additional discrete audio channels, 2 channels of stereo downmix and the associated Dolby- $E^{\text{TM}}$  metadata. Up to 16 selected channels may be optionally delayed up to 1.2 seconds and re-embedded into the output video and/or directed to AES outputs. Video output may be optionally delayed to help with lip sync. If PCM audio is embedded, the device acts as a simple 4 group audio de-embedder.

This device also handles the Dolby-E™ Metadata. Metadata is optionally embedded in VANC and can be provided as an output for downstream devices (i.e. Dolby Encoders, Multichannel Audio Tool, etc.).


For lip sync cohesion and ease of editing, Dolby-E™ data is organized in blocks with lengths matching the associated video frame. The decoder will match the beginning of each output block with the start of video, as provided with the genlock input. Additional delay can be dialed up by the user, up to 1.2 seconds. The 8 AES inputs can be configured as a backup, in the event the primary is lost, or as a voice-over source.


VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as Evertz® VistaLINK® PRO locally or remotely.

### ▶ Features & Benefits

- Synchronizes 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 1035i/59.94, 1035i/60, 480p/59.94, 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats.
- · Program Video output bypass relay protected on power loss
- · Programmable output phase with respect to reference input
- Freeze on last good frame, or field, go to black on loss of video or pass input
- Synchronizes 4 groups of embedded audio and re-embeds 4groups
- Front panel LEDs indicate: module fault, video and embedded group presence, and AES input presence
- Serial remote data logging
- Adjustable video black level (brightness), Y level (contrast) and chroma level saturation)
- Adjustable hue control for SD video standards
- Maximum audio input to output delay equivalent to additional frames of video delay

- · Synchronizes VANC data starting after switch line
- Synchronizes SMPTE 12M-2 time codes
- Separate control of video and audio delay
- Audio Sample Rate Converters can be disabled, or set to automatically detect non-PCM data (i.e. Dolby-E™) and disable on a per-input basis
- Independently adjustable audio levels and inversion on all channels
- Ability to combine any two inputs to any output (including monoaural downmixes of all input stereo pairs)
- · Reassignment of audio channels
- · Synchronizes eight external AES signals
- Synchronized audio is output as 8 AES signals
- AES and embedded outputs can choose from two independent mixers
- AES outputs bypass relay protected on power loss
- De-embeds and embeds Dolby-E<sup>™</sup> metadata to and from video VANC space
- VistaLINK®-capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

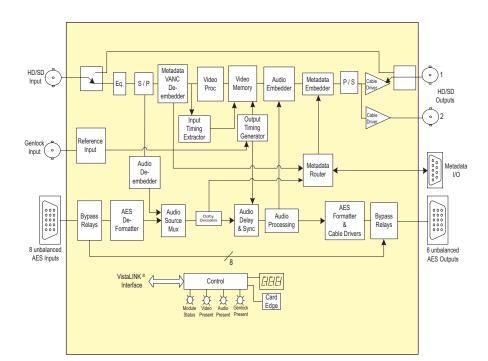

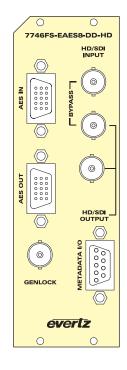







# 7746FS-EAES8-DD-HD

# HD/SD-SDI Frame Synchronizer with Dolby-E/AC-3™ Decoder & 8 AES Support

# ▶Specifications

Serial Video Input:

DIP switch selectable Standard: SMPTE 292M (1.485Gb/s)

SMPTE 274M, SMPTE 296M SMPTE 349M (270Mb/s) SMPTE 259M-C 525i/59.94 or 625i/50 BNC per IEC 61169-8 Annex A

Connector: Input Equalization:

Automatic to 300m @ 270Mb/s with SD: Belden 1694A or equivalent cable Automatic to 115m @ 1.5Gb/s with

HD: Belden 1694A or equivalent cable

Return Loss:

>15dB up to 270MHz SD: HD: >13dB up to 1.5GHz

Serial Video Outputs:

Number of Outputs: 2 (1 output is bypass relay protected) Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal (HD) or 900ps nominal (SD) Overshoot:

< 10% of amplitude < 0.16 UI (HD) or < 0.10 UI (SD) Wide Band Jitter:

Genlock Input:

HD Tri-level Sync Type:

NTSC or PAL Color Black 1V p-p, or Composite bi-level sync (525i/59.94

or 625i/50) 300mV

BNC per IEC 61169-8 Annex A Connector: 75 $\Omega$  (jumper selectable)

**AES Audio Input:** 

SMPTE 276M Standard: Number of Inputs: 8 unbalanced

Connector: Female High Density dB-15 (breakout cable to BNC provided) 0.1 to 2.5V p-p (5V p-p tolerant) Input Level:

Input Impedance:  $75\Omega$ 

Return Loss: >25dB 100kHz to 6MHz Automatic to 1000m with Belden Equalization:

1694A (or equivalent) @ 48kHz AES

signal

48kHz ±100ppm Sample Rate:

**AES Audio Output:** 

SMPTE 276M, single ended AES Standard:

Number of Outputs: 8 unbalanced Connector: Female High Density dB-15 (breakout cable to BNC provided)

Sample Rate: 48kHz Impedance: Resolution: 75Ω 24-bit

Meta-Data:

Dolby-E™ Metadata Type: Standard: RS-422 Female dB-9 Baud Rate: 115,200 baud

**Processing Functions:** 

Video: Black Level: +7% Luminance Gain: ±6dB Chrominance Gain: ±6dB

Hue: Audio:

±24dB (including invert) Gain:

Any input or mix of any two inputs to Remapping:

any output

±20° (SD)

Input To Output Processing Delay:

Video Processing Delay Minimum Delay Mode:

3 lines to 1 frame plus 3 lines

Additional Delay Mode:

Up to 12 frames for interlaced formats (28 frames for progressive formats) of additional delay (1 frame increments)

**Data Logging Serial Port:** 

Standard: RS 232

Connector: Baud Rate: Software upgrade cable female dB-9

115.200

Format: 8 bits, no parity, and 2 stop bits

Electrical:

Voltage: +12V DC Power:

EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

7700 frame mounting: 2 slots 7701 frame mounting: 1 slot











# >>>Ordering Information

HD/SD-SDI Frame Synchronizer with Dolby E/AC-3™ Decoder & 7746FS-EAES8-DD-HD 8 AES Support

Ordering Option Rear Plate must be specified at time of order

Ea: Model +3RU

Rear Plate Suffix

+SA

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Accessories

WPAES8-BNCM-6F Cable (included)

VistaLINK® Frame Controller 7700FC

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

The 7746FS-EAES8-DD-AC3E-HD HD/SD-SDI Frame Synchronizer is designed

to re-time the input to a local reference tri-level or composite sync signal. When necessary, frames are repeated or dropped to maintain synchronization.

- HD/SD video proc functions
- Dolby-E<sup>™</sup> decode from embedder or discrete source
- 16 channel audio proc
- Audio synchronization
- Dolby AC-3™ encode
- 16 channel audio demux & re-mux

The module will also pass all VANC data after switching line. When the input video is lost, it will pass the input AES or mute if embedded audio is selected for synchronizing. The frame synchronizers also have the ability to set the audio delay independently from the video delay.

Video proc features are provided allowing the ability to adjust video parameters such as brightness, contrast and saturation. Hue control is available for SD standards (525i/59.94 and 625i/50).

The on-board Dolby Decoder processes one user selectable audio channel. If the channel contains Dolby-E™ or Dolby Digital (AC-3)™, it will yield up to 8 additional discrete audio channels, 2 channels of stereo downmix and the associated Dolby ™metadata. This metadata can be optionally embedded into the VANC, used to program the Dolby Digital (AC-3)™ encoder, or can be provided as an output for downstream devices.

The on-board audio processor provides control to route, shuffle, mix and proc up to 16 selected channels. All channels can be additionally delay.

Six audio channels can be selected and encoded to Dolby Digital (AC-3)™. The encoder supports bit ranges from 56 to 640 kbps and channel configurations from mono to 5.1-channel surround sound. Dolby™ Metadata can be accepted from the input Dolby-E™ stream, extracted from the VANC, from an external source or authored (via VistaLINK® PRO).

The final processed audio can be re-embedded as 4 embedded audio groups into the HD/SD-SDI output signal and additionally can be routed discretely to the AES outputs.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP - enabled control systems such as Evertz® VistaLINK® PRO locally or remotely.


### ▶Features & Benefits

- Synchronizes 1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF, 1080p/23.98sF, 720p/60, 720p/59.94, 720p/50, 1035i/59.94, 1035i/60, 480p/59.94, 525i/59.94 or 625i/50
- Minimum video input to output delay 3 lines
- Maximum video input to output delay 1 frame plus 3 lines
- 12 additional frames of delay can be added for interlaced video formats, 28 frames for progressive formats.
- Program Video output bypass relay protected on power loss
- Programmable output phase with respect to reference input Freeze on last good frame, or field, go to black on loss of video or pass input
- · Synchronizes 4 groups of embedded audio and re-embeds 4groups
- Front panel LEDs indicate: module fault, video and embedded group presence, and AES input presence
- Serial remote data logging
- · Adjustable video black level (brightness), Y level (contrast) and chroma level

0

- · Adjustable hue control for SD video standards
- Synchronizes VANC data starting after switch line
- Synchronizes SMPTE 12M-2 time codes
- · Separate control of video and audio delay

- · Audio Sample Rate Converters can be disabled, or set to automatically detect non-PCM data (i.e. Dolby-E™ or AC-3™) and disable on a per-input basis
- Dolby-E/AC-3<sup>™</sup> decoding for a selected audio source
- Dolby Digital (AC-3) encoding for a selected 6 audio channels
- · Automatically apply accurate delay to compensate for Dolby Decoding and Encoding stage
- · Independently adjustable audio levels and inversion on all channels
- · Ability to combine any two inputs to any output (including monaural down-mixes of all input stereo pairs)
- · Reassignment of audio channels
- · Synchronizes eight external AES signals
- Synchronized audio is output as 8 AES signals
- · AES and embedded outputs can choose from two independent mixers
- · AES outputs bypass relay protected on power loss
- De-embeds and embeds Dolby-E<sup>™</sup> metadata to and from video VANC space
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 350FR or 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

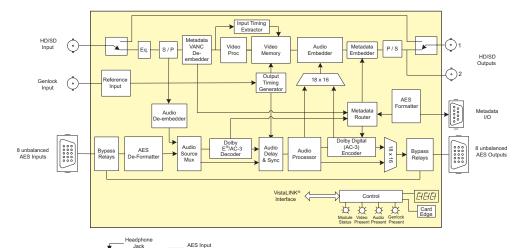


- DOLBY Status LED

HHHH

AES Group

746FS-EAES8-DD-AC3E-HD





# 7746FS-EAES8-DD-AC3E-HD

# HD/SD-SDI 8 AES Frame Synchronizer with Dolby Decoder and Dolby Digital (AC-3) Encoder

- Input HD-SDI or SD-SDI video with associated Dolby-E<sup>™</sup> program audio, either embedded or discretely
- Decode the Dolby-E<sup>™</sup> audio data into PCM baseband audio including the Dolby-E™ Metadata
- Frame synchronize the audio and video to the supplied reference
- · Apply any audio and video adjustments, such as brightness, hue, saturation, gain, inversion, and two-channel mixing
- Encode the PCM baseband audio into Dolby Digital (AC-3) compressed audio
- Use or re-author the decoded Dolby-E<sup>™</sup> Metadata to configure the Dolby Digital (AC-3) encoder
- · Apply appropriate audio and video delays to compensate for Dolby decoding and encoding processing delay
- Output HD-SDI or SD-SDI video with associated Dolby Digital (AC-3) audio, either embedded or discretely
- · All contained within a single module!

### ▶ Specifications

Serial Video Input:

1 485Gb/s SMPTF 292M Standard: SMPTE 274M, SMPTE 296M, SMPTE 349M, 270Mb/s

SMPTE 259M-C 525i/59.94or 625i/50 BNC per IEC 61169-8 Annex A

Connector: Input Equalization:

Automatic to 300m @ 270Mb/s with Belden 1694A or equivalent cable Automatic to 115m @ 1.5Gb/s with HD:

Belden 1694A or equivalent cable

Return Loss:

>15dB up to 270MHz SD: HD: >13dB up to 1.5GHz

Serial Video Outputs:

Number of Outputs: 2 (1 output is bypass relay protected) Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal (HD)

900ps nominal (SD) Overshoot: Wide Band Jitter: < 10% of amplitude

< 0.16 UI (HD) or < 0.10 UI (SD)

Genlock Input:

HD Tri-level Sync NTSC or PAL Color

Black 1V p-p, or Composite bi-level sync (525i/59.94 or 625i/50) 300mV

Connector: BNC per IEC IEC 61169-8 Annex A

Termination: 75 $\Omega$  (jumper selectable) AES Audio Input:

SMPTF 276M Standard: Number of Inputs: 8 unbalanced

Female High Density DB-15 Connector

(breakout cable to BNC provided) 0.1 to 2.5V p-p (5V p-p tolerant)

Input Level: Input Impedance:

Return Loss: >25dB 100kHz to 6MHz Automatic to 1000m with Belden Equalization:

1694A (or equivalent) @ 48kHz AES

signal

Sample Rate: 48kHz ±100ppm

AES Audio Output:

SMPTE 276M, single ended AES Standard: Number of Outputs: 8 unbalanced

Female High Density DB-15 Connector: (breakout cable to BNC provided)

Sample Rate: 48kHz Impedance: 750 24-bit Resolution:

Meta-Data: Type:

Dolby-E™ Metadata

RS-422 Standard Female DB-9 Connector: Baud Rate: 115.200 baud

Processing Functions:

Black Level: Luminance Gain: ±6dB Chrominance Gain: ±6dB ±20° (SD) Audio:

±24dB (including invert) Gain:

Any input or mix of any two inputs to Remapping

Input To Output Processing Delay:

Video Processing Delay: Minimum Delay Mode

3 lines to 1 frame plus 3 lines

Additional Delay Mode:

Up to 12 frames for interlaced formats (28 frames for progressive formats) of additional delay (1 frame

increments)

Data Logging Serial Port: RS 232 Standard:

Connector Software upgrade cable female DB-9

Baud Rate

Format: 8 bits, no parity, and 2 stop bits

Electrical:

Voltage: +12V DC Power: 24 W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

7700 frame mounting:2 slots

# **>>>**Ordering Information

### 7746FS-EAES8-DD-AC3E-HD

HD/SD-SDI 8 AES Frame Synchronizer with Dolby Decoder and Dolby

Digital (AC-3) Encode

Ordering Option Rear Plate must be specified at time of order

Rear Plate Suffix

+SA

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

WPAES8-BNCM-6F Cable (included)

7700FC VistaLINK® Frame Controller

9000NCP 1RU VistaLINK® General Purpose Network Control Panel 9000NCP2 2RU VistaLINK® General Purpose Network Control Panel

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure



The 7743DLY-HD is a full function HD/SD-SDI Video Delay module designed for applications such as satellite uplink, signal re-entry on master control inputs, at cable headends, mobile vehicle outputs, broadcast transmitter inputs, virtual sets and matching delays caused by multi-channel audio compression.


The 7743DLY-HD can act as a delay for SD video (SMPTE 259M) or for HD video (SMPTE 292M). The same technology built on our clean switch router line (Xseries) is utilized here.


The 7743DLY-HD is capable of up to 3.2 seconds of delay for HD and up to 16.5 seconds of delay for SD. With the broadcast environment in mind, the modules feature bypass relay protection on output. The 7743DLY-HD occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

### ▶ Features & Benefits

- Full signal delay capability including VBI and ANC DATA for SMPTE 292M (1.5Gb/s) signals
- 7743DLY-HD also supports full signal delay capability including VBI for SMPTE 259M (270Mb/s) signals
- Delay programmable in video units (frames, lines, and samples) or as time units (seconds)
- · Auto senses video standard
- · Bypass relay for program path protection on power loss
- Up to 3.2 seconds delay for HD

- Up to 16.5 seconds delay for SD
- · Card edge controls operate on-screen menu system to program delay settings
- · Input circuit features a line buffer which is suitable for "de-glitching" hot switches on upstream equipment (very useful for HD equipment)
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

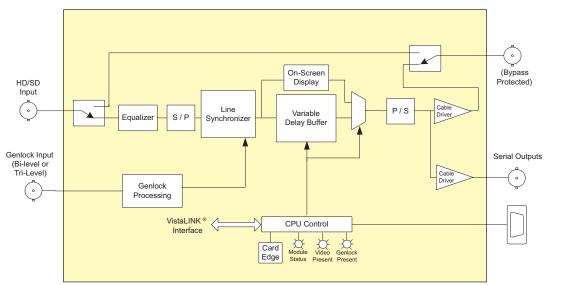

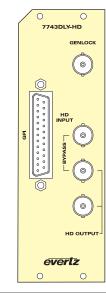

### ▶ Specifications

High Definition Serial Digital Video:

SMPTE 292M (1.5Gb/s) or SMPTE

259M (270Mb/s)

BNC per IEC 61169-8 Annex A Connector: Automatic to 75m @ 1.5Gb/s with Equalization: Belden 1694A or equivalent cable

Return Loss: > 15dB up to 1.0Gb/s

> 10dB up to 1.5Gb/s (with relay)

### Standard Definition Serial Digital Video:

SMPTE 259M (270Mb/s) Standard: Connector: BNC per IEC 61169-8 Annex A > 15dB up to 270Mb/s Return Loss:

### Serial Video Outputs:

Number of Outputs: 1 with relay bypass, 1 additional output

Connector: BNC per IEC 61169-8 Annex A

800mV nominal

Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal (HD), 740ps nominal (SD) Overshoot: < 10% of amplitude Return Loss: > 15dB up to 1.5Gb/s (HD), > 15dB

up to 540Mb/s Wide Band Jitter: < 0.2 UI

Genlock Input:

HD Tri-level Sync Type:

NTSC or PAL Color Black 1V p-p, or Composite bi-level sync (525i/59.94

or 625i/50) 300mV

BNC per IEC 61169-8 Annex A Connector: 75Ω (jumper selectable) Termination:

Functional: Minimum Delay:

Maximum Delay:

65.5µs (1770 samples) for standard definition, 37.7µs (2800 samples)

for high definition Approx. 16.5 seconds for standard

definition, approx. 3.2 seconds for

high definition

Electrical: Voltage:

Complies with FCC Part 15, Class A FMI/RFI

+12V DC

EU EMC Directive

# Physical:

7700 frame mounting: 2 slots 7701 frame mounting: 1 slot

### Stand Alone Enclosure:

14" L x 4.5" W x 1.9" H Dimensions:

(355mm L x 114mm W x 48mm H) Approx. 1.5lbs (0.7kg) Weight:

### **>>>**Ordering Information

7743DLY-HD HD/SD-SDI Video Delay

Rear Plate must be specified at time of order **Ordering Options** 

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

7700FC 9000NCP 9000NCP2

VistaLINK® Frame Controller

1RU VistaLINK® General Purpose Network Control Panel 2RU VistaLINK® General Purpose Network Control Panel

Enclosures 350FR

7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone Enclosure









HD/SD BYPASS DELAY SYSTEM model HDSD9545DLY-PRO

everlz

In live shows, there is invariably the need to time-shift various feeds that contribute

to the final production. This may be required to provide delays to accomplish

profanity censorship, contribution backhaul delay mis-match compensation or

The Evertz® HDSD9545DLY-PRO time shifting delay processor has been designed

to give an operator complete control over the program content being broadcast to air. This product enables the operator to insert the desired time delay via a front

panel control and display panel. There are two program paths which are HD and













The main program feed will usually be focused on the main detailed action. Both channels are delayed by the same amount. If an unscheduled switch to an alternate source is required, the operator has only to hit one remote button to cause the program video and audio output to be clean switched to the alternative back-up channel. The output can be returned to the main program content with interruption to the video, or pops and clicks in the audio.

VIDEO DELAY

The delay can be adjusted from a minimum 2 frame program or to a maximum of 40 seconds of 1.5Gb/s HDTV or 240 seconds for SDTV (with the HD40 option). This max delay can be allocated to primary and secondary paths as per the user.

The HDSD9545DLY-PRO includes dual power supplies and a built-in HD/SD Quattro™ card which shows all four pictures on a single screen. The four pictures are as follows: Main program, Delayed Main program, Alternate input, Delayed Alternate input.

### ▶ Features & Benefits

• HD or SD SDI compatible

SD compatible.

- · Embedded Audio and Discrete (4ch AES) Audio Support
- Monitoring outputs of delayed program and delayed backup can be provided
- · Selectable guad split monitoring outputs

compliance for other contractual obligations.

- · Safe input frame capture
- Clean transition between program and backup feed
- \* SoftSwitch™ audio (patent pending)
- \* Clean switch video
- · Supports program video blur features
- · Relay bypass protection for video and audio

- Delay memory is solid state (no moving parts)
- · No hard drive to fail or maintain
- Contact closure inputs for bypass triggering
- Programmable pre-trigger reaction time
- Delay on HDSD9545DLY-PRO: 24 seconds for HD or SD Delay
- Delay on HDSD9545DLY-PRO-HD40: 40 seconds for HD Delay or 240 seconds
- Delay is user-allocated between primary & secondary back-up paths
- Dual power supplies
- Min 2 frame PGM delay and 2 frame safe delay

### ▶ Specifications

Serial Digital Video Inputs:

Standard: SMPTE 292M (1.5Gb/s) 1080i/59.94, 1080i/50, 720p/59.94

SMPTE 259M (270Mb/s) 525i/59.94, 625i/50

Embedded Audio: **SMPTE 299M (HD)** SMPTE 272M (SD)

Number of Inputs:

Connector:

BNC per IEC 61169-8 Annex A Equalization:

HD Video Stds:

Automatic up to 50m with Belden 1694A or equivalent cable SD Video Stds: Automatic up to 250m with Belden

8281 or equivalent cable > 15dB up to 1.0Gb/s, > 10dB at 1.5Gb/s Return Loss:

Serial Digital Video Outputs:

Standard: Same as Inputs

Number of Outputs: 5 outputs (2 copies of Output A)

Input A bypass protected to output A1 BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal 0V ±0.5V DC Offset:

Rise and Fall Time: HD Video Stds: 200ps nominal 650ps nominal < 10% of amplitude SD Video Stds:

Overshoot: Wide Band Jitter:

Output Return Loss:

Out A2, B, C, D, E: Output Phase:

> 10dB up to 1.5Gb/s > 15dB up to 1.5Gb/s

0 to a full frame of offset - separate H and V phase adjustments

### Video Reference:

NTSC or PAL Color Black 1V p-p Type: Composite Bi-level sync (525i/59.94

or 625i/50) 300mV

HD Tri-level Sync

Connectors: BNC per IEC 61169-8 Annex A High impedance loop through or High Termination: impedance non-looping or 75Ω non-

looping (jumper selectable)

### **AES Audio Inputs:**

SMPTE 276M single ended AES Standards: Number of Inputs: 2 Groups of 4

Connector: BNC per IEC 61169-8 Annex A Signal Level: 1V p-p ±10% > 25dB up to 6MHz Return Loss:

### **AES Audio Outputs:**

SMPTE 276M single ended AES Standards Number of Outputs: 3 buses, 4 outputs per bus

Safe AES Inputs bypass protected to AES A outputs when bypass relay

option is installed Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p

> 35dB up to 6MHz Return Loss: Reference: From Video Reference

### GPI Control Port:

Number of Inputs: 8 opto-isolated, active high or active low, programmable functions

Number of Outputs: 4 sets of relay contacts, normally

closed, programmable functions
Relay Max Current: 1 A at 30V DC

### Functional:

### Maximum Total Delay (configurable between live and safe inputs):

HDSD9545DLY-PŘÒ

24 seconds of HD or SD delay HDSD9545DLY-PRO-HD40:

40 seconds of HD delay or 240 seconds of SD delay

### Electrical: Voltage:

Auto ranging 100 to 240V AC, 50/60Hz - dual redundant power

supplies

Fuse Rating 250V, 1amp time delay

40W

ETL Listed, complies with EU safety Safety:

directives

EMI/RFI: Complies with FCC Part 15 Class A regulations

Complies with EU EMC directive

# Physical:

Dimensions: 19" W x 3.5" H x 7.75" D. (483mm W x 89mm H x 196mm D)

Weight: 8lbs (3.5kg)

Audio Output C AES (1-4)/Dolby E

AES (1-4)/Dolby E

Audio Output B

Audio Output A

AES (1-4)/Dolby E

(Bypass Protected)

(Bypass protected)

HD/SD

Outputs

HD/SD Video and Audio Delay/Profanity Protection System

++Hard Mute/Pass

++Hard Mute/Pass

++Hard

Relay

Bypass

Relay

Bypass

\*Audio soft

without

source

switch

2x1 AES

Switch

with Audio Softswitch

2x1 Video Switch with:

Glitchless Output and

Embedded

Audio

Cross-Fade

Panic Input

PGM PGM Delay Safe Safe Delay Quad Split Resolution follows program input

\*\* Soft mutes only function when embedded audio softswitch is enabled ++ Hard mutes only function when delayed sources are selected

Output Config

Embedded

Audio only

soft mute

Output Config





## **▶** ► ► Ordering Information

DARS/Genlock

Video

Genlock

ADJUSTABLE DELAY

ADJUSTABLE

DELAY

ADJUSTABLE DELAY

ADJUSTABLE

Relay

Bypass

Safe Audio

4 AES/Dolby E

Live Program

4 AES/Dolby E

Audio

HD/SD Program Shot

(Live Talent)

HD/SD

Safe Shot

HDSD9545DLY-PRO

HD/SD Video Delay/Time Shift Processor







7700 Series Modular - Synchronizing, Delay & Keyer Products

The 7725VBI-K-HD module is a multi-function VBI keyer. Every program input vertical interval video line can be programmed to pass upstream video, blank the line, insert any VBI line from the HD/SD Key input, insert a selectable VITS (vertical interval test signal) for SD, and insert user-selected data such as Wide Screen Signaling (WSS) and Active Format Description (AFD). The 7725VBI-K-HD allows for up to 70 lines to be programmed. The module provides the capability to store different VBI configurations as presets and recall them from the On-Screen Display (via Program Monitor Out), VistaLINK®, or via 8 opto-isolated GPI inputs.

The 7725VBI-K-HD has two re-clocked program outputs and one program monitor output. The module is often used in critical on-air applications and hence bypass relay protection of the program video path is provided. The 7725VBI-K-HD is setup via the On-Screen Display or VistaLINK®.

VistaLINK® enables remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage operations including signal monitoring and module configuration from SNMP enabled control systems (Manager or NMS) locally or remotely.

The 7725VBI-K-HD occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.


### ▶ Features & Benefits

- One serial digital 1.5Gb/s HD input per SMPTE 292M, or 270Mb/s SD input per SMPTE 259M
- Two re-clocked HD or SD program outputs
- · Video input relay bypass for power failure bypass protection
- · One HD input or SD input digital Key video input
- One HD or SD monitor program output with On-Screen Display
- A comprehensive on-screen menu is available to configure the various features of the module
- 128 different presets for storing VBI keying configurations
- Up to 70 lines of output video can be programmed

- Up to 16 line patterns may be captured from any key input line and stored in User Memories for later insertion on any VBI line
- Each line of VBI independently programmable to pass, blank, insert from key signal, insert from user memory or insert factory test signal
- On-Air Preset configuration selected with GPI, OSD, or VistaLINK® selection
- Non-volatile memory protects current configuration in case of power loss
- Fully hot-swappable from front of frame
- VistaLINK® -capable for remote monitoring and control via SNMP (using VistaLINK® PRO) when installed in 7700FR-C frame with 7700FC VistaLINK® Frame Controller


### ▶ Master Control Output Chain Protection

Typically there are several units "chained" together on the output of a master control switcher. Units such as caption encoders, AMOL. encoders, VITS inserters, data encoders, etc. are typically connected in series in the program output so that if one unit fails the network output will fail. The 7725VBI-K-HD allows you to have one point of insertion in the program output path.




#### **▶VANC Bridging**

Some processing devices modify or destroy VBI data such as captioning or VITC. An example of this occurs with some DVEs during a squeeze back application or with HD color correction. The 7725VBI-K-HD device will provide a bypass of VBI around the processing device.



### **▶** VBI Line Shuffler

By providing the same feed to both inputs of the 7725VBI-K-HD the unit will allow the user to modify the VBI and move lines as necessary.



0

0

0

0

evertz

0

2 Reclocked

Outputs

(Program)

HD/SD

Program Monitor

Out

VistaLINK®

Interface GPI Control





















HD/SD

Input 1

(Program)

HD/SD

Fill

▶Specifications Serial Video Input:

Number of Inputs:

Connector:

Equalization:

Return Loss:

Standard:

Auto-detect

1080i/50, 1080p/23.98,

(525i/59.94, 625i/50)

> 15dB (PGM input)

1 for Program video (PGM)

1 for Key Signal to insert (FILL) PGM and FILL need to be

Belden 8281 or equivalent cable

synchronous and timed w.r.t. each

other (±1/2 line)
BNC input per IEC 61169-8 Annex A
Automatic 100m @ 1.5Gb/s with

SMPTE 292M (1080i/59.94, 1080i/60,

1080p/23.98sF, 720p/59.94, 720p/60, and 720p/50) SMPTE 259M-C

7725VBI-K-HD HD/SD-SDI VBI Sidechain Bridge Keyer

Rear Plate must be specified at time of order

Eq: Model +3RU

Ordering Options Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU +1RU

+SA Standalone Enclosure Rear Plate

Serial Video Output:

VBI Line

Mix

OSD

Video

Frame

Memory

Video Line Memory

> Number of Outputs: 3 (re-clocked for program, 1 bypass protection) same as input

1 (program monitor) same as input

Video

Output

Formatter

Video

Output

Formatter

Connector: BNC per IEC 61169-8 Annex A 800mV nominal Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.20 UI Return Loss: > 15dB

General Purpose Inputs:

Number of Inputs: Opto-isolated, active low with internal

pull-ups to +5 or +12V (jumper settable) Female dB-9 Connector: Input signal: Closure to ground

Electrical:

Protected

P/S

Control

+12V DC Voltage: 9.5W Power:

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC directive

Physical:

Number of slots:

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR

Standalone enclosure

7700 Series Modular - Synchronizing, Delay & Keyer Products

### 10MHz-3GHz RF 1x4 Active Splitter

The 7702DA4-RF & 7703DA4-RF 1x4 Active Splitters provide amplification and distribution of RF signals from 10MHz to 3GHz. The 7702DA4-RF & 7703DA4-RF handle any RF input modulation format and provide 4 buffered isolated outputs for further signal distribution. Typical applications include amplification and distribution of 950MHz-2150MHz L-Band and 70MHz-140MHz IF signals.


Monitoring of RF input power, card status and control of gain/attenuation is provided remotely via VistaLINK® capability on the 7703DA4-RF version. Optional LNB power is available at the input connector on the 7703DA4-RF version.

The 7702DA4-RF & 7703DA4-RF occupy one card slot and can be housed in either a 1RU frame which holds up to 3 modules, a 3RU frame which holds up to 15 modules or a standalone enclosure which holds 1 module

### ▶Features & Benefits

- · Low noise amplification and distribution of RF signals from 10MHz to 3GHz
- Wide dynamic range (-10 to -60dBm)
- Adjustable output gain of -8dB to +14dB on 7703DA4-RF version
- Fixed gain of 0dB on 7702DA4-RF version
- Protocol independent handles all modulation formats
- Input RF signal strength indication on 7703DA4-RF version
- · Fully hot-swappable from front of frame

- Optional LNB power (@ +13 or +17V DC with built-in current limiting) into RF input cable on 7703DA4-RF version
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

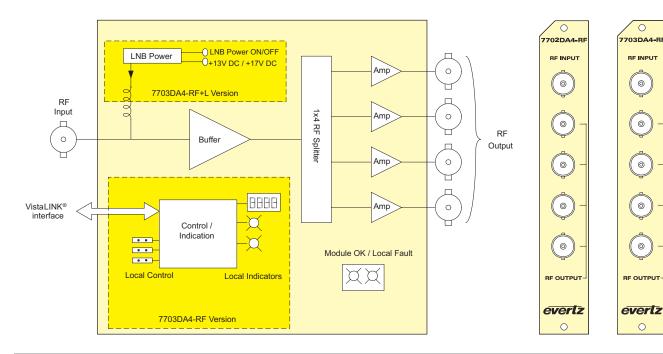

### ▶ Specifications

#### RF Input:

Connector 1 BNC per IEC 61169-8 Annex A

2 (F-Type optional)

I/O Impedance:  $75\Omega$ Return Loss: > 12dB Input Frequency Range: Standard: 10MHz-3GHz

+L option: 950MHz-3GHz Input Power Range: -10 to -60dBm

#### RF Output:

Number of outputs: 4

BNC per IEC 61169-8 Annex A Connector:

(F-Type optional)

I/O Impedance: Return Loss:

10MHz to 2200MHz: > 15dB 2200MHz to 3GHz: > 10dB Gain:

7702DA4-RF: 0dB 7703DA4-RF: -8dB to +14dB

Intermodulation Products:

< -50dBc (@ -20dBm input power)

Signal To Noise: > 55dB (@ -20dBm input power)

Frequency Response: Standard Version:

30MHz to 2.7GHz: < ±1.5dB 2.7GHz to 3GHz: < ±2dB

+L Version:

950MHz to 2.7GHz: < ±1.5dB 2.7GHz to 3GHz: < ±2dB Isolation (Output to Output): 10MHz to 350MHz: > 15dB 350MHz to 3GHz: > 20dB

Physical:

Number of Slots:

Electrical:

+12V DC Voltage:

6W (excluding LNB power) Power:

### **>>>**Ordering Information

7702DA4-RE 7703DA4-RF

10MHz-3GHz RF 1x4 Active Splitter 10MHz-3GHz RF 1x4 Active Splitter with VistaLINK®

7703DA4-RF-LNB 10MHz-3GHz RF 1x4 Active Splitter with LNB power and VistaLINK®

Rear Plate must be specified at time of order **Ordering Options** 

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix

+3RU +1RU

+SA

75 $\Omega$ , F-Type rear connector

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure



Monitoring of RF input power, card status and control of gain/attenuation is provided remotely via Vistalink capability on the 7703DA8-RF version. Optional LNB power is available at the input connector on the 7703DA8-RF version.

The 7702DA8-RF & 7703DA8-RF occupy two card slots and can be housed in either a 1RU frame which holds up to 3 modules, a 3RU frame which holds up to 7 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

#### ▶ Features & Benefits

· Low noise amplification and distribution of RF signals from 10MHz to 3GHz

The 7702DA8-RF & 7703DA8-RF 1x8 Active Splitters provide amplification and

distribution of RF signals from 10MHz to 3GHz. The 7702DA8-RF & 7703DA8-RF handle any RF input modulation format and provide 8 buffered isolated outputs for


further signal distribution. Typical applications include amplification and distribution


- Wide dynamic range (-10 to -60dBm)
- Adjustable output gain of -8dB to +14dB on 7703DA8-RF version


of 950MHz-2150MHz L-Band and 70MHz-140MHz IF signals.

- Fixed gain of 0dB on 7702DA8-RF version
- · Protocol independent handles all modulation formats
- · Input RF signal strength indication on 7703DA8-RF version
- Fully hot-swappable from front of frame

- Optional LNB power (@ +13 or +17V DC with built in current limiting) into RF input cable on 7703DA8-RF version
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

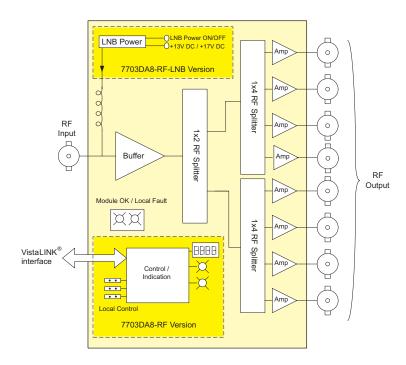

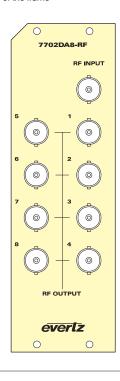

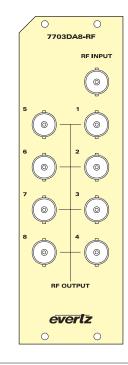

#### ▶ Specifications

RF Input:

1 BNC per IEC 61169-8 Annex A

(F-Type optional)

I/O Impedance: Return Loss > 12dB Input Frequency Range:

10MHz-3GHz Standard: -LNB option: 950MHz-3GHz Input Power Range: -10 to -60dBm

RF Output:

Number of outputs: 8

1 BNC per IEC 61169-8 Annex A Connector

(F-Type optional)

I/O Impedance:

Return Loss

10MHz to 2200MHz: > 15dB 2200MHz to 3GHz: > 10dB Gain:

7702DA8-RF

7703DA8-RF -8dB to +14dB

Intermodulation Products

< -50dBc (@ -20dBm input power) Signal To Noise: > 55dB (@ -20dBm input power)

Frequency Response: Standard Version: 30

30MHz to 2.7GHz:< ±1.5dB

2.7GHz to 3GHz: < ±2.5dB

-LNB Version: 950MHz to 2.7GHz: < ±1.5dB

2 7GHz to 3GHz: < +2dB

Isolation (Output to Output):

10MHz to 350MHz: > 15dB 350MHz to 3GHz: > 20dB

Physical:

Number of Slots: 2

Electrical:

Voltage: +12V DC

10W (excluding LNB load) Power:

### **▶▶▶** Ordering Information

10MHz-3GHz RF 1x8 Active Splitter

10MHz-3GHz RF 1x8 Active Splitter with LNB power and VistaLINK® 7703DA8-RF-LNB

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

75 $\Omega$ , F-Type rear connector

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure









7700 Modular - Fiber - Satellite RF Distribution

The 7703BPX-IF has integrated VistaLINK® technology for remote control and monitoring capability via SNMP. This provides the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.

When used for automatic changeover, the 7702BPX-IF and 7703BPX-IF have a MAIN input and a STANDBY input. It will automatically switch to the Standby input when the Main input power is weak or lost. Switch back to the Main input when the signal is re-established may be configured to happen automatically or manually. The 7702/7702BPX-IF may also be configured to operate manually as a 2:1 switch, which may be controlled locally or remotely via GPI or SNMP (7703 model only)


The 7702BPX-IF and 7703BPX-IF occupy one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

#### ▶ Features & Benefits

• Wide operating frequency range, 10MHz to 850MHz

protection for 70/140MHz uplink applications.

- · Intelligent auto switching with input power detection
- User-definable threshold levels on 7703BPX-IF version
- · Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-IF
- · Switch state indication via GPO
- · Card edge LEDs indicate active input channels, output channel and power levels below threshold
- · Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® on 7703 version
- VistaLINK® capability is available when 7703BPX-IF modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

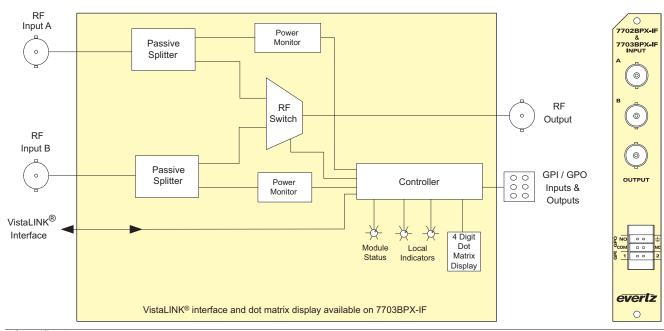

### ▶ Specifications

RF Input/Output:

Inputs Outputs

1 BNC per IEC 61169-8 Annex A Connector:

(F-type optional)

750 I/O Impedance: Frequency Response: 10-200MHz: < ±0.25dB

10-850MHz: < ±0.5dB Insertion Loss: < 4dB Return Loss:

10-200MHz: < 15dB 10-850MHz: < 17dB

> 50dB (10-850MHz) Isolation: Input Power Range: 0dBm to -50dBm

#### General Purpose Inputs:

Number of Inputs:

Type: Opto-isolated, active low with internal

pull-ups to +5V

Connector: 2 pins plus ground on 6-pin

terminal strip

Signal Level: Low: -5 to +2.5 V DC, High: 3.5 to

10 V DC

+12V Pullup: Low: -5 to +9.5 V DC, High: 10.5 to

15 V DC

Max Sink Current: (input shorted to ground) 15 mA Max Leakage Current for input High:

200μΑ

### General Purpose Outputs:

Number of Outputs: 1

"Dry Contact" relay contacts -normally Type: open & normally closed contact

Connector 3 pins on 6-pin terminal strip

Electrical:

Voltage: +12V DC

Power: 3W

Physical:

Number of Slots:

### **>>>**Ordering Information

7702BPX-IF 703BPX-IF 2x1 RF Protection Switch for IF Frequencies

2x1 RF Protection Switch for IF Frequencies, with VistaLINK®

Rear Plate and optional connector type must be specified at time of order Eg: Model +3RU (if 75 $\Omega$  F-type connector required, order optional +F75)

**Ordering Options** Rear Plate Suffix

+3RU +1RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

### Connector Suffix

+F75

75Ω, F-Type Rear Connector

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



## 7702BPX-LB, 7703BPX-LB

### 2x1 RF Protection Switch for L-Band Frequencies

The 7702BPX-LB and 7703BPX-LB 2x1 RF protection switches for L-Band frequencies provide automatic changeover functionality to provide bypass protection for RF signals from 950MHz to 2250MHz.


The 7703BPX-LB has integrated VistaLINK® technology for remote control and monitoring capability via SNMP. This provides the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.

When used for automatic changeover, the 7702/7703BPX-LB has a MAIN input and a STANDBY input. It will automatically switch to the Standby input when the Main input power is weak or lost. Switch back to the Main input when the signal is re-established, may be configured to happen manually or automatically. The 7702/7702BPX-LB may also be configured to operate manually as a 2:1 switch, which may be controlled locally or remotely via GPI or SNMP (7703 model only)

The 7702BPX-LB and 7703BPX-LB occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

#### ▶ Features & Benefits

- · Wide operating frequency range, 950MHz-2250MHz
- Intelligent auto switching with input power detection
- User-definable threshold levels on 7703BPX-LB version
- Maintains switch state and RF channel on loss of power to card or frame
- Supports automatic or manual control via GPI or SNMP on 7703BPX-LB
- · Switch state indication via GPO
- Card edge LEDs indicate active input channels, output channel and power levels below threshold
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® on 7703 version
- VistaLINK® capability is available when 7703BPX-LB modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

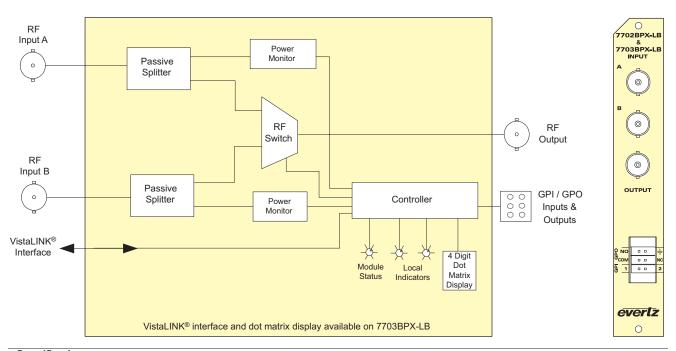

### ▶Specifications

RF Input/Output: Inputs: 2 Outputs: 1

Connector: 1 BNC per IEC 61169-8 Annex A

(F-type optional)

I/O Impedance:  $75\Omega$ Frequency Response: 950MHz to 2250MHz:

< ±1.5dB</li>
 Insertion Loss:
 < 4dB</li>
 Return Loss:
 > 10dB
 Isolation:
 > 50dB

Input Power Range: 0dBm to -50dBm

### General Purpose Inputs:

Number of Inputs: 2 Type: Or

Type: Opto-isolated, active low with internal pull-ups to +5V

Connector: 2 pins plus ground on 6-pin terminal

strip

Signal Level: +5V Pullup: Low: -5 to +2.5V DC, High: 3.5 to 10V DC

+12V Pullup: Low: -5 to +9.5V DC, High: 10.5 to

15V DC

Max Sink Current: (input shorted to ground) 15mA Max Leakage Current for input High:

200μΑ

### General Purpose Outputs:

Number of Outputs: 1

Type: "Dry Contact" relay contacts normally open & normally closed

contact provided

Connector: 3 pins on 6-pin terminal strip

Electrical:

Voltage: +12V DC Power: 4W

Physical:

Number of Slots: 1

### **>>>**Ordering Information

7702BPX-LB 2x1 RF Protection Switch for L-Band Frequencies 2x1 RF Protection Switch for L-Band Frequencies, with VistaLINK® Monitoring

Rear Plate and optional connector type must be specified at time of order Eg: Model +3RU (if  $75\Omega$  F-type connector required, order optional +F75)

Rear Plate Suffix

**Ordering Options** 

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe
+1RU 1RU Rear Plate for use with 7701FR Multiframe
+\$A Standalone Enclosure Rear Plate

Connector Suffix

**+F75** 75Ω, F-Type Rear Connector

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure










### **Dual Port LNB Power Inserters**


The 7702LPS-2 & 7703LPS-2 dual port LNB power inserters offer a modular, high performance and compact platform for inserting DC power via coaxial cable to two LNBs. Housed in the 7700FR-C 3RU frame with dual power supplies, up to 30 (7702) or 28 (7703) LNBs can be powered with a single frame. On their RF input connectors, the cards provide +13/+18V DC power and 22kHz tone generation with low RF insertion loss. The 7703 version includes SNMP support for remote monitoring and control via VistaLINK® software, including LNB current and RF input power monitoring.

The 7702LPS-2 & 7703LPS-2 each occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone frame which will hold 1 module.

#### ▶ Features & Benefits

- Provide DC voltage of +13/+18V DC with available +1V DC (+14/+19V DC) cable compensation for long cable runs
- · 22kHz tone generation available on both ports for LNB control
- DC voltage level and 22kHz tone generation are independently controllable on each port
- Dynamic or static short circuit current protection. Dynamic mode features continuous short circuit check and automatic recovery, while static mode disables DC voltage until a reset is performed. Both modes indicate the short circuit condition on card edge LEDs and VistaLINK® (7703 version)
- For system diagnostics and troubleshooting, the 7703 version provides RF input power and LNB current monitoring with adjustable thresholds for SNMP/VistaLINK® alarming
- 7700FR-C frame power supplies are redundant, front-loading and hot swappable for reliability and ease of maintenance
- 7702 and 7703 cards are front loading and hot swappable for simple installation and maintenance
- 7703 cards feature full SNMP/VistaLINK® support and local card edge monitoring and control via the dot matrix display and toggle switch/pushbutton

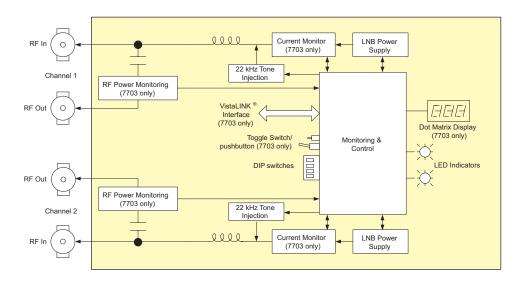

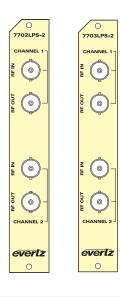

#### ▶ Specifications

RF Input/Output:

BNC per IEC 61169-8 Annex A Connector:

(F type connector optional) 75Ω

I/O Impedance: Insertion Loss:

< 1.6dB (950-2250MHz) > 14dB (950-2250MHz) Return Loss:

> 60dB (950-2250MHz) Isolation

Electrical

+13 / +14 / +18 / +19V DC LNB DC Voltage:

Max LNB Current: 400mA Electrical:

+12VDC

Voltage: Power: 3W with no LNB load

EMI/RFI: Complies with FCC regulations for

Class A devices

Complies with EU EMC directive

Physical:

Number of slots:

### >>> Ordering Information

7702LPS-2 **Dual Port LNB Power Inserter** 

7703LPS-2 Dual Port LNB Power Inserter with NMP/VistaLINK® support

**Ordering Options** Rear Plate must be specified at time of order Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix

+F75

75 $\Omega$ , F-Type Rear Connector

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure




The 7703R8x1 and 7703R16x1 are bi-directional, low loss switches for signals from DC to 3GHz. The 7703R8x1 is an 8x1 switch while the 7703R16x1 is a 16x1 switch. Control of the switch may be done locally at the card-edge with the built-in rotary encoder and dot-matrix display, or remotely through SNMP/VistaLINK®.

Applications include selecting from multiple signal sources and routing one to a piece of instrumentation such as an oscilloscope, spectrum analyzer or other signal analysis/monitoring equipment. Similarly, a single signal source may be routed to any one of multiple connected receiving devices for applications such as antenna The 7703R8x1 and 7703R16x1 are ideal for use any facility where signal switching is required, or in automated testing applications.

The 7703R8x1 and 7703R16x1 occupy two card slots and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules, a 350FR portable frame that will hold up to 3 modules or a standalone enclosure which holds 1 module

#### ▶ Features & Benefits

- Low insertion loss and high return loss to preserve original signal integrity
- Unused ports automatically terminate to 75Ω (AC coupled)
- · Latching relays conserve power usage in the latched state and maintain position in the event of power loss to the card or frame
- Modular, front accessible and hot-swappable can be conveniently removed from the frame without disconnecting wiring for greatly simplified servicing
- 8x1 and 16x1 versions available to accommodate different sized requirements
- DC 3GHz bandwidth allows switching of many signal types including RF (L-Band, 70/140 MHZ IF, CATV, etc.) analog or digital video or audio, serial digital such as DS3, etc.
- · Will pass DC LNB power for antenna switching or similar applications
- · Controllable via industry standard SNMP allowing easy integration into facilities or automated test setups
- · Comprehensive card status monitoring and control via four digit card edge display and rotary encoder or remotely through SNMP and VistaLINK®

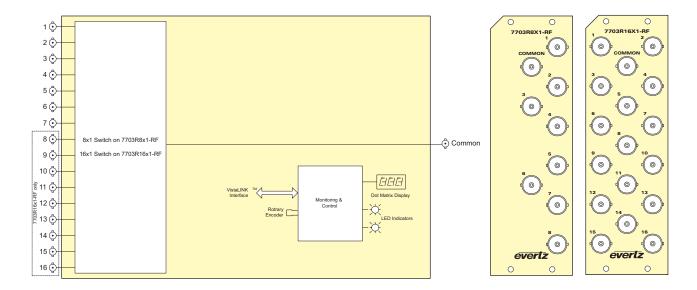

<11 ms

30 V 500 mA

#### ▶ Specifications

Signal Input/Output DC - 3GHz: > 10dB Number of Ports: Isolation: DC - 1.0GHz: 7703R8x1: 8 + 1 Common > 50dB 16 + 1 Common DC - 2.25GHz: 7703R16x1 > 45dB Connector Type: BNC per IEC 61169-8 Annex A DC - 3GHz: > 40dB Impedance: 75Ω

Switching DC - 3GHz Bandwidth: Switching Time: Insertion Loss: DC - 1.0GHz: < 1.0dB Max Voltage: DC - 2.25GHz: < 1.6dB Max Current: DC - 3GHz: < 2.7dB Return Loss:

Electrical:

Voltage: 12 VDC Power: 6 W

Physical:

Number of Slots: 2

### >>> Ordering Information

> 12dB

7703R8x1-RF 8x1 Switch, DC-3GHz, VistaLINK® 7703R16x1-RF 16x1 Switch, DC-3GHz, VistaLINK® **Ordering Options** 

Rear Plate must be specified at time of order Eg. Model +3RU

Rear Plate Suffix

DC - 2.25GHz:

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure



247


### Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Transmitter


### ▶ Features & Benefits

- Single card fiber optic transmitter for one composite Analog or SDI video and four analog or AES audio signals
- · Auto-sensing (analog or digital) video and audio inputs
- · Supports both NTSC and PAL analog or 4:2:2 component digital video
- Supports Analog to Digital and Digital to Analog audio conversion
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- · Supports 32, 44.1, 48kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Audio de-embedding capability for digital video and Analog or AES Audio
- -NF version converts copper 270Mb/s link input back to video & audio
- Converts input video & audio to a 270Mb/s copper output to interface with any SD-SDI or other 270Mb/s service


- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable gain equalization for analog video for up to 250m of Belden 1694A coaxial cable
- Fully Hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU G 694.2 compliant)
- DWDM wavelengths also available (ITU G.694.1 compliant)
- Outputs available with fiber optics and BNC or BNC's only (-NF version)
- · Passes embedded and/or external audio for digital video


### ▶7707ADVT Block Diagram

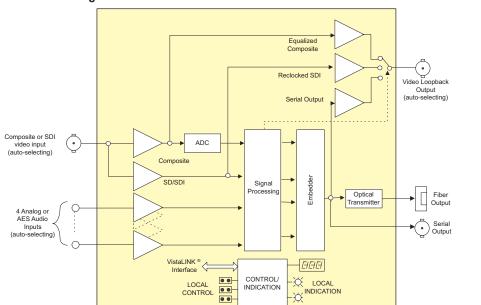



### ▶7707ADVT-NF Block Diagram

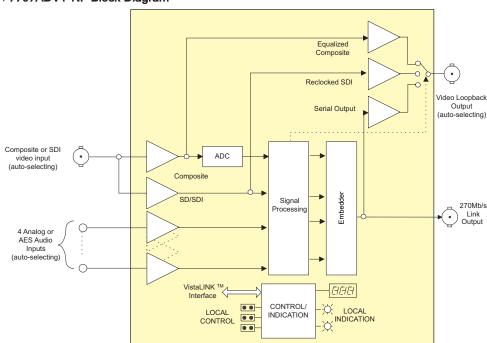



### Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Transmitter

### ▶Specifications

Analog Video Input:

SMPTE 170M (NTSC), ITU-R 624-2 (PAL) Standards: Number of Inputs: 1 BNC per IEC 61169-8 Annex A

Connector: Signal Quantization:12 bit

System Bandwidth: > 5.5MHz 2V p-p (Maximum) Input Level:

Gain Equalization: Up to 250m of Belden 1694A or

equivalent (adjustable) Input impedance:

Return Loss: > 30dB to 5.5MHz Signal/Noise Ratio: > 70dB Differential Gain: < 1.0% Differential Phase:

Passband Ripple:

NTSC: < ±0.1dB to 4.1MHz < ±0.2dB to 5.5MHz

PAL: < ±0.1dB to 4.8MHz < ±0.2dB to 5.8MHz

Chroma/Luma Gain: 98% to 103% Chroma/Luma Delay: , < 5ns

NTSC: PAI · < 12ns Line Time Distortion: 1.2%

Serial Video Input:

SMPTE 259M-C (525 or 625 line Standard:

component), SMPTE 305M (SDTi), DVB-ASI (without separate audio)

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 300m @ 270Mb/s with Equalization: Belden 1694A or equivalent cable

Return Loss: > 15dB up to 270Mb/s

Analog Video Output:

Same as Analog Video Input

Number of Outputs: 1

1 BNC per IEC 61169-8 Annex A Connector:

Output Level: 1V p-p Output Impedance:

> 30dB to 5.5MHz Return Loss:

Serial Video Output:

Number of Outputs: 2 (1 loopback, 1 serial) 1 BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot: > 15dB at 270Mb/s Return Loss

Wide Band Jitter: < 0.2 UI

Analog Audio Inputs: Number of Inputs:

Balanced analog audio Type:

Connector: 12-pin removable terminal block High Impedance (> 20kΩ) ±0.1dB, 20Hz to 20kHz Input impedance: Freq. Response:

< 0.005% THD 20Hz-20kHz: Channel Phase Diff.: ±1° > 85dB SNR (weighted): Max. Audio Input Level: +24dBu Signal Quantization: 24 Bits

AES Audio Inputs:

Number of Inputs: 4 (auto-sensing for balanced or

unbalanced input)

Standard:

Unbalanced AES: SMPTE 276M Balanced AES: AES3-1992 Dolby-E™ compatible Other:

Connector: 12-pin removable terminal block Input Return Loss: > 15dB (1MHz to 6MHz)

Signal Level: 1.2V p-p ±0.1V Unbalanced: Balanced: 1 to 7V p-p

Equalization: Unbalanced: 450m of Belden 1800D cable 1500m of Belden 1694A cable Balanced:

Resolution: Up to 24 bits Sampling Rate: 32, 44.1, 48kHz

Impedance: Unbalanced: 75Ω Balanced:  $110\Omega$ 

Optical Outputs: Number of Outputs:

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 14dB Rise and Fall Time: 200ps nominal

Fiber Size: 9μm core/125μm overall

Wavelengths:

1310nm, 1550nm (nominal) Standard: See Ordering Information DWDM: See Ordering Information

Output Power

1310nm FP (Standard):

-7dBm ±1dBm

1550 & CWDM DFB: 0dBm ±1dBm

DWDM DFB +7dBm ±1dBm Electrical: +12V DC Voltage:

15W (Non DWDM), 18W (DWDM)

Physical:

Number of slots:

Compliance:

Laser Safety:

Electrical Safety: CSA Listed to UL 60065-03, IEC

Complies with CE Low voltage

Directive Class 1 laser product

Complies with 24 CFR 1040.10 and

1040 11 IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | Х      |        |
| 7705/7707OE-3       | Х      |        |
| 7705/7707OE-3-HD    | Х      |        |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      |        |
| 7707VAR-HD          | х      |        |

### >>> Ordering Information

7707ADVT13 Analog or SDI Video & 4 Analog or 4 AES audio Fiber Transmitter,

7707ADVT15

1310nm laser, VistaLINK® Analog or SDI Video & 4 Analog or 4 AES audio Fiber Transmitter, 1550nm DFB Laser, VistaLINK®

7707ADVT-NF

For CWDM applications please refer to the end of the fiber section for details

Analog or SDI Video & 4 Analog or 4 AES audio fiber transmitter, 7707ADVTxx

CWDM Laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details

7707ADVTDxxx Analog or SDI Video & 4 Analog or 4 AES audio fiber transmitter,

DWDM Laser, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 7700FR-D Multiframe

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC

Enclosures

7700FR-D

3RU Multiframe which holds up to 15 single slot modules


## Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Receiver


### ▶ Features & Benefits

- Single card fiber optic receiver for one composite Analog or SDI video and four analog or AES audio signals
- · Auto sensing (analog or digital) video and audio outputs
- Supports both NTSC and PAL analog or 4:2:2 component digital video
- Supports Analog to Digital and Digital to Analog audio conversion
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- Supports 32, 44.1, 48kHz AES audio
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Dolby-E<sup>™</sup> compatible
- · Audio de-embedding capability for digital video and Analog or AES Audio


- -NF version converts copper 270Mb/s link input back to video & audio
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable gain, DC offset and pre-emphasis for driving up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Input available with fiber optics or BNC (-NF version)
- Wideband optical input (1270nm-1610nm)
- · Passes embedded and/or external audio for digital video


### ▶7707ADVR Block Diagram

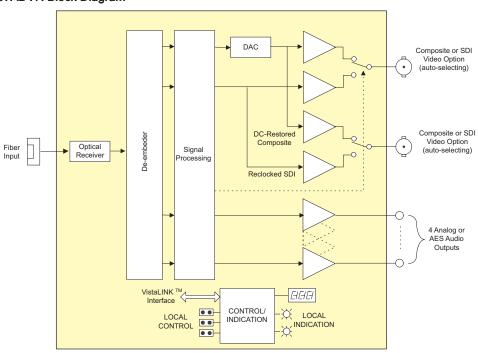



### ▶7707ADVR-NF Block Diagram

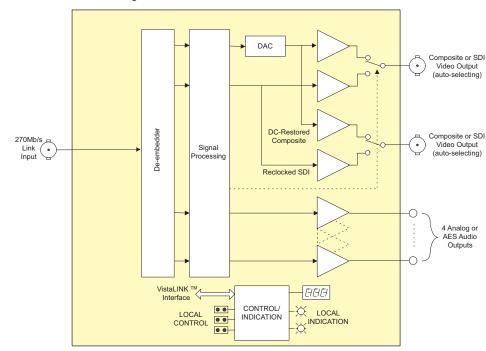











### Analog or SDI Video with 4-Channel Analog or AES Audio Fiber Receiver

### ▶Specifications

Analog Video Outputs:

SMPTE 170M, (NTSC), ITU-R 624-2 Standard: (PAL)

Number of Outputs: 2 BNC per IEC 61169-8 Annex A

System bandwidth: > 5.5MHz

Output Level: 1V p-p (nominal), 2V p-p (maximum) Unity gain nominal, adjustable 50% to

150%

Output Impedance: 75Ω > 30dB to 5.5MHz Return Loss: SNR: > 70dB

Differential Gain: < 1.0% Differential Phase:

Pre-Emphasis: Adjustable cable loss compensation

for up to 250m of Belden 1694A

Passband Ripple:

< ±0.1dB to 4.1MHz and NTSC: < ±0.2dB to 5.5MHz PAL: < ±0.1dB to 4.8MHz and < ±0.2dB to 5.8MHz

Chroma/Luma Delay: Chroma/Luma Gain: 98%-103% < 12ns PAL: Line Time Distortion: 1.2%

Serial Video Output:

Number of Outputs: 2 regenerated

Standard: SMPTE 259M-C (525 or 625 line

components) SMPTE 305M (SDTi), DVB-ASI

(without separate audio) 1 BNC per IEC 61169-8 Annex A

Connector: Automatic to 300m with Belden Equalization:

1694A (or equivalent) Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot: Return Loss: > 15dB at 270Mb/s

Wide Band Jitter: < 0.2 []] Serial Input:

Number of Inputs: Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal 0V ± 0.5U DC Offset: Rise & Fall Time: 900ps nominal Overshoot: < 10% of amplitude > 15dB at 270Mb/s Return Loss:

Wideband jitter: < 0.2UI

Analog Audio Outputs: Number of Outputs: 4

Balanced analog audio Type:

Connector: 12-pin removable terminal block

Output impedance:  $66\Omega$ ±0.1dB, 20Hz to 20kHz Frea. Response:

THD 20Hz-20kHz < 0.005% Channel Phase Diff.: ±1° > 85dB SNR (weighted):

Output Level Adj: -20dB to +3dB +24dBu into 10kΩ loads Max Output Level:

**AES Audio Outputs:** 

Standard:

Number of Outputs: 4 regenerated (selectable for

balanced or unbalanced)

Unbalanced AES: SMPTE 276M AES3-1992 Balanced AES: Other: Dolby-E™ compatible

Connector: 12-pin removable terminal block Input Return Loss: >15dB (1MHz to 6MHz)

Signal Level:

1V p-p ±0.1V p-p 2V p-p ±0.1V p-p Up to 24-bits Unbalanced: Balanced: Resolution: Sampling Rate: 32, 44.1, 48kHz Output Jitter: < 0.1 UI

Impedance: Unbalanced: 75Ω Balanced:  $110\Omega$ Optical Input: Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC

Operating Wavelength:

1270nm to 1610nm

Max. Input Power: 0dBm Optical Sensitivity: -31dBm Electrical:

Voltage: +12V DC 13W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | Х              |        |
| 2405/7705/7707EO-HD | х              |        |
| 7705/7707EO-3       | х              |        |
| 7705/7707EO-3-HD    | х              |        |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              |        |
| 7707VAT-HD          | х              |        |

## **>>>**Ordering Information

7707ADVR Analog or SDI video with 4-channel analog or AES audio fiber optic

7707ADVR-NF Analog or SDI video with 4-channel analog or AES electrical input only receiver

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Ea: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 7700FR-D Multiframe

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

7700FR-D 3RU Multiframe which holds up to 15 single slot modules




### CATV Fiber Transmitter

### ▶ Features & Benefits

- 80/110 Channel PAL/NTSC CATV fiber optic transmitter
- 50-850MHz operational bandwidth
- · Low CSO and CTB intermod products
- · Supports single mode fiber
- · Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C and 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- RF input power monitoring and alarm thresholds

- Two setting adjustable optical output power level
- Two optical output power versions available at 1310nm wavelength, +8dBm and +11dBm
- Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

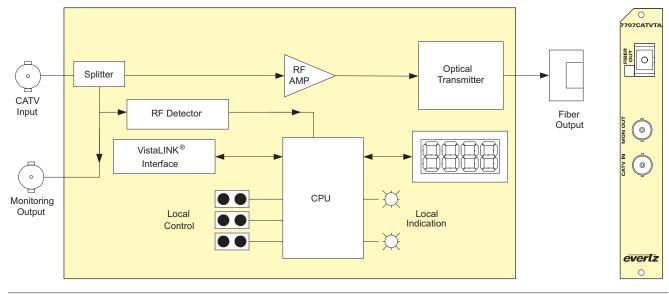

### ▶Specifications

CATV Input:

Number of Inputs: 1, 80/110 channel, PAL/NTSC CATV

signal Bandwidth: 50-850MHz

RF Drive Level/channel:

40dBmV/channel for full 80 PAL/110

NTSC channel load

1 F-Type (BNC optional) Connector: I/O Impedance:

Return Loss: > 18dB

Monitoring Output:

Number of Outputs:

Connector: F-Type (BNC optional)

I/O Impedance:  $75\Omega$ 

Signal Level: (Input) -25dB RF Flatness: ±1dB (50-850MHz) Optical Output:

1 SC/APC Operating Wavelength: 1310nm

Output Power:

+8dBm +1dBm 110-8

110-11: +11dBm ±1dBm

9μm core/125μm overall Fiber Size:

CATV Channel Performance (7707CATVTA &

7707CATVRA):

Flatness: ±1dB, (50-850MHz)\* CNR:

> 50dB\* < -61dBc\* CSO:

< -65dBc

\* Measured with fully loaded CATV spectrum with 40dBmV/channel input to 7707CATVTA and 0dBm optical power input to 7707CATVRA with 0dB gain setting on 7707CATVRA

Electrical:

Voltage: +12V DC Power: 12W

Physical:

Number of slots:

Compliance:

CSA Listed to UL 60065-03, Electrical Safety:

IEC 60065

Complies with CE Low voltage

Directive:

FMI/RFI

Laser Safety:

Class 3b laser product Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive

### **>>>**Ordering Information

7707CATVTA13-110-8

1310nm, DFB Laser, +8dBm output power, 80/110 channel PAL/NTSC

7707CATVTA13-110-11 1310nm, DFB Laser, +11dBm output power, 80/110 channel PAL/NTSC

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Optical Connector Suffix

+AP+FC FC/APC (Angle Polished) +AP+SC SC/APC (Angle Polished)

RF Connector Suffix

**BNC Connector** +BNC


Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

S7701FR Standalone Enclosure

### ▶ Features & Benefits

- 80/110 Channel PAL/NTSC CATV fibre optic receiver
- 50-850 MHz operational bandwidth
- Supports single mode fiber
- Low CSO and CTB intermod products
- Fully hot swappable from front of frame
- Provides up to 35km extension of CATV systems
- · Comprehensive signal and card status monitoring via four digit card-edge display or remotely through SNMP and VistaLINK® capability
- Two RF outputs for extra signal distribution or monitoring functions
- Adjustable gain setting from -10dB to ±10dB in 1dB steps
- · Optical power monitoring and alarm thresholds
- RF output power monitoring and alarm thresholds
- The 7707CATVRA occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

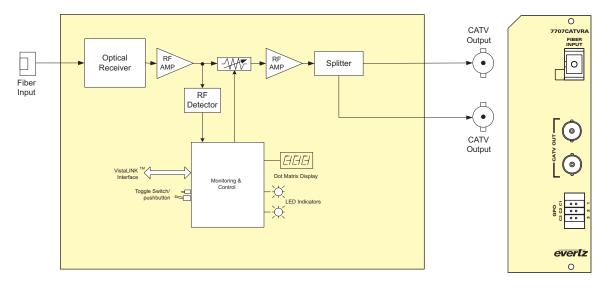

### ▶Specifications

Optical Input:

Number of outputs: Female SC/APC, FC/APC

Operating Wavelength: 1310nm Max Optical Power: +6dBm

Fiber Size: 9 mm core / 125 mm overall

CATV Output:

Number of outputs: Connector: F-Type (BNC optional)

I/O Impedance: 75Ω

> 17dB Return Loss: Flatness: ±1dB\* @ 50MHz - 850MHz

Composite Second Order: < - 61dB\* Composite Triple Beat: < - 65dB\* > 50dB\* Carrier to Noise:

Gain: ± 10dB in 1dB steps

\* Measured with input to CATVTA at +40dBmV / channel, fully loaded spectrum with 0dBm optical input power into CATVR A and 0dB gain setting on the CATVRA.

Electrical: Voltage:

+12VDC

Complies with FCC regulations for EMI/RFI:

class A devices

Complies with EU EMC directive

### General Purpose Outputs:

Number of Outputs:

"Dry Contact" relay contacts -Type:

normally open and normally closed

contact provided

6 pins on 6 pin terminal strip

### Connector: Physical:

7700 or 7701 frame mounting:

Number of slots:

### **>>>**Ordering Information

7707CATVRA CATV Fiber Optic Receiver, 80/110 Channel PAL/NTSC

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

Optical Connector Suffix +AP+FC

FC/APC (Angle Polished) +AP+SC SC/APC (Angle Polished) RF Connector Suffix

+BNC **BNC** Connector

**Enclosures** 350FR

7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









### Analog Video, 4-Channel Audio and RS-232 / 422 Fiber Transmitter

The 7707CVDTA-A4 is a VistaLINK $^\circ$ -capable composite analog video, 4-channel audio and bi-directional RS-232/422 fiber optic transmitter for broadcast quality video signals.

The 7707CVDTA-A4 is backwards compatible with previous 7707CVDT-A4 versions.

The 7707CVDTA-A4 is ideal for analog VTR link extension or camera PTZ applications.

The 7707CVDTA-A4 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module

#### ▶ Features & Benefits

- Single card fiber optic transmitter for analog video, four analog audio and bi-directional RS-232/422
- · Supports both NTSC and PAL video signals
- · Broadcast quality analog video and audio performance
- 2 bi-directional RS-232 or 1 bi-directional RS-422
- Superior digital data transmission
- Signal transport over fiber uninterrupted by loss of input video, audio or data feeds
- Adjustable gain equalization for up to 300m of Belden 1694A coaxial cable
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK<sup>®</sup>
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available













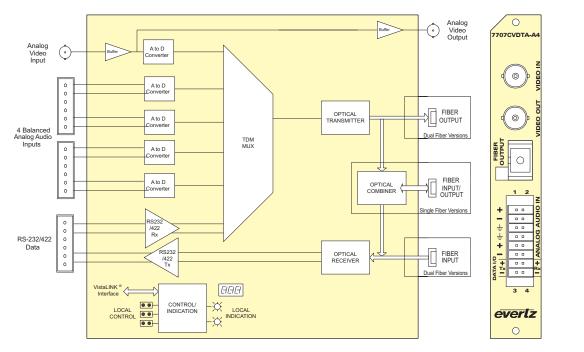



### Analog Video, 4-Channel Audio and RS-232 / 422 Fiber Transmitter

### ▶Specifications

Analog Video Input:

NTSC, SMPTE 170M, PAL, ITU-R 624-4

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector:

Signal Quantization: 12 bits System Bandwidth: 5.5MHz

Input Level:

2V p-p (Maximum) Up to 300m of Belden 1694A or Gain Equalization:

equivalent (adjustable)

Input impedance: 750

> 30dB to 5.5MHz Return Loss:

Analog Video Outputs (Not available on -F2 versions): NTSC, SMPTE 170M, PAL, ITU-R

Standard: 624-4

Number of Outputs: 1 buffered version of input 1 BNC per IEC 61169-8 Annex A

Connector: Output Level: 1V p-p Output Impedance:  $75\Omega$ 

> 30dB to 5.5MHz Return Loss:

Analog Audio Inputs:

Number of Inputs:

Balanced analog audio Туре: Connector: 12-pin removable terminal block Input impedance: High Impedance (>  $20k\Omega$ )

Max. Audio Input Level:

+24dBu Signal Quantization: 24 Bits

>>>Ordering Information

±0.1dB, 20Hz to 20kHz Freq. Response:

Serial Data Ports:

Connector

Baud Rate:

Number of Ports: 1 RS422 or 2 RS232 - Jumper

Selectable

4 pins (plus ground) on 16-pin removable terminal block

Up to 3Mb/s (Determined by incoming

Optical Input: Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector

Operating Wavelength:

1270nm to 1610nm

Max. Input Power: 0dBm Optical Sensitivity:

WDM (-w version) -26dBm Standard: -28dBm

Optical Output:

Number of Outputs: Connector: Female SC/PC, ST/PC or FC/PC

> 14dB Return Loss: Rise and Fall Time: 200ps nominal

Fiber Size: 9μm core/125μm overall

Wavelengths:

Standard: 1310nm. 1550nm 1270nm - 1610nm CWDM:

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power:

1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB): 0dBm ± 1dBm

DWDM (DFB): +7dBm ± 1dBm

#### System Performance (7707CVDTA-A4 + 7707CVDRA-A4):

Video Input to Video Output Delay:

< 10ms

Audio Input to Audio Output Delay: < 1.9ms

Electrical:

+12V DC Voltage:

12W (Non-DWDM) 15W (DWDM)

Physical:

Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive











For CWDM, please refer to end of fiber section for ordering information

Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, dual

fiber, CWDM Laser

For DWDM, please refer to end of fiber section for ordering information

7707CVDTADxx-A4-F2 Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, dual fiber, DWDM Laser

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Connector Suffix

ST/PC FC/PC

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure S7701FR

### Analog Video, 4-Channel Audio and RS-232 / 422 Fiber Receiver

The 7707CVDRA-A4 is a VistaLINK® -capable composite analog video, 4-channel audio and bi-directional RS-232/422 fiber optic receiver for broadcast quality video signals.

The 7707CVDRA-A4 is backwards compatible with previous 7707CVR-A4 versions.

The 7707CVDRA-A4 is ideal for analog VTR link extension or camera PTZ applications.

The 7707CVDRA-A4 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module

#### ▶ Features & Benefits

- Single card fiber optic receiver for analog video, four analog audio and bi-directional RS-232/422 signals
- · Supports both NTSC and PAL video signals
- Broadcast quality analog video and audio performance
- 2 bi-directional RS-232 or 1 bi-directional RS-422
- Superior digital data transmission
- Signal transport over fiber uninterrupted by loss of input video, audio or data feeds
- Adjustable gain, DC offset, and pre-emphasis for up to 300m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available












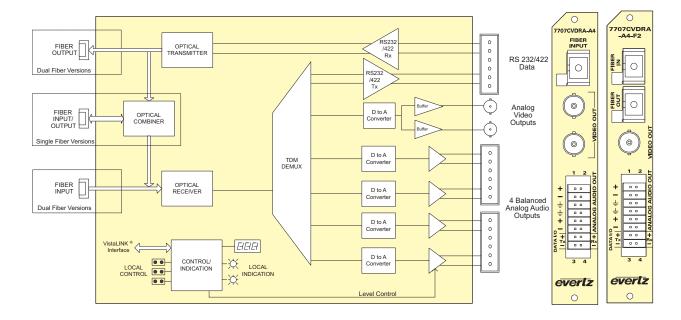

### Analog Video, 4-Channel Audio and RS-232 / 422 Fiber Receiver

### ▶Specifications

Optical Input:

Number of Inputs:

Female SC/PC, ST/PC. FC/PC Connector:

Operating Wavelength: 1270nm to 1610nm 0dBm

Max. Input Power: Optical Sensitivity:

WDM (-w version) -26dBm -28dBm Standard:

Optical Output: Number of Outputs: 1

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss > 14dB Rise and Fall Time: 200ps nominal Fiber Size: 9μm core/125μm overall Wavelengths:

Standard: 1310nm, 1550nm CWDM: 1270nm - 1610nm

C-Band (ITU-T G.694.1 compliant) DWDM:

Output V Power: -7dBm ±1dBm 1310nm FP:

1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Analog Video Outputs:

NTSC, SMPTE 170M, PAL, ITU-R624-4 Standard: Connector: 1 BNC per IEC 61169-8 Annex A

Signal Resolution: 12 bits System bandwidth: 5.5MHz

Output Level: 1V p-p (nominal), 2V p-p maximum Unity gain nominal, adjustable 50% to 150% Gain:

Output Impedance:  $75\Omega$ Return Loss: > 20dB Signal/Noise: > 67dB Differential Gain: < 1.0% Differential Phase: < 1.0°

Passband Ripple: < ±0.1dB to 4.7MHz (Equalization set to 0 m)

< ±0.2dB to 4.7MHz (Equalization set to maximum)

Pre-Emphasis: Cable loss compensation for up to

300m of Belden 1694A (each output adjustable separately)

Chroma/Luma Delay: < 11ns

Line time distortion: < 1% (0.5% typical)

Analog Audio Outputs:

Number of Outputs: 4

Type: Balanced analog audio Connector: 12-pin removable terminal block

Output impedance:  $66\Omega$ 

 $\pm 0.1 dB,\, 20 Hz$  to 20 kHzFreq. Response: THD 20Hz-20kHz: < 0.005%

Channel Phase Diff.: ±1° SNR (weighted): > 85dB Output Level Adj: -20dB to +3dB +24dBu into  $10 k\Omega$  loads Max Output Level:

Serial Data Ports:

Number of Ports: 1 RS-422 or 2 RS-232 - Jumper

Selectable

4 pins (plus ground) on 16-pin Connector: removable terminal block Baud Rate: Up to 3Mb/s (Determined by

incoming data)

System Performance (7707CVDTA-A4 + 7707CVDRA-A4):

Video Input to Video Output Delay: < 10ms Audio Input to Audio Output Delay

< 1.9ms

Electrical:

Voltage: +12V DC

12W (Non DWDM), 15W (DWDM) Power:

Physical:

Number of slots:

Compliance:

CSA Listed to UL 60065-03, IEC 60065 Electrical Safety:

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

### >>> Ordering Information

7707CVDRA13-A4-F2

Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber,

7707CVDRA13M-A4-W

Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, single

fiber, 1310nm TX @ 0dBm, RX on 1550nm

For CWDM, please refer to the end of the fiber section for ordering information 7707CVDRAxx-A4-F2

Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber,

For DWDM, please refer to the end of the fiber section for ordering information

7707CVDRADxxx-A4-F2

Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber

DWDM Laser

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eq: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone Enclosure







257

### Single / Dual Analog Video with 4-Channel Analog Audio Fiber Transmitter

The 7707CVTA is a VistaLINK® -capable, composite analog video and analog audio fiber transmitter for broadcast quality video and audio signals. This single card module accepts one NTSC or PAL analog video input with up to four analog audio inputs, performs analog to digital conversion and transmits them over a single fiber. The companion 7707CVRA Composite Video and Analog Audio Fiber Receiver demultiplexes the signals and converts them back to analog form.

The 7707CVTA-2 Dual Composite Video and Analog Audio fiber transmitter is a dual channel version that digitizes and multiplexes two analog video and up to four analog audio signals and converts them to an optical signal for transmission.

The companion 7707CVRA-2 Dual Composite Video and Analog Audio Fiber Receiver accepts a fiber optic input, demultiplexes the signals, performs D to A conversion and outputs two NTSC or PAL analog video signals and up to four balanced analog audio signals.


The fiber optic output of the 7707CVTA and 7707CVTA-2 is available in an assortment of optical wavelengths, accommodating 1310nm/1550nm, CWDM and DWDM transmission schemes. The 7707CVTA and 7707CVTA-2 occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules, a 3RU portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- · Single card fiber optic transmitter for one or two analog video and four analog audio signals
- · Supports both NTSC and PAL video signals
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- · Superior digital data transmission
- Video loop-through for additional signal distribution or monitoring (7707CVTA only)
- Signal transport over fiber is uninterrupted by loss of input video or audio feeds
- · Low Audio to Video latency
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable gain equalization for up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required

( o

- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

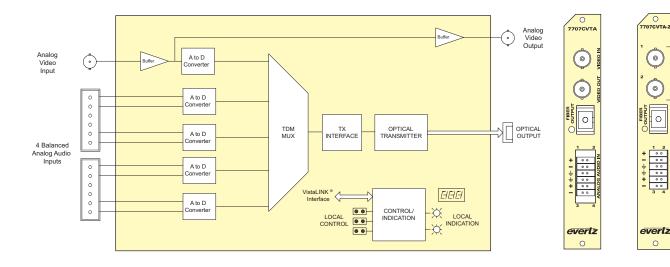







## 7707CVTA, 7707CVTA-2

### Single / Dual Analog Video with 4-Channel Analog Audio Fiber Transmitter

### ▶Specifications

Analog Video Input:

NTSC, SMPTE 170M, PAL, ITU-R

624-4

Number of Inputs: 1 on 7707CVTA, 2 on 7707CVTA-2 Connector: 1 BNC per IEC 61169-8 Annex A

Signal Quantization: 12 bits

System Bandwidth: 5.5MHz Input Level: 2V p-p (Maximum)

Gain Equalization: up to 250m of Belden 1694A or

equivalent (adjustable)

Input impedance: 75Ω

> 30dB to 5.5MHz Return Loss: Signal/Noise Ratio: > 70dB Differential Gain: < 1.0% Differential Phase:

Passband Ripple:

NTSC: < ±0.1dB to 4.1MHz < ±0.2dB to 5.5MHz PAL: < ±0.1dB to 4.8MHz

< ±0.2dB to 5.8MHz

Chroma/Luma Gain: 98% to 103%

Chroma/Luma Delay:

PAL: < 12ns Line Time Distortion: 1.2%

Analog Video Outputs (7707CVTA only):

Standard: NTSC, SMPTE 170M, PAL, ITU-R 624-4 Number of Outputs: 1 buffered version of input

Connector: 1 BNC per IEC 61169-8 Annex A

Output Level: 1V p-p Output Impedance:  $75\Omega$ 

Return Loss: > 30dB to 5.5MHz Analog Audio Inputs: Number of Inputs:

Type: Balanced analog audio Connector: 12-pin removable terminal block

Input impedance: High Impedance (>  $20k\Omega$ ) Freq. Response: ±0.1dB, 20Hz to 20kHz

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1° SNR (weighted): > 85dB Max. Audio Input Level:

+24dBu 24 Bits

Signal Quantization: Optical Outputs:

Number of Outputs: Connector: Female SC/PC, SC/PC, ST/PC or FC/PC

Return Loss: > 14dB

Wavelengths: Standard: 1310nm, 1550nm (nominal) CMDW-See Ordering Information DWDM: See Ordering Information

Output Power:

1310nm FP (Standard):

-7dBm ±1dBm

1310nm FP (M version): 0dBm ±1dBm

1550 & CWDM DFB:

0dBm ±1dBm DWDM: +7dBm ±1dBm System Performance (7707CVTA + 7707VCRA or

7707CVTA-2 + 7707CVRA-2):

Video Input to Output Delay:

Audio Input to Output Delay: < 1.9ms

Electrical:

Voltage: +12V DC

11/12W (Non-DWDM). Power:

13/14W (DWDM)

Physical:

7700 or 7701 frame mounting:

Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03. IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

### **>>>**Ordering Information

7707CVTA13 Analog Video with 4-channel Analog Audio Fiber Transmitter 1310nm

FP Laser, VistaLINK®

7707CVTA13M Analog Video with 4-channel Analog Audio Fiber Transmitter 1310nm

FP Laser (0dBm launch), VistaLINK®

Dual Analog Video with 4-channel Analog Audio Fiber Transmitter,
1310nm FP Laser, VistaLINK® 7707CVTA13-2

7707CVTA13M-2 Dual Analog Video with 4-channel Analog Audio Fiber Transmitter,

1310nm FP Laser, (0dBm launch), VistaLINK® 7707CVTA15 Analog Video with 4-channel Analog Audio Fiber Transmitter 1550nm

DFB Laser, VistaLINK®

Dual Analog Video with 4-channel Analog Audio Fiber Transmitter, 7707CVTA15-2

1550nm DFB Laser, VistaLINK®

or CWDM, please refer to the end of the fiber section for ordering information

7707CVTAxx Analog Video with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®

7707CVTAxx-2 Dual Analog Video with 4-channel Analog Audio Fiber Transmitter

CWDM DFB Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information
7707CVTADxxx Analog Video with 4-channel Analog Audio Fiber Transmitter DWDM

DFB Laser, VistaLINK®

7707CVTADxxx-2 Dual Analog Video with 4-channel Analog Audio Fiber Transmitter

DWDM DFB Laser, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Ea: Model +SC +3RU

Rear Plate Suffix

+3RH 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST +FC FC/PC

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 350FR 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone Enclosure









### Quad Analog Video, 16 Channel Analog Audio Fiber Transmitter

The 7707CVT-4 and 7707CVT-4-A16 are VistaLINK® -capable, composite analog video fiber transmitters for broadcast quality analog video and 16 analog audio signals. These card modules accept up to 4 NTSC or PAL analog video inputs and 16 analog audio, performs analog to digital conversion and transmits them over a single fiber. The companion 7707CVR-4 and 7707CVR-4-A16 Fiber Receiver demultiplexes the signals and converts them back to analog form.

The fiber optic output of these modules are available in an assortment of optical wavelengths, accommodating 1310nm, 1550nm, CWDM and DWDM transmission schemes

The 77707CVT-4 occupies a single slot where as the 707CVT-4-A16 occupies two card slots and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 3 modules or a standalone enclosure that will hold 1 module.

### ▶ Features & Benefits

- Single card fiber optic transmitter for up to four analog video and 16 analog audio signals
- Supports both NTSC and PAL video signals
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video transport
- Signal transport over fiber is uninterrupted by loss of input video feeds
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Supports single-mode and multi-mode fiber optic cable

- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable equalization for up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available













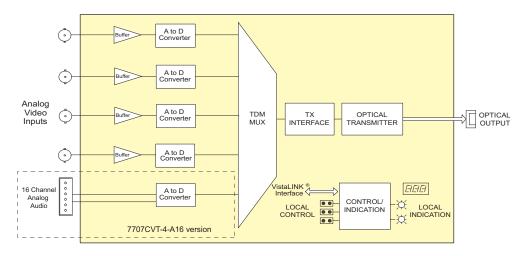



## 7707CVT-4, 7707CVT-4-A16

### Quad Analog Video, 16 Channel Analog Audio Fiber Transmitter

### ▶Specifications

Analog Video Input:

NTSC, SMPTE 170M, PAL, ITU-R 624-4 Standards:

Number of Inputs:

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Quantization: 12 hits System Bandwidth: 5.5MHz

Input Level: 2V p-p (maximum)

up to 250m of Belden 1694A or Gain Equalization:

equivalent (adjustable)

Input impedance: > 30dB to 5.5MHz

Return Loss: Signal/Noise Ratio: > 70dB Differential Gain: < 1.0% Differential Phase:

Passband Ripple:

< ±0.1dB to 4.1MHz NTSC: < ±0.2dB to 5.5MHz < ±0.1dB to 4.8MHz

< ±0.2dB to 5.8MHz Chroma/Luma Gain: 98% to 103%

Chroma/Luma Delay:

PAI · < 12ns Line Time Distortion: 1.2%

Number of Inputs:

Type:

Connector: 48-pin removable terminal block Input impedance: High Impedance (>  $20k\Omega$ ) ±0.1dB, 20Hz to 20kHz Freq. Response:

Balanced analog audio

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1° > 85dB SNR (weighted): Max. Audio Input Level: +24dBu

Analog Audio Inputs (7707CVT-4-A16):

Signal Quantization: 24 Bits

Optical Outputs: Number of Outputs:

Female SC/PC, SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 14dB

Wavelengths:

Standard: 1310nm, 1550nm (nominal) CWDM: See Ordering Information DWDM: See Ordering Information

Output Power:

1310nm FP (Standard):

-7dBm ±1dBm

1550 & CWDM DFB: 0dBm ±1dBm +7dBm ±1dBm DWDM DFB:

Electrical: Voltage: Power:

+12V DC

11/12W (Non-DWDM)

13/14W (DWDM)

Physical:

Number of slots: 1 or 2

Compliance:

Electrical Safety: CSA Listed to UL 60065-03. IEC 60065

Complies with CE Low voltage

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

IEC 60825-1 EMI/RFI:

Complies with FCC Part 15. Class A

EU EMC directive

### >>> Ordering Information

7707CVT13-4 7707CVT15-4

Quad Analog Video Fiber Transmitter 1310nm FP Laser, VistaLINK® Quad Analog Video, Fiber Transmitter 1550nm DFB Laser, VistaLINK® 7707CVT13-4-A16 Quad Analog Video, 16 Analog, Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®

7707CVT15-4-A16 Quad Analog Video, 16 Analog, Audio Fiber Transmitter 1550nm DFB

Laser, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information

7707CVTxx-4 Quad Analog Video Fiber Transmitter CWDM DFB Laser, VistaLINK® Quad Analog Video, 16 Analog, Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707CVTDxxx4 Quad Analog Video Fiber Transmitter DWDM DFB Laser, VistaLINK® 7707CVTDxxx4-A16Quad Analog Video, 16 Analog, Audio Fiber Transmitter DWDM DFB

Laser, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix +3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

S7701FR Standalone Enclosure









7700 Modular - Analog Video/Audio Fiber Transport

### Tri-Level Sync and Analog Audio Fiber Transmitter

The 7707CVTA-TRI is a VistaLINK® -capable, tri level sync and analog audio fiber transmitter. This single slot card module accepts one tri level sync analog video input with up to four analog audio inputs, performs analog-to-digital conversion and transmits them over a single fiber. The companion 7707CVRA-TRI Tri Level Sync and Analog Audio Fiber Receiver demultiplexes the signals and converts them back to analog form.

The 7707CVTA-2-TRI Dual Tri Level Sync and Analog Audio fiber transmitter is a dual channel version that digitizes and multiplexes two tri level sync and up to four analog audio signals and converts them to an optical signal for transmission.


The companion 7707CVRA-2-TRI Tri Level Sync and Analog Audio Fiber Receiver accepts a fiber optic input, demultiplexes the signals, performs D to A conversion and outputs two tri-level sync signals and up to four balanced analog audio signals.


The fiber optic output of the 7707CVTA-TRI and 7707CVTA-2-TRI is available in an assortment of optical wavelengths, accommodating 1310nm/1550nm, CWDM and DWDM transmission schemes.

The 7707CVTA-TRI and 7707CVTA-2-TRI can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 3RU portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- Single card fiber optic transmitter for one or two tri level sync and four analog audio signals
- · Supports all tri level sync standards for HD video
- · Superior digital data transmission
- Video loop-through for additional signal distribution or monitoring (7707CVTA-TRI only)
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Adjustable gain equalization for up to 250m of Belden 1694A coaxial cable
- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

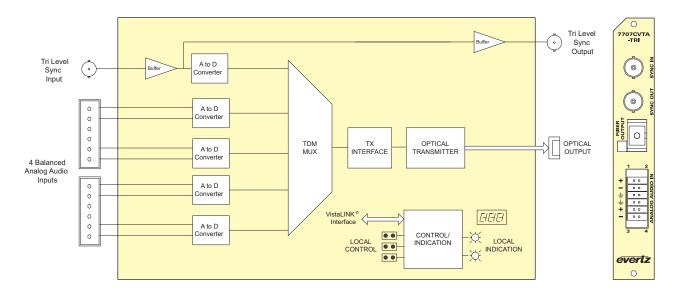

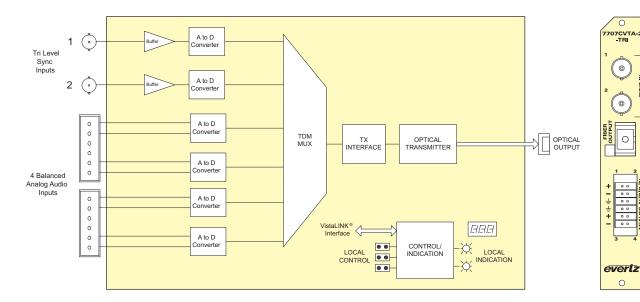











## 7707CVTA-TRI, 7707CVTA-2-TRI

### Tri-Level Sync and Analog Audio Fiber Transmitter

### ▶Specifications

Sync Input:

Analog tri level sync signals defined

by SMPTE 274M, SMPTE 296M NTSC or PAL analog video signals are not valid inputs to this card

Number of Inputs: 1 on 7707CVTA-TRI, 2 on 7707CVTA-2-TRI

1 BNC per IEC 61169-8 Annex A Connector:

Signal Quantization: 12 bits System Bandwidth: 5.5MHz Input Level:

2V p-p (Maximum) up to 250m of Belden 1694A or Gain Equalization:

equivalent (adjustable)

Input impedance: 750

> 30dB to 5.5MHz Return Loss:

Signal/Noise Ratio: > 70dB

Sync Outputs (7707CVTA-TRI only):

Analog tri level sync signals defined Standard: by SMPTE 274M and SMPTE 296M

Number of Outputs: 1 buffered version of input 1 BNC per IEC 61169-8 Annex A Connector:

Output Level: 1V p-p Output Impedance: 75Ω

> 30dB to 5.5MHz Return Loss:

Analog Audio Inputs:

Number of Inputs: Type: Balanced analog audio

12-pin removable terminal block Connector: Input impedance: High Impedance (>20K $\Omega$ ) Freq. Response: ±0.1dB, 20Hz to 20kHz

THD 20Hz-20kHz < 0.005% Channel Phase Diff.: ±1° SNR (weighted): > 85dB Max. Audio Input Level: +24dBu Signal Quantization: 24 Bits

**Optical Outputs:** Number of Outputs:

Connector: Female SC/PC, SC/PC, ST/PC or

FC/PC > 14dB

Return Loss: Wavelengths:

Standard: 1310nm, 1550nm (nominal) CMDW-See Ordering Information DWDM: See Ordering Information

Output Power:

1310nm FP (Standard): -7dBm ±1dBm

1310nm FP (M version): 0dBm ±1dBm

1550 & CWDM DFB:

0dBm ±1dBm DWDM: +7dBm ±1dBm System Performance (7707CVTA-TRI + 7707VCRA-TRI or 7707CVTA-2-TRI + 7707CVRA-2-TRI):

Video Input to Output Delay:

< 10ms Audio Input to Output Delay: < 1.9ms

Electrical:

Voltage: +12V DC Power:

11/12W (Non-DWDM), 13/14W (DWDM)

Physical:

7700 or 7701 frame mounting:

Number of slots:

Compliance:

CSA Listed to UL 60065-03, IEC Electrical Safety:

60065

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1 EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

### **>>>**Ordering Information

Tri Level Sync with 4-channel Analog Audio Fiber Transmitter. 7707CVTA13-TRI

1310nm FP Laser, VistaLINK® 7707CVTA13-2-TRI Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter,

1310nm FP Laser, VistaLINK®
Tri Level Sync with 4-channel Analog Audio Fiber Transmitter, 7707CVTA15-TRI

1550nm DFB Laser, VistaLINK® 7707CVTA15-2-TRI Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter

1550nm DFB Laser, VistaLINK®

CWDM, please refer to the end of the fiber section for ordering information

Tri Level Sync with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK® 7707CVTAxx-TRI

7707CVTAxx-2-TRI Dual Tri Level Sync with 4-channel Analog Audio Fiber

Transmitter CWDM DFB Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information

Tri Level Sync with 4-channel Analog Audio Fiber Transmitter DWDM

DFB Laser, VistaLINK®

7707CVTADxxx-2-TRI

Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter DWDM DFB Laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC

SC/PC connector with flap cover ST/PC +SCF

+ST +FC

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone Enclosure









### Eight Analog Video Fiber Transmitter


The 7707CVT-8 is a VistaLINK® -capable, composite analog video fiber transmitter for broadcast quality video signals. This single card module accepts one NTSC or PAL analog video input, performs analog to digital conversion and transmits them over a single fiber. The companion 7707CVR-8 Analog Video Fiber Receiver demultiplexes the signals and converts them back to analog form.


The fiber optic output of the 7707CVT-8 is available in an assortment of optical wavelengths, accommodating 1310nm/1550nm, CWDM and DWDM transmission schemes.

The 7707CVT-8 occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules, a 350FR portable frame that will hold up to 3 modules or a standalone enclosure which holds 1 module.

#### ▶ Features & Benefits

- · Single card fiber optic transmitter for up to eight analog video signals
- · Supports both NTSC and PAL video signals
- · Broadcast quality analog video performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video transport
- Signal transport over fiber is uninterrupted by loss of input video feeds
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame.
- Adjustable equalization for up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

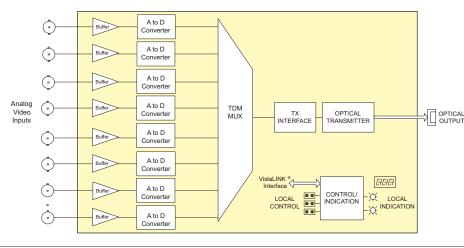



### ▶Specifications

Analog Video Input: NTSC, SMPTE 170M, PAL, Standards:

ITU-R 624-4

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Signal Quantization:

System Bandwidth: 5.5MHz

Input Level: 2 Vp-p (Maximum) Gain Equalization: up to 250m of Belden 1694A

or equivalent (adjustable) Input impedance: 75W

> 30dB to 5.5 MHz Return Loss:

Signal/Noise Ratio: > 70dB Differential Gain: < 1.0 % Differential Phase: < 0.7

Passband Ripple:

NTSC < ± 0.1dB to 4.1 MHz < ± 0.2dB to 5.5 MHz PAL: < ± 0.1dB to 4.8 MHz < ± 0.2dB to 5.8 MHz

Chroma/Luma Gain: 98% to 103% Chroma/Luma Delay: NTSC: < 5 ns

PAL: < 12 ns Line Time Distortion: 1.2%

Optical Outputs:

Number of Outputs:

Female SC/PC, SC/PC, ST/PC Connector: or FC/PC

Return Loss: > 14 dB

Wavelengths:

1310nm, 1550nm (nominal) Standard CWDM: See Ordering Information DWDM: See Ordering Information

Output Power:

1310nm FP (Standard) -7dBm ± 1dBm 1310nm FP (M Version) 0dBm ± 1dBm 1550 & CWDM DFB 0dBm ± 1dBm

DWDM: +7dBm ± 1dBm

EMI/RFI:

Electrical: Voltage:

+12VDC 13W (Non-DWDM) Power:

15W (DWDM)

Physical:

Number of slots: 2

Compliance:

Electrical Safety CSA Listed to UL 60065-03,

IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Complies with 24 CFR 1040.10 and 1040.11 IEC

60825-1

Complies with FCC Part 15,

Class A EU EMC directive

### **>>>**Ordering Information

7707CVT13-8 Eight Analog Video Fiber Transmitter, VistaLINK® 7707CVT15-8 Eight Analog Video Fiber Transmitter 1550nm DFB Laser, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information

Eight Analog Video Fiber Transmitter CWDM DFB Laser, VistaLINK® 7707CVTxx-8

For DWDM, please refer to the end of the fiber section for ordering information Eight Analog Video Fiber Transmitter DWDM DFB Laser, VistaLINK® 7707CVTDxxx-8

Rear Plate and Fiber Connector must be specified at time of order Ordering Options Eq: Model +SC +3RU

Rear Plate Suffix +3RH

+1RU +SA

Standalone Enclosure Rear Plate

Connector Suffix +SC

SC/PC +ST ST/PC +FC FC/PC

Enclosures: 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

1RU Rear Plate for use with 7701FR Multiframe


0

The 7707CVR-8 is a VistaLINK® -capable, composite analog video fiber receiver for broadcast quality video signals. This single card module accepts a fiber optic input from the companion 7707CVT-8 composite analog video fiber transmitter, demultiplexes the signals, performs D to A conversion and outputs NTSC or PAL analog video.

The 7707CVR-8 occupies two card slots and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to  $7\,$ modules, a 350FR portable frame which holds up to 3 modules, or a standalone enclosure which will hold 1 module.

#### ▶ Features & Benefits

- · Single card fiber optic receiver for up to eight analog video signals
- · Supports both NTSC and PAL video signals
- Broadcast quality analog video performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video transport
- · Adjustable gain, DC offset and pre-emphasis for up to 250m of Belden 1694A coaxial cable
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

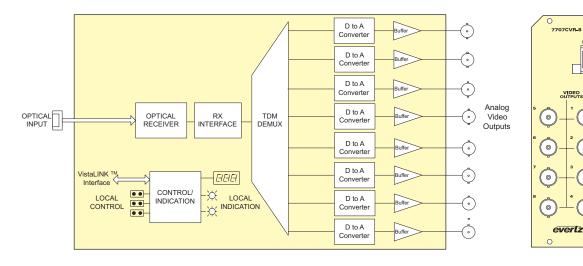

### ▶ Specifications

Optical Input:

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC Operating

0dBm

Wavelength: 1270nm to 1610nm

Maximum Input Power:

Optical Sensitivity:

-25dBm Standard:

High Sensitivity: -30dBm

Analog Video Outputs:

NTSC, SMPTE 170M, PAL, ITU-R624-4 Standards:

Number of Outputs: 8

BNC per IEC 61169-8 Annex A Connector:

5.5 MHz System bandwidth:

1 Vp-p (nominal), 2 Vp-p maximum Output Level:

Unity gain nominal, adjustable 50% to Gain:

Output Impedance: 75Ω Return Loss: > 20dB

SNR: > 70dB Differential Gain: < 1.0% Differential Phase: < 0.7°

Pre-Emphasis: Cable loss compensation for up to

250m of Belden 1694A (each output

adjustable separately)

Passband Ripple:

PAL:

NTSC: < ±0.1dB to 4.1MHz and < ±0.2dB to 5.5MHz

> < ±0.1dB to 4.8MHz and < ±0.2dB to 5.8MHz

Chroma/Luma Gain:98% - 103%

Chroma/Luma Delay:

PAL <12nsLine Time Distortion:1.2% Electrical:

+12VDC Voltage: 13W

Physical:

Number of slots:

### **>>>**Ordering Information

7707CVR-8 Eight Analog Video Fiber Receiver, VistaLINK® 7707CVR-8-H Eight Analog Video Fiber Receiver, High Sensitivity, VistaLINK®

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model + 3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

SC/PC +ST ST/PC FC/PC +FC

Enclosures: 350FR 7700FR-C 7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



### Tri-Level Sync and Analog Audio Fiber Receiver


The 7707CVRA-TRI is a VistaLINK® -capable, tri-level sync and analog audio fiber receiver. This single slot card module accepts a fiber optic input from the companion 7707CVTA-TRI tri-level sync and Analog Audio Fiber Transmitter, demultiplexes the signals, performs D to A conversion and outputs tri level sync and up to four balanced analog audio signals.


The 7707CVRA-2-TRI Dual Tri-Level Sync and Analog Audio Fiber Receiver is a dual channel version that accepts a fiber optic input from the companion 7707CVTA-2-TRI transmitter, demultiplexes the signals, performs D to A conversion and outputs 2 tri level sync signals and up to four balanced analog audio signals.


The 7707CVRA-TRI and 7707CVRA-2-TRI occupy one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules, a 3RU portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.


#### ▶ Features & Benefits

- Single card fiber optic receiver for one or two tri-level sync and four analog audio signals
- · Supports all tri-level sync standards for HD video
- Adjustable gain, DC offset and pre-emphasis for up to 250m of Belden 1694A coaxial cable
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- Accepts any wavelength in the 1270nm to 1610nm range

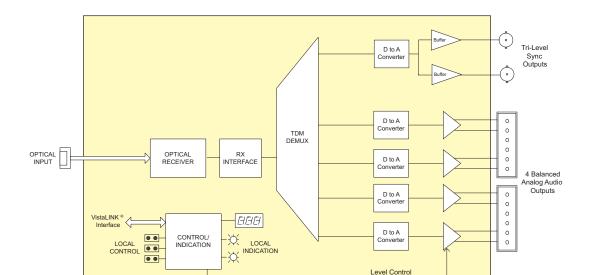



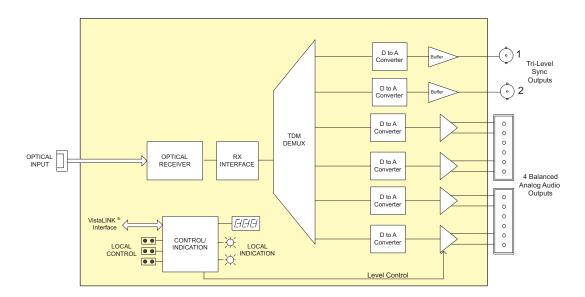









## 7707CVRA-TRI, 7707CVRA-2-TRI

### Tri-Level Sync and Analog Audio Fiber Receiver

### **▶**Specifications

Optical Input:

Number of Inputs

Female SC/PC, ST/PC, FC/PC Connector:

Operating Wavelength: 1270nm to 1610nm

Maximum Input Power: 0dBm Optical Sensitivity: -28dBm

Analog Video Outputs:

Standards:

Analog tri level sync signals defined by SMPTE 274M and

SMPTE 296M 2 on 7707CVRA-TRI

Number of Outputs: 2 (1 per input channel) on 7707CVRA-2-TRI

1 BNC per IEC 61169-8 Annex A

System bandwidth: 5.5 MHz

1 Vp-p (nominal), 2 Vp-p maximum Output Level:

Unity gain nominal, adjustable 50% to 150%

Output Impedance: 75Ω Return Loss:

> 20dB SNR: > 70dB Analog Audio Outputs:

Number of Outputs:

Balanced analog audio Type: Connector: 12 pin removable terminal block

Output impedance:

 $\pm$  0.1dB, 20Hz to 20 kHz < 0.005%

Freq. Response: THD 20Hz-20kHz: Channel Phase Diff. > 85dB SNR (weighted): -20dB to +3dB Output Level Adi:

Max Output Level: +24 dBu into 10kΩ loads

System Performance (7707CVTA-TRI + 7707CVRA-TRI or 7707CVTA-2-TRI + 7707CVRA-2-TRI):

Video Input to Output Delay:

Audio Input to Output Delay: <1.9ms

Electrical:

+12VDC Voltage: 12W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

Physical:

Number of slots:

### **>>>**Ordering Information

7707CVRA-TRI 7707CVRA-2-TRI Tri-Level Sync with 4-Channel Analog Audio Fiber Receiver.

Dual Tri-Level Sync with 4-Channel Analog Audio Fiber Receiver

VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU +1RU +SA

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix

+SCF SC/PC connector with flap cover +ST

ST/PC FC/PC +FC

Enclosures 350FR 7700FR-C 7701FR

S7701FR

+SC

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone Enclosure











### Dual S-Video Fiber Transmitter

The 7707SVT-2 is a Vistal INK® -capable S-Video fiber transmitter for broadcast quality signals. This single card module accepts two S-Video inputs, performs analog to digital conversion and transmits them over a single fiber. The companion 7707SVR-2 S-Video Fiber Receiver demultiplexes the signals and converts them back to analog form.


The fiber output of the 7707SVT-2 is available in an assortment of optical wavelengths accommodating 1310nm/1550nm, CWDM and DWDM transmission schemes.

The 7707SVT-2 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules, a 3RU portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module

#### ▶ Features & Benefits

- · Single card fiber optic transmitter for up to two S-Video signals
- Supports both NTSC and PAL video signals
- Broadcast quality 12 bit S-Video performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video transport
- · Superior digital data transmission
- Signal transport over fiber is uninterrupted by loss of input video feeds
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Supports single-mode and multi-mode fiber optic cable

- · Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1of the frame
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

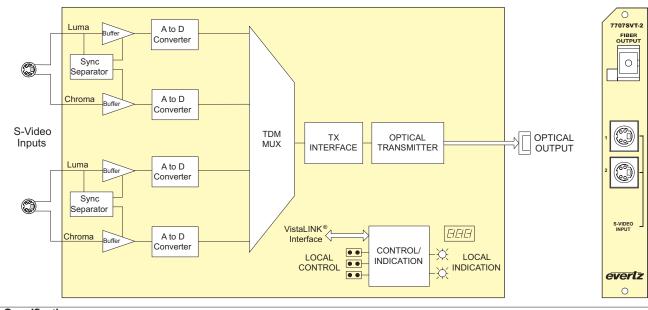

### ▶ Specifications

### Analog S-Video Input:

NTSC. SMPTE 170M, PAL, ITU-R 624-4 Standards

Number of Inputs:

IEC 933-5 (4-pin mini-DIN) Connector: Signal Quantization:12 bits

System Bandwidth: 5.5MHz

Y: 1.0V p-p, C: 0.286V p-p Input Level:

Input impedance:  $75\Omega$ Return Loss: > 30dB to 5.5MHz Signal/Noise Ratio: > 70dB

Differential Gain: < 1.0% Differential Phase:

Passband Ripple:

< ±0.1dB to 4.1MHz NTSC: < ±0.2dB to 5.5MHz

PAL: < ±0.1dB to 4.8MHz < ±0.2dB to 5.8MHz

Line Time Distortion:1.2%

### Optical Outputs:

Number of Outputs:

Female SC/PC, ST/PC or FC/PC Connector: > 14dB

Return Loss: Wavelengths:

1310nm, 1550nm (nominal) Standard: CWDM: See Ordering Information DWDM: See Ordering Information

Output Power

1310nm FP (Standard):

-7dBm ±1dBm 1550 & CWDM DFB:

0dBm ±1dBm

DWDM: +7dBm ±1dBm

System Performance (7707SVT-2 + 7707SVR-2): Video Input to Output Delay

< 10us

Electrical: Voltage:

+12V DC

11/12W (Non-DWDM), Power: 13/14W (DWDM)

Physical:

Number of slots:

Compliance:

Electrical Safety CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

### **>>>**Ordering Information

7707SVT13-2 Dual S-Video Fiber Transmitter, 1310nm FP Laser, VistaLINK® 7707SVT15-2 Dual S-Video Fiber Transmitter, 1550nm DFB Laser, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information 7707SVTxx-2 Dual S-Video Fiber Transmitter CWDM DFB Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information Dual S-Video Fiber Transmitter DWDM DFB Laser, VistaLINK® 7707SVTDxxx-2

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix +SC

SC/PC +ST ST/PC FC/PC +FC

Enclosures 350FR 7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone Enclosure



# Single / Dual Analog Video with 4-Channel Analog Audio Fiber Receiver


The 7707CVRA is a VistaLINK® -capable, composite analog video and analog audio fiber receiver for broadcast quality video signals. This single card module accepts a fiber optic input from the companion 7707CVTA Composite Video and Analog Audio Fiber Transmitter, demultiplexes the signals, performs D to A conversion and outputs NTSC or PAL analog video and up to four balanced analog audio signals.

The 7707CVRA-2 Dual Composite Video and Analog Audio Fiber Receiver is a dual channel version that accepts a fiber optic input from the companion 7707CVTA-2 transmitter, demultiplexes the signals, performs D to A conversion and outputs 2 NTSC or PAL analog video signals and up to four balanced analog audio signals.

#### ▶ Features & Benefits

- Single card fiber optic receiver for one or two analog video and four analog audio signals
- · Supports both NTSC and PAL video signals
- · Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- · Adjustable gain, DC offset and pre-emphasis for up to 250m of Belden 1694A coaxial cable
- · Low Audio to Video latency

- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Accepts any wavelength in the 1270nm to 1610nm range

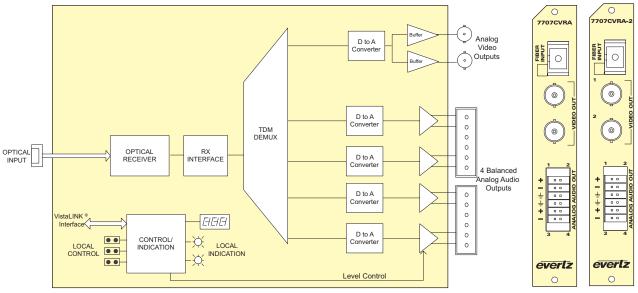

#### ▶ Specifications

Optical Input: Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Operating Wavelength

, 1270nm to 1610nm

Max. Input Power: 0dBm Optical Sensitivity: -24dBm Standard: High Sensitivity: -31dBm

Analog Video Outputs:

NTSC, SMPTE 170M, PAL, ITU-R624-4 Standards:

Number of Outputs: 2 on 7707CVRA

2 (1 per video channel) on 7707CVRA-2 1 BNC per IEC 61169-8 Annex A Connector:

System bandwidth: 5.5MHz

1V p-p (nominal), 2V p-p maximum Output Level: Gain:

Unity gain nominal, adjustable 50% to 150%

Output Impedance:  $75\Omega$ 

Return Loss: > 20dB SNR: > 70dB

< 1.0% Differential Gain:

Differential Phase:  $< 0.7^{\circ}$ 

Pre-Emphasis: Cable loss compensation for up to

250m of Belden 1694A (each output

adjustable separately)

Passband Ripple

NTSC: < ±0.1dB to 4.1MHz and < ±0.2dB to 5.5MHz PAI ·

< ±0.1dB to 4.8MHz and < ±0.2dB to 5.8MHz

Chroma/Luma Gain: 98%-103%

Chroma/Luma Delay:

< 5ns NTSC: < 12ns Line Time Distortion: 1.2%

### Analog Audio Outputs:

Number of Outputs: 4

Balanced analog audio Type: 12-pin removable terminal block Connector:


Output impedance: 66Ω

Freq. Response: ±0.1dB, 20Hz to 20kHz

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.:

VistaLINK® capability is available when modules are used with the 3RU

· Supports single-mode and multi-mode fiber optic cable









## System Performance (7707CVTA + 7707CVRA or

+24dBu into 10kΩ loads

> 85dB -20dB to +3dB

7707CVTA-2 + 7707CVRA-2): Video Input to Output Delay:

< 10us Audio Input to Output Delay:

< 1 9ms

Electrical: Voltage:

SNR (weighted):

Output Level Adj:

Max Output Level:

+12V DC Power 12W

EMI/RFI: Complies with FCC Part 15, Class A EU EMC directive

Physical: Number of slots:

### >>> Ordering Information

7707CVRA Analog Video with 4-Channel Analog Audio Fiber Receiver, VistaLINK® Dual Analog Video with 4-Channel Analog Audio Fiber Receiver, 7707CVRA-2

> Analog Video with 4-Channel Analog Audio High Sensitivity Receiver Vistal INK®

7707CVRA-2-H Dual Analog Video with 4-Channel Analog Audio High Sensitivity Receiver, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

Rear Plate Suffix

7707CVRA-H

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC FC/PC

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone Enclosure


### Quad Analog Video and 16 Analog Audio Fiber Receiver

The 7707CVR-4 and 7707CVR-4-A16 are VistaLINK® -capable, composite analog analog/video fiber receivers for broadcast quality analog video and audio signals. These single card modules accept fiber optic input from their companions 7707CVT-4 and 7707CVT-4-A16 fiber transmitters, demultiplexes the signals, performs D to A conversion and outputs NTSC or PAL analog video and audio.

The 7707CVR-4 occupy a one card slot and the 7707CVR-4-A16 occupies a two card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 3 modules or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- · Single card fiber optic receiver for up to four analog video, 16 analog audio signals
- Supports both NTSC and PAL video signals
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video
- · Adjustable gain, DC offset and pre-emphasis for up to 250m of Belden 1694A coaxial cable
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module slot 1 of the frame
- · Fully hot-swappable from front of frame with no fiber disconnect/reconnect
- Supports single-mode and multi-mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

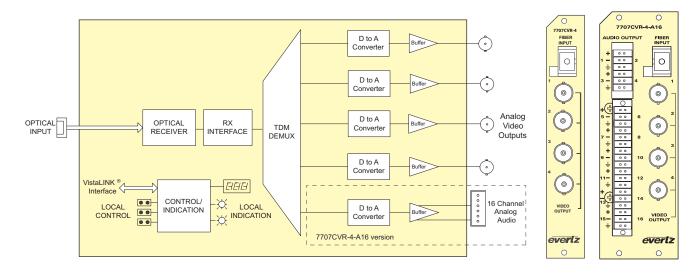

### ▶Specifications

Optical Input:

Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Operating Wavelength:

1270nm to 1610nm

Max. Input Power: 0dBm Optical Sensitivity: Standard: -25dBm

High Sensitivity: -30dBm

Analog Video Outputs

NTSC, SMPTE 170M, PAL, ITU-R624-4 Number of Outputs: 4

Connector: 1 BNC per IEC 61169-8 Annex A System bandwidth: 5.5MHz

1V p-p (nominal), 2V p-p maximum Output Level:

Unity gain nominal, adjustable 50% to

150% Output Impedance: 75Ω Return Loss: > 20dB SNR: > 70dB Differential Gain: Differential Phase: < 0.7°

Pre-Emphasis Cable loss compensation for up to

250m of Belden 1694A (each output

adjustable separately)

Passband Ripple: NTSC:

PAL:

< ±0.1dB to 4.1MHz and < ±0.2dB to 5.5MHz

< ±0.1dB to 4.8MHz and

< ±0.2dB to 5.8MHz Chroma/Luma Gain:

98%-103%

Chroma/Luma Delay:

NTSC: < 5ns < 12ns PAL: Line Time Distortion:1.2%

Analog Audio Outputs (7707CVR-4-A16):

Number of Outputs: 16 Balanced analog audio Type:

48-pin removable terminal block Connector:

+12V DC

Output impedance:

Freq. Response: ±0.1dB, 20Hz to 20kHz

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.:

SNR (weighted): > 85dB -20dB to +3dB Output Level Adi: Max Output Level: +24dBu into  $10k\Omega$  loads

Electrical: Voltage:

12W Power:

Physical:

Number of slots:

7700 Frame mounting: 7701 Frame mounting: 2

### >>> Ordering Information

7707CVR-4 Quad Analog Video Fiber Receiver, VistaLINK® 7707CVR-4-H

Quad Analog Video Fiber Receiver, High Sensitivity, VistaLINK® Quad Analog Video, 16 Analog Audio, Fiber Receiver, VistaLINK® 7707CVR-4-A16 Quad Analog Video, 16 Analog Audio, Fiber Receiver, High Sensitivity 7707CVR-4-A16 -H

Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

**Ordering Options** 

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC +ST SC/PC ST/PC +FC

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone Enclosure




The 7707SVR-2 is a VistaLINK® -capable. S-Video fiber receiver for broadcast quality video signals. This single card module accepts a fiber optic input from the companion 7707SVT-2 S-Video Fiber Transmitter, demultiplexes the signals, performs D to A conversion and outputs NTSC or PAL S-Video signals.

The 7707SVR-2 occupies one card slot and can be housed in either a 1RU frame. which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

#### ▶ Features & Benefits

- · Single card fiber optic receiver for up to two S-Video signals
- Supports both NTSC and PAL video signals
- Broadcast quality S-Video performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video transport
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- Accepts any wavelength in the 1270nm to 1610nm range

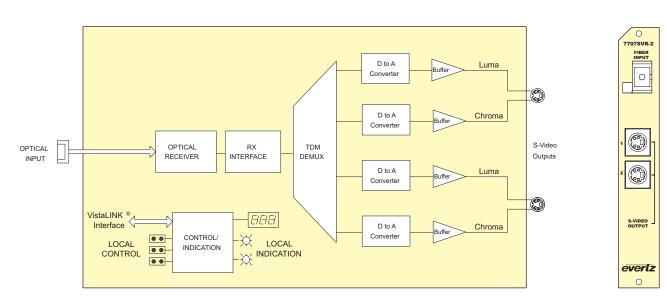

### ▶Specifications

#### Optical Input:

Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Operating Wavelength:

1270nm to 1610nm

Optical Sensitivity: -28dBm

Max. Input Power: 0dBm

#### S-Video Outputs:

Standards: NTSC, SMPTE 170M, PAL, ITU-R624-4

Number of Outputs:

Connector: IEC 933-5 (4-pin mini-DIN)

System bandwidth: 5.5MHz

Y: 1.0V p-p, C: 0.286V p-p Output Level: Output Impedance: 75Ω

> 20dB > 70dB Return Loss: SNR:

Differential Gain: < 1.0% Differential Phase:

Passband Ripple: NTSC:

< ±0.1dB to 4.1MHz and < ±0.2dB to 5.5MHz

PAL: < ±0.1dB to 4.8MHz and < ±0.2dB to 5.8MHz

### System Performance (7707SVT-2 + 7707SVR-2):

Video Input to Output Delay: < 10µs

Electrical:

Voltage: +12V DC

12W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

Physical:

Number of slots:

### >>> Ordering Information

7707SVR-2 Dual S-Video Fiber Receiver, VistaLINK® Connector Suffix +SC +ST SC/PC ST/PC FC/PC **Ordering Options** Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU **Enclosures** Rear Plate Suffix 350FR 3RU Portable Multiframe which holds up to 7 single slot modules +3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 7700FR-C 3RU Multiframe which holds up to 15 single slot modules +1RU 1RU Rear Plate for use with 7701FR Multiframe 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules +SA Standalone Enclosure Rear Plate S7701FR Standalone Enclosure

271

### RGBHV / DVI / KVM Fiber Transmitter

The 7707RGBT is a VistaLINK® SNMP capable RGBHV/DVI/KVM fiber transmitter for high resolution/high quality RGB and DVI video signals. This single card module accepts one analog RGBHV or digital DVI video input up to WUXGA resolution and transmits them over a single or dual fiber/coax. The 7707RGBT is also available with analog audio, keyboard + mouse, serial and USB options. The companion 7707RGBR RGBHV/DVI/KVM Fiber Receiver demultiplexes the signals and converts them back to analog RGBHV and digital DVI.

The -EO version provides an electrical I/O path via coax in addition to the fiber I/O path. This allows the cards to interface with electrical devices supporting 3Gb/s (i.e.


electrical router) while providing the capability to convert the electrical signal back to optical on the same card. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm, CWDM and DWDM transmission schemes.

The 7707RGBT occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, a 350FR portable frame based on the type of card. See the physical specifications for the slot count.

#### ▶ Features & Benefits

- Supports DVI or RGBHV transport over a single fiber or coax (-C version)
- Both RGBHV and DVI outputs available simultaneously on companion 7707RGBR receiver
- · VESA video resolutions supported up to WUXGA
- Full 24 bits per pixel color resolution
- Backwards compatible with 2407 series RGB and DVI standalone units
- · Ideal for use with high resolution LCD, plasma and projection screens
- Superior digital data transmission
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber or coax disconnect/reconnect required
- Supports up to 50 meters on coaxial I/O
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Optional 2 channel stereo analog audio
- Optional keyboard, mouse and serial
- Optional USB interface
- Optional coaxial BNC connectors with additional optical/electrical conversion
- Optional G-Link support for use with Evertz VIP™ & MVP® Multi-display products
- Optional coax I/O for Tx & Rx (\*Please Contact Factory)

### ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

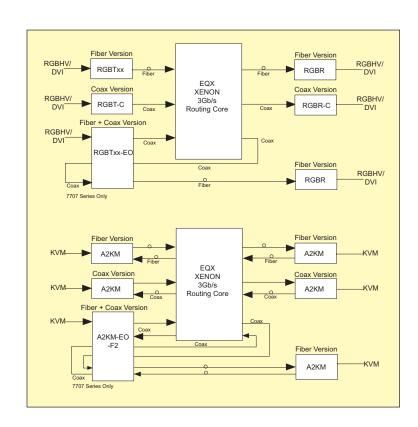




















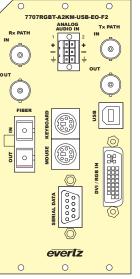


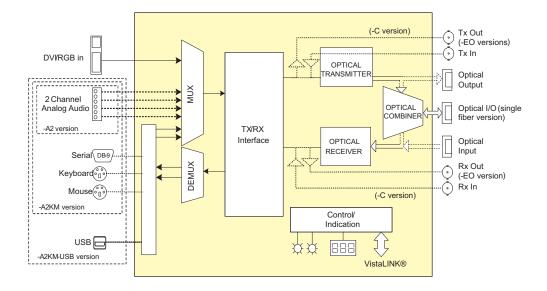





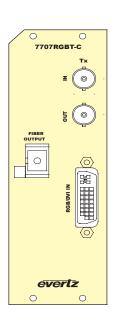

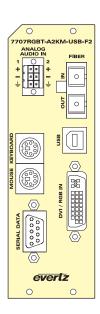

### RGBHV / DVI / KVM Fiber Transmitter

### ▶ Specifications

Video Input:

RGBHV or DVI 1.0, VESA Standards:

Number of Inputs:

Connectors: 28-pin DVI with Analog Video Resolution: Up to WUXGA (1920x1200) at 75Hz

Video Bandwidth: 500MHz Color Resolution: 24 bits

Analog Output Level: 1V p-p (maximum)

Analog Output Impedance

75Ω

Signal/Noise Ratio: > 55dB

Analog Audio Input (A2, A2KM & A2KM-USB versions):

Number of Inputs:

Balanced analog audio Type: 12-pin removable terminal block High Impedance (> 20kΩ) Connector: Impedance Frequency Response: ±0.1dB (20Hz to 20kHz)

THD: < 0.005% (20Hz to 20kHz) Channel Phase Diff: < ±1°

SNR: > 85dB Max. Input Level: +24dBu Signal Quantization: 24 bits

Serial, Keyboard/Mouse, USB Input/Output (A2KM & A2KM-USB versions):

Standards: **ÚSB 1.1** 

Number: 3 (A2KM versions), 4 (USB versions) Connector 2 PS2 for keyboard & mouse 1 USB Type B, 1DB-9F serial

Coaxial Input/Output:

Number:

Connector 1 BNC per IEC 61169-8 Annex A

Optical Inputs:

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC 1270 to 1610nm

Wavelength: Maximum Power: 0dBm

Optical Sensitivity:

WDM Version (-W):-17dBm Standard: -19dBm

Optical Output:

Number of Outputs: 1

Connector: Female SC/PC, ST/PC or FC/PC

Wavelengths

Standard: 1310nm, 1550nm CWDM: 1270nm - 1610nm

C-Band (ITU-T G 694 1 compliant) DWDM:

Output Power

1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB):

0dBm + 1dBm DWDM (DFB): +7dBm ± 1dBm

Electrical:

+12V DC Voltage:

11W (Non-DWDM), 14W (DWDM) Power:

Physical:

EMI/RFI:

Number of Slots: 1 (Standard and A2 versions)

2 (A2KM, and A2KM-USB versions) 3 (A2KM-USB EO version)

Compliance:

CSA Listed to UL 60065-03, IEC Electrical Safety

60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11 IEC 60825-1

Complies with FCC Part 15, Class A

EU EMC directive

### **▶** ► ► Ordering Information

Fiber Only Versions

7707RGRT13-A2

RGBHV/DVI Fiber Transmitter, 1310nm FP

RGBHV/DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP Laser RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm 7707RGBT13-A2KM-F2

7707RGRT13-A2KM-LISR-F2

RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and

Mouse + USB Fiber Transmitter, dual fiber, 1310nm TX & RX RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse single fiber, TX on 1550nm, RX on 1310nm 7707RGBT15A2KM-W

7707RGBT15-A2KM-USB-W RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse

Fiber Transmitter + USB, single fiber, TX on 1550nm, RX on 1310nm RGBHV/DVI Fiber Transmitter, CWDM Laser (Ordering Information) RGBHV/DVI Fiber Transmitter + 2 Analog Audio, CWDM Laser 7707RGRTyy 7707RGBTxx-A2 (Ordering Information)

RGBHV/DVI Fiber Transmitter +2 Analog Audio + Bi-di Keyboard and 7707RGBTxxA2kMF2

Mouse dual fiber, CWDM Laser (Ordering Information)

7707RGBTxx-A2KM-USB-F2

RGBHV/DV/KVM +2 Analog Audio + Bi-di Keyboard Mouse + USB Fiber Transmitter, dual fiber, CWDM Laser (Ordering Information) 7707RGBTDxxx RGBHV/DVI Fiber Transmitter, DWDM Laser (Ordering Information) RGBHV/DVI + 2 Analog Audio Fiber Transmitter, DWDM Laser 7707RGBTDxxx-A2

(Ordering Information) 7707RGBTDxxx-A2KM-F2 RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, DWDM Laser (Ordering Information)

7707RGBTDxxx-A2KM-USB-F2 RGBHV/DVI +2 Analog Audio + Bi-di Keyboard Mouse + USB

Fiber Transmitter, dual fiber, DWDM Laser (Ordering Information)

3Gb/s Coax Versions

7707RGBT-C 7707RGBT-A2-C 7707RGBT-A2KM-C2 **RGBHV/DVI Coaxial Transmitter** 

RGBHV/DVI + 2 Analog Audio, Coaxial Transmitter RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse Coaxial Transmitter, dual coax, TX & RX

7707RGBT-A2KM-USB-C2

RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse + USB Coaxial Transmitter, dual coax, TX & RX

Fiber + 3Gb/s Coax Versions

7707RGBT13-EO 7707RGBT13-A2-E0

RGBHV/DVI Coax Transmitter + E to O converter, 1310nm FP RGBHV/DVI + 2 Analog Audio Coax Transmitter + E to O converter, 1310nm FP Laser

7707RGBT13-A2KM-FO-F2

RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse + USB Coaxial Transmitter + E to O converter, dual fiber/coax,

7707RGBT13A2KMUSBEOF2

RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse + USB Coaxial Transmitter + E to O/O to E converter, dual fiber/coax,

1310nm TX & RX

7707RGBTxx-EO

RGBHV/DVI Coax Transmitter + E to O converter, CWDM Laser

7707RGBTxx-A2-EO

RGBHV/DVI + 2 Analog Audio Coax Transmitter + E to O converter, CWDM Laser (Ordering Information)
RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse Coaxial

7707RGBTxx-A2KM-EO-F2 Transmitter + E to O converter, dual fiber/coax, CWDM Laser (Ordering

7707RGBTxxA2KM-USB-EO-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard Mouse + USB Coaxial Transmitter + E to O converter, dual fiber/coax,

CWDM Laser (Ordering Information)
RGBHV/DVI Coax Transmitter + E to O converter, DWDM Laser

7707RGBTDxxx-EO

(Ordering Information) 7707RGBTDxxx-A2-EO RGBHV/DVI + 2 Analog Audio Coax Transmitter + E to O

converter, DWDM Laser (Ordering Information)
RGBHV/DVI +2 Analog Audio + Bi-di Keyboard and Mouse 7707RGBTDxxxA2KMEOF2

Coaxial Transmitter + E to O converter, dual fiber/coax, DWDM Laser (Ordering Information)

7707RGBTDxxxA2KMUSBEOF2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard Mouse + USB Coaxial Transmitter + E to O converter, dual fiber/coax,

DWDM Laser (Ordering Information

G-Link Versions

7707RGBT-GC 7707RGBT-GF 7707RGBT-A2-GC 7707RGBT-A2-GF

RGBHV/DVI G-Link Coaxial Transmitter

RGBHV/DVI G-Link Fiber Transmitter, 1310nm FP Laser RGBHV/DVI + 2 Analog Audio, G-Link Coaxial Transmitter, RGBHV/DVI + 2 Analog Audio, G-Link Fiber Transmitter,

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of

order Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU rear plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

+SA (Note: +SA unit can only have up to 2 slot modules)

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC

**Enclosures** 

S7701FR

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure









## RGBHV / DVI / KVM Fiber Receiver


The 7707RGBR is a VistaLINK® SNMP capable RGBHV/DVI/KVM receiver for high resolution/high quality RGB and DVI video signals. Available in fiber optic and coaxial versions, this single card module accepts an input from the companion 7707RGBT RGHV/DVI/KVM Transmitter and outputs both analog RGBHV and digital DVI video. The 7707RGBR is also available with analog audio, keyboard + mouse, serial and USB options.


The 7707RGBR occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, a 350FR portable frame based on the type of card. See the physical specifications for the slot count.

#### ▶ Features & Benefits

- Supports DVI or RGBHV transport over a single fiber or coax (-C version)
- · Provides both RGBHV and DVI outputs simultaneously
- VESA video resolutions supported up to WUXGA
- Full 24 bits per pixel color resolution
- Backwards compatible with 2407 series RGB and DVI standalone units
- Ideal for use with high resolution LCD, plasma, and projection screens
- · Superior digital data transmission
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/re-connect required
- Supports single-mode and multi-mode fiber optic cable
- Supports up to 50 meters on coaxial I/O
- Accepts any wavelength in the 1270nm to 1610nm range
- Optional 2 channel stereo analog audio
- · Optional keyboard, mouse and serial
- · Optional USB interface
- Optional G-Link support for use with Evertz VIP™ & MVP® Multi-display products
- Optional coax I/O for Tx & Rx (\*Please Contact Factory)

# ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

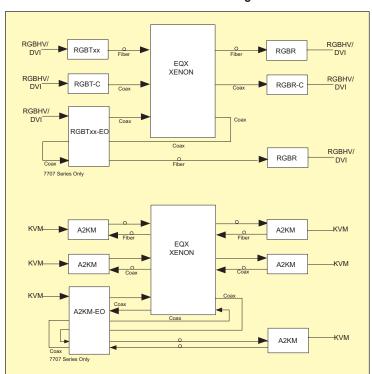

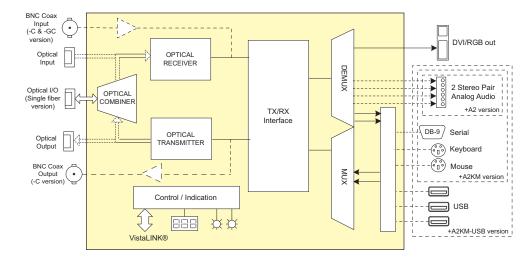



















#### ▶ Specifications

Video Output:

Standards: RGBHV and DVI 1.0, VESA

Number of Outputs:

28-pin DVI with Analog Connectors:

Video Resolution: Up to WUXGA (1920x1200) at 75Hz

Video Bandwidth: 500MHz Color Resolution: 24 bits

Analog Output Level: 1.4V p-p (maximum)

Analog Output Impedance:

Signal/Noise Ratio: >55dB

#### Analog Audio Output (A2, A2KM & A2KM-USB-F2 versions):

Number of Outputs:

Balanced analog audio Type: Connector: 12-pin removable terminal block Impedance High Impedance (> 20kΩ) Frequency Response:±0.1dB (20Hz to 20kHz) THD: < 0.005% (20Hz to 20kHz)

< ±1° Channel Phase Diff: SNR > 85dB -20dB to +3dB Level +24dBu into  $10k\Omega$  loads Max. Output Level:

#### Serial, Keyboard/Mouse, USB Input/Output (A2KM & A2KM-USB versions):

USB 1.1 Standards

Number: 3 (A2KM versions), 6 (USB versions)

Connector: 2 PS2 for keyboard & mouse

3 USB Type A, 1DB-9F serial

Optical Input:

Number of Inputs: Female SC/PC, ST/PC or FC/PC Connector:

Operating Wavelength:1270nm-1610nm

Max Input Power: 0dBm Optical Sensitivity: WDM (-w version) -17dBm

-19dBm Standard:

Optical Output: Number of Outputs:

Female SC/PC, ST/PC, FC/PC Connector

Wavelengths: Standard: 1310nm, 1550nm

CWDM: 1270nm - 1610nm DWDM: C-Band (ITU-T G.694.1 compliant)

Output V Power:

1310nm FP: -7dBm +1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm

Coaxial Input:

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector:

Coaxial Output:

Number of outputs:

1 BNC per IEC 61169-8 Annex A Connector:

Electrical:

+12V DC Voltage: 11W (Non-DWDM) 14W (DWDM) Power:

Physical:

Compliance:

FMI/RFI

Number of Slots 1 (Standard versions) 2 (A2KM versions)

CSA Listed to UI 60065-03 JEC60065 Electrical Safety:

Complies with CE Low voltage

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A

EU EMC directive

# **>>>**Ordering Information

Fiber Only Versions

RGBHV/DVI Fiber Received

7707RGBR-A2 RGBHV/DVI +2 Analog Audio Fiber Receiver 7707RGBR13-A2KM-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, 1310nm TX & RX 7707RGBR13-A2KM-USB-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse +

USB, Fiber Receiver, dual fiber, 1310nm TX & RX

7707RGBR13M-A2KM-W

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, single fiber, 1310nm TX, RX on 1550nm

7707RGBR13M-A2KM-USB-W

RGBHV/I/VI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Receiver, single fiber, 1310nm TX, RX on 1550nm

7707RGBRxx-A2KM-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, CWDM Laser (Ordering Information)

7707RGBRxx-A2KM-USB-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Receiver, dual fiber, CWDM Laser (Ordering Information)

7707RGBRDxxx-A2KM-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, DWDM Laser (Ordering Information)

7707RGBRDxxx-A2KM-USB-F2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Receiver, dual fiber, DWDM Laser (Ordering Information)

3Gb/s Coax Versions

7707RGBR-C RGBHV/DVI Coaxial Receiver

RGBHV/DVI +2 Analog Audio Coaxial Receiver

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse

Coaxial Receiver, dual coax, TX & RX

7707RGBR-A2KM-USB-C2

RGBHV/DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse +

USB Coaxial Receiver, dual coax, TX & RX

G-Link Versions

7707RGBR-GC RGBHV/DVI G-Link Coaxial Receiver 7707RGBR-GF 7707RGBR-A2-GC

RGBHV/DVI G-Link Fiber Receiver RGBHV/DVI +2 Analog Audio, G-Link Coaxial Receiver RGBHV/DVI +2 Analog Audio, G-Link Fiber Receiver 7707RGBR-A2-GF

Ordering Options Rear Plate and Fiber Connector must be specified at time of order Ea: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU rear plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

Enclosures

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



## DVI / KVM Fiber Transmitter


The 7707DVIT is a VistaLINK® SNMP capable DVI/KVM transmitter for high resolution/high quality DVI video signals. Available in fiber optic versions, this single card module accepts one DVI video input up to WUXGA resolution and transmits it over a single or dual fiber. The 7707DVIT is also available with analog audio, keyboard + mouse, serial and USB options. The companion 7707DVIR DVI/KVM Fiber Receiver demultiplexes the signals and converts them back to digital DVI. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm, CWDM and DWDM transmission schemes.


The 7707DVIT occupies one card slot (two card slots for the A2KM and A2KM-USB versions) and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules (7 for -F2 version), a 3RU portable frame which will hold up to 7 modules (3 for -F2 version) or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- VESA video resolutions supported up to WUXGA
- Full 24 bits per pixel color resolution
- · Ideal for use with high resolution LCD, plasma, and projection screens
- · Superior digital data transmission
- Backwards compatible with 2407 series RGB and DVI standalone units
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Optional 2 channel stereo analog audio
- · Optional keyboard, mouse and serial
- Optional USB interface

## ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

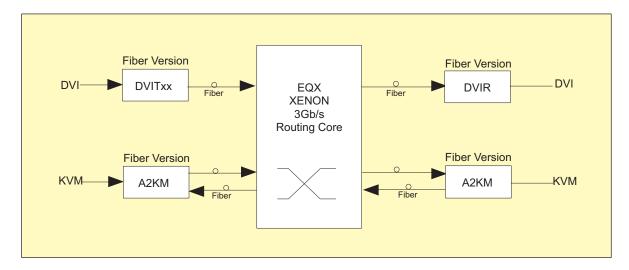

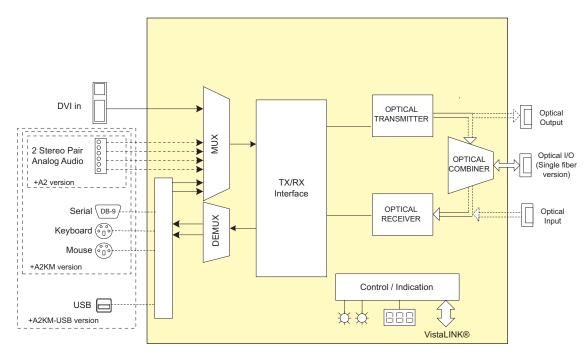















7707DVIT-A2KM





#### ▶Specifications

Video Input:

Standards: **DVI 1.0** Number of Inputs:

Connectors: 28-pin DVI Video Resolution: Up to WUXGA (1920x1200) at 75Hz

Color Resolution: 24 bits

#### Analog Audio Input (A2, A2KM & A2KM-USB versions):

Number of Inputs:

Balanced analog audio Type: Connector: Removable terminal block High Impedance (>  $20k\Omega$ ) Impedance: Frequency Response: ±0.1dB (20Hz to 20kHz)

< 0.005% (20Hz to 20kHz) THD

Channel Phase Diff: > 85dB SNR: +24dBu Max. Input Level: Signal Quantization:24 bits

#### Serial USB, Keyboard/Mouse Input/Output (A2KM & A2KM-USB versions):

Standards: **USB 1.1** 

3 (A2KM), 4 (A2KM-USB) DB-9F serial, 1 PS2 for each keyboard Number: Connector:

& mouse, 1 USB type B (A2KM-USB only)

Optical Input:

Number of Inputs: Female SC/PC, ST/PC, FC/PC Connector: 1270 to 1610nm

Wavelength: Maximum Power: 0dBm

Optical Sensitivity: WDM (-w version) -17dBm Standard: -19dBm

#### Optical Output:

Number of Outputs: 1

Connector: Female SC/PC, ST/PC or FC/PC

Wavelengths: Standard:

1310nm, 1550nm 1270nm - 1610nm CWDM:

DWDM: C-Band (ITU-T G.694.1 compliant)

Output V Power

1310nm FP: -7dBm ±1dBm 1310nm (-W):

-1dBm ±1dBm 1550nm, CDWM (DFB): 0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Electrical:

+12V DC Voltage: 11W (Non-DWDM) Power: 14W (DWDM)

Physical:

Number of Slots: 1 (Standard and A2 versions)

2 (A2KM and A2KM-USB versions)

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IFC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

Fiber Only Versions

DVI Fiber Transmitter, 1310nm FP 7707DVIT13

DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP Laser

7707DVIT13-A2KM-F2

DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter

dual fiber, 1310nm TX & RX

7707DVIT13-A2KM-USB-F2

DVI +2 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber

Transmitter, dual fiber, 1310nm TX & RX

7707DVIT15-A2KM-W

DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter

single fiber, TX on 1550nm, RX on 1310nm

7707DVIT15-A2KM-USB-W

DVI +2 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber

Transmitter, single fiber, TX on 1550nm, RX on 1310nm DVI Fiber Transmitter, CWDM Laser (Ordering Information) 7707DVITxx 7707DVITxx-A2 DVI +2 Analog Audio Fiber Transmitter, CWDM Laser (Ordering

Information) 7707DVITxx-A2KM-F2

DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter,

dual fiber, CWDM Laser (Ordering Information)

7707DVITxx-A2KM-USB-F2

DVI+2 Analog Audio + Bi-di Keyboard Mouse + USB Fiber Transmitter, dual fiber, CWDM Laser (Ordering Information)

DVI Fiber Transmitter, DWDM Laser (Ordering Information) 7707DVITDxxx

7707DVITDxxx-A2 DVI +2 Analog Audio Fiber Transmitter, DWDM Laser (Ordering

Information)

7707DVITDxxx-A2KM-F2

DVI +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, DWDM Laser (Ordering Information)

7707DVITDxxx-A2KM-USB-F2

DVI +2 Analog Audio + Bi-di Keyboard Mouse + USB Fiber Transmitter, dual fiber, DWDM Laser (Ordering Information) Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eq: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU rear plate for use with 7701FR Multiframe +1RU +SA

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

**Enclosures** 

7701FR

S7701FR

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules

1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



## DVI / KVM Fiber Receiver


The 7707DVIR is a VistaLINK® SNMP capable DVI/KVM receiver for high resolution/high quality DVI video signals. Available in fiber optic versions, this single card module accepts an input from the companion 7707DVIT DVI/KVM Transmitter and outputs digital DVI video. The 7707DVIR is also available with analog audio, keyboard + mouse, serial and USB options.


The 7707DVIR occupies one card slot (two card slots for the A2KM and A2KM-USB versions) and can be housed in a 1RU frame which will hold up to 3 modules, a 7700FR 3RU frame which will hold up to 15 modules (7 for -F2 version), a 3RU portable frame which will hold up to 7 modules (3 for -F2 version) or a standalone enclosure that will hold 1 module.

#### ▶ Features & Benefits

- VESA video resolutions supported up to WUXGA
- Full 24 bits per pixel color resolution
- Backwards compatible with 2407 series RGB and DVI standalone units
- · Ideal for use with high resolution LCD, plasma, and projection screens
- Superior digital data transmission
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Fully hot-swappable from front of frame with no fiber disconnect/re-connect required
- Supports single-mode and multi-mode fiber optic cable
- Accepts any wavelength in the 1270nm to 1610nm range
- Optional 2 channel stereo analog audio
- · Optional keyboard, mouse and serial
- · Optional USB interface

# ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

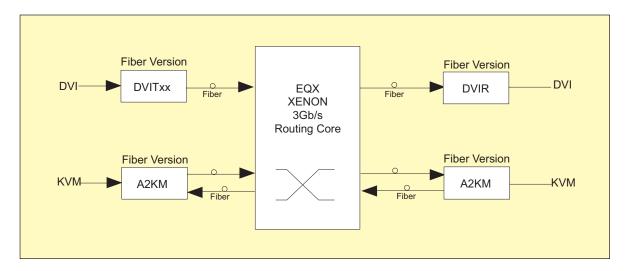

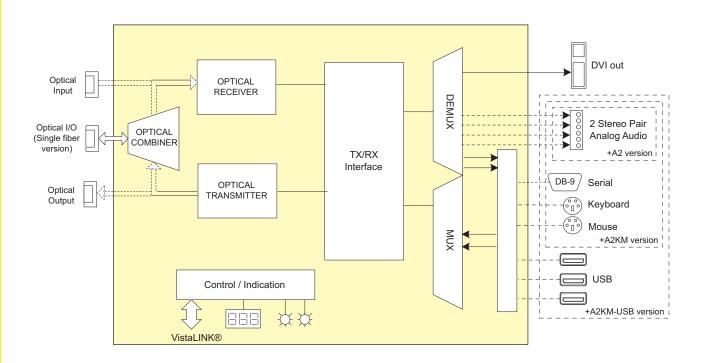













7707DVIF

0

evertz

0



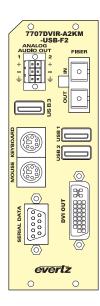

#### ▶ Specifications

Video Output:

DVI 1.0 Standards Number of Outputs: 1 28-pin DVI Connectors:

Video Resolution:

Up to WUXGA (1920x1200) at 75Hz

Color Resolution: 24 bits

## Analog Audio Output (A2, A2KM & A2KM-USB versions):

Number of Outputs: 2

Balanced analog audio Connector Removable terminal block Impedance High Impedance (>  $20k\Omega$ ) Frequency Response: ±0.1dB (20Hz to 20kHz) THD. < 0.005% (20Hz to 20kHz)

Channel Phase Diff: < ±1° > 85dB SNR: -20dB to +3dB Max. Output Level: +24dBu into  $10k\Omega$  loads

#### Serial, USB, Keyboard/Mouse Input/Output (A2KM & A2KM-USB versions):

Standards: **ÚSB 1.1** 

3 (A2KM), 6 (A2KM-USB) Number: 1 DB-9M serial, 1 PS2 for each Connector

keyboard & mouse 3 USB type A (A2KM-USB only)

Optical Input:

Number of Outputs: 1 Female SC/PC, ST/PC or FC/PC Connector:

Operating Wavelength:

1270nm-1610nm

Max Input Power: Optical Sensitivity: WDM (-w version) -17dBm Standard:

Optical Output:

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC Wavelengths:

1310nm, 1550nm Standard: 1270nm - 1610nm CWDM:

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power:

1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB):

0dBm ± 1dBm

DWDM (DFB): +7dBm ± 1dBm

Electrical:

+12 V DC Voltage:

11W (Non-DWDM) Power: 14W (DWDM)

Physical: Number of Slots:

1 (Standard and A2 versions)

2 (A2KM and A2KM-USB versions)

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage Directive

Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive

EMI/RFI:

Laser Safety:

#### **>>>**Ordering Information

DVI Fiber Receiver

7707DVIR-A2 7707DVIR13-A2KM-F2

DVI + 2 Analog Audio Fiber Receiver
DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber
Receiver, dual fiber, 1310nm TX & RX

7707DVIR13-A2KM-USB-F2

7707DVIR13-A2KM-W

DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Receiver, dual fiber, 1310nm TX & RX DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber

Receiver, single fiber, 1310nm TX, RX on 1550nm
7707DVIR13-A2KM-USB-W
DVI/KVM +2 Analog Audio + Bi-di Keyboard, Mouse and USB

Fiber Receiver, single fiber, 1310nm TX, RX on 1550nm

For CWDM, please refer to the end of the fiber section for ordering information DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, CWDM Laser 7707DVIRxx-A2KM-F2

7707DVIRxx-A2KM-USB-F2

DVI/KVM +2 Analog Audio + Bi-di Keyboard, Mouse and USB Fiber Receiver, dual fiber, CWDM Laser

For DWDM, please refer to the end of the fiber section for ordering information 7707DVIRDxxx-A2KM-F2 DVI/KVM +2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, DWDM Laser

7707DVIRDxxx-A2KM-USB-F2

DVI/KVM +2 Analog Audio + Bi-di Keyboard, Mouse and USB Fiber Receiver, dual fiber, DWDM Laser

Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix +3RU

+1RU +SA

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU rear plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

Rear Plate and Fiber Connector must be specified at time of order

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



- Triple SDI electrical to optical converter for 3 independent channels
- Provides 45 independent channels of optical conversion, in a single 3RU frame
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M
- (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Supports multi-mode or single-mode fiber
- Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Inputs


• Three independent serial digital BNC inputs, each providing cable equalization to > 300m @ 270Mb/s (Belden 8281)

#### Outputs

- · Three independent fiber outputs
- Optical output wavelength of 1310nm
- SC/PC, ST/PC, FC/PC connector options

#### Status LEDs

- Signal presence indication for each channel
- · Laser status indication for each channel
- · Module status indication

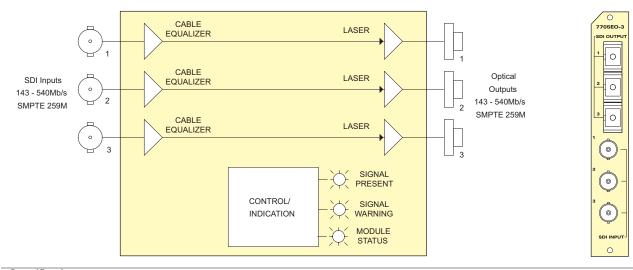

#### ▶ Specifications

SMPTE 259M A, B, C, D, SMPTE 297M, SMPTE 305M, SMPTE 310M, Standards:

SMPTE344M, M2S, DVB-ASI

Serial Video Input:

Number of Inputs: 3 (independent channels) 3 BNC per IEC 61169-8 Annex A Equalization: Automatic to 300m @ 270Mb/s, with

Belden 8281 (or equivalent)

Return Loss: > 15dB up to 540Mb/s

Optical Outputs:

3 (independent channels) Number of Outputs:

SC/PC, ST/PC, FC/PC female housing Connector: Return Loss: > 14dB

400-700ps

Rise/Fall Time: < 0.2 UI Jitter:

Nominal Wavelength: 1310nm Optical Power: -7dBm ±1dBm Electrical:

+12V DC Voltage: 6W

Physical: Number of Slots:

Compliance: Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive EMI/RFI:

# Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | Х      |        |
| 2405/7705/7707OE-HD | х      |        |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | Х      |        |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | x      |        |
| 7707VAR-HD          | Х      |        |

#### >>> Ordering Information

7705EO13-3 Triple SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s,

Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

**Ordering Options** 

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST +FC ST/PC FC/PC Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures

350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3single or dual slot modules

# Triple SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s

#### ▶ Features & Benefits

- Triple SDI optical to electrical converter for 3 independent channels
- Provides 45 independent channels of optical conversion, in a single 3RU frame
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s • Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M
- (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Supports multi-mode or single-mode fiber
- · Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Inputs


- · Three independent fiber inputs
- 1270nm to 1610nm input wavelength range
- Input sensitivity to -32dBm
- SC/PC, ST/PC, FC/PC connector options


#### Outputs

- · Three independent, reclocked, serial digital BNC outputs
- Wideband jitter < 0.2 UI

#### Status LEDs

- · Signal presence indication for each channel
- Input carrier weak indication for each channel
- · Module status indication

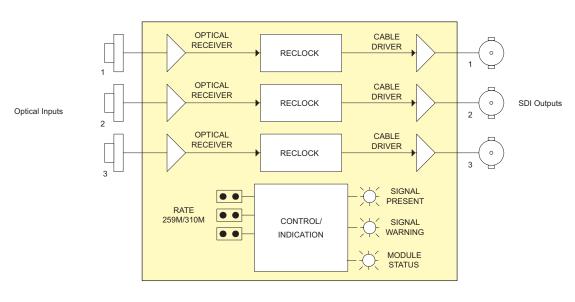



#### ▶ Specifications

Standards: SMPTE 259M A, B, C, D, SMPTE

297M, SMPTE 305M, SMPTE 310M, SMPTE344M, M2S, DVB-ASI

Optical Inputs:

Number of Inputs: 3 (independent channels)

Connector SC/PC, ST/PC, FC/PC female housing

Operating Wavelength:

, 1270nm to 1610nm

Max. Input Power: 0dBm -32dBm Optical Sensitivity:

#### Serial Video Outputs:

Number of Outputs: 3 reclocked (independent channels) Connector:

3 (1 per input channel) reclocked 800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise/Fall Time: 900ps nominal Overshoot: < 10% of amplitude > 15dB up to 540Mb/s Return Loss:

< 0.2 UI

Electrical:

Voltage: +12V DC 6W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

#### Physical:

Number of Slots:

#### Transmitter Compatibility Chart:

| SD-SDI/DVB-ASI | HD-SDI           |
|----------------|------------------|
| х              |                  |
| х              |                  |
| х              |                  |
| х              |                  |
| х              |                  |
| х              |                  |
| х              |                  |
|                | X<br>X<br>X<br>X |

#### **>>>**Ordering Information

Triple SDI Optical to Electrical Converter 19.4Mb/s or 143-540Mb/s 7705OE-3

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eq. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate +SA

Connector Suffix

+SC SC/PC +ST FC/PC

#### Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR

7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3single or dual slot modules



- · Electrical to optical converter for all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports additional standards of SMPTE 305M (SDTi) SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Compatible with multi-mode or single-mode fiber
- · Fully hot-swappable from front of frame with no fiber or BNC disconnect/reconnect require
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Input


• Automatic input cable equalization to > 300m @ 270Mb/s (Belden 8281)

#### Outputs

- Two reclocked serial digital BNC outputs for loop-through or monitoring
- One reclocked fiber output available in 1310nm or 1550nm
- Wideband Jitter < 0.2 UI
- · SC/PC, ST/PC, FC/PC connector options

#### Status LEDs

- Signal presence indication
- · Maximum equalization warning indication
- · Module status indication

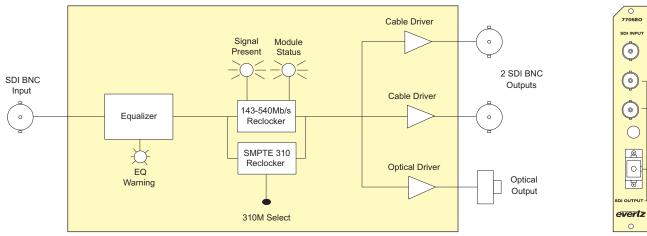

# ▶ Specifications

Standards: SMPTE 259M A, B, C, D, SMPTE 297M. SMPTE 305M. SMPTE 310M.

SMPTE 344M, M2S, DVB-ASI

Serial Video Input:

Return Loss:

1 BNC per IEC 61169-8 Annex A Connector Equalization: Automatic to 300m @ 270Mb/s with

Belden 8281 (or equivalent) > 15dB up to 540Mb/s

Serial Video Outputs:

Number of Outputs: 2 per card-reclocked

1 BNC per IEC 61169-8 Annex A 800mV nominal Connector: Signal Level:

0V ±0.5V DC Offset: Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot: > 15dB up to 540Mb/s Return Loss

Wideband Jitter: < 0.2 UI

Optical Outputs:

Number of Outputs: 1

Connector: SC/PC, ST/PC, FC/PC female housing

1310nm, 1550nm Wavelength:

Return Loss: > 14dB Optical Power: 1310nm FP

-7dBm +1dBm 1550nm DFB: 0dBm ±1dBm

+12V DC Voltage

Power: 6W

Physical:

Electrical:

Number of Slots:

Compliance: Electrical Safety:

Laser Safety:

CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

# Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | х      |        |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      |        |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      |        |
| 7707VAR-HD          | Х      |        |

# >>> Ordering Information

7705EO13 SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s,

1310nm, FP Laser SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s, 7705EO15

1550nm, DFB Laser

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC SC/PC ST/PC +ST +FC FC/PC

**Enclosures** 350FR

7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

# SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s

#### ▶ Features & Benefits

- Optical to electrical converter for all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- · Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- Supports multi-mode or single-mode fiber
- · Fully hot-swappable from front of frame with no fiber or BNC disconnect/reconnect required
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display


- Optical input range from 1270nm to 1610nm
- Input sensitivity to -32dBm
- · SC/PC, ST/PC, FC/PC connector options

#### Outputs

- Three serial digital BNC outputs for loop-through or monitoring
- Wideband Jitter < 0.2 UI

#### Status LEDs

- Signal presence indication
- · Module status indication

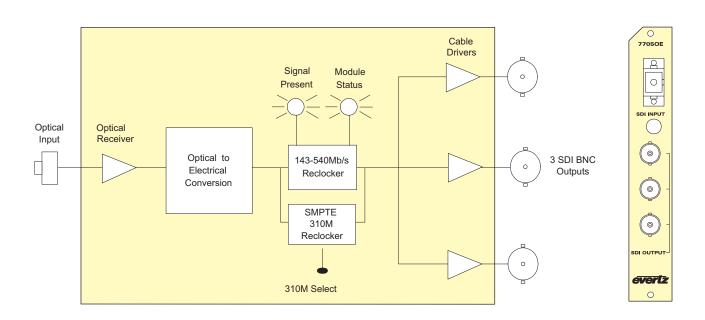

#### ▶Specifications

Standards: SMPTE 259M A, B, C, D, SMPTE

297M, SMPTE 305M, SMPTE 310M, SMPTE 344M, M2S, DVB-ASI

Optical Input:

Number of Inputs:

SC/PC, ST/PC, FC/PC Female Housing Connector:

Operating Wavelength:

, 1270nm to 1610nm

Optical Sensitivity: Max. Input Power: 0dBm

#### Serial Video Outputs:

Number of Outputs: 3 per card reclocked

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude

> 15dB up to 540Mb/s Return Loss: Wideband Jitter: < 0.2 UI

#### Electrical:

Voltage: +12V DC 6W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

#### Physical:

Number of Slots:

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707EO    | х      |        |
| 2405/7705/7707EO-HD | х      |        |
| 7705/7707EO-3       | х      |        |
| 7705/7707EO-3-HD    | х      |        |
| 7707ADVT            | х      |        |
| 7707ADVT-HD         | х      |        |
| 7707VAT-HD          | Х      |        |

#### **>>>**Ordering Information

7705OE SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC ST/PC FC/PC +ST +FC

#### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 

350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules











- Triple SDI electrical to optical converter for 3 independent channels
- Provides 45 independent channels of optical conversion, in a single 3RU frame
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M
- (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Supports multi-mode or single-mode fiber
- · Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Inputs


• Three independent serial digital BNC inputs, each providing cable equalization to > 300m @ 270Mb/s (Belden 8281)

#### Outputs

- · Three independent fiber outputs
- Optical output wavelength of 1310nm
- · SC/PC, ST/PC, FC/PC connector options

#### Status LEDs

- · Signal presence indication for each channel
- · Laser status indication for each channel
- · Module status indication

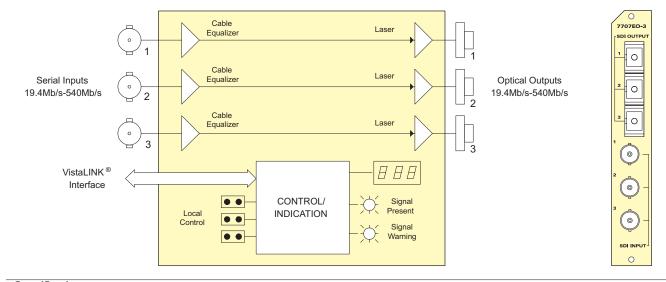

# **▶**Specifications

SMPTE 259M A, B, C, D, SMPTE 297M, SMPTE 305M, SMPTE 310M, Standards

SMPTE344M, M2S, DVB-ASI

Serial Video Input:

Number of Inputs: 3 (independent channels) 3 BNC per IEC 61169-8 Annex A Equalization:

Automatic to 300m @ 270Mb/s, with Belden 8281 (or equivalent)

Return Loss: > 15dB up to 540Mb/s

Ontical Outputs:

3 (independent channels) Number of Outputs:

Connector: SC/PC, ST/PC, FC/PC female housing

Return Loss: > 14dB 400-700ps Rise/Fall Time: Jitter:

Nominal Wavelength: 1310nm -7dBm ±1dBm Optical Power:

Electrical: Voltage:

+12V DC 7W

Physical: Number of Slots:

Compliance:

Laser Safety:

EMI/RFI:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage

Directive

Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A

EU EMC directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | Х      |        |
| 2405/7705/7707OE-HD | х      |        |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      |        |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      |        |
| 7707VAR-HD          | х      |        |

#### **>>>**Ordering Information

7707EO13-3 Triple SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s, 1310nm, FP laser VistaLINK® Monitoring

Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

**Ordering Options** 

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST +FC FC/PC

#### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 

350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



# Triple SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s

#### ▶ Features & Benefits

- Triple SDI optical to electrical converter for 3 independent channels
- Provides 45 independent channels of optical conversion, in a single 3RU frame
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- Supports multi-mode or single-mode fiber
- Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®

#### Inputs


- Three independent fiber inputs
- 1270nm to 1610nm input wavelength range
- Input sensitivity to -30dBm
- · SC/PC, ST/PC, FC/PC connector options

#### Outputs

· Three independent, reclocked, serial digital BNC outputs

#### Status LEDs

- · Signal presence indication for each channel
- Input carrier weak indication for each channel
- · Module status indication

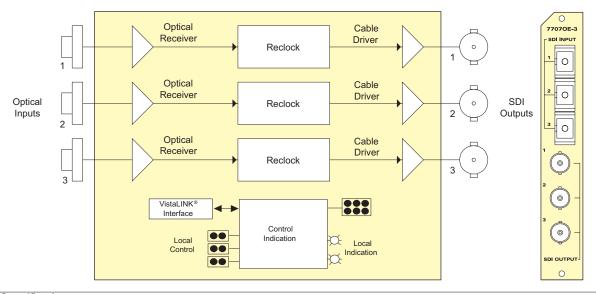

# ▶Specifications

SMPTE 259M A, B, C, D, SMPTE Standards

297M,SMPTE 305M, SMPTE 310M, SMPTE344M, M2S, DVB-ASI

Optical Inputs:

Number of Inputs:

3 (independent channels) SC/PC, ST/PC, FC/PC female housing Connector:

Operating Wavelength: 1270nm to 1610nm

Max. Input Power: 0dBm

-30dBm Optical Sensitivity:

Serial Video Outputs:

3 reclocked (independent channels) 3 BNC per IEC 61169-8 Annex A 800mV nominal Number of Outputs: Connector:

Signal Level: DC Offset: 0V ±0.5V Rise/Fall Time:

900ps nominal Overshoot: < 10% of amplitude > 15dB up to 540Mb/s Return Loss:

Jitter: < 0.2 UI

Electrical:

Voltage: +12V DC

Power: EMI/RFI: 7W

Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of Slots:

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707EO    | х      |        |
| 2405/7705/7707EO-HD | х      |        |
| 7705/7707EO-3       | х      |        |
| 7705/7707EO-3-HD    | х      |        |
| 7707ADVT            | х      |        |
| 7707ADVT-HD         | х      |        |
| 7707VAT-HD          | х      |        |
| •                   |        |        |

#### >>> Ordering Information

77070E-3 Triple SDI Optical to Electrical Converter 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC FC/PC +FC

## Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 350FR

7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3 single or dual slot modules
















- · Electrical to optical converter for all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- · Supports SMPTE 310M (19.4Mb/s), M2S, DVB-ASI (270Mb/s), SMPTE 344M (540Mb/s) and SMPTE 305M (SDTi) rates
- · Detection and display of input equalization, video format and EDH errors
- Automatic coaxial input equalization up to 275m at 270Mb/s (Belden 8281)
- · Reclocked optical and electrical outputs
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports multi-mode and single-mode fiber

- · Fully hot-swappable from front of frame
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

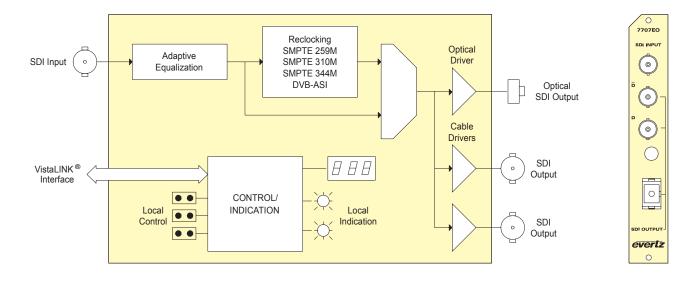

# ▶Specifications

Standards:

SMPTE 259M A, B, C, D, SMPTE Reclocked 297M. SMPTE 344M. SMPTE 310M.

SMPTE 305M, M2S or DVB-ASI Any bi-level signal type at rates of

19.4-540Mb/s

Serial Video Input:

Non-Reclocked:

Connector: 1 BNC per IEC 61169-8 Annex A Equalization: Automatic up to 275m @ 270Mb/s with

Belden 8281 (or equivalent cable) > 15dB up to 540Mb/s Return Loss:

Serial Video Output:

Number of Outputs: 2 per card (1 output DVB-ASI/M2S

compliant)

1 BNC per IEC 61169-8 Annex A Connectors

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss > 15dB up to 270Mb/s

Wide Band Jitter: < 0.2 UI Optical Output:

SMPTE 297M Standard:

Connector: 1 Female SC/PC, ST/PC or FC/PC > 14dB Return Loss:

Rise and Fall Time: 400-700ps Wide Band Jitter: < 0.2 UI

See Ordering Information Wavelengths:

Output Power

1310nm FP: -7dBm ±1dBm

1550nm & CWDM: 0dBm ±1dBm DWDM DFB: 7dBm ±1dBm

Electrical:

Voltage: +12V DC

6W (Non-DWDM), 9W (DWDM) Power:

Physical:

Number of slots:

Compliance:

CSA Listed to UL 60065-03, IEC 60065 Electrical Safety:

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040 11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | Х      |        |
| 2405/7705/7707OE-HD | х      |        |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      |        |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      |        |
| 7707VAR-HD          | х      |        |

# **>>>**Ordering Information

7707EO13 SDI Electrical to Optical Converter 19.4Mb/s or 143-540Mb/s,

1310nm, FP Laser SDI Electrical to Optical Converter 19.4Mb/s or 143-540Mb/s, 7707EO15

For CWDM, please refer to the end of the fiber section for ordering information SDI Electrical to Optical Converter 19.4Mb/s or 143-540Mb/s, 7707E0xx

CWDM DFB Laser

For DWDM, please refer to the end of the fiber section for ordering information 7707EODxxx SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s

DWDM Laser, +7dBm

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC +3RU

Rear Plate Suffix +3RH

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR

S7701FR Standalone Enclosure

77070E

COAX SDI INPUT

0

0

0

0


OPTICAL SDI INPUT

0

#### SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s

#### ▶ Features & Benefits

- Optical to electrical converter for all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports SMPTE 310M (19.4Mb/s), M2S, DVB-ASI (270Mb/s), SMPTE 344M (540Mb/s) and SMPTE 305M (SDTi) rates
- · Detection and display of optical input power, video format and EDH errors
- · Reclocked optical input, with selectable non-reclocked mode
- Wide range optical input (1270nm to 1610nm)
- · Supports multi-mode and single-mode fiber
- Redundant second SDI input for automatic failure switching applications
- Automatic input cable equalization to 275m at 270Mb/s (Belden 8281) on coaxial input
- Fully hot-swappable from front of frame
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

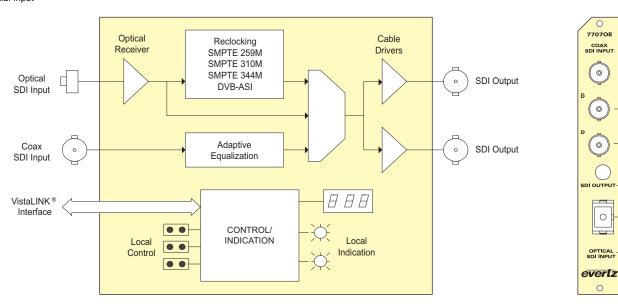

# ▶Specifications

Standards: Reclocked:

SMPTE 259M A, B, C, D, SMPTE 297M, SMPTE 305M, SMPTE 310M,

SMPTE 344M, M2S or DVB-ASI Any bi-level signal type at rates of

Non-Reclocked: 19.4Mb/s to 540Mb/s

Optical Input:

Connector: 1 Female SC/PC, ST/PC or FC/PC

Wavelength: Optical Sensitivity 1270nm to 1610nm -32dBm @ 270Mb/s

Max. Input Power:

Coaxial Input::

1 BNC per IEC 61169-8 Annex A Connector:

Impedance:  $75\Omega$  (nominal)

Automatic to 275m @ 270Mb/s with Equalization:

Belden 8281 cable > 15dB to 540Mb/s Return Loss:

Serial Video Outputs:

Number of Outputs: 2 per card (1 output DVB-ASI/M2S

compliant)

Connector: 1 BNC per IEC 61169-8 Annex A 75W (nominal)

Impedance: Signal Level: 800mV nominal 0V ±0.5V DC Offset: Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude

> 15dB up to 540Mb/s Return Loss:

Wide Band Jitter: < 0.20 UI

Electrical:

+12V DC Voltage:

6W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical: Number of slots:

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | Х              |        |
| 2405/7705/7707EO-HD | х              |        |
| 7705/7707EO-3       | х              |        |
| 7705/7707EO-3-HD    | Х              |        |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              |        |
| 7707VAT-HD          | х              |        |

# **>>>**Ordering Information

77070E SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s VistaLINK® Monitoring

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order Eq: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

#### Fiber Optic Patch Cable


See CWDM & DWDM Ordering Information Page


**Enclosures** 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

- Reclocking for all SDTV video rates including SMPTE 259M (143Mb/s-360Mb/s), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S, and DVB-ASI (270Mb/s)
- Available in 1310nm, 1550nm and up to sixteen different CWDM wavelengths (ITU-T G.694.2 compliant)
- · Automatic laser shutdown on absence of input signal for extended laser life
- Supports single-mode and multi-mode fiber optic cable
- Immunity to video Pathological signals
- · Long reach transmission capability · Rugged, small form factor enclosure
- Low Power, +12V DC operation
- Backwards capability with 7705 & 7707OE modules



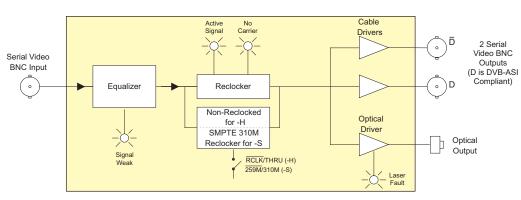





## ▶ Specifications

Standards SMPTE 259M (A, B, C, D), SMPTE

297M, SMPTE 310M, SMPTE 344M,

M2S, & DVB-ASI

#### Serial Video BNC Input:

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 300m @ 270Mb/s with

Belden 8281 (or equivalent)

> 15dB up to 540MHz Return Loss:

## Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant)
Connector: 1 BNC per IEC 61169-8 Annex A
Signal Level: 800mV nominal

DC Offset: Rise, Fall Time: 900ps nominal < 10% of amplitude Overshoot:

> 15dB up to 540MHz Return Loss

Wideband Jitter: < 0.2 UI

#### Optical Output:

Number of Outputs:

SC/PC, ST/PC, FC/PC Female Connector:

> 14dB Return Loss:

Rise, Fall Time: 400-700ps < 0.2UI

Jitter: Optical Power:

1310nm FP: -7dBm ±1dBm

1550nm DFB: 0 dBm ±1dBm

CWDM DFB: 0 dBm ±1dBm

#### Physical:

Dimensions: With Flanges: 6"L x 4"W x 1"H

(152mm L x 114mm W x 25mm H)

Weight: 0.5lbs (0.28kg)

#### Electrical:

Voltage:

Auto ranging 100-240VAC 12V DC 50/60Hz (adapter included)

Power:

#### Compliance:

Safety: Power supply UL Listed

Complies with EU low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707OE    | х              |        |
| 2405/7705/7707OE-HD | х              |        |
| 7705/7707OE-3       | х              |        |
| 7705/7707OE-3-HD    | Х              |        |
| 7707ADVR            | х              |        |
| 7707ADVR-HD         | х              |        |
| 7707VAR-HD          | х              |        |

#### **>>>**Ordering Information

2405FO3F SDI Miniature Optical Transmitter 1310nm FP, Laser SDI Miniature Optical Transmitter 1550nm DFB Laser 2405EO5D

For CWDM, please refer to the end of the fiber section for ordering information SDI Miniature Optical Transmitter CWDM DFB Lase

All 2405 modules include power supply

Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC

Connector Suffix

+SC SC/PC +ST ST/PC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page


# SDI Miniature Optical Receiver, 19.4Mb/s or 143-540Mb/s


## ▶ Features & Benefits

- Reclocking for all SDTV video rate including SMPTE 259M (143Mb/s-540Mb/s), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- Automatic signal failure switching for optical input
- · Immunity to video Pathological signals

- · Supports single-mode and multi-mode fiber optic cable
- Rugged, small form factor enclosure
- Low Power, +12V DC operation
- Backwards capability with 7705 & 7707EO modules



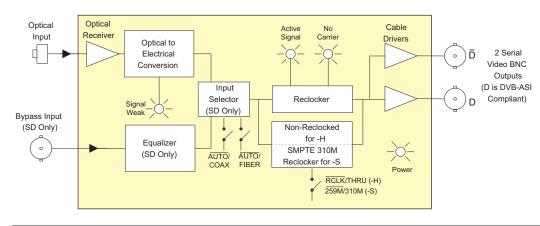



#### **▶**Specifications

Standards SMPTE 259M (A, B, C, D), SMPTE 297M, SMPTE 310M, SMPTE 344M,

M2S. DVB-ASI

#### Serial Video BNC Input:

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Automatic to 300m @ 270Mb/s with Connector: Equalization: Belden 8281 (or equivalent)

Return Loss: > 15dB up to 540MHz

#### Optical Input:

Number of Inputs: Operating Wavelength:

1270nm to 1610nm

Maximum Input Power: 0dBm Optical Sensitivity: -32 dBm

SC/PC, ST/PC, FC/PC Female Housing Connector:

#### Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant) Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal 0V ±0.5V DC Offset: Rise, Fall Time: 900ps nominal < 10% of amplitude > 15dB up to 540MHz Overshoot:

Return Loss: Wideband Jitter: < 0.2 UI

## Physical:

With Flanges: 6"L x 4"W x 1"H Dimensions: (152mm L x 114mm W x 25mm H) Weight:

0.5lbs (0.28kg)

#### Electrical

Auto ranging 100-240VAC 12V DC Voltage:

50/60Hz (adapter included) Power:

#### Compliance:

Safety: Power supply UL Listed

Complies with EU low voltage

Directive

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | Х              |        |
| 2405/7705/7707EO-HD | х              |        |
| 7705/7707EO-3       | х              |        |
| 7705/7707EO-3-HD    | х              |        |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              |        |
| 7707VAT-HD          | х              |        |

# **>>>**Ordering Information

2405OE SDI Miniature Optical Receiver, 19.4Mb/s or 143-540Mb/s,

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

#### Connector Suffix

**Ordering Options** 

SC/PC +SC +ST ST/PC +FC FC/PC


#### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page





- · SDI video and 2 AES audio fiber optic transmitter
- Supports 270Mb/s on 525 or 625 line 4:2:2 component SDI and SDTi (SMPTE 305M) video signals
- · Supports 32, 44.1, 48kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible
- · AES audio inputs can be synchronous or asynchronous to each other and/or to
- Reclocked SDI output for additional signal distribution or monitoring
- · Signal transport over fiber uninterrupted by loss of SDI or AES audio input feeds
- · Low audio to video latency over transport interface
- Local display of input SDI signal strength, video format, and EDH errors
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Automatic coaxial input equalization up to 300m at 270Mb/s (Belden 1694A) Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports single-mode and multi-mode fiber optic cable

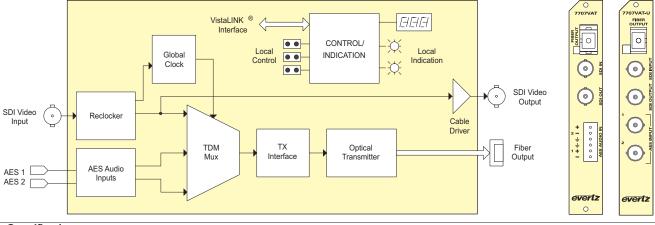

#### ▶Specifications

Serial Video Input:

SMPTE 259M-C, 525 or 625 line component, SMPTE 305M, (SDTi) 1 BNC per IEC 61169-8 Annex A Connector:

Automatic to 300m @ 270Mb/s with Equalization: Belden 1694A or equivalent cable

Return Loss: > 15dB up to 270Mb/s

Serial Video Output:

Number of Outputs: 1 Per Card reclocked

Connector: 1 BNC per IEC 61169-8 Annex A 800mV nominal

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude > 15dB at 270Mb/s Return Loss

Wide Band Jitter: < 0.2 UI

AES Audio Inputs (7707VAT & 7707VAT-U):

Number of Inputs: 2 (Jumper selectable for balanced or

unbalanced input)

Standard: Unbalanced AES: SMPTE 276M

7707VAT15

AES3-1992 Balanced AES Dolby-E™ compatible Other:

Connector 7707VAT-U: 1 BNC per IEC 61169-8 Annex A 7707VAT: 6-pin terminal strip

Signal Level: Balanced: 2 to 7V p-p with level jumper set to HI,

1 to 2V p-p set to LO 1V p-p ±0.1V

Unbalanced: Equalization: Balanced: Unbalanced

500m @ 48kHz with Belden 1800B or

equivalent cable 2200m @ 48kHz with Belden 8281 or

equivalent cable Resolution:

Up to 24 bits Sampling Rate: 32, 44,1, 48kHz

Impedance: Unbalanced: 750

Balanced: 110Ω

Optical Output:

Number: Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 14dB

Rise and Fall Time: 200ps nominal

Wavelengths: See Ordering Information Output Power

1310nm FP (Standard):

-7dBm ±1dBm

1310nm FP (M version):

0dBm ±1dBm

1550nm & CWDM DFB:

0dBm ±1dBm 7dBm ±1dBm DWDM DFB:

Fiber Size: 9um core/125um overall

#### System Performance (7707VAT + 7707VAR):

Video Input To Output Delay: < 1.5us

Audio to Video delay: < 1µs with SoftSwitch™ disabled on

7707VAR

< 2ms with SoftSwitch™ enabled on 7707VAR

Electrical:

+12V DC Voltage:

10W (Non-DWDM) 13W (DWDM) Power:

Compliance:

Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

# >>> Ordering Information

SDI with 2 AES Audio Fiber Transmitter, 1310nm, FP Laser, 7707VAT13

VistaLINK® Monitoring SDI with 2 AES Audio Fiber Transmitter, 1550nm, DFB Laser (0dBm), VistaLINK® Monitoring

For CWDM, please refer to the end of the fiber section for ordering information 7707VATxx SDI with 2 AES Audio Fiber Transmitter, CWDM DFB Laser,

VistaLINK® Monitoring

For DWDM, please refer to the end of the fiber section for ordering information 7707VATDxxx SDI with 2 AES Audio Fiber Transmitter, DWDM wavelength

VistaLINK® Monitoring

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Ea: Model +SC +3RU

+U Unbalanced AES Audio Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC


Enclosures 350FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

- · SDI video and 2 AES audio fiber optic receiver
- Supports 270Mb/s on 525 or 625 line 4:2:2 component SDI and SDTi (SMPTE 305M) video signals
- Supports 32, 44.1, 48kHz AES audio inputs
- Dolby-E™ compatible
- Incorporates Evertz SoftSwitch™ (Patent Pending) technology for virtually glitchfree AES Audio outputs when upstream SDI or AES feeds are switched
- User-selectable SoftSwitch™ bypass
- · Low Audio to Video latency
- Output AES "Mute" on loss of AES or fiber optic input signals
- SDI Video regeneration for jitter reduction
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®

- Output Video "Black" or "Blue" (selectable) on loss of video or fiber optic input signals
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Local display of optical signal strength, video and audio presence, video and AES formats, EDH errors
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Accepts any wavelength in the 1270nm to 1610nm range
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

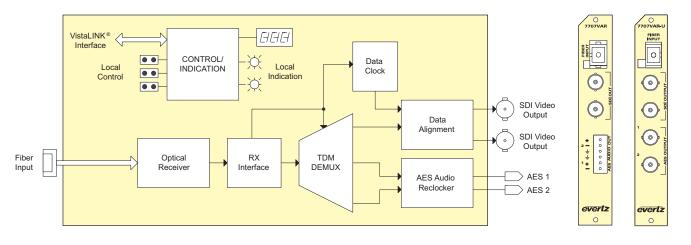

#### ▶ Specifications

#### Optical Input:

Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Return Loss: > 25dB Operating Wavelength: 1270nm to 1610nm

Max. Input Power: 0dBm

Optical Sensitivity: -28dBm

#### Serial Video Outputs:

Number of Outputs: 2 regenerated

SMPTF 259M-C (525 or 625 line Standard:

component) SMPTE 305M (SDTi)

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal 0V ±0.5V DC Offset: Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss > 15dB at 270Mb/s

Wide Band Jitter: < 0.15 UI

#### **AES Audio Outputs:**

Number of Outputs: 2 regenerated

Standard: Jumper selectable for balanced or

unbalanced output Unbalanced AES: SMPTE 276M

Balanced AES: AES3-1992 balanced AES

Connector:

7707VAR-U: 1 BNC per IEC 61169-8 Annex A

7707VAR: 6-pin terminal strip

Signal Level 1V p-p 5V p-p Unhalanced: Balanced: Resolution: up to 24 bits Sampling Rate: 32, 44.1, 48kHz

Intrinsic Jitter: < 20ns Impedance: Unbalanced:  $75\Omega$ Balanced: 1100

#### System Performance (7707VAT + 7707VAR):

Video Input To Output Delay: < 1.5us

Audio to Video delay: < 1µs with SoftSwitch™ disabled

< 2ms with SoftSwitch™ enabled

Electrical:

+12V DC Voltage: Power:

Complies with FCC Part 15, Class A EMI/RFI:

FU FMC Directive

Physical:

Number of slots:

# **>>>**Ordering Information

SDI with 2 AES Audio Fiber Receiver, VistaLINK® Monitoring 7707VAR

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

+U Unbalanced AES Audio

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

#### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 

350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

## 3G/HD/SD with 4 AES Audio Fiber Receiver


The 7707VAR-3G is a VistaLINK® -capable fiber optic receiver for 3G. HDTV or SDTV video and AES audio signals. This single card module outputs one 3G, HD-SDI or SD-SDI video plus four AES audio signals that have been transmitted by the companion 7707VAT-3G fiber optic transmitter.

The 7707VAR-3G occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds

#### ▶ Features & Benefits

- · Supports SMPTE 424M formats
- · Supports HDTV video formats @ 1.485Gb/s
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Provides up to four de-embedded AES audio outputs
- Dolby-E<sup>™</sup> compatible
- · Local display of optical signal strength, video and audio presence, video and AES formats
- · Fully hot-swappable from front of frame

- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Supports single-mode and multi-mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

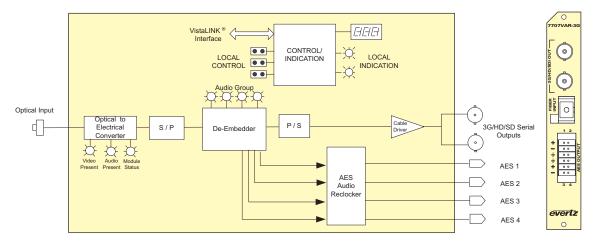

#### ▶Specifications

#### Optical Input:

Number of Inputs: Connector:

Female SC/PC, ST/PC, FC/PC Return Loss > 25dB

Operating Wavelength:

1270nm to 1610nm Maximum Input Power:

-1dBm Standard: High Sensitivity -H version:

-7dBm Optical Sensitivity:

-23dBm Standard: High Sensitivity -H version:

-28dBm

#### Serial Video Outputs:

Number of Outputs: 2 regenerated Standard:

SMPTE 424M, SMPTE 292M.

SMPTE 259M-C,SMPTE 305M (SDTi), DVB-ASI (without separate

audio)

1 BNC per IEC 61169-8 Annex A Connector: 800mV nominal Signal Level:

DC Offset: 0V ±0.5V

Rise and Fall Time: < 270ps for HDSDI, < 900ps for SDI

Overshoot: < 10% of amplitude > 15dB up to 1.485Gb/s Return Loss:

High Freq. Jitter: < 0.2 UI to 1.5G

#### **AES Audio Outputs:**

Number of Signals: 4 (user-selectable for balanced or

unbalanced)

Standards: AES3-2003 (Balanced AES) SMPTE 276M (Unbalanced AES)

Connector: 12-pin terminal block

Sampling Rate: 48kHz Resolution: Up to 24 bits Signal Level: Balanced: 1V p-p ±0.1V

Unbalanced: 2V p-p ±0.1V Differential

Rise/Fall Times:

20ns ±5ns Balanced: Unbalanced: 35ns ±5ns

Impedance: 110Ω Balanced: Unbalanced 75Ω

Return Loss: Wideband Jitter:

> 15dB, from 1MHz to 6MHz < 10ns p-p, with conditions of minimum to maximum cable length

#### Electrical:

Voltage: +12V DC

Power. 11W

Physical:

Number of slots: 1

#### **▶▶▶** Ordering Information

7707VAR-3G HDTV with 4 AES Audio Fiber Receiver, VistaLINK® Monitoring 7707VAR-3G-H HDTV with 4 AES Audio High Sensitivity Fiber Receiver, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules


## 3G/HD/SD with 4 AES Audio Fiber Transmitter

The 7707VAT-3G is a VistaLINK® -capable fiber optic transmitter for 3G. HDTV or SDTV video and AES audio signals. This single card module accepts one 3G, HD-SDI or SD-SDI video plus four AES audio and transmits them on a single fiber. The companion 7707VAR-3G receiver converts the 3G, HD, SD and AES back to video The optical output is available in an assortment of optical wavelengths accommodating 1310/1550nm, CWDM and DWDM transmission schemes. The 7707VAT-3G occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

#### ▶ Features & Benefits

- Supports SMPTE 424M standards @ 2.970 Gb/s
- Supports HDTV video formats @ 1.485Gb/s
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Supports 32, 44.1, 48 kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible
- · AES audio inputs can be synchronous or asynchronous to each other and/or to input video
- · Reclocked video output for additional signal distribution or monitoring
- · Signal transport over fiber uninterrupted by loss of video or AES audio input feeds
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Automatic coaxial input equalization up to 100m at 1.485Gb/s and 250m at 270Mb/s (Belden 1694A), 70m at 3G
- · Fully Hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant) DWDM wavelengths (ITU-T G.694.1 compliant) also available

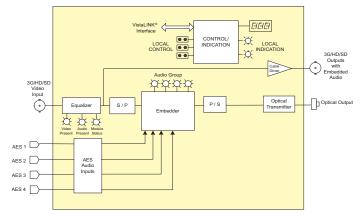



# ▶ Specifications

Serial Video Input:

SMPTE 424M, SMPTE 292M, Standard: SMPTE 259M-C, SMPTE 305M

(SDTi), DVB-ASI (without separate àudio)

4 BNC per IEC 61169-8 Appex A Connector: Automatic to 70m @ 2.970 Gb/s and Equalization:

250m @ 270 Mb/s with Belden 1694A (or equivalent)

> 15 dB up to 1.485Gb/s Return Loss:

#### Serial Video Output:

Number of Outputs: 1 reclocked

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset 0V + 0.5V

Rise and Fall Time: < 270ps for HDI, < 900ps for SD < 10% of amplitude

Overshoot: Return Loss: > 15dB up to 1.485Gb/s High Freq. Jitter: < 0.2 UI to 1.5G

#### AES Audio Inputs:

Number of Signals: 4 Inputs

AES3-2003 (Balanced AES) Standards: SMPTE 276M (Unbalanced AES) Connector: 12-pin terminal block

Sampling Rate: 32kHz. 44.1kHz. 48kHz Resolution: Up to 24 bits

Minimum Input: 200mV p-p Maximum Input:

Balanced 7V p-p, Unbalanced 1.2V p-p Equalization

Balanced: <600m @ 48kHz, with Belden 1800B,

and 2V p-p source signal Unhalanced <1200m @ 48kHz, with Belden 8281 and 1V p-p source signal Impedance: Balanced 110 $\Omega$ , Unbalanced 75 $\Omega$ 

Return Loss: > 15dB, from 1MHz to 6MHz Alignment Jitter: < 10ns p-p, with conditions of minimum to maximum cable length

## Optical Output:

Number:

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss:

See Ordering Information Wavelengths:

Output Power: 1310nm FP(Standard)

-7dBm ±1dBm 1550nm & CWDM DFB:

0dBm ±1dBm DWDM DFB: 7dBm ±1dBm

Fiber Size: 9μm core/125 mm overall

#### Electrical:

Voltage:

11W (Non-DWDM), 13W (DWDM) Power:

# Compliance:

Laser Safety:

FMI/RFI:

Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11, IEC 60825-1

Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

7707VAT-13-3G 3G/HD/SD with 4 AES Audio Fiber Transmitter, 1310nm FP laser,

7707VAT-15-3G 3G/HD/SD with 4 AES Audio Fiber Transmitter, 1550nm DFB laser,

Vistal INK®

For CWDM applications please refer to the end of the fiber section for details 7707VAT-xx-3G 3G/HD/SD with 4 AES Audio Fiber Transmitter, CWDM Laser

For DWDM application please refer to end of fiber section for details 7707VATDxxx-3G 3G/HD/SD with 4 AES Audio Fiber Transmitter, DWDM Laser

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** Eg: Model +SC +3RU

#### Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC ST/PC +ST +FC FC/PC

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR










- · SDI Video and 4 broadcast quality analog audio fiber optic transmitter
- Supports 525 or 625 line 4:2:2 component SDI signals
- Analog audio inputs can be synchronous or asynchronous to each other and/or to input video
- Reclocked SDI output for additional signal distribution or monitoring
- · Signal transport over fiber uninterrupted by loss of SDI or Analog audio input feeds
- · Low Audio to Video latency over transport interface
- · Local display of input SDI signal strength, video format, and EDH errors
- Automatic coaxial input equalization to 300m at 270Mb/s (Belden 8281)
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- $\bullet$  VistaLINK  $\!\!^{\circ}$  capability is available when modules are used with the 7700FR-C or 350FR 3RU frame and a 7700FC VistaLINK® Frame Controller module in slot
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- · Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

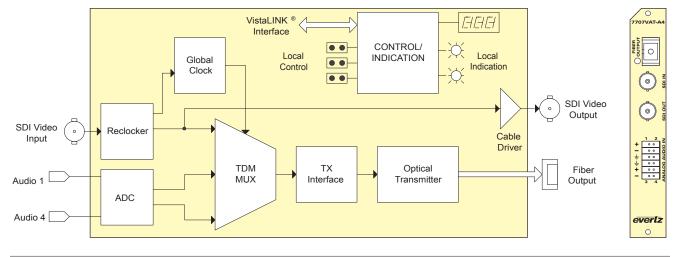

#### ▶Specifications

# Serial Video Input:

Standard: SMPTE 259M-C

1 BNC per IEC 61169-8 Annex A Connector

Equalization: Automatic to 300m @ 270Mb/s with

Belden 8281 or equivalent cable Return Loss: > 15dB up to 270Mb/s

#### Serial Video Output:

Overshoot:

Number of Outputs: 1 Per Card reclocked SMPTE 259M-C Standard:

1 BNC per IEC 61169-8 Annex A Connector

< 10% of amplitude

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal

> 15dB at 270Mb/s Return Loss Wide Band Jitter: < 0.2 UI

#### Analog Audio Inputs:

Number of Inputs:

Balanced analog audio Type: Connector: 12-pin removable terminal block High Impedance (>  $20k\Omega$ )  $\pm 0.1dB$ , 20Hz to 20kHzInput impedance: Freq. Response:

THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1° > 85dB SNR (weighted): Max. Audio Input Level: +24dBu Signal Quantization:24 Bits

Optical Output: Number:

Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 14dB Rise and Fall Time: 200ps nominal

Wavelengths: See Ordering Information Output Power

1310nm FP(Standard):

-7dBm ±1dBm 1310nm FP(M version):

0dBm ±1dBm

1550nm and CWDM DFB: 0dBm ±1dBm

DWDM DFB: 7dBm ±1dBm

#### System Performance (7707VAT-A4 + 7707VAR-A4):

Video Input To Output Delay: < 2µs

Audio Input to Output delay: < 1.9ms

Electrical:

Voltage: +12V DC Power: 11W (Non-DWDM)

13W (DWDM)

Compliance:

Electrical Safety: CSA Listed to CSA C22.2 No. 60065-03,

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

Directive 93/68/EEC

Laser Safety: Complies with 24 CFR 1040.10 and

1040.11 except for deviations pursuant to LN No. 50, dated July 26, 2001 Complies with IEC 60825-1, Am. 2

EMI/RFI: Complies with FCC regulations for

class A devices

Complies with EU EMC directive

## **>>>**Ordering Information

7707VAT13-A4 SDI with 4 Analog Audio Fiber Transmitter, 1310nm, FP Laser,

7707VAT15-A4

VistaLINK® Monitoring SDI with 4 Analog Audio Fiber Transmitter, 1550nm, DFB

Laser(0dBm), VistaLINK® Monitoring

For CWDM, please refer to the end of the fiber section for ordering information 7707VATxx-A4 SDI with 4 Analog Audio Fiber Transmitter, CWDM DFB Laser,

VistaLINK® Monitoring

For DWDM, please refer to the end of the fiber section for ordering information SDI with 4 Analog Audio Fiber Transmitter, DWDM DFB Laser

VistaLINK® Monitoring

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

+3RU

+1RU

+SA

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules


3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate



- · SDI video and four broadcast quality analog audio fiber optic receiver
- Supports 525 or 625 line 4:2:2 component SDI signals
- · Low Audio to Video latency
- · Output Video "Black" or "Blue" (selectable) on loss of video or fiber optic input signals
- · Built-in jitter attenuation
- · Local display of optical signal strength, video and audio presence, video format and EDH errors
- · Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Supports single mode and multi mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

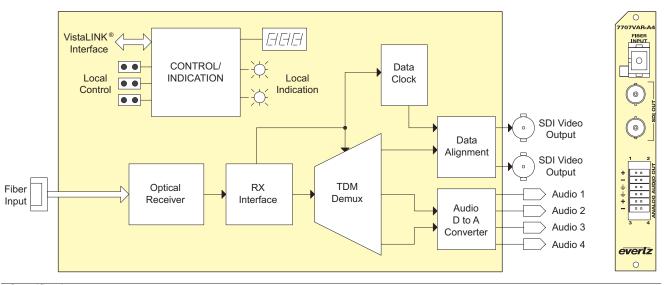

#### ▶Specifications

Optical Input:

Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Operating Wavelength:

, 1270nm to 1610nm

Maximum Input Power: 0dBm

Optical Sensitivity: -28dBm

#### Serial Video Outputs:

Number of Outputs: 2 regenerated Standard: SMPTE 259M-C

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude > 15dB at 270Mb/s Return Loss

Wide Band Jitter: < 0.2 UI

#### Analog Audio Outputs:

Number of Outputs:

Type: Balanced analog audio 12-pin removable terminal block Connector:

Output impedance:  $\pm 0.1 dB$ , 20Hz to 20 kHz

Freq. Response: THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1°

SNR (weighted): > 85dB Output Level: Adjustable to +24dBu

Audio Headroom: +24dBu

#### System Performance (7707VAT-A4 + 7707VAR-A4):

Video Input To Output Delay:

Audio Input to Output delay:

< 1.9ms

#### Voltage: Power. EMI/RFI:

Electrical:

11W

Complies with FCC Part 15, Class A

+12V DC

EU EMC directive

Physical:

Number of slots:

# >>> Ordering Information

#### 7707VAR -A4 SDI with 4 Analog Audio Fiber Receiver **Ordering Options** Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

+U Unbalanced AES Audio

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC FC/PC +FC

#### Fiber Optic Patch Cable


See CWDM & DWDM Ordering Information Page

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



- · Single card TDM multiplexer for four synchronous or asynchronous 270Mb/s SDI, SDTi or DVB-ASI video signals
- Signal transport over fiber uninterrupted by loss of any SDI, SDTi or DVB-ASI input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Automatic coaxial input equalization up to 250m at 270Mb/s (Belden 8281)
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · SC/PC, ST/PC, FC/PC connector options

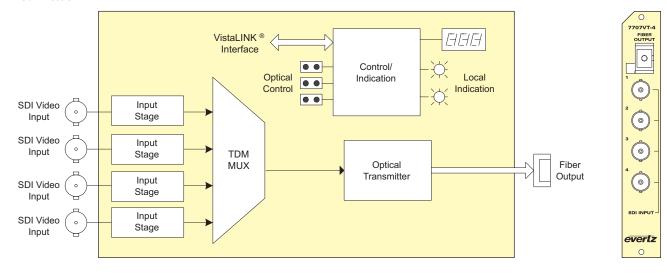

# **▶** Specifications

Serial Video Input:

SMPTE 259M-C. SMPTE 305M. Standard: DVB-ASI

4 independent SDI or DVB-ASI Number of Inputs:

270Mb/s signals 4 BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 250m @ 270Mb/s with Belden 8281 or equivalent cable

Return Loss: > 15dB up to 270Mb/s

Optical Output:

Number:

Connector: Female SC/PC, ST/PC or FC/PC

> 14dB Return Loss Rise and Fall Time: 200ps nominal Wideband Jitter: < 0.2 UI

9μm core/125μm overall Fiber Size:

Wavelengths: Standard:

1310nm, 1550nm (nominal) 1270nm to 1610nm (See Ordering

CWDM: Information)

C-Band (ITU-T G.694.1 compliant) DWDM:

(See Ordering Information)

Output Power: 1310nm FP(Standard):

-7dBm ±1dBm 1550nm & CWDM DFB: 0dBm ±1dBm

DWDM DFR-7dBm ±1dBm

Electrical:

Voltage: +12V DC Power:

10W (Non DWDM) 13W (DWDM)

Physical:

Number of slots:

Compliance:

Electrical Safety CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive FMI/RFI

#### **>>>**Ordering Information

7707VT13-4 Quad SDI/ASI Mux Fiber Transmitter, 1310nm FP, VistaLINK® 7707VT15-4 Quad SDI/ASI Mux Fiber Transmitter, 1550nm DFB, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information 7707VTxx-4 Quad SDI/ASI Mux Fiber Transmitter, CWDM Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707VTDxxx-4 Quad SDI/ASI Mux Fiber Transmitter, DWDM Laser, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure












# 7700 Modular - Fiber - SDI/Audio Transport

# ▶ Features & Benefits

- Single card demultiplexer for four synchronous or asynchronous 270Mb/s SDI, SDTi or DVB-ASI video signals
- · Low jitter SDI outputs
- · Independent signal outputs unaffected by loss of any other SDI or DVB-ASI input feed
- · Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable

- · Accepts any wavelength in the 1270nm to 1610nm range
- · SC/PC, ST/PC, FC/PC connector options
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

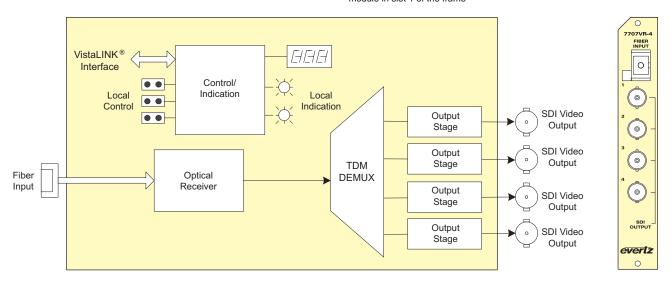

#### ▶ Specifications

Optical Input:

Number of Inputs: Female SC/PC, ST/PC, FC/PC Connector:

Return Loss

Operating Wavelength: 1270nm to 1610nm

Maximum Input Power: Standard Version:-1dBm -H Version: Optical Sensitivity:

Standard Version: -23dBm -H Version: -28dBm Serial Video Outputs:

Standards: SMPTE 259M-C, SMPTE 305M,

DVB-ASI

Number of Outputs: 4 independent SDI, SDTi or DVB-ASI

270Mb/s signals 1 BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal
Overshoot: < 10% of amplitude > 15dB up to 270Mb/s Return Loss:

Wide Band Jitter: < 0.2 UI Electrical:

Voltage: +12V DC 10W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

Physical: Number of slots:

#### **>>>**Ordering Information

7707VR-4 Quad SDI/ASI Demux Fiber Receiver, VistaLINK® 7707VR-4-H Quad SDI/ASI Demux Fiber Receiver, High sensitivity RX VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC +ST SC/PC ST/PC FC/PC

**Enclosures** 


350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

- Multiplexor for eight synchronous or asynchronous 270Mb/s SDI, DVB-ASI or SDTi video signals
- Signal transport uninterrupted by loss of any SDI, DVB-ASI or SDTi input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · VistaLINK® capability is available when modules are used with the 3RU

7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

- Automatic coaxial equalization up to 250m at 270Mb/s (Belden 8281)
- Fully hot-swappable from front of frame with no fiber/coax disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm and up to 16 CWDM wavelengths
- DWDM wavelengths also available
- SC/PC, ST/PC, FC/PC fiber connectors available
- Input selection feature allows user to route 1 of the 8 incoming video signals to the SDI output

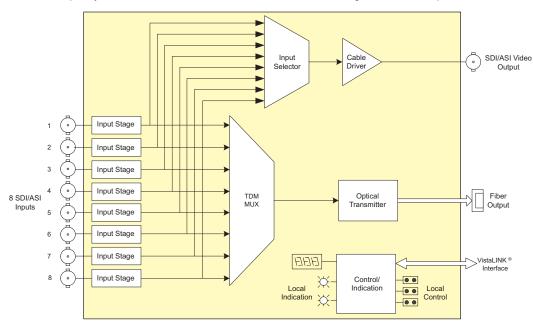

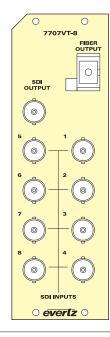

#### ▶ Specifications

#### Serial Video Input:

Standard: SMPTE 259M, SMPTE 305M, DVB-ASI Number of Inputs: 8 independent SDI, SDTi or DVB-ASI 270Mb/s signals

Connector: 8 BNC per IEC 61169-8 Annex A Equalization: Automatic to 250m @ 270Mb/s with Belden 8281 or equivalent cable

> 15dB up to 270Mb/s

#### Serial Video Output:

Return Loss:

SMPTE 259M, SMPTE 305M, DVB-ASI Standards 1 Independent SDI, SDTi or DVB-ASI Number of Outputs: 270Mb/s signal

1 BNC per IEC 61169-8 Annex A 800mV(nominal) Connectors:

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 900ps(nominal) Overshoot: < 10% of amplitude > 15dB to 270Mb/s Return Loss

Wide Band Jitter: < 0.2 UI Optical Output: Number:

Connector: Female SC/PC, ST/PC or FC/PC

> 14dB Return Loss:

Wideband Jitter: < 0.2 UI

Fiber Size: 9μm core/125μm overall Wavelengths

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm

(See Ordering Information) C-Band (ITU-T G.694.1 compliant) DWDM: (See Ordering Information)

Output Power

1310nm FP(Standard):

-7dBm ±1dBm

1550nm & CWDM DFB:

DWDM DFB: 7dBm ±1dBm

0dBm ±1dBm

Physical: Number of slots:

Electrical:

Voltage:

Power.

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC

+12V DC

60065

2

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

12W (Non DWDM), 15W (DWDM)

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A EU EMC directive

#### **>>>**Ordering Information

7707VT13-8 Eight SDI/ASI Mux Fiber Transmitter, 1310nm FP, Laser, VistaLINK® Eight SDI/ASI Mux Fiber Transmitter, 1550nm DFB Laser, VistaLINK® 7707VT15-8

For CWDM, please refer to the end of the fiber section for ordering information 7707VTxx-8 Eight SDI/ASI Mux Fiber Transmitter, CWDM Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707VTDxxx-8 Eight SDI/ASI Mux Fiber Transmitter, DWDM Laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC +3RU

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

+SA

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

**Enclosures** 350FR


3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure



Rear Plate Suffix

- Demultiplexor for eight synchronous or asynchronous 270Mb/s SDI, DVB-ASI or SDTi video signals
- · Signal transport over fiber uninterrupted by loss of any input video feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, 3RU portable frame that holds up to 3 modules or a standalone frame which will hold 1 module
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Supports single-mode and multi-mode fiber optic cable
- Accepts any wavelength in the 1270nm to 1610nm range
- · SC/PC, ST/PC, FC/PC fiber connectors available

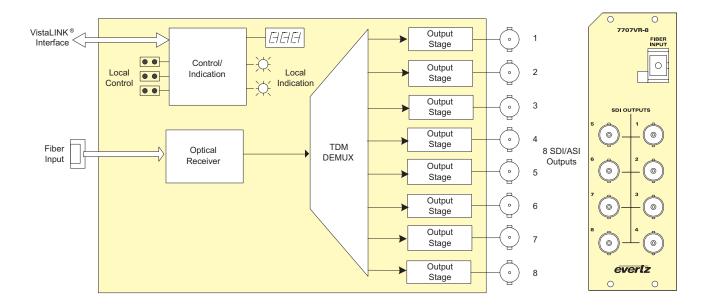

#### ▶ Specifications

Optical Input:

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC

Return Loss > 25dB

Operating Wavelength: 1270nm to 1610nm

Maximum Input Power: Standard Version: -1dBm -H Version: -8dBm Optical Sensitivity: Standard Version: -21dBm -H Version: -28dBm

Serial Video Output:

Standards Number of Outputs:

ASI 270Mb/s signals Connector: 1 BNC per IEC 61169-8 Annex A 800mV nominal

Signal Level: DC Offset:

0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 270Mb/s

Wide Band Jitter:

Electrical:

Voltage: +12V DC

Power: 12W

Safety: CSA Listed to CSA C22.2 No. 60065-03,

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

Directive 93/68/EEC

EMI/RFI: Complies with FCC regulations for

class A devices

Complies with EU EMC directive

89/336/EEC

Physical:

Number of slots: 2

# **>>>**Ordering Information

7707VR-8 Eight SDI/ASI Demux Fiber Receiver, VistaLINK® Monitoring Eight SDI/ASI Demux Fiber Receiver, High Sensitivity Optical Input, 7707VR-8-H VistaLINK® Monitoring

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

SMPTE 259M, SMPTE 305M, DVB-ASI

8 independent SDI, SDTi or DVB-

+SC SC/PC +ST ST/PC +FC FC/PC

Enclosures 350FR 7700FR-C

7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



# SDI, 2 AES Audio, Bi-directional RS-232/422, 2 GPI & 2 GPO, Fiber Transmitter

The 7707MT Multi-Signal Fiber Transmitter is a VistaLINK® -capable, fiber transmitter for SDI Video, AES Audio, RS-422 control and GPI/O. This single card module transports one uni-directional SDI Video, two uni-directional AES Audio, one bi-directional RS-422 and two bi-directional GPIs and GPOs. These signals are combined using Time Domain Multiplex (TDM) technology and transmitted over a single fiber. The companion 7707MR Multi-Signal Fiber Receiver demultiplexes the signals and converts them back to their original formats. The 7707MT and companion 7707MR will transparently pass incoming SDI video feeds with embedded AES audio or any other data in the horizontal or vertical ancillary data space. Minimal Audio to Video latency over the transport interface is also achieved.


The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm, CWDM and DWDM transmission schemes.


The 7707MT occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module


#### ▶ Features & Benefits

- SDI Video, 2 AES Audio, 1 bi-directional RS-232/422 and 2 GPI/O fiber optic transmitter
- Supports 525 or 625 line 4:2:2 component SDI signals
- · Supports SDTi signals
- Supports 32, 44.1, 48kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible
- · Supports bi-directional RS-422 signals at baud rates up to 3Mb/s
- AES audio inputs can be synchronous or asynchronous to each other and/or to input video
- Reclocked SDI output for additional signal distribution
- Signal transport over fiber uninterrupted by loss of input SDI, AES, Serial Data or GPI/O feeds
- Low Audio to Video latency over transport interface
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®

- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot1 of the frame
   Local display of optical signal strength, video, audio, and data presence,
- Local display of optical signal strength, video, audio, and data presence video and AES formats, EDH errors, GPI and GPO status
- Automatic coaxial input equalization to 300m at 270Mb/s (Belden 1694A)
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Bi-directional optical input/output
- Accepts any wavelength in the 1270nm to 1610nm range
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports multi-mode and single mode fiber optic cable

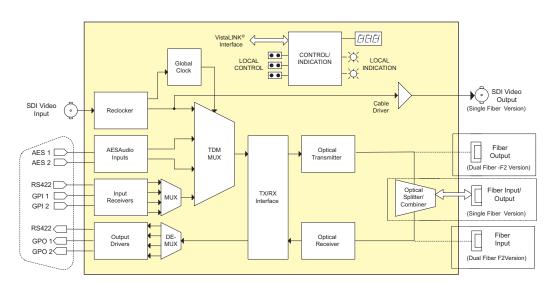





# SDI, 2 AES Audio, Bi-directional RS-232/422, 2 GPI & 2 GPO, Fiber Transmitter

#### ▶Specifications

Serial Video Input:

SMPTE 259M-C, SMPTE 305M Standard: 1 BNC per IEC 61169-8 Annex A Automatic to 300m @ 270Mb/s with Connector Equalization: Belden 1694A or equivalent cable

Return Loss: > 15dB up to 270Mb/s

Serial Video Output (Not available on dual fiber '-F2' version):

Number of Outputs: 1 Per Card reclocked 1 BNC per IEC 61169-8 Annex A Connector: 800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal < 10% of amplitude > 15dB at 270Mb/s Overshoot: Return Loss Wide Band Jitter: < 0.2 UI

**AES Audio Inputs:** 

Standard:

Unbalanced: SMPTE 276M Balanced: AFS3-1992 Dolby-E<sup>™</sup> compatible Other:

Number of Inputs: 2 (Jumper selectable for balanced or

unbalanced input)

Connector: 4 pins on female high density DB-15 Signal Level:

Unbalanced:

1V p-p ±0.1V 2 to 7V p-p with Level Jumper set to HI, Balanced: 1 to 2V p-p with level jumper set to LO

Equalization: 500m @ 48kHz with Belden 1800B or equivalent cable Resolution: Up to 24 bits

Sampling Rate: 32, 44.1, 48kHz Intrinsic Jitter: < 20ns Impedance: Unbalanced: 75Ω Balanced:  $110\Omega$ 

Serial Data Ports:

Number of Ports: 1 RS-422 or 2 RS-232 - Jumper Selectable 4 pins (plus ground) on female high

density DB-15 Up to 3Mb/s (Determined by

Baud Rate:

incoming data)

#### General Purpose Inputs:

Number of Inputs:

Type: Opto-isolated, active low with internal pull-ups to +5V or +12V (jumper

Connector: 2 pins (plus ground) on female high

density DB-15

Signal Drive Level: Open or closure to ground

General Purpose Outputs: Number of Outputs: 2

"Dry Contact" relay closure Type: 2 pins per output on female high Connector:

density DB-15

Signal Level: Normally Closed or Normally Open

(jumper settable)

Optical Input/Output:

Number:

1 (Single fiber version) 2 (Dual fiber -'F2' version) Female SC/PC, ST/PC or FC/PC

Connector: > 20dB Return Loss: Rise and Fall Time: 200ps nominal

Max. Input Power: 0 dBm Input Wavelengths: 1270nm to 1610nm Input Optical Sensitivity:

-26dBm WDM (-w version) Standard: -28dBm < 0.2 UI

Output Jitter: Wavelengths:

Standard: 1310nm, 1550nm CWDM: 1270nm - 1610nm

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power: 1310nm FP:

-7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB): 0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm System Performance (7707MT + 7707MR):

Video Input To Output Delay: < 1.5µs

< 1µs with SoftSwitch™ disabled on Audio to Video delay:

7707MR

< 2ms with SoftSwitch™ enabled on

7707MR

Electrical:

Voltage: +12V DC

12W (Non DWDM), 14W (DWDM) Power:

Physical: Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03. IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive







#### >>> Ordering Information

7707MT13-F2 SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual

Fiber, 1310nm FP TX & RX, VistaLINK®
SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter single 7707MT15-W fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual fiber, CWDM TX, VistaLINK® 7707MTxx-F2

For DWDM, please refer to the end of the fiber section for ordering information SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual fiber, DWDM Laser, VistaLINK® 7707MTDxxx-F2

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

+SC SC/PC ST/PC +FC FC/PC

7707MX-BHP-15 Bulkhead Breakout Panel for 15 x 7707MT cards (includes 15, 3ft 7707MX-BHP-15-B Bulkhead Breakout Panel for 15 x 7707MT cards (includes 15, 3ft

cables) for balanced audio only

Bulkhead Breakout Panel for 1 x 7707MT card (includes 1 3ft cable) 7707MX-BHP-1

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

Connector Suffix

# SDI, 2 AES Audio, Bi-directional RS-232/422, 2 GPI & 2 GPO, Fiber Receiver

The 7707MR Multi-Signal Fiber Receiver is a VistaLINK® -capable fiber optic receiver for SDI Video, AES Audio, RS-422 control, and GPI/O signals. This single card module demultiplexes one uni-directional SDI Video, two uni-directional AES Audio, one bi-directional RS-422 and two bi-directional GPIs and GPOs that have been Time Domain Multiplexed (TDM) by the companion 7707MT Multi-Signal Fiber Transmitter module. Evertz patent pending SoftSwitch™ technology is applied to the received signal to ensure virtually glitch free AES Audio output signals when upstream SDI or AES feeds are switched. The 7707MR and companion 7707MT will transparently pass incoming SDI video feeds with embedded AES audio or any other data in the horizontal or vertical ancillary data space. Minimal Audio to Video latency over the transport interface is also achieved.


The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm, CWDM and DWDM transmission schemes.

The 7707MR occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

#### ▶ Features & Benefits

- SDI Video, 2 AES Audio, 1 bi-directional RS-232/422 and 2 GPI/O fiber optic receiver
- · Supports 525 or 625 line 4:2:2 component SDI signals
- Supports SDTi signals
- Supports 32, 44.1, 48kHz AES audio
- Dolby-E<sup>™</sup> compatible
- Supports bi-directional RS-422 rates up to 3Mb/s
- Incorporates Evertz SoftSwitch™ (Patent Pending) technology for virtually glitch-free AES Audio outputs when upstream SDI or AES feeds are switched
- User selectable SoftSwitch™ bypass
- · Minimal Audio to Video latency
- Output AES "Mute" on loss of fiber optic input signal or AES feed to upstream 7707MT multiplexer
- Output Video "Black" or "Blue" (selectable) on loss of video input signal
- Signal transport over fiber uninterrupted by loss of input SDI, AES, Serial Data or GPIO feeds

- · SDI video regeneration for jitter removal
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VisitaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot1 of the frame
- Local display of optical signal strength, video, audio and data presence, video and AES formats, EDH errors, GPI and GPO status
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Bi-directional optical input/output
- · Accepts any wavelength in the 1270nm to 1610nm range
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports single-mode and multi mode fiber optic cable

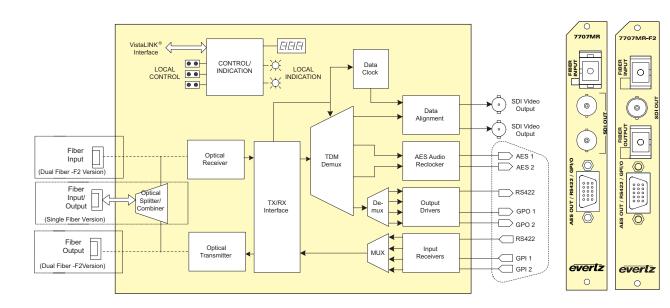











# SDI, 2 AES Audio, Bi-directional RS-232/422, 2 GPI & 2 GPO, Fiber Receiver

# ▶Specifications

Optical Input/Output:

(Single fiber version) 2 (Dual fiber - F2 version) Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 20dB Rise and Fall Time: 200ps nominal Max. Input Power: 0 dBm Input Wavelengths: 1270nm-1610nm

Input Optical Sensitivity: WDM (-w version) -26dBm Standard: -28dBm Output Jitter: < 0.2 UI Wavelengths:

1310nm, 1550nm Standard: CWDM: 1270nm - 1610nm

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power: 1310nm FP:

-7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB): 0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm

Serial Video Outputs:

Number of Outputs: 2 regenerated (1 output on -F2

versions) Standard: SMPTE 259M-C

1 BNC per IEC 61169-8 Annex A 800mV nominal Connector: Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot: Return Loss: > 15dB at 270Mb/s Wide Band Jitter: < 0.15 UI

AES Audio Outputs:

Standard Unbalanced AES: SMPTE 276M Balanced: AES3-1992 Other: Dolby-E™ compatible

Number of Outputs: 2 regenerated (Jumper selectable for balanced or unbalanced)

4 pins on female high density DB-15 Unbalanced - 1V p-p, Balanced - 5V p-p

Signal Level: Resolution: Up to 24 bits Sampling Rate: 32, 44.1, 48kHz Intrinsic Jitter: < 20ns Unbalanced - 75Ω Impedance: Balanced - 110Ω

Serial Data Ports:

Connector:

Number of Ports: 1 RS-422 or 2 RS-232 - Jumper

Selectable

Connector: 4 pins (plus ground) on female high

Baud Rate: Up to 3Mb/s RS-422 (Determined by

incoming data)

General Purpose Inputs:

Number of Inputs:

Opto-isolated, active low with internal Type: pull-ups to +5V or +12V (jumper

selectable)

Connector: 2 pins (plus ground) on female high

density DB-15

Signal Drive Level: Open or closure to ground

General Purpose Outputs: Number of Outputs: 2

"Dry Contact" relay closure Type: 2 pins per output on female high

density DB-15

Normally Closed or Normally Open (jumper settable) Signal Level:

System Performance (7707MR + 7707MT):

Video Input To Output Delay: < 1.5µs

Audio to Video delay: < 1µs with SoftSwitch™ disabled

< 2ms with SoftSwitch™ enabled

Electrical:

Voltage: +12V DC 12W (Non DWDM) Power. 14W (DWDM)

Physical: Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

# >>> Ordering Information

7707MR13-F2 SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual

fiber, 1310nm FP TX & RX, VistaLINK®

7707MR13M-W SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, single

fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK®

or CWDM, please refer to the end of the fiber section for ordering information 7707MRxx-F2 SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual

fiber, CWDM TX, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707MRDxxx-F2 SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual

fiber, DWDM Laser, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eq: Model +SC +3RU

Rear Plate Suffix: +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix:

+SC SC/PC ST/PC +ST +FC FC/PC

7707MX-BHP-15 Bulkhead Breakout Panel for 15x7707MR cards (includes 15 3ft

7707MX-BHP-15-B Bulkhead Breakout Panel for 15x7707MR cards (includes 15 3ft

cables) for balanced audio only

Bulkhead Breakout Panel for 1x7707MR card (includes 1 3ft cable) 7707MX-BHP-1

Enclosures:

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

# Bi-directional Transceiver for 1 SDI, 2 AES, RS-232/422, 2 GPI/O

The 7707MB is a VistaLINK $^\circ$ -capable fiber optic transceiver for SDI Video, AES Audio, RS-232/422 and GPI/O signals. This single card module transports one bi-directional SDI Video, two bi-directional AES Audio, one bi-directional RS-232/422 and two bi-directional GPI/Os over a single or dual fiber optic cable.


The 7707MB will transparently pass incoming SDI video feeds with embedded AES audio or any other data in the horizontal or vertical ancillary data space. Minimal Audio to Video latency over the transport interface is also achieved.


The fiber output is available in 1310nm, 1550nm, CWDM and DWDM wavelengths.


The 7707MB can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules (7 for -F2 version), 350FR portable frame that holds up to 7 modules (3 for the -F2 version) or a standalone frame which will hold 1 module.

#### ▶ Features & Benefits

- Bi-directional fiber optic transceiver for 1 SDI Video, 2 AES Audio, 1 RS-232/422 and 2 GPI/O
- Supports 525 or 625 line 4:2:2 component SDI signals
- · Supports 32, 44.1, 48kHz AES audio
- Dolby-E<sup>™</sup> compatible
- · Supports bi-directional RS-422 rates up to 3Mb/s
- Low Audio to Video latency
- Signal transport over fiber uninterrupted by loss of input SDI, AES or Serial Data feeds
- · Built-in jitter attenuation
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Local display of optical signal strength, video, audio, data presence, video and AES formats and EDH errors
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Bi-directional optical input/output
- Accepts any wavelength in the 1270nm to 1610nm range
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Supports single-mode and multi-mode fiber optic cable

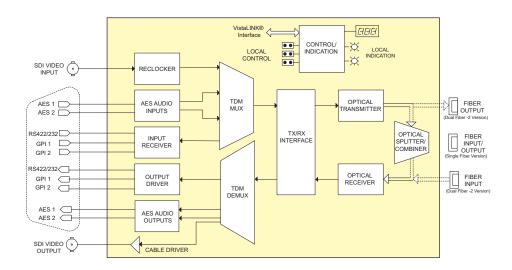











# Bi-directional Transceiver for 1 SDI, 2 AES, RS-232/422, 2 GPI/O

#### ▶Specifications

Serial Video Input:

SMPTE 259M-C, 525 or 625 line Standard: component, SMPTE 305M Connector 1 BNC per IEC 61169-8 Annex A Equalization: Automatic to 250m @ 270Mb/s with

Belden 8281 or equivalent cable

> 15dB up to 270Mb/s Return Loss:

Serial Video Output: Number of Outputs: 1

Standard: SMPTE 259M-C, SMPTE 305M 1 BNC per IEC 61169-8 Annex A Connector

Signal Level: DC Offset: 800mV nominal 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude > 15dB at 270Mb/s Return Loss:

Wide Band Jitter: < 0.2 UI

Optical Input/Output:

Number: 1 (single fiber version) 2 (dual fiber -F2 version) Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 14dB Max. Input Power: 0dBm

Input Wavelength: 1270nm to 1610nm

Input vvaverengen. .\_
Input Optical Sensitivity:

WDM (-w version) -26dBm Standard: -28dBm Output Jitter: < 0.2 UI Wavelengths:

1310nm, 1550nm Standard: CWDM: 1270nm - 1610nm

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power 1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm

1550nm, CDWM (DFB): 0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm AES Audio Inputs:

Standard: Unbalanced AES: SMPTE 276M Balanced: AES3-1992 Dolby-E<sup>™</sup> compatible Other:

2 (Jumper selectable for balanced or Number of Inputs: unbalanced)

4 pins on female high density DB-15 Connector:

Signal Level: Unbalanced:

1V p-p ±0.1V

Balanced: 2 to 7V p-p with Level Jumper set to HI, 1 to 2V p-p with level jumper set to LO Equalization: 300m @ 48kHz with Belden 1800B or

equivalent cable Up to 24 bits

Sampling Rate: 32, 44.1, 48kHz Impedance: Unbalanced -  $75\Omega$ , Balanced -  $110\Omega$ 

**AES Audio Outputs:** 

Resolution:

Standard Unbalanced SMPTE 276M Balanced: AES3-1992 Dolby-E<sup>™</sup> compatible Other

Number of Outputs: 2 regenerated (Jumper selectable for balanced or unbalanced)

Connector: 4 pins on female high density DB-15

Signal Level: Unbalanced: 1V p-p Balanced: 5V p-p Up to 24 bits Resolution Sampling Rate: 32, 44.1, 48kHz < 20ns Intrinsic Jitter: Unbalanced -  $75\Omega$ Impedance: Balanced -  $110\Omega$ 

General Purpose Inputs: Number of Inputs:

Opto-isolated, active low with internal Type: pull-ups to +5V or +12V (jumper

selectable)

6-pin removable terminal block Signal Drive Level: Open or closure to ground

General Purpose Outputs:

Number of Outputs: 2 "Dry Contact" relay closure Type: Connector 6-pin removable terminal block Signal Level: Normally Closed or Normally Open

(jumper settable)

Serial Data Port:

Baud Rate:

1 RS-422 or 2 RS-232 - Jumper Number of Ports:

Selectable

4 pins (plus ground) on female high Connector: density DB-15

Up to 3Mb/s RS-422 (Determined by incoming data)

System Performance (7707MB pair):

Video Input To Output Delay: < 2μs Audio to Video delay: < 1µs

Electrical:

+12V DC Voltage: Power: 12W (Non-DWDM) 14W (DWDM)

Physical:

Number of slots: 1 (7707MB) 2 (7707MB-F2)

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage Directive Class 1 laser product

Laser Safety: Complies with 24 CFR 1040.10 and

1040 11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, 7707MB13M-W

single fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK® use with 7707MB15-W

7707MB15-W Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK® use with 7707MB13M-W

Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual fiber, 1310nm FP TX & RX, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information
7707MBxx-F2 Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information
7707MBDxxx-F2 Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual

fiber, DWDM Laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix

7707MB13-F2

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate +SC SC/PC +ST ST/PC +FC FC/PC

7707MB-BHP-15 Bulkhead Breakout Panel for 15 x 7707MB cards (includes 15, 3ft

cables)

7707MB-BHP-15-B Bulkhead Breakout Panel for 15 x 7707MB cards (includes 15, 3ft cables) for balanced audio only

7707MX-BHP-1

Bulkhead Breakout Panel for 1 x 7707MB card (includes 1 3ft cable) Enclosures

350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone enclosure

- Operation from 19.4Mb/s to 1.5Gb/s
- Reclocking for SMPTE 292M (1.485Gb/s)
- Non-reclocking mode for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S, DVB-ASI, etc.
- · Supports single-mode and multi-mode fiber optic cable
- Fully hot-swappable from front of frame with no fiber or BNC disconnect/reconnect required
- · Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Input


• Automatic input cable equalization to 130m (Belden 1694A)

#### Outputs

- Two serial digital BNC outputs for loop-through or monitoring
- One fiber output available in 1310nm or 1550nm
- Wideband Jitter < 0.2 UI (reclocked)
- · SC/PC, ST/PC, FC/PC connector options

#### Status LEDs

- · Signal presence indication
- · Maximum equalization warning indication
- · Module status indication

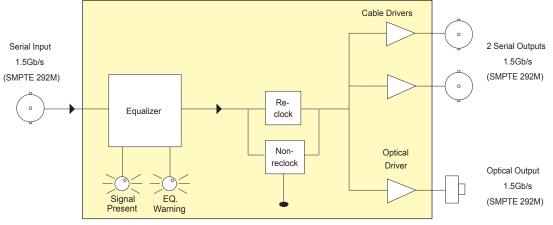

\*Note: Non-reclock Mode will operate 19.4Mb/s to 1.5Gb/s.





# ▶Specifications

Standards: SMPTE 292M, 259M, 297M, 305M, 310M, M2S, DVB-ASI, DVB-SSI, and other bi-

level Telecom/Datacom rates from 19.4Mb/s to 1.5Gb/s

Serial Video Input:

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 130m with Belden Equalization:

1694A (or equivalent)

Return Loss: > 15dB to 1GHz, > 12dB to 1.5GHz

# Serial Video Outputs:

Number of Outputs: 2 Reclocked outputs

Connector: 1 BNC per IEC 61169-8 Annex A 800mV nominal Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time 200ps nominal < 10% of amplitude > 15dB to 1GHz, > 12dB to 1.5GHz Overshoot:

Return Loss: < 0.2 UI Reclocked

Optical Outputs: Connector: Return Loss:

Number of Outputs: SC/PC, ST/PC, FC/PC female housing

> 14dB Rise and Fall Time: 270ps nominal

< 0.2 UI (reclocked)

Nominal Wavelength: 1310nm, 1550nm

#### Optical Power:

-7dBm ±1dBm 1310nm/1550nm DFB: 0 dBm ±1dBm

Electrical:

Voltage: +12V DC 6W Power:

Safety Complies with EU safety Directive EMI/ŔFI:

Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of Slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

(e)

Θ

0

₩

everlz

0

IFC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | х      | Х      |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      | х      |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      | х      |
| 7707VAR-HD          | х      | Х      |
|                     |        |        |

#### **▶▶▶** Ordering Information

7705EO13-HD HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5 Gb/s, 1310nm, 7705EO13-HD-L HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5 Gb/s, 1310nm,

HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5 Gb/s, 1550nm, 7705EO15-HD

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC FC/PC

#### Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

# HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s

## ▶ Features & Benefits


- · Operation from 19.4Mb/s to 1.5Gb/s
- Reclocking for SMPTE 292M (1.485Gb/s)
- Non-reclocking mode for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S, DVB-ASI, etc.
- · Supports single-mode and multi-mode fiber optic cable
- Fully hot-swappable from front of frame with no fiber or BNC disconnect/reconnect required
- · Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1
- · Comprehensive signal and card status monitoring via four digit card edge display

#### Input

- Optical input range from 1270nm to 1610nm
- Input sensitivity up to -23dBm
- · SC/PC, ST/PC, FC/PC connector options

- Three serial digital BNC outputs for fan-out, loop-through or monitoring
- · Wideband Jitter < 0.2 UI (reclocked)

- · Signal presence indication
- · Module status indication

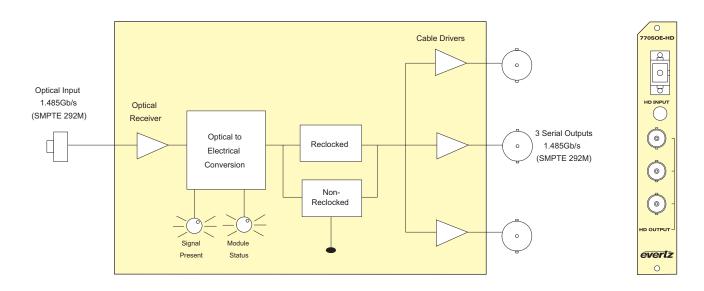

#### ▶ Specifications

Standard: SMPTE 292M, 259M, 297M, 305M,

310M, M2S, DVB-ASI, and other Telecom/Datacom standards involving data rates from 19.4Mb/s to

Optical Input:

Number of Inputs:

SC/PC, ST/PC, FC/PC Female housing Connector:

Operating Wavelength:

1270nm to 1610nm Max. Input Power: -1dBm

Optical Sensitivity: -23dBm Serial Video Outputs:

Number of Outputs: 3 Reclocked outputs 1 BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 270ps nominal < 10% of amplitude Overshoot:

Return Loss: > 15dB to 1GHz, > 12dB to 1.5GHz Jitter:

< 0.2 UI Reclocked

Electrical:

+12V DC Voltage:

6W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of Inputs: 1

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707EO    | Х      |        |
| 2405/7705/7707EO-HD | Х      | х      |
| 7705/7707EO-3       | Х      |        |
| 7705/7707EO-3-HD    | Х      | х      |
| 7707ADVT            | Х      |        |
| 7707ADVT-HD         | x      | х      |
| 7707VAT-HD          | х      | х      |

#### >>>Ordering Information

77050E-HD HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC FC/PC

#### Accessories: Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR










- · Three independent channels of electrical to optical conversion that support all SMPTE 292M standards at 1.485Gb/s
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports additional standards of SMPTE 305M (SDTi), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- Automatic cable equalization to 300m @ 270Mb/s and 75m @ 1.485Gb/s with Belden 1694A (or equivalent) cable
- · Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- High density accommodates up to 45 independent channels of optical conversion, in a single 3RU frame
- · Signal and card status monitoring via four-digit card-edge display, or remotely through SNMP and VistaLINK® available

- · Detection and display of input cable length
- · Supports single-mode and multi-mode fiber optic cable
- · SC/PC, ST/PC or FC/PC connector options
- · Tally output on Frame Status bus upon loss of input signal
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules,350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

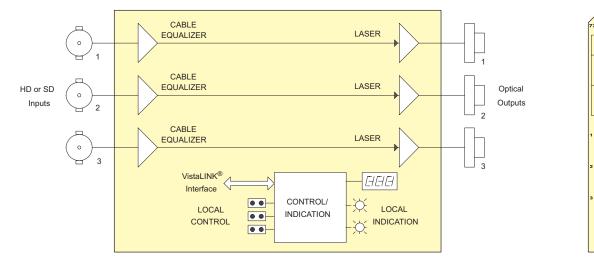

#### ▶Specifications

Standards: SMPTE 292M, SMPTE 259M A, B, C, D,

SMPTE 297M, SMPTE 305M, SMPTE 310M, SMPTE 344M, M2S,

DVB-ASI

Serial Video Input:

Return Loss:

3 (independent channels) Number of Inputs: 3 BNC per IEC 61169-8 Annex A Connector: Equalization:

Automatic to 75m @ HD (1.485Gb/s) and 300m @ SD (270Mb/s) with Belden 1694A (or equivalent) > 14dB up to 1.5Gb/s

Optical Outputs:

Number of Outputs: 3 (independent channels)
Connector: SC/PC, ST/PC, FC/PC female housing

Return Loss > 14dB 270ps nominal < 0.2 UI Rise/Fall Time: Jitter:

Nominal Wavelength:1310nm 1550nm

Optical Power: -7dBm ±1dBm @ 1310nm

0dBm ±1dBm @ 1550nm

Electrical:

Voltage: Power: +12V DC 6W

Physical:

Number of Slots:

Compliance:

CSA Listed to UI 60065-03 JEC 60065 Electrical Safety

Complies with CE Low voltage

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

0

HD OUTPL 0

0

0

(o)

(o)

0

0

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A FMI/RFI

EU EMC directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | х      | х      |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      | х      |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      | х      |
| 7707VAR-HD          | х      | Х      |
| 7707VAR-HD          | Х      | Х      |

#### **>>>**Ordering Information

7707EO13-3-HD Triple HD or SD Electrical to Optical Converter, 19.4Mb/s or 143Mb/s -1.485Gb/s, 1310nm FP laser, VistaLINK®
Triple HD or SD Electrical to Optical Converter, 19.4Mb/s or 143Mb/s 7707EO15-3-HD

-1.485Gb/s, 1550nm DFB laser, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

+1RU +SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST +FC ST/PC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

 $\circ$ 

0

0

0

0

0














▶ Features & Benefits

- · Three independent channels of optical to electrical conversion that support all SMPTE 292M standards at 1.485Gb/s
- Supports reclocking of all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- · Supports reclocking of additional standards of SMPTE 305M (SDTi), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Automatically operates in non-reclocking mode in the presence of rates not supported by reclocking
- Fully hot-swappable from front of frame, with no fiber or BNC disconnect/reconnect required
- High density -accommodates up to 45 independent channels of optical conversion, in a single 3RU frame
- · Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Detection and display of optical input power, and data rate
- Wide range optical input (1270nm-1610nm)
- Supports single-mode and multi-mode fiber optic cable
- · SC/PC, ST/PC or FC/PC connector options
- · Tally output on Frame Status bus upon loss of input signal

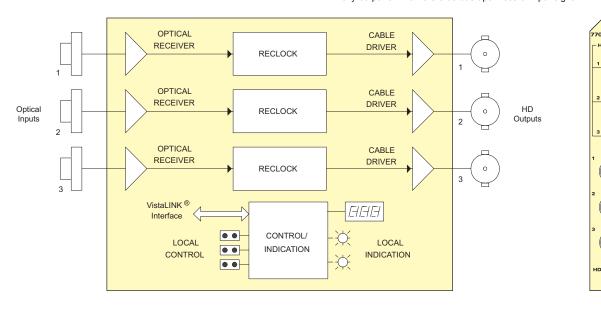

### ▶Specifications

SMPTE 292M, SMPTE 259M-A,B,C,D Standards:

SMPTE 305M, SMPTE 310M, SMPTE 344M, M2S, DVB-ASI

Optical Inputs:

3 (independent channels) Number of Inputs:

SC/PC, ST/PC, FC/PC female housing Connector

Operating Wavele

, 1270nm to 1610nm

Max. Input Power: -1dBm Optical Sensitivity: -18dBm Serial Video Outputs:

Number of Outputs: 3 reclocked (independent channels) 3 BNC per IÈC 61169-8 Annex A Connector:

Signal Level: 800mV nominal

DC Offset: 0V ±0.5V

Rise/Fall Time SD @270Mb/s:

600ps nominal HD @1.485Gb/s: 150ps nominal

Overshoot: < 10% of amplitude Return Loss: > 15dB up to 1.5Gb/s

< 0.2 UI

Jitter: Electrical:

+12V DC Voltage:

Power: EMI/RFI: 6W

Complies with FCC Part 15, Class A

EU EMC Directive

### Number of Slots: Transmitter Compatibility Chart:

Physical:

| MODEL #             | SD-SDI | HD-SDI |  |
|---------------------|--------|--------|--|
| 2405/7705/7707OE    | Х      |        |  |
| 2405/7705/7707OE-HD | Х      | х      |  |
| 7705/7707OE-3       | Х      |        |  |
| 7705/7707OE-3-HD    | Х      | х      |  |
| 7707ADVR            | Х      |        |  |
| 7707ADVR-HD         | Х      | х      |  |
| 7707VAR-HD          | Х      | х      |  |

### >>>Ordering Information

77070E-3-HD Triple HD or SD Optical to Electrical Converter, 19.4Mb/s or 143Mb/s - 1.485Gb/s, VistaLINK®

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU +1RU

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC Accessories:

Fiber Optic Patch Cable See CWDM & DWDM Ordering Information Page

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure


7700 Modular - Fiber - HD-SDI Transport

### HDTV Electrical to Optical Converter, 19.4Mb/s to 1.5Gb/s

### ▶ Features & Benefits

- Supports all SMPTE 292M standards at 1.485Gb/s
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports SMPTE 310M (19.4Mb/s), M2S or DVB-ASI (270Mb/s), SMPTE 344M (540Mb/s), and SMPTE 305M (SDTi) rates
- Auto rate selection, indication and reclocking for all SDI and HD-SDI data rates from 143Mb/s to 1.485Gb/s
- · Selectable non-reclock mode for other data rates
- · Detection and display of equalization strength, video format, and EDH errors (SDI only)
- Automatic coaxial input equalization to 150m for all rates to 1.485Gb/s (Belden 1694A)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- · Supports single-mode and multi-mode fiber optic cable
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

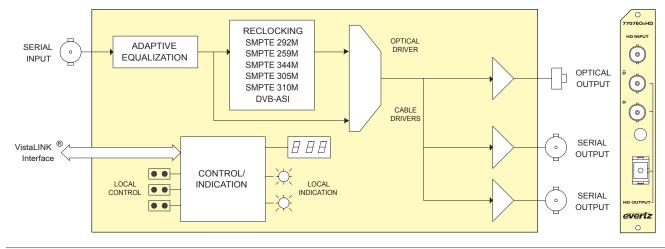

### ▶Specifications

### Serial Video Input:

Standards

Reclocked SMPTE 292M, SMPTE 259M A, B, C, D,

SMPTE 344M, SMPTE 305M, DVB-ASI,

M2S, SMPTE 310M

Any bi-level signal type at rates of Non-Reclocked: 19.4Mb/s to 1.485Gb/s

Connector: 1 BNC per IEC 61169-8 Annex A Equalization: Automatic to 150m @ 1.485Gb/s with

Belden 1694A or equivalent cable > 15dB to 1.5GHz Return Loss:

### Serial Video Outputs:

Number of Outputs: 2 Per Card (1 output DVB-ASI/M2S

1 BNC per IEC 61169-8 Annex A 800mV ±80mV Connector: Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: < 270ps

Overshoot: < 10% of amplitude > 12dB to 1.5GHz Return Loss Wide Band Jitter: < 0.2 UI (Reclocked). Optical Output:

Output Power

SMPTE 297M Standard: Number of Outputs:

Connector: Female SC/PC, ST/PC or FC/PC > 14dB

Return Loss: Rise and Fall Time: < 270ps

< 0.2 UI (Reclocked). Wide Band Jitter: Wavelengths: See Ordering Information

1310nm FP: -7dBm ±1dBm 1310/1550nm DFB: 0dBm ±1dBm

CWDM 0dBm +1dBm DWDM: 7dBm ±1dBm

Electrical:

+12V DC Voltage: 8W (Non DWDM) Power: 11W (DWDM)

EMI/RFI: Complies with FCC Part 15, Class A

FU FMC Directive

Physical: Number of slots:

### Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |  |
|---------------------|--------|--------|--|
| 2405/7705/7707OE    | х      |        |  |
| 2405/7705/7707OE-HD | х      | х      |  |
| 7705/7707OE-3       | х      |        |  |
| 7705/7707OE-3-HD    | Х      | х      |  |
| 7707ADVR            | х      |        |  |
| 7707ADVR-HD         | х      | х      |  |
| 7707VAR-HD          | Х      | х      |  |

### **▶** ► ► Ordering Information

7707EO13-HD HD Electrical to Optical Converter, 1310nm FP Laser 7707EO15-HD HD Electrical to Optical Converter, 1550nm DFB Laser

For CWDM, please refer to the end of the fiber section for ordering information 7707EOxx-HD HD Electrical to Optical Converter, CWDM DFB Laser

For DWDM, please refer to the end of the fiber section for ordering information 7707EODxxx-HD HD Electrical to Optical Converter, DWDM Laser

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +ST +FC ST/PC FC/PC Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

### HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s

### ▶ Features & Benefits

- · Supports all SMPTE 292M standards at 1.485Gb/s
- Supports all SMPTE 259M standards with operation from 143Mb/s-360Mb/s
- Supports SMPTE 310M (19.4Mb/s), M2S or DVB-ASI (270Mb/s), SMPTE 344M (540Mb/s), and SMPTE 305M (SDTi) rates
- Auto rate selection, indication and reclocking for all SDI and HD-SDI data rates from 143Mb/s to 1.485Gb/s
- · Selectable non-reclock mode for other rates
- · Detection and display of optical input power, video format, and EDH errors (SDI only)
- Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module
- · Display of received optical power for continuous indication of link integrity
- Wide range optical input (1270nm-1610nm)
- Supports single-mode and multi-mode fiber optic cable
- · Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller

module in slot 1 of the frame

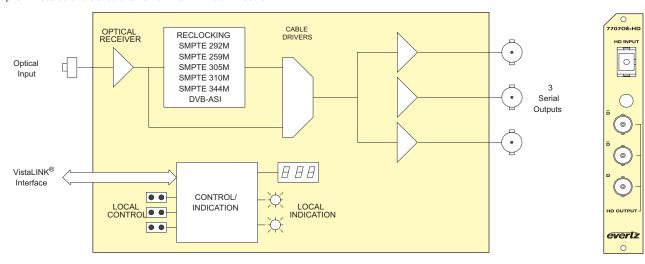

### ▶ Specifications

Optical Input:

SMPTE 297M Standards

SMPTE 292M, SMPTE 259M , A, B, C,D, SMPTE 310M (19.4Mb/s)SMPTE

305M, DVB-ASI, M2S

Non-Reclocked: Any bi-level signal type at rates of

19.4Mb/s-1.485Gb/s

Female SC/PC, ST/PC or FC/PC Connector: 1270nm-1610nm

Wavelength: Optical Sensitivity:

Standard: -23dBm @ 1.485Gb/s

High Sensitivity (-H): -28dBm @ 1.485Gb/s

Max. Input Power:

-1dBm High Sensitivity (-H): -8dBm

### Serial Video Outputs:

Number of Outputs: 3 Per Card (1 output DVB-ASI/ M2S

compliant)

Connectors 1 BNC per IEC 61169-8 Annex A Impedance:  $75\Omega$  (nominal)

Signal Level: 800mV(nominal) DC Offset: 0V ±0.5V < 270ps < 10% of amplitude Rise and Fall Time Overshoot:

> 12dB to 1.5GHz Return Loss Wide Band Jitter: < 0.20 UI (Reclocked)

Electrical:

Voltage: +12V DC 8W

Power EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

### Physical:

Number of slots:

### Transmitter Compatibility Chart:

| SD-SDI | HD-SDI                |
|--------|-----------------------|
| х      |                       |
| х      | х                     |
| х      |                       |
| х      | х                     |
| х      |                       |
| х      | х                     |
| Х      | х                     |
|        | x<br>x<br>x<br>x<br>x |

### **>>>**Ordering Information

77070E-HD HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s

77070E-HD-H HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s, High

Sensitivity

Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

**Ordering Options** 

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU +1RU

Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST SC/PC ST/PC FC/PC +FC

### Accessories:

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 7700FR-C 7701FR 1RU Multiframe, which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

7700 Modular - Fiber - HD-SDI Transport








### ▶ Features & Benefits

- · Single card TDM multiplexer for two HD-SDI signals, or one HD-SDI signal and three SDI/DVB-ASI signals, or four SDI/DVB-ASI signals
- Two auto-sensing video inputs for HD-SDI or SDI/DVB-ASI video signals
- Two 270Mb/s inputs for SDI or DVB-ASI video signals
- Signal transport over fiber uninterrupted by loss of any HD-SDI, SDI, SDTi or DVB-ASI input feed
- · Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame

Controller module in slot 1 of the frame

- Automatic coaxial input equalization up to 130m at 1.485Gb/s and 250m at 270Mb/s (Belden 1694A)
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · SC/PC, ST/PC, FC/PC connector options
- Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

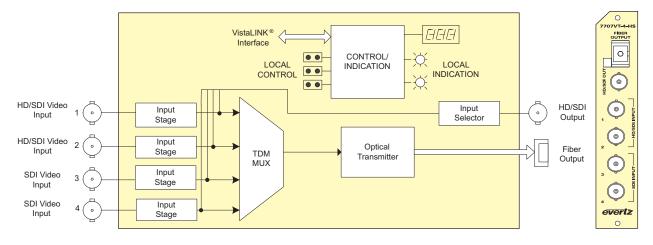

### ▶Specifications

### Serial Video Input:

2 HD/SDI/DVB-ASI and 2 SDI/DVB-ASI Number of Inputs:

video signals

Standard: SMPTE 292M\_SMPTE 259M-C\_DVB-ASI Inputs 1&2 SMPTE 259M-C, DVB-ASI Inputs 3&4

4 BNC per IEC 61169-8 Annex A Equalization: Automatic to 100m @ 1.485Gb/s and 250m @ 270Mb/s with Belden 1694A or equivalent cable

> 15dB up to 1.5Gb/s Return Loss:

Serial Video Output:

Number of Outputs: 1, loopback signal user-selectable

from above 4 inputs 1 BNC per IEC 61169-8 Annex A SMPTE 292M, SMPTE 259-C, Connector: Standards:

SMPTE 305.2M 800mV nominal 0V +0.5V

Signal Level: DC Offset: Rise and Fall Time:

< 270ps at 1.485Gb/s and 900ps

nominal at 270Mb/s < 10% of amplitude

Return Loss: > 12dB to 1.5Gb/s

Wideband Jitter: < 0.2 UI

Overshoot:

Optical Output:

Number:

Female SC/PC, ST/PC or FC/PC Connector Return Loss > 14dB

Rise and Fall Time: 200 ps nominal

Wideband Jitter: < 0.2 UI

Fiber Size: 9μm core/125mm overall Wavelengths:

1310nm, 1550nm (nominal) Standard: CWDM:

1270nm to 1610nm (See Ordering

Information)

C-Band (ITU-T G.694.1 compliant) (See

Ordering Information) Output Power:

1310nm FP(Standard)

-7dBm ±1dBm 1550nm & CWDM DFB:

0dBm ±1dBm

DWDM DFB: 7dBm ±1dBm

Electrical:

DWDM:

Voltage: +12V DC

10W (Non DWDM) Power: 13W (DWDM)

Physical: Number of slots:

Compliance:

Electrical Safety

CSA Listed to CSA C22.2 No. 60065-03.

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

directive 93/68/EEC

Complies with 24 CFR 1040.10 and Laser Safety: 1040.11 except for deviations

pursuant to LN No. 50, dated July 26,

2001

Complies with IEC 60825-1, Am. 2 EMI/RFI Complies with FCC regulations for

class A devices

Complies with EU EMC directive

89/336/EEC

### >>> Ordering Information

7707VT13-4-HS Quad SD/Dual HD Fiber Transmitter, 1310nm FP, VistaLINK® 7707VT15-4-HS Quad SD/Dual HD Fiber Transmitter, 1550nm DFB, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information Quad SD/Dual HD Fiber Transmitter, CWDM Laser, VistaLINK® 7707VTxx-4-HS

For DWDM, please refer to the end of the fiber section for ordering information 7707VTDxx-4-HS Quad SD/Dual HD Fiber Transmitter, DWDM Laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eq: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

**Enclosures** 

350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

### ▶ Features & Benefits

- Single card TDM de-multiplexer for two HD-SDI signals, or one HD-SDI signal and three SDI/DVB-ASI signals, or four SDI/DVB-ASI signals
- · Low litter outputs
- · Independent signal outputs unaffected by loss of any other HD, SDI or DVB-ASI input feed
- · Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Fully hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

- SC/PC, ST/PC, FC/PC connector options
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

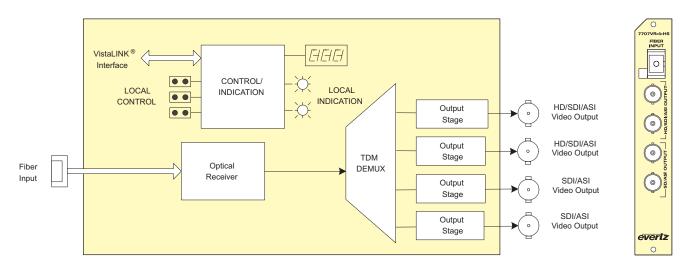

### **▶** Specifications

Optical Input:

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC

Return Loss > 25dB Operating Wavelength:

1270nm to 1610nm

Maximum Input Power: Standard Version: -1dBm -H Version: -8dBm Optical Sensitivity: Standard Version: -20dBm -H Version: -28dBm

Serial Video Outputs:

Standard:

Number of Outputs: 2 HD/SDI/DVB-ASI and 2 SDI/DVB-ASI

video signals

SMPTE 292M, SMPTE 259M-C, Outputs 1&2: DVB-ASI

SMPTE 259M-C, DVB-ASI Outputs 3&4:

Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V

Rise and Fall Time:

1.485Gb/s: < 270ps 270Mb/s: 900ps nominal < 10% of amplitude Overshoot:

Return Loss: > 12dB to 1.5Gb/s Wide Band Jitter: < 0.2 UI

Electrical:

+12V DC Voltage:

Power: 10W

Physical: Number of slots:

### **>>>**Ordering Information

7707VR-4-HS Quad SD/Dual HD Demux Fiber Receiver, VistaLINK® 7707VR-4-HS-H Quad SD/Dual HD Demux Fiber Receiver, High sensitivity RX,

**Ordering Options** 

Rear Plate and Fiber Connector must be specified at time of order

Eq: Model +SC +3RU

Rear Plate Suffix

Connector Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

+SC

+ST +FC

> 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

SC/PC ST/PC

FC/PC




### HDTV Miniature Optical Transmitter, 19.4Mb/s to 1.5Gb/s


### ▶ Features & Benefits

- · Operation from 19.4Mb/s to 1.5Gb/s
- Reclocking for SMPTE 292M (1.485Gb/s)
- Non-reclocking for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S and DVB-ASI
- · Available in 1310nm, 1550nm, and up to sixteen different CWDM wavelengths (ITU-T G.694.2 compliant)
- · Automatic laser shutdown on absence of input signal for extended laser life
- Supports single-mode and multi-mode fiber optic cable
- Immunity to video Pathological signals
- · Rugged, small form factor enclosure
- · Low Power, +12V DC operation
- Backwards compatible with 7705 & 7707OE-HD modules



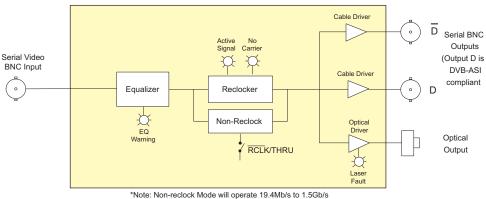





▶ Specifications Standards

SMPTE 292M, 259M, 297M, 310M, M2S, DVB-ASI, and any bi-level Telecom/Datacom signal from 19.4Mb/s to 1.5Gb/s

Serial Video BNC Input:

Number of Inputs:

Connector: 1 BNC per IEC 61169-8 Annex A Equalization: Automatic to 125m @ 1.485Gb/s with Belden 1694A (or equivalent)

> 15dB up to 1.485GHz Return Loss:

Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant) 1 BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise, Fall Time: 270ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 1.485GHz

Wideband Jitter: < 0.2 UI Optical Output:

Number of Outputs: 1

Connector: SC/PC, ST/PC, FC/PC Female Housing

Return Loss > 14dB Rise, Fall Time: 200ps nominal Jitter: < 0.2 UI reclocked

Nominal Wavelength: Standard:

1310nm, 1550nm CWDM: 1270nm-1610nm (See Ordering Info)

Optical Power:

1310nm FP: -7dBm ±1dBm 1310nm/1550nm DFB: 0 dBm +1dBm CWDM DFB: 0 dBm ±1dBm

Physical:

With Flanges: 6"L x 4"W x 1"H (152mm L x 114mm W x 25mm H) Dimensions:

Weight: 0.5lbs (0.28kg)

Electrical:

+12V DC Voltage: Power:

Safety Complies with EU Safety Directive Complies with FCC Part 15, Class A EU EMC Directive EMI/RFI:

### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | х      | х      |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      | х      |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      | х      |
| 7707VAR-HD          | х      | Х      |
|                     |        |        |

### >>> Ordering Information

2405EO3F-HD HD Miniature Optical Transmitter 1310nm, FP Laser 2405EO3D-HD HD Miniature Optical Transmitter 1310nm, DFB Laser HD Miniature Optical Transmitter 1550nm, DFB Laser 2405EO5D-HD

For CWDM, please refer to the end of the fiber section for ordering information 2405EOxx-HD HD Miniature Optical Transmitter CWDM DFB Laser

All 2405 modules include power supply

Connector Suffix

+SC +ST SC/PC ST/PC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Ordering Options

Fiber Connector must be specified at time of order


Eg: Model +SC













- · Operation from 19.4Mb/s to 1.5Gb/s
- Reclocking for SMPTE 292M (1.485Gb/s)
- Non-reclocking for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S and DVB-ASI
- Immunity to video Pathological signals

- · Supports single-mode and multi-mode fiber optic cable
- Rugged, small form factor enclosure
- Low Power, +12V DC operation
- Backwards compatible with 7705 & 7707EO-HD modules



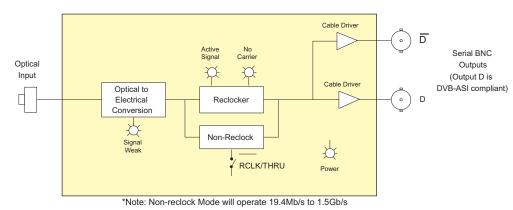



### **▶** Specifications

SMPTE 292M, 259M, 297M, 310M, Standards

M2S, DVB-ASI, and any bi-level Telecom/Datacom signal from 19.4Mb/s to 1.5Gb/s

Optical Input:

Number of Inputs: Operating Wavelength:

1270nm to 1610nm

Max. Input Power: -1dBm Optical Sensitivity: -23dBm

SC/PC, ST/PC, FC/PC Female Housing Connector:

Serial Video BNC Outputs:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant)
Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V +0.5V Rise, Fall Time: 270ps nominal < 10% of amplitude Overshoot:

Return Loss:

> 15dB up to 1.485GHz

Wideband Jitter: < 0.2 UI

Physical:

With Flanges: 6"L x 4"W x 1"H (152mm L x 114mm W x 25mm H) Dimensions:

Weight: 0.5lbs (0.28kg) Electrical:

+12V DC Voltage:

Power:

Safety: Complies with EU Safety Directive Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | х              |        |
| 2405/7705/7707EO-HD | х              | х      |
| 7705/7707EO-3       | х              |        |
| 7705/7707EO-3-HD    | х              | Х      |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              | Х      |
| 7707VAT-HD          | х              | Х      |
|                     |                |        |

### >>> Ordering Information

24050E-HD HD Miniature Optical Receiver, 19.4Mb/s to 1.5Gb/s

**Ordering Options** Fiber Connector must be specified at time of order

Eg: Model +SC

Connector Suffix


SC/PC +ST ST/PC +FC FC/PC Fiber Optic Patch Cable


See CWDM & DWDM Ordering Information Page

### ▶ Features & Benefits

- Single card fiber optic transmitter for one composite Analog, SDI or HD-SDI video and four analog or AES audio signals
- · Auto-sensing (analog or digital) video and audio inputs
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Supports HD (SMPTE 292M) video @ 1.485Gb/s
- · Supports both NTSC and PAL analog video
- Supports Analog to Digital and Digital to Analog audio conversion
- · Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- Supports 32, 44.1, 48kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible

- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable gain equalization for analog video for up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU G 694.2 compliant)
- DWDM wavelengths also available (ITU G.694.1 compliant)

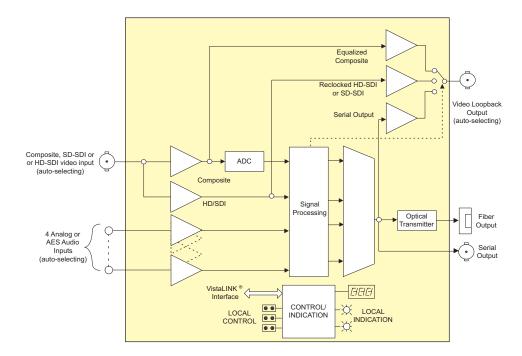











# 7700 Modular - Fiber - HD-SDI Audio/Data Transport

### Analog, SDI or HD-SDI Video with 4/Channel Analog or AES Audio Fiber Transmitter

### ▶Specifications

Analog Video Input:

SMPTE 170M (NTSC), ITU-R 624-2 (PAL) Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector:

Signal Quantization: 12 bit System Bandwidth: > 5.5MHz Input Level:

2V p-p (Maximum) Up to 250m of Belden 1694A or Gain Equalization: equivalent (adjustable)

Input impedance: 75Ω > 30dB to 5.5MHz Return Loss:

Signal/Noise Ratio: > 70dB Differential Gain: Differential Phase:  $< 0.7^{\circ}$ Passband Ripple:

< ±0.1dB to 4.1MHz, < ±0.2dB to 5.5MHz NTSC: PAI ·  $< \pm 0.1$ dB to 4.8MHz,  $< \pm 0.2$ dB to 5.8MHz

Chroma/Luma Gain: 98% to 103%

Chroma/Luma Delay: PAL: Line Time Distortion: 1.2%

Serial Video Input:

SMPTE 259M-C (525 or 625 line Standard:

component), SMPTE 305M (SDTi), DVB-ASI (without separate audio),

SMPTE 292M (HD)

1 BNC per IEC 61169-8 Annex A Connector: Automatic to 300m @ 270 Mb/s and Equalization:

100m @1.485 Gb/s with Belden 1694A or equivalent cable

> 15dB up to 1.485Gb/s Return Loss:

Analog Video Output:

Standard: Same as Analog Video Input Number of Outputs: 1

Connector:

1 BNC per IEC 61169-8 Annex A

Output Level: 1V p-p Output Impedance:  $75\Omega$ 

> 30dB to 5.5MHz Return Loss:

Serial Video Output:

Number of Outputs: 2, (1 loopback, 1 serial) 1 BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270 Mb/s

< 270ps @ 1.485Gh/s Overshoot: < 10% of amplitude > 15dB at 270Mb/s

Wide Band Jitter: < 0.2 UI

Analog Audio Inputs:

Number of Inputs: Type: Balanced analog audio Connector: 12-pin removable terminal block Input impedance: High Impedance (>  $20k\Omega$ )

±0.1dB, 20Hz to 20kHz Freq. Response: THD 20Hz-20kHz: < 0.005% Channel Phase Diff.: ±1° SNR (weighted): > 85dB Max. Audio Input Level:+24dBu

Signal Quantization: 24 Bits

AES Audio Inputs:

Number of Inputs: 4 (auto-sensing for balanced or

unbalanced input)

Standard: Unbalanced AES: SMPTE 276M

Balanced AES: AES3-1992 Other: Dolby-E™ compatible

Connector: 12-pin removable terminal block Input Return Loss: > 15dB (1MHz to 6MHz)

Signal Level:

Unbalanced: 1.2V p-p ±0.1V Balanced: 1 to 7 Vp-p

Equalization:

450m of Belden 1800D cable Unbalanced: 1500m of Belden 1694A cable Balanced: Resolution: Up to 24 bits

Sampling Rate: 32, 44.1, 48kHz

Impedance: Unbalanced: 75Ω Balanced:  $110\Omega$  Optical Outputs:

Number of Outpu

Female SC/PC, ST/PC or FC/PC Connector:

See Ordering Information

> 14dB Return Loss Rise and Fall Time: 200ps nominal Fiber Size: 9mm core/125mm overall

Wavelengths Standard 1310nm, 1550nm (nominal) CWDM: See Ordering Information

DWDM: Output Power:

1310nm FP (Standard):

-7dBm ±1dBm 1550 & CWDM DFB:

0dBm ±1dBm DWDM DFB +7dBm ±1dBm

Electrical:

+12V DC Voltage:

Power: 16W (Non DWDM) 19W (DWDM)

Physical:

Number of slots:

Compliance:

CSA Listed to UL 60065-03, IEC 60065 Electrical Safety

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040 11 IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | х      | х      |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | х      | х      |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      | х      |
| 7707VAR-HD          | х      | х      |

### **▶** ► ► ► Ordering Information

Analog, or SDI or HD Video with 4/Channel Analog or AES Audio 7707ADVT13-HD:

Fiber Transmitte

Analog, or SDI or HD Video with 4/Channel Analog or AES Audio 7707ADVT15-HD

Fiber Transmitter

For CWDM applications please refer to the end of the fiber section for details Analog, HD-SDI or SDI Video & 4 Analog or 4 AES audio Fiber 7707ADVTxx-HD

Transmitter, CWDM Laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details Analog, HD-SDI or SDI Video & 4 Analog or 4 AES audio Fiber 7707ADVTDxxx-HD

Transmitter, DWDM Laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

**Ordering Options** 

Rear Plate Suffix +3RU 3RU Rear Plate for use with 7700FR-D Multiframe Connector Suffix

+SC +ST SC/PC ST/PC FC/PC +FC

Enclosures 7700FR-D

3RU Multiframe which holds up to 15 single slot modules








### Analog, SDI or HD-SDI Video with 4 Channel Analog or AES Audio Fiber Receiver

### ▶ Features & Benefits

- Single card fiber optic receiver for one composite Analog, SDI or HD-SDI video and four analog or AES audio signals
- · Auto sensing (analog or digital) video and audio outputs
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Supports HD (SMPTE 292M) video @ 1.485Gb/s
- Supports both NTSC and PAL analog or 4:2:2 component digital video
- Supports Analog to Digital and Digital to Analog audio conversion
- Broadcast quality analog video and audio performance
- Meets or exceeds EIA/TIA RS250-C short haul specifications for analog video and audio transport
- Supports 32, 44.1, 48kHz AES audio
- Dolby-E<sup>™</sup> compatible

- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Adjustable gain, DC offset and pre-emphasis for analog video for driving up to 250m of Belden 1694A coaxial cable
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single-mode and multi-mode fiber optic cable
- Wideband optical input (1270nm-1610nm)

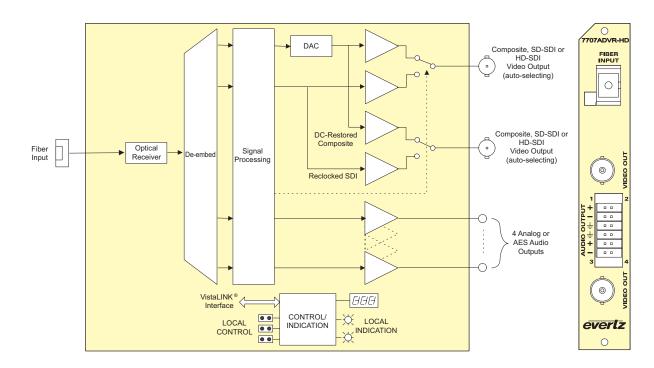











### Analog, SDI or HD-SDI Video with 4 Channel Analog or AES Audio Fiber Receiver

### ▶Specifications

Analog Video Outputs:

SMPTE 170M, (NTSC), ITU-R 624-2

(PAL)

Number of Outputs: 2 BNC per IEC 61169-8 Annex A

System bandwidth: > 5.5MHz

1V p-p (nominal), 2V p-p (maximum) Output Level: Gain: Unity gain nominal, adjustable

50% to 150%

Output Impedance:  $75\Omega$ 

> 30dB to 5.5MHz Return Loss:

SNR: > 70dB Differential Gain: Differential Phase: < 0.7°

Pre-Emphasis: Adjustable cable loss compensation for up to 250m of Belden 1694A

Passband Ripple:

< +0 1dB to 4 1MHz and NTSC: < ±0.2dB to 5.5MHz PAL: < ±0.1dB to 4.8MHz and < ±0.2dB to 5.8MHz

Chroma/Luma Gain: 98%-103%

Chroma/Lurna Chroma/Luma Delay: PAI · < 12ns Line Time Distortion: 1.2%

Serial Video Output:

Number of Outputs: 2 regenerated

SMPTE 259M-C (525 or 625 line Standard:

component), SMPTE 305M (SDTi), DVB-ASI (without separate audio), SMPTE 292M (HD)

1 BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270Mb/s

< 270ps @1.485Gb/s Overshoot: < 10% of amplitude Return Loss: > 15dB up to 1.485Gb/s

Wide Band Jitter: < 0.2 UI

Analog Audio Outputs: Number of Outputs: 4

Balanced analog audio Type:

Connector: 12-pin removable terminal block Output impedance:  $66\Omega$ 

Freq. Response: THD 20Hz-20kHz: ±0.1dB, 20Hz to 20kHz < 0.005%

Channel Phase Diff.±1° SNR (weighted): > 85dB Output Level Adi: -20dB to +3dB Max Output Level: +24dBu into  $10k\Omega$  loads

**AES Audio Outputs:** 

Number of Outputs: 4 regenerated (selectable for balanced or unbalanced)

Standard:

Unhalanced AFS: SMPTF 276M AES3-1992 Balanced AES:

Other: Dolby-E™ compatible

Connector: 12-pin removable terminal block > 15dB (1MHz to 6MHz) Input Return Loss:

Signal Level: Unbalanced: Balanced:

1V p-p ±0.1V p-p 2V p-p ±0.1V p-p Up to 24-bits Resolution: Sampling Rate: 32, 44.1, 48kHz Output Jitter: < 0.1 UI Impedance:

75Ω Unbalanced: Balanced: 110Ω

Optical Input:

Number of Inputs: Female SC/PC, ST/PC, FC/PC

Operating Wavelength:

1270nm to 1610nm

Max. Input Power: 0dBm Optical Sensitivity: -25dBm High Standard Sensitivity: -30dBm Electrical:

+12V DC Voltage: 13W Power:

Physical:

Number of slots:

### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707EO    | Х      |        |
| 2405/7705/7707EO-HD | Х      | х      |
| 7705/7707EO-3       | Х      |        |
| 7705/7707EO-3-HD    | Х      | х      |
| 7707ADVT            | х      |        |
| 7707ADVT-HD         | х      | х      |
| 7707VAT-HD          | x      | х      |











Analog, SDI or HD-SDI Video & Analog/AES Audio Fiber Optic 7707ADVR-HD

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 7700FR-D Multiframe

Connector Suffix

SC/PC ST/PC FC/PC +ST +FC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures

7700FR-D 3RU Multiframe which holds up to 15 single slot modules

### HDTV with 4 AES Audio Fiber Receiver


The 7707VAR-HD is a VistaLINK® -capable fiber optic receiver for HDTV or SDTV video and AES audio signals. This single card module outputs one HD-SDI or SD-SDI video plus four AES audio signals that have been transmitted by the companion 7707VAT-HD fiber optic transmitter.

The 7707VAR-HD occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

### ▶ Features & Benefits

- Supports HDTV video formats @ 1.485Gb/s
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- · Provides up to four de-embedded AES audio outputs
- Dolby-E<sup>™</sup> compatible
- · Local display of optical signal strength, video and audio presence, video and AES formats
- · Fully hot-swappable from front of frame

- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Supports single-mode and multi-mode fiber optic cable
- · Accepts any wavelength in the 1270nm to 1610nm range

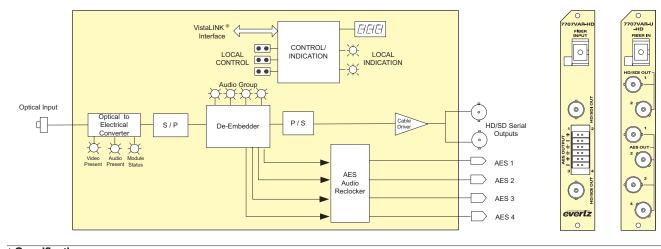

### ▶Specifications

Optical Input: Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC

Return Loss: > 25dB Operating Wavelength

1270nm to 1610nm

Maximum Input Power: -1dBm Standard: -H version: -7dBm Optical Sensitivity: Standard: -23dBm -H version: -28dBm

Serial Video Outputs:

Number of Outputs: 2 regenerated Standard: SMPTE 292M, SMPTE 259M-C,

SMPTE 305M (SDTi), DVB-ASI (without separate audio)
1 BNC per IEC 61169-8 Annex A

Connector: 800mV nominal

Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: < 270 ps for HDSDI, < 900 ps for SDI

< 10% of amplitude Overshoot: > 15dB up to 1.485Gb/s Return Loss

Wide Band Jitter: < 0.2 UI

### **AES Audio Outputs:**

Number of Signals: 4

Standards: AES3-2003 (Balanced AES) SMPTE 276M (Unbalanced AES)

Connector

7707VAR-HD 12-pin removable terminal strip 7707VAR-U-HD 1 BNC per IEC 61169-8 Annex A

Sampling Rate: 48kHz Resolution: Up to 24 bits Signal Level:

Balanced: Unbalanced: 1V p-p ±0.1V 2V p-p ±0.1V Differential

Rise/Fall Times: Balanced: 20ns ±5ns

Unbalanced: 35ns ±5ns Impedance: Balanced: 110Ω Unbalanced:  $75\Omega$ 

> 15dB from 1MHz to 6MHz Return Loss: Wideband Jitter:

< 10ns p-p, with conditions of minimum to maximum cable length

### System Performance (7707VAT-HD + 7707VAR-HD):

Video Input To Output Delay:

Audio to Video delay:

< 3.3ms with SRC enabled +4ms with audio pop minimization enabled

Electrical:

Voltage: +12V DC 11W

Physical:

Number of slots:

### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707EO    | х      |        |
| 2405/7705/7707EO-HD | х      | х      |
| 7705/7707EO-3       | х      |        |
| 7705/7707EO-3-HD    | х      | х      |
| 7707ADVT            | х      |        |
| 7707ADVT-HD         | х      | х      |
| 7707VAT-HD          | х      | Х      |
|                     |        |        |

### **▶** ► ► ► Ordering Information

HDTV with 4 AES Audio Fiber Receiver, VistaLINK® Monitoring 7707VAR-HD 7707VAR-HD-H

HDTV with 4 AES Audio High Sensitivity Fiber Receiver, VistaLINK®

Monitoring

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

+U Unbalanced AES audio

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC SC/PC

+SCF SC/PC connector with flap cover +ST ST/PC

+FC FC/PC

Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 

350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules


7701FR S7701FR Standalone enclosure The 7707VAT-HD is a VistaLINK® -capable fiber optic transmitter for HDTV or SDTV video and AES audio signals. This single card module accepts one HD-SDI or SD-SDI video plus four AES audio and transmits them on a single fiber. The companion 7707VAR-HD receiver converts the HD-SDI and AES back to separate video and audio.


The fiber output is available in an assortment of optical wavelengths accommodating 1310/1550nm, CWDM and DWDM transmission schemes. The 7707VAT-HD occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR that will hold up to 7 modules, or a standalone enclosure holding 1 module.

### ▶ Features & Benefits

- Supports HDTV video formats @ 1.485Gb/s
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Supports 32, 44.1, 48 kHz AES audio inputs
- Dolby-E<sup>™</sup> compatible
- · AES audio inputs can be synchronous or asynchronous to each other and/or to input video
- Reclocked video output for additional signal distribution or monitoring
- · Signal transport over fiber uninterrupted by loss of video or AES audio input feeds
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Local display of input coaxial cable length equalization

- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Automatic coaxial input equalization up to 130m at 1.485Gb/s and 300m at 270Mb/s (Belden 1694A)
- · Fully Hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

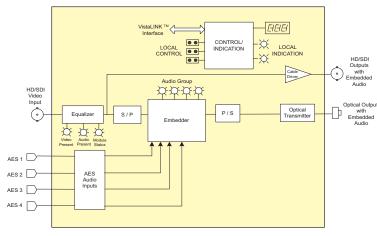



### ▶ Specifications

Serial Video Input:

SMPTE 292M SMPTE 259M-C Standard: SMPTE 305M (SDTi), DVB-ASI

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 100m @ 1.485 Gb/s and Equalization:

300m @ 270 Mb/s with Belden 1694A (or

> 15 dB up to 1.485Gb/s Return Loss:

Serial Video Output:

Number of Outputs: 1 Per Card reclocked 1 BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level:

0V ± 0.5V DC Offset: Rise and Fall Time: < 270ps for HDI, < 900ps for SD < 10% of amplitude

Return Loss: > 15dB up to 1.485Gb/s

Wide Band Jitter: < 0.2 UI

AES Audio Inputs:

Overshoot:

Number of Signals: 4 Inputs

Standards: AES3-2003 (Balanced AES) SMPTE 276M (Unbalanced AES)

Connector: 7707VAT-HD:

12-pin removable terminal strip 1 BNC per IEC 61169-8 Annex A 32kHz, 44.1kHz, 48kHz 7707VAT-U-HD: Sampling Rate

Resolution: Up to 24 bits Minimum Innut

200mV p-p Balanced 7V p-p, Unbalanced 1.2V p-p Maximum Input: Equalization:

Balanced: <600m @ 48kHz, with Belden 1800B,

and 2V p-p source signal

Unbalanced: <1200m @ 48kHz, with Belden 8281, and 1V p-p source signal

Balanced 110 $\Omega$ . Unbalanced 75 $\Omega$ Impedance: Return Loss > 15dB, from 1MHz to 6MHz Alianment Jitter < 10ns p-p, with conditions of minimum to maximum cable length

Optical Output:

Number:

Female SC/PC, ST/PC or FC/PC Connector: Return Loss: > 14dB See Ordering Information

Wavelengths: Output Power

-7dBm ±1dBm 1310nm FP:

1550nm & CWDM DFB:

0dBm ±1dBm DWDM DFB: 7dBm ±1dBm

Fiber Size: 9um core/125 mm overall

System Performance (7707VAT-HD + 7707VAR-HD):

Video Input To Output Delay: < 35ms Audio to Video delay:< 1.2ms @32kHz/< 1ms @48kHz

+3.3ms with SRC enabled +4ms with audio pop minimization enabled

Electrical:

Voltage: +12V DC

11W (Non-DWDM), 13W (DWDM) Power:

Compliance:

Electrical Safety CSA Listed to UL 60065-03. IEC 60065 Complies with CE Low voltage Directive Class 1 laser product, Complies with 24 CFR Laser Safety 1040.10 and 1040.11, IEC 60825-1 EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC directive

### Receiver Compatibility Chart:

| SD-SDI | HD-SDI           |
|--------|------------------|
| Х      |                  |
| Х      | х                |
| Х      |                  |
| Х      | х                |
| х      |                  |
| х      | х                |
| Х      | х                |
|        | X<br>X<br>X<br>X |

### >>> Ordering Information

7707VAT-13-HD HD-SDI with 4 AES Audio Fiber Transmitter, 1310nm FP laser, Vistal INK® 7707VAT-15-HD HD-SDI with 4 AES Audio Fiber Transmitter, 1550nm DFB laser,

For CWDM applications please refer to the end of the fiber section for details HD-SDI with 4 AES Audio Fiber Transmitter, CWDM Laser

For DWDM application please refer to end of fiber section for details 7707VATDxx-HD HD-SDI with 4 AES Audio Fiber Transmitter, DWDM Laser

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Unbalanced AES audio

Rear Plate Suffix

Eg: Model +SC +3RU

350FR 7700FR-C 7701FR S7701FR

Connector Suffix

+3RU

+1RU

+SA

+SC

+SCF

+ST

+FC

Enclosures

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

SC/PC connector with flap cover

Standalone enclosure

SC/PC

ST/PC

FC/PC









### HD-SDI 4 AES Audio Bi-directional RS-232/422, 2 GPI/GPO Fiber Receiver


### ▶ Features & Benefits


- · Supports HD-SDI and SDI video
- Demultiplexes up to 4 AES audio, bi-directional RS-232/422 and 2 GPIO with HD-SDI or SDI
- Supports all SMPTE 292M (1.485Gb/s) rates/standards
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- Supports 32, 44.1, 48kHz AES audio
- Dolby-E<sup>™</sup> compatible
- · Built-in jitter attenuation
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Local display of optical signal strength, video, audio and data presence, video and AES formats, GPI and GPO status
- · Accepts any wavelength in the 1270nm to 1610nm range
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Supports single-mode and multi mode fiber optic cable
- · Fully hot-swappable from front of frame
- Occupies a single or dual card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules, a 350FR that will hold up to 7 modules or a standalone enclosure that will hold 1 module


| FIBER       | FIBERS   | OPTICAL/LINK<br>BUDGET | TRANSMIT SIDE            |             | RECEIVE SIDE             |                   |   |  |
|-------------|----------|------------------------|--------------------------|-------------|--------------------------|-------------------|---|--|
| TYPE        |          |                        | ORDERING<br>PRODUCT INFO | TX<br>POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |  |
| Multi-Mode  | 2        | < 1km                  | 7707MTA13-HD-F2          | -7dBm       | 7707MRA13-HD-F2          | -23dBm            | 1310nm on Tx & Rx fibers  |  |
| Single-Mode | 2        | 16dB/45km              | 7707MTA13-HD-F2          | -7dBm       | 7707MRA13-HD-F2          | -23dBm            | 1310nm on Tx & Rx fibers  |  |
| Single-Mode | 1 (WDM)  | 20dB/57km              | 7707MTA15-HD-W           | -1dBm       | 7707MRA13-HD-W           | -21dBm            | 1310nm/1550nm, WDM, bi-directional on one fiber                         |  |
| Single-Mode | 1 (CWDM) | 19dB/76km**            | 7707MTAxx-HD-F2          | 0dBm        | 7707MRAxx-HD-F2          | -23dBm            | Different CWDM wavelengths for Tx & Rx, with 8 channel CWDM Mux/Demux** |  |
| Single-Mode | 1 (CWDM) | 24dB/96km**            | 7707MTAxx-HD-H-<br>F2    | 0dBm        | 7707MRAxx-HD-F2-H        | -28dBm            | Different CWDM wavelengths for Tx & Rx, with 8 channel CWDM Mux/Demux** |  |
| Single-Mode | 1 (DWDM) | 30dB/120km***          | 7707MTADxxx-HD-H-<br>F2  | +7dBm       | 7707MRADxxx-HD-H-<br>F2  | -28dBm            | Different DWDM wavelengths for Tx & Rx, with 8 channel DWDM Mux/Demux** |  |

<sup>\*\*</sup>Assumes 8 Ch CWDM Mux/Demux loss of 3.5dB

Fiber loss= 0.35/0.25dB per km @ 1310nm/1550nm

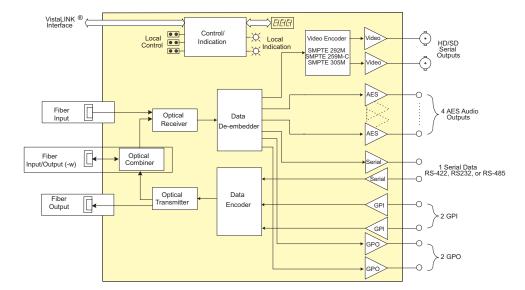











<sup>\*\*\*</sup>Assumes 8 Ch DWDM Mux/Demux loss of 5dB

### 7707MRA-HD-F2, 7707MRA-HD-W

### HD-SDI 4 AES Audio Bi-directional RS-232/422, 2 GPI/GPO Fiber Receiver

### ▶Specifications

Optical Input/Output:

Number of Outputs: 1 (Single fiber version), 2 (Dual fiber

version) Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 14dB Rise and Fall Time: 200 ps nominal

Wide Band Jitter: < 0.2 UI Fiber Size: 9mm core/125mm overall

Input Optical Sensitivity:

See Application Configuration Chart

Wavelengths:

Standard: CWDM: 1310nm, 1550nm (nominal) 1270nm to 1610nm (See ordering information)

DWDM: C-Band/L-Band (ITU-T G.694.1 compliant)

Output Power 1310nm FP:

-7dBm ±1dBm CWDM 0dBm ±1dBm DWDM: +7dBm ±1dBm

Serial Digital Video Outputs:

Number of Outputs: 2 regenerated

SMPTE 292M (HD-SDI), SMPTE 259M-C (SD-SDI), SMPTE 305.2M (SDTi) Standard:

1 BNC per IEC 61169-8 Annex A Connector: 800mV nominal

Signal Level: DC Offset 0V ±0.5V

Rise and Fall Time: 150ps nominal @ 1.485Gb/s, 600ps nominal @ 270Mb/s

Overshoot: < 10% of amplitude Return Loss: > 15dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI

### **AES Audio Outputs:**

Number of Signals: 4 (user-selectable for balanced or

unbalanced)

AES3-2003 (Balanced AES), SMPTE Standards 276M (Unbalanced AES) Multi-pin Removable Terminal Block

Connector: Signal Level:

Unbalanced: 1V p-p ±0.1V Differential

Balanced: 3.5V p-p ±0.1V Resolution: Up to 24-bits Sampling Rate: 48kHz Rise/Fall Times: Balanced: 20ns ±5ns Unhalanced: 35ns +5ns > 15dB to 6MHz Return Loss:

Wideband Jitter: < 10ns p-p, with conditions of minimum to maximum cable length

Latency:

SRC enabled: < 6ms @ 48KHz, < 9ms @ 32KHz SRC disabled: < 4ms @ 48KHz, < 6ms @ 32KHz

Impedance: Unbalanced:  $75\Omega$ Balanced: 110Ω Serial Data:

Number of Signals: 2 input/output

Connector at Breakout:

Multi-pin Removable Terminal Block Signal Type: RS-422, RS-232, or RS-485

(selectable)

Input Termination: High impedance Input Failsafe Bias:  $5K\Omega$  to 5V on DI+ (selectable)

Baud Rate: Up to 153Kb/s (selectable)

General Purpose Inputs:

Number of Signals: 2 input Connector at Breakout:

Multi-pin Removable Terminal Block

Opto-isolated, active low Type:

Input Voltage:

Safe Voltage Range

-20V to +10V

Off Condition (min): +3.5V

On condition (max):

+2.5V (active low)

Input Current (min): 1mA

Input Current (max):10mA (internally limited)

General Purpose Outputs:

Number of Outputs: 'Dry Contact" relay closure Type:

Connector: 1 pin on 16-pin removable terminal block

Signal Level: Normally open

Electrical:

Voltage: +12V DC Power: Non-DWDM: DWDM: 12W

Physical:

7700 or 7701 frame mounting

Number of slots: 1 (7707MRA13-HD-W) 2 (all except above)

Compliance:

EMI/RFI:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage Directive Class 1 laser product

Laser Safety:

Complies with 24 CFR 1040.10 and 1040 11

IEC 60825-1 Complies with FCC Part 15, Class A

EU EMC directive











### >>>Ordering Information

7707MRA13-HD-F2 HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, 1310nm FP Tx & Rx, VistaLINK®

7707MRA13-HD-W

HD-SDL 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver single fiber, WDM, 1310nm FP Tx, Rx on 1550nm, VistaLINK® (Use with 7707MTA15-HD-W)

For CWDM, please refer to the end of the fiber section for ordering information

7707MRAxx-HD-F2 HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber,

CWDM TX, VistaLINK®

7707MRAxx-HD-F2-H High Sensitivity Receiver

For DWDM, please refer to the end of the fiber section for ordering information

7707MRADxxx-HD-F2

HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, DWDM Tx, VistaLINK®

7707MRADxxx-HD-F2-H

High Sensitivity Receiver

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix

+SA

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC

+SCF SC/PC connector with flap cover (-W version only)

+ST ST/PC +FC

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

### ▶ Features & Benefits


- · Supports HD-SDI and SDI video
- Multiplexes up to 4 AES audio, bi-directional RS-232/422 and 2 GPIO with HD-SDI or SDI
- Supports all SMPTE 292M (1.485Gb/s) rates/standards
- Supports 525/625 line component 4:2:2 SDI @ 270Mb/s
- · Supports 32, 44.1, 48kHz AES audio inputs
- Reclocked video output for additional signal distribution
- AES audio inputs can be synchronous or asynchronous to each other and/or to input video
- Dolby-E<sup>™</sup> compatible
- Embedded audio assignment/shuffle from input AES, input groups/channels and internal audio mixers
- Four stereo pair mixers allow left/right assignment and summing from input AES and input groups/channels
- Adjustable AES delay up to 50ms
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®


- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Local display of optical signal strength, video, audio and data presence, video format, GPI and GPO status
- Automatic coaxial input equalization up to 130m at 1.485Gb/s and 300m at 270Mb/s (Belden 1694A)
- · Accepts any wavelength in the 1270nm to 1610nm range
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-G.694.1 compliant) also available
- · Supports single-mode and multi-mode fiber optic cable
- Fully hot-swappable from front of frame
- Occupies a single or dual card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules, a 350FR that will hold up to 7 modules or a standalone enclosure that will hold 1 module

| FIDED         | FIRED OPTION // IN |                        | TRANSMIT SIDE            |             | RECEIVE SIDE             |                   |   |
|---------------|--------------------|------------------------|--------------------------|-------------|--------------------------|-------------------|---|
| FIBER<br>TYPE | FIBERS             | OPTICAL/LINK<br>BUDGET | ORDERING<br>PRODUCT INFO | TX<br>POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |
| Multi-Mode    | 2                  | < 1km                  | 7707MTA13-HD-F2          | -7dBm       | 7707MRA13-HD-F2          | -23dBm            | 1310nm on Tx & Rx fibers  |
| Single-Mode   | 2                  | 16dB/45km              | 7707MTA13-HD-F2          | -7dBm       | 7707MRA13-HD-F2          | -23dBm            | 1310nm on Tx & Rx fibers  |
| Single-Mode   | 1<br>(WDM)         | 20dB/57km              | 7707MTA15-HD-W           | -1dBm       | 7707MRA13-HD-W           | -21dBm            | 1310nm/1550nm, WDM, bi-directional on one fiber                         |
| Single-Mode   | 1<br>(CWDM)        | 19dB/76km**            | 7707MTAxx-HD-F2          | 0dBm        | 7707MRAxx-HD-F2          |                   | Different CWDM wavelengths for Tx & Rx, with 8 channel CWDM Mux/Demux** |
| Single-Mode   | 1<br>(CWDM)        | 24dB/96km**            | 7707MTAxx-HD-F2          | 0dBm        | 7707MRAxx-HD-F2-H        | I -7XdRm          | Different CWDM wavelengths for Tx & Rx, with 8 channel CWDM Mux/Demux** |
| Single-Mode   | 1<br>(DWDM)        | 30dB/120km***          | 7707MTADxxx-HD-H-<br>F2  | +7dBm       | 7707MRADxxx-HD-F2        |                   | Different DWDM wavelengths for Tx & Rx, with 8 channel DWDM Mux/Demux** |

<sup>\*\*</sup>Assumes 8 Ch CWDM Mux/Demux loss of 3.5dB

Fiber loss= 0.35/0.25dB per km @ 1310nm/1550nm

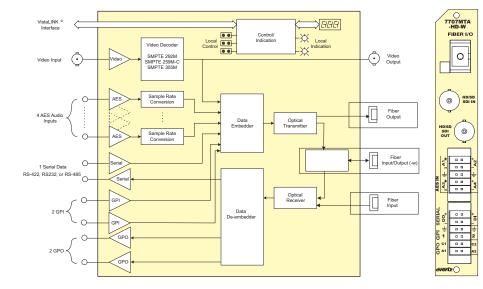









<sup>\*\*\*</sup>Assumes 8 Ch DWDM Mux/Demux loss of 5dB

### HD, SDI 4 AES Audio Bi-directional RS-232/422, 2 GPI/GPO Fiber Transmitter

### ▶Specifications

Serial Digital Video Input:

Number of Signals:

Standards:

SMPTE 292M (HD-SDI) SMPTE 259M-C (SD-SDI)

SMPTE305 2M (SDTi) 1 BNC per IEC 61169-8 Annex A

Connector: Automatic to 100m (typ) @ 1.485Gb/s Equalization: with Belden 1694A or equivalent cable

Automatic to 250m (typ) @ 270Mb/s with Belden 1694A or equivalent cable

> 15dB up to 1.5GHz Return Loss:

Serial Digital Video Output:

Number of Signals:

Standards: SMPTE 292M (HD-SDI),

SMPTE 259M-C (SD-SDI) SMPTE305.2M (SDTi), EN500083-9

(DVB-ASI) Connector: 1 BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 150ps nominal @1.485Gb/s

600ps nominal @270Mb/s < 10% of amplitude Overshoot:

> 15dB up to 1.5GHz Return Loss: High Freq. Jitter: < 0.2 UI

AES Audio Inputs:

Number of Signals: 4

Standards: AES3-2003 (Balanced AES) SMPTE 276M (Unbalanced AES) Multi-pin Removable Terminal Block Connector:

Sampling Rate: 32kHz, 44.1kHz, 48kHz up to 24 bits < 200mV p-p

Resolution: Minimum Input: Maximum Input:

> 7V p-p Balanced: Unhalanced: > 1.2V p-p

Equalization:

< 1500ft @ 48kHz, with Belden 1800B,

and 2V p-p source signal

Unbalanced: < 1200m @ 48kHz, with Belden 8281. and 1V p-p source signal

Impedance: Balanced: 110Ω Unbalanced: 750

> 15dB, from 1MHz to 6MHz Return Loss: Wideband Jitter: < 10ns p-p, with conditions of minimum to maximum cable length

Serial Data: Number of Signals: 1 input/output

Connector at Breakout:

Multi-pin Removable Terminal Block Signal Type: RS-422, RS-232, or RS-485 (selectable) Input Termination: High impedance

Input Failsafe Bias:  $5k\Omega$  to 5V on DI+ (selectable) Baud Rate: Up to 153kb/s (selectable

General Purpose Inputs: Number of Signals: 2 Connector at Breakout:

Multi-pin Removable Terminal Block

Type: Opto-isolated. Active low Input Voltage:

Safe Voltage Range:

-20V to +10V

Off Condition (min): +3.5V On Condition (max):+2.5V(active low)

Input Current (min): 1mA

Input Current (max):10mA(internally limited)

General Purpose Outputs:

Number of Signals: 2 GPO Outputs,

Connector at Breakout:

Multi-pin Removable Terminal Block Output Type: Dry contact relay closure to GPO

COMMON, normally open

Output Current (min): 100mA

### Optical Input/Output:

Number of Connections

1 (Single fiber version) 2 (Dual fiber version)

Connector: Female SC/PC, ST/PC or FC/PC

> 14dB Return Loss Rise and Fall Time: 200 ps nominal Wide Band Jitter: < 0.20 UI

9mm core/125mm overall Fiber Size:

Input Optical Sensitivity:

See Applications Configuration Chart Wavelengths:

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm (See ordering

information) C-Band/L-Band (ITU-T G.694.1 DWDM: compliant) (See ordering information)

Output Power: 1310nm FP:

-7dBm ±1dBm CWDM: 0dBm ±1dBm DWDM: +7dBm ±1dBm

Electrical:

+12V DC Voltage: Power: Non-DWDM: 9W DWDM: 12W

Physical:

7700 or 7701 frame mounting

Number of slots: 1 (7707MTA15-HD-W)

2 (All except above)

### **>>>**Ordering Information

7707MTA13-HD-F2 HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, 1310nm FP Tx & Rx, VistaLINK®

7707MTA15-HD-W HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, single fiber, WDM, 1550nm DFB Tx, Rx on 1310nm, VistaLINK® (Use with

7707MRA13-HD-W)

For CWDM, please refer to the end of the fiber section for ordering information

7707MTAxx-HD-F2 HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber

CWDM Tx, VistaLINK®

7707MTAxx-HD-F2-H HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber,

CWDM Tx, High Sensitivity, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707MTADxx:HD-F2HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, DWDM Tx, VistaLINK®

7707MTADxxx-HD-F2-H

HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, DWDM Tx, High Sensitivity, VistaLINK® **Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate +SA

Connector Suffix

+SC SC/PC

+SCF SC/PC connector with flap cover (-W version only)

+ST ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure







### 8/16 Channel AES Audio Fiber Transmitter Mux

### ▶ Features & Benefits

- · Eight or sixteen AES audio fiber optic transmitter
- Dolby-E<sup>™</sup> compatible
- 7707AT-8 and 7707AT-16 versions provide interface to balanced or unbalanced signals
- 7707AT-8U version provides interface to unbalanced signals via BNC connections
- · AES audio sample rate detection is provided independently for each channel
- · Audio monitoring via card-edge headphone jack with adjustable volume
- All configuration settings are controllable through the card-edge user interface, or remotely through SNMP and VistaLINK®
- DWDM wavelengths also available (ITU-T G.694.1 compliant)

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- Supports single-mode and multi-mode fiber optic cable
- SC/PC, ST/PC, or FC/PC fiber connector options
- Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

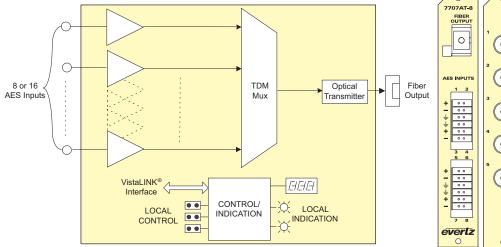

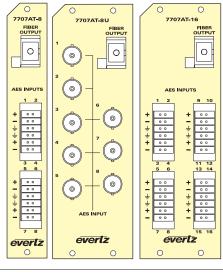

### ▶Specifications

### AES Audio Inputs:

Standard: 7707AT-8U:

SMPTE 276M - Unbalanced AES.

Dolby-E™ compatible

7707AT-8/16: AES3-1992, Balanced or Unbalanced (selectable), Dolby-E™ compatible

Number of Inputs: 7707AT-8/8U - 8 7707AT-16 - 16

7707AT-8U

1 BNC per IEC 61169-8 Annex A 7707AT-8/16: Multi-pin Removable Terminal Blocks

Input Sample Rate: 32 to 48kHz

Input Impedance:

Unbalanced: 750  $110\Omega$ Balanced: Input Return Loss: > 15dB

Input Amplitude (max): Unbalanced: 1.2V p-p 7V p-p Balanced:

Input Amplitude (min): 320mV p-p Unbalanced:

200mV p-p Balanced:

Cable Equalization (max):

Unbalanced: 450m (≈1900ft) of Belden 1694A cable 1500m (≈4900ft) of Belden 1800B cable Balanced:

Optical Output:

SC/PC, ST/PC, FC/PC female housing Connector:

Output Wavelengths: See Ordering Information

Output Power

1310nm FP (Standard): -7dBm ±1dBm

CWDM DFB: 0dBm ±1dBm

DWDM DFB: +7dBm ±1dBm

Electrical:

Voltage: 12V DC

Power 7707AT-8/-8U: 6W (Non DWDM) or

9W (DWDM) 7707AT-16: 8W (Non DWDM) or 11W (DWDM)

Physical:

7700 frame mounting: Number of Slots

7707AT-8U: 2 slots 1 slot

7707AT-8: 7707AT-16: 2 slots

7707A1-10.
7701 frame mounting:

Compliance:

CSA Listed to UL 60065-03, IEC 60065 Electrical Safety: Complies with CE Low voltage Directive

Class 1 laser product Laser Safety:

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

### **▶** ► ► ► Ordering Information

7707AT13-8 Eight channel AES Audio Fiber Transmitter Mux, 1310nm FP, VistaLINK® 7707AT13-8U Eight channel AES Unbalanced Audio Fiber Transmitter Mux

1310nm FP, VistaLINK®, AES on BNCs

7707AT13-16 Sixteen channel AES Audio Fiber Transmitter Mux, 1310nm FP, VistaLINK® Eight channel AES Audio Fiber Transmitter Mux, 1550nm DFB, VistaLINK® 7707AT15-8U Eight channel AES Unbalanced Audio Fiber Transmitter Mux,

1550nm DFR Vistal INK®

7707AT15-16 Sixteen channel AES Audio Fiber Transmitter Mux, 1550nm DFB, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information 7707ATxx-8 Eight channel AES Audio Fiber Transmitter Mux, CWDM wavelength

7707ATxx-8U Eight channel AES Unbalanced Audio Fiber Transmitter Mux, CWDM

wavelength, VistaLINK® 7707ATxx-16

Sixteen channel AES Audio Fiber Transmitter Mux. CWDM wavelength, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information Eight channel AES Audio Fiber Transmitter Mux, DWDM wavelength, 7707ATDxxx-8

7707ATDxxx-8U Eight channel AES Unbalanced Audio Fiber Transmitter Mux

DWDM wavelength, VistaLINK® Sixteen channel AES Audio Fiber Transmitter Mux, DWDM 7707ATDxxx-16 wavelength, VistaLINK®

**Ordering Options** 

Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC FC/PC +FC

**Enclosures** 350FR 7700FR-C

7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

- · Eight or twelve professional quality analog audio fiber optic transmitter
- · Adjustable audio detection for each channel · Audio monitoring via card-edge headphone jack with adjustable volume

▶ Features & Benefits

- All configuration settings controllable through the card-edge user interface, or remotely through SNMP and VistaLINK®
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths also available (ITU-T G.694.1 compliant)
- · Supports single-mode and multi-mode fiber optic cable

- · SC/PC, ST/PC, or FC/PC fiber connector options
- Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

0


evertz 0


7700 frame mounting:

Number of Slots:

7707AT-A8:

7707AT-A12:

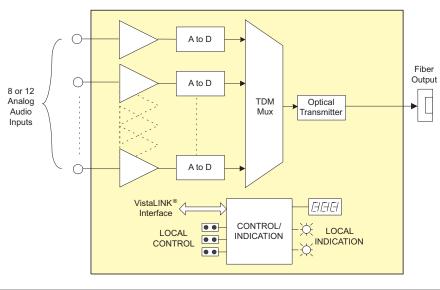

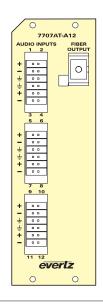

### ▶Specifications

### Analog Audio Inputs:

Number of Inputs: 7707AT-A8 7707AT-A12

Connectors: Multi-pin Removable Terminal Blocks

+24dBu (max) Input Level: Frequency Response

±0.1dB (max, 20Hz to 20kHz) -90dB or 0.003% (max, 20Hz to THD + Noise:

20kHz, @ 0dBFS)

-100dB (max, 20Hz to 20kHz, Crosstalk measured channel connected at input)

100dB (min) S/N Ratio:

Channel Phase:  $\pm 0.5^{\circ}$  (max, 20Hz to 20kHz) 10kΩ (min, differential) Input Impedance:

Resolution:

### Optical Output:

SC/PC, ST/PC, FC/PC female housing Output Wavelengths See Ordering Information Output Power

1310nm FP (Standard):

-7dBm (nom) ±1dBm

CWDM DEB 0dBm (nom) ±1dBm +7dBm (nom) ±1dBm DWDM DFB:

Electrical:

12V DC Voltage:

Power:

7707AT-A8

Non DWDM Laser

8W (max) DWDM Laser: 10W (max)

7707AT-A12:

Non DWDM Laser

10W (max) DWDM Laser: 12W (max)

### 7701 frame mounting: Number of Slots:

Physical:

Compliance: Electrical Safety CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

1 slot

2 slots

1 slot

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

### **>>>**Ordering Information

7707AT13-A8 Eight channel Analog Audio Fiber Transmitter Mux, 1310nm FP,

7707AT15-A8 Eight channel Analog Audio Fiber Transmitter Mux, 1550nm DFB

7707AT13-A12 Twelve channel Analog Audio Fiber Transmitter Mux, 1310nm FP. VistaLINK®

Twelve channel Analog Audio Fiber Transmitter Mux, 1550nm DFB, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information

Eight channel Analog Audio Fiber Transmitter Mux , CWDM wavelength 7707ATxx-A12 Twelve channel Analog Audio Mux Fiber Transmitter, CWDM wavelength

For DWDM, please refer to the end of the fiber section for ordering information Eight channel Analog Audio Mux Fiber Transmitter, DWDM wavelength 7707ATDxxx-A12 Twelve channel Analog Audio Mux Fiber Transmitter, DWDM wavelength

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

7707AT15-A12

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

### Connector Suffix

+SC +ST SC/PC ST/PC FC/PC

### Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

### Enclosures

3RU Portable Multiframe which holds up to 7 single slot modules 350FR 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR

Standalone enclosure












### 8/16 Channel AES Audio Fiber Receiver Demux


### ▶ Features & Benefits

- · Eight or sixteen AES audio fiber optic receiver
- Dolby-E<sup>™</sup> compliant
- 7707AR-8 and 7707AR-16 versions provide interface to balanced or unbalanced signals
- 7707AR-8U version provides interface to unbalanced signals via BNC
- · AES audio sample rate detection provided independently for each channel
- · Audio monitoring via card-edge headphone jack with adjustable volume
- · All configuration settings controllable through the card-edge user interface, or remotely through SNMP and VistaLINK®
- · Wide-band optical input is compatible with 1310nm, 1550nm, CWDM, or DWDM wavelengths
- Supports single-mode and multi-mode fiber optic cable
- · SC/PC, ST/PC, or FC/PC fiber connector options
- · Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

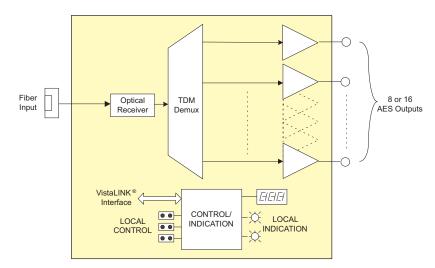







### **▶** Specifications

### AES Audio Outputs:

Standard: 7707AR-8U:

SMPTE 276M - Unbalanced AES,

Dolby-E™ compliant 7707AR-8/16:

AES3-1992, Balanced or Unbalanced (selectable), Dolby-E™ compliant

Number of Outputs

7707AR-8/8U: 7707AR-16:

Connectors:

7707AR-8U: 1 BNC per IEC 61169-8 Annex A 7707AR-8/16 Multi-pin Removable Terminal Blocks

Output Sample Rate:

32 to 48kHz (same as input signal at

Output Impedance Unbalanced:

Balanced

Output Return loss: > 15dB

Output Amplitude:

Unbalanced: 1V p-p to ±0.1V p-p Balanced: 2V p-p to ±0.1V p-p

Output Rise/Fall Times:

Unbalanced: 35ns ±5ns Balanced: 20ns ±5ns

Output Jitter: < 0.1 UI

Optical Input:

SC/PC, ST/PC, FC/PC female

housing

1270 to 1610nm Input Wavelength: Input Power (max): 0dBm

Input Optical Sensitivity: -28dBm

### Electrical: Voltage:

12V DC Power (max):

EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

2 slots

### Physical:

7700 frame mounting: Number of Slots:

7707AR-8U:

7707AR-8: 1 slot

7707AR-16: 2 slots

770 / Art- To.
7701 frame mounting:
1-or of Slots: 1 slot all versions

### >>> Ordering Information

7707AR-8 Eight Channel AES Audio Fiber Receiver Demux, VistaLINK®

7707AR-8U Eight Channel Unbalanced AES Audio Fiber Receiver Demux

VistaLINK® Monitoring
Sixteen Channel AES Audio Fiber Receiver Demux, VistaLINK® 7707AR-16

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU +SA

Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC

+FC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR


3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules


S7701FR Standalone enclosure


### 7700 Modular - Fiber -Audio Transport

### ▶ Features & Benefits

- · Eight or twelve professional quality analog audio fiber optic receiver
- · Adjustable audio detection for each channel
- · Adjustable audio gain for each channel
- · Audio monitoring via card-edge headphone jack
- · All configuration settings controllable through the card-edge interface, or remotely through SNMP and VistaLINK®
- · Wide-band optical input compatible with 1310nm, 1550nm, CWDM, or DWDM transmission wavelengths
- Supports single-mode and multi-mode fiber optic cable
- SC/PC, ST/PC, or FC/PC fiber connector options
- · Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

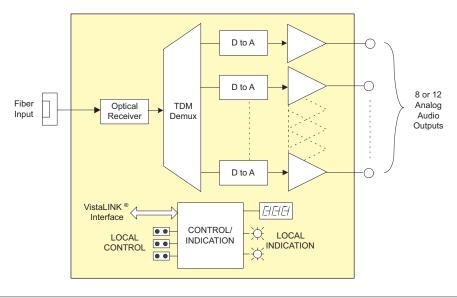





### ▶Specifications

### Analog Audio Outputs:

Number of Outputs: 7707AR-A8: 7707AR-A12:

Connectors: Multi-pin Removable Terminal Blocks

Output Level:

Into High Impedance

+24dBu (max) Into  $600\Omega$ : +23dBu (max)

Frequency Response:

±0.1dB (max, 20Hz to 20kHz) -90dB or 0.003% (max, 20Hz to THD + Noise:

20kHz, @0dBFS)

-100dB (max, 20Hz to 20kHz, Crosstalk:

measured channel connected at input)

S/N Ratio: 100dB (min)

Channel Phase: ±0.5° (max, 20Hz to 20kHz) Output Impedance: 66Ω (nom, differential) -10dB to +10dB (0.5dB increments) Adjustable Gain:

Optical Input:

SC/PC, ST/PC, FC/PC female housing Connector

Input Wavelength: 1270 to 1610nm

Input Power (Max): 0dBm Input Optical Sensitivity:

-28dBm

### Electrical:

Voltage: 12V DC Power 7707AR-A8: 13.5W (max)

7707AR-A12: 18.5W (max)

EMI/RFI: Complies with FCC Part 15, Class A EU EMC Directive

### Physical:

7700 frame mounting: Number of Slots:

7707AR-A8: 1 slot 7707AR-A12: 7701 frame mounting: Number of Slots: 1 slot

### **>>>**Ordering Information

7707AR-A8 Eight Channel Analog Audio Fiber Receiver, Demux VistaLINK®

7707AR-A12 Twelve Channel Analog Audio Fiber Receiver, Demux VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

### Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU +SA

Standalone Enclosure Rear Plate

### Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

### Enclosures

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR

S7701FR Standalone enclosure









### Multi-Channel Intercom Fiber Transceivers


### ▶ Features & Benefits


- Extends up to 3 or 8 independent channels of intercom communication over a single fiber optic link
- Configurable interface to:
- RTS-Telex Matrix: 4-Wire Audio, RS-485 Data, GPIO
- ClearCom Matrix: 4-Wire Audio, RS-422 Data, GPIO
- RTS-Telex Party-Line: 2-Wire Audio, GPIO
- ClearCom Party-line: 2-Wire Audio, GPIO


Note: Does not perform conversion between 2-Wire and 4-Wire systems


- Independent channels can simultaneously accommodate different intercom types
- User-friendly selection of intercom interfaces via programmed profiles
- All configurations and adjustments are controllable through the card-edge user interface or remotely via SNMP and VistaLINK® -capable capability
- Selectable termination, and failsafe bias settings for RS-422/485 data inputs
- Provides 2 general-purpose inputs (GPIs), and 2 general purpose outputs (GPOs)


- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Compatible with single-mode and multi-mode fiber optic cable (dual fiber version)
- · Fully hot-swappable from front of frame
- Occupies two card slots and is housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, 3RU portable frame that holds up to 3 modules or a standalone frame which will hold 1 module.

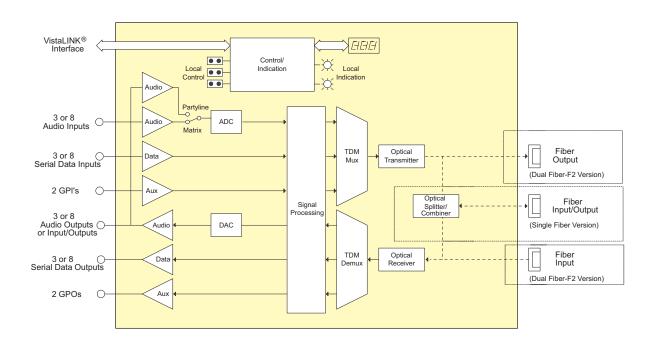

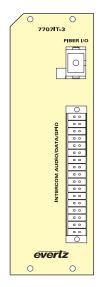





















### Multi-Channel Intercom Fiber Transceivers

### ▶Specifications

Analog Audio:

Balanced/Matrix Type Audio

Number of Signals: 7707IT-3

3 inputs, 3 outputs 7707IT-8: 8 inputs, 8 outputs Type: Analog Audio, Balanced Industry Standards: ClearCom, RTS-Telex

Connector: Multi-pin removable terminal block

Input Impedance: > 10kΩ Output Impedance:  $66\Omega$  Signal Resolution: 24-bi 24-bit Sampling Rate: 52.7kHz Frequency Response:

20Hz to 20kHz Gain Flatness: ±2dB Input Level(max): +20dBu Output Level(max): Into 10KW +20dBu

Into 600W +19dBu Signal/Noise Ratio: > 90dB THD: < 0.01% Crosstalk: < -80dB Controllable Gain: -10dB to +10dB

### Unbalanced/Party-Line Type Audio:

Number of Signals 7707IT-3: 7707IT-8:

Analog Audio, Full-duplex, Unbalanced Type:

Industry Standards: ClearCom, RTS-Telex

Connector: Multi-pin removable terminal block Signal Coupling: AC coupled (accommodates 30V 'wet

inputs) 24-bit

Bridging Impedance: Signal Resolution: Sampling Rate: 52.7kHz Sidetone Null: > 25dB Sidetone Null Range:

 $100\Omega$  to  $300\Omega$  load Frequency Response:

120Hz to 20kHz Gain Flatness: ±2dB

Input Level(max): +5dBu Output Level(max): +5dBu (into 200W load)

Signal/Noise Ratio: > 75dB THD: < 0.1% Crosstalk: < -60dB

-5dB to +5dB (into 200W load) Controllable Gain: Receive Signaling: 4V DC min (ClearCom), 20kHz

±500Hz (RTS) 11V DC min (ClearCom), 20kHz Send Signaling:

±100Hz (RTS)

Serial Data: RS-422 /RS-485 Type Data Number of Signals: 7707IT-3: 7707IT-8:

Connector: Multi-pin removable terminal block RS-485 or RS-422 (selectable) Signal Type:  $120\Omega$  or Open (selectable) Input Termination: Input Failsafe Bias: 200mV (3.3mA into  $60\Omega)$  or none

(selectable)

Bit Rate: RS485: Compatible with all Telex RS485 rates

RS422: 460kb/s

Optical Input/Output:

1 (Standard and -W Single Fiber Version) Number

2 (-F2 Dual Fiber Version)

Connector at Frame: SC/PC, ST/PC, FC/PC female

housing

Input Wavelength: 1270nm to 1610nm

Max. Input Power: 0dBm Output Wavelengths

Standard: CWDM: 1310nm, 1550nm (nominal) 1270nm to 1610nm (ITU-T G.694.2

compliant)

DWDM: C-Band (ITU-T G.694.1 compliant) Output Power: 1310nm FP:

-7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB): 0dBm ± 1dBm

DWDM (DFB): +7dBm ± 1dBm Optical Sensitivity:

WDM (-w version) -26dBm -28dBm Standard:

### General Purpose Outputs (GPO):

Number of Signals: 2 Outputs Connector: Multi-pin removable terminal block

Output Type: Dry contact relay closure, normally open Output Current (min):

100mA

General Purpose Inputs (GPI): Number of Signals: 2 Inputs

Multi-pin removable terminal block Connector: Opto-isolated, Active low Type:

GPI Input Voltage

Safe Voltage Range -20V to +10V

On Condition (max): Off Condition (min): > +3.5V < +2.5V(active low)

GPI Input Current (min): 1mA GPI Input Current (max):

10mA (internally limited)

Electrical:

12V DC (nominal frame voltage) Voltage(type): Power(max): 7707IT-3 (Non DWDM) = 7W 7707IT-3 (DWDM) = 9W 7707IT-8 (Non DWDM) = 18W 7707IT-8 (DWDM) = 20W

Physical:

Number of Slots: 2

Compliance:

CSA Listed to UL 60065-03. IEC 60065 Electrical Safety:

Complies with CE Low voltage

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive EMI/RFI:

### **>>>**Ordering Information

7707IT13M-3-W 3 Channel Intercom Fiber Transceiver, single fiber, WDM,

1310nm FP TX, RX on 1550nm 7707IT15-3-W 3 Channel Intercom Fiber Transceiver, single fiber, WDM,

1550nm DFB TX, RX on 1310nm 7707IT13-3-F2 3 Channel Intercom Fiber Transceiver, dual fiber, 1310nm FP TX & RX 7707IT13M-8-W

8 Channel Intercom Fiber Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm

8 Channel Intercom Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm 7707IT15-8-W

7707IT13-8-F2 8 Channel Intercom Fiber Transceiver, dual fiber, 1310nm FP TX & RX

For CWDM, please refer to the end of the fiber section for ordering information 7707ITxx-3-F2 3 Channel Intercom Fiber Transceiver, dual fiber, CWDM TX

7707ITxx-8-F2 8 Channel Intercom Fiber Transceiver, dual fiber, CWDM TX, VistaLINK<sup>®</sup>

For DWDM, please refer to the end of the fiber section for ordering information 7707ITDxxx-3-F2 3 Channel Intercom Fiber Transceiver, dual fiber, DWDM TX,

VistaLINK®

7707ITDxxx-8-F2 8 Channel Intercom Fiber Transceiver, dual fiber, DWDM TX.

VistaLINK<sup>®</sup>

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone enclosure rear plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C

7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3 single or dual slot modules Standalone enclosure

### Multi RS-232 / 422 / 485 / GPIO Fiber Data Transmitter

The 7707DT series Fiber Data Transceivers provide an economical method of transmitting multiple bi-directional RS-232, RS-422, RS-485 data signals as well as Linear Time Code (LTC) over a single fiber optic link. The 7707DT-GPIO version provides additional RS232 and General Purpose Input/Outputs (GPIO). A pair of 7707DT Data Transceivers permits bi-directional data transmission over distances up to 100km, with minimum possible latency.

Single and dual fiber (-F2) optical interface configurations allow the user to choose the optimal function/price/performance to suit a particular application.


The dual fiber configuration is compatible with CWDM/DWDM systems and is designed to transmit and receive over separate fibers. The optical output of the 7707DT is available in 1310nm, 1550nm, CWDM and DWDM wavelengths.


The 7707DT occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules (7 for GPIO version), a 350FR portable frame that will hold up to 7 modules (3 for -GPIO version) or a standalone enclosure which holds 1 module. The 7707DT-GPIO occupies two card slots and can be housed in the same enclosures.


### ▶ Features & Benefits


- 7707DT transports four RS-422 or RS-485, three RS-232, and one LTC
- 7707DT-GPIO version provides five additional RS-232 and eight General Purpose Input/Outputs (GPIO)
- $\bullet$  Selectable termination and failsafe bias settings for RS-422/485 data inputs
- Selectable network timeouts for RS-485 accommodates twelve data rates
- All configuration settings are controllable through the card-edge user interface, or VistaLINK  $^{\!\circ}$
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths also available (ITU-T G.694.1 compliant)

- Supports single-mode and multi-mode fiber optic cable
- SC/PC, ST/PC, or FC/PC\* fiber connector options
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

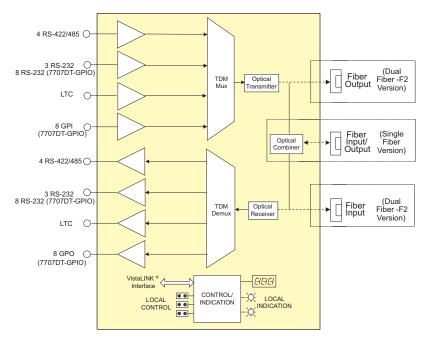

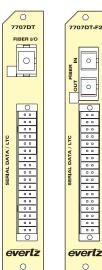

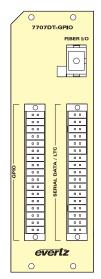









### 7707DT & 7707DT-GPIO

### Multi RS-232 / 422 / 485 / GPIO Fiber Data Transmitter

### ▶Specifications

RS-422/485 Serial Data:

Number of Signals: 4 Inputs/Outputs Connector: Multi-pin Removable Terminal Block Signal Type: RS-485 or RS-422 (selectable) 110Ω or Open (selectable) Input Termination: 200mV (3.3mA into  $60\Omega$ ) or None Input Failsafe Bias:

(selectable)

Bit Rate (max): RS-422

460kb/s

RS-485: 1.2kb/s, 2.4kb/s, 4.8kb/s, 9.6kb/s,

19.2kb/s, 38.4kb/s, 57.6kb/s, 76.8kb/s, 115kb/s, 153kb/s, 230kb/s, or 460kb/s (selectable)

RS-232 Serial Data

Number of Signals

Standard Version: 3 Input/Outputs GPIO Version: 8 Inputs/Outputs

Connector: Multi-pin Removable Terminal Block RS-232 Signal Type:

Bit Rate (max): 115kb/s

LTC Data:

Number of Signals: 1 Input/Output

Connector: Multi-pin Removable Terminal Block Signal Type: SMPTE 12-1 Linear Time Code Input Level: 0.2 to 4V p-p (balanced or unbalanced)

Rise/Fall Times: 40μs ±10μs

Output Level: 1V p-p nominal (balanced) General Purpose Inputs (7707DT-GPIO ONLY): Number of Signals: 8 Inputs

Multi-pin Removable Terminal Block Connector:

Type: Opto-isolated, Active low Input Voltage:

Safe Voltage Range: -20V to +10V Off Condition (min): +3.5V On Condition (max): +2.5V (active low)

Input Current (min): 1mA

Input Current (max): 10mA (internally limited)

General Purpose Outputs (7707DT-GPIO ONLY):

Number of Signals: 8 Outputs

Connector: Multi-pin Removable Terminal Block Output Type: Dry contact relay closure, normally

open Output Current (min): 100mA

Optical Input/Output:

Connector

Single fiber version: 1 Bi-directional optical connector: SC/PC. ST/PC or FC/PC\*

female housing

Dual fiber (F2) version:

2 optical connector: SC/PC or ST/PC female housing

Maximum Input Power: Single fiber versions: 0dBm

Dual fiber (F2) versions: Input Optical Sensitivity: -26dBm WDM (-w version) -28dBm Standard:

Wavelengths: 1310nm, 1550nm 1270nm - 1610nm Standard: CWDM:

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power:

1310nm FP: -7dBm +1dBm 1310nm (-W): -1dBm ±1dBm

1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Electrical: Voltage:

12V DC

Power (max): 6W (Non DWDM), 8W (DWDM) FMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

7700 frame mounting: Number of Slots: 7707DT: 7707DT-GPIO: 7701 frame mounting: Number of Slots:

7707DT: 7707DT-GPIO:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC

60065

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive EMI/RFI:



### >>>Ordering Information

7707DT15-W

7707DT13M-W Multi RS232/422 Fiber Data Transceiver, single fiber, WDM,

1310nm FP TX, RX on 1550nm, VistaLINK®

7707DT13M-W-GPIO Multi RS232/422 and GPIO Fiber Data Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK®

Multi RS232/422 Fiber Data Transceiver, single fiber, WDM

1550nm DFB TX, RX on 1310nm, VistaLINK®

7707DT15-W-GPIO Multi RS232/422 and GPIO Fiber Data Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®

7707DT13-F2 Multi RS232/422 Fiber Data Transceiver, dual fiber, 1310nm

FP TX & RX, VistaLINK®
7707DT13-F2-GPIO Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber.

1310nm FP TX & RX, VistaLINK

For CWDM, please refer to the end of the fiber section for ordering information 7707DT-xx-F2 Multi RS232/422 Fiber Data Transceiver, dual fiber, CWDM TX 7707DT-xx-F2-GPIO Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber, CWDM TX

For DWDM, please refer to the end of the fiber section for ordering information 7707DTDxxx-F2 Multi RS232/422 Fiber Data Transceiver, dual fiber, DWDM TX 7707DTDxxx-F2-GPIO

Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber, DWDM TX

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

**+SA** Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

\*Note: FC/PC is only available on single fiber version

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR

Standalone enclosure



indication of power, link status and data reception.

Multiple versions of the 7707FT are available to address single-mode/multi-mode fiber, single/dual fiber and CWDM/DWDM applications (See Applications Configuration Chart).

The 7707ET occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.


### ▶ Features & Benefits

- 2 (10 Base T) Ethernet channels or 1 (100 Base TX) Ethernet channel
- Auto negotiation for 10/100 speed and half/full duplex modes
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Local display of optical signal strength, link parameters and link status
- Optical output available in 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports single-mode and multi-mode fiber optic cable

- Fully hot-swappable from front of frame with no fiber or Ethernet channel disconnect required
- SC/PC, ST/PC or FC/PC connector options

### Status Indicators

- Frame Status
- 10/100 speed indication for all copper ports
- Full duplex/Collision Indication for all copper ports
- · Link activity for copper port
- · Received optical power level
- · Fiber link indication

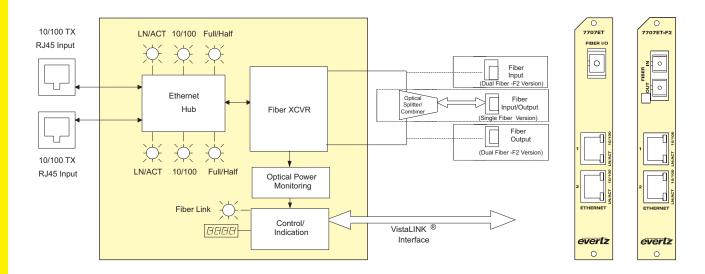

### ▶Specifications

### Ethernet Input/Output:

IEEE 802.3 (10 BaseT), IEEE 802.3u Standard

(100 BaseTX) Two RJ45s  $100\Omega$ 

Impedance Number of channels: 2 (10Base-T) or 1 (100BaseTX)

Cable Requirements:

Connector:

UTP category 3,4 or 5 cable up to 10 BaseT:

328ft/100m (2 pairs)

100 BaseTX: UTP category 5 cable up to 328 ft/100m

(2 pairs)

Optical Input/Output:

Connector: Single Fiber Versions

1 Female SC/PC, ST/PC or FC/PC

Dual Fiber (F2) Versions:

2 Female SC/PC, ST/PC or FC/PC

Input wavelengths: 1270nm-1610nm Max. Input Power: 0dBm

Optical Sensitivity:

WDM (-w version) -30dBm Standard: -32dBm

Wavelengths

Standard: 1310nm, 1550nm CWDM:

1270nm - 1610nm C-Band (ITU-T G.694.1 compliant) DWDM:

Output Power:

1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm

1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Electrical:

Physical:

Voltage:

Power: 6W (Non DWDM)

8W (DWDM)

Number of slots:

Compliance:

Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

### **▶▶▶**Ordering Information

7707ET13M-W Ethernet Fiber Transceiver - Single Fiber, WDM, 1310nm, FP TX, RX

on 1550nm, VistaLINK® Monitoring

Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK® 7707ET15-W

7707ET13-F2 Ethernet Fiber Transceiver - Dual Fiber, 1310nm, FP Laser,

VistaLINK® Monitoring

For CWDM, please refer to the end of the fiber section for ordering information 7707ETxx-F2 Ethernet Fiber Transceiver - Dual Fiber, CWDM, DFB Laser, VistaLINK®

Monitoring

For DWDM, please refer to the end of the fiber section for ordering information 7707ETDxxx-F2 Ethernet Fiber Transceiver, dual fiber, DWDM TX, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order Ordering Options Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST SC/PC ST/PC FC/PC +FC

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 7700FR-C 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules

S7701FR Standalone enclosure









The 7707ET-TE1 is a VistaLINK® -capable Ethernet and T1/E1/J1 Fiber Transceiver that provides an economical method of transmitting one 10/100BaseT Ethernet signal and one T1/E1/J1 signal over optical fiber. Monitoring control of card status and parameters is provided locally at the card edge and remotely via VistaLINK®. A pair of 7707ET-TE1 transceivers permits full duplex communication of all signals over single or dual optical fibers.

The 7707ET-TE1 provides one RJ45 input connector for the 10/100BaseT Ethernet, one RJ45 input connector for the T1/E1/J1 and one or two fiber optic output connectors. Multiple versions of the 7707ET-TE1 are available to address single-mode/multi-mode fiber, single/dual fiber and CWDM/DWDM applications (See Applications Configuration Chart below).

The 7707ET-TE1 occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.


### ▶ Features & Benefits

- 10/100BaseT Ethernet and T1/E1/J1 fiber optic transceiver
- Auto negotiation for 10/100 speeds and full/half duplex operation on Ethernet port
- · G.703 compliant T1/E1/J1 port
- Ethernet and T1/E1/J1 signals completely independent over transport interface
- · Built-in Ethernet switch for isolation of each transmission end
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Local display of optical signal strength, link parameters and link status
- Optical output available in 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

- · Supports single-mode and multi-mode fiber optic cable
- · Fully hot-swappable from front of frame
- · SC/PC, ST/PC or FC/PC connector options

### Status Indication

- · Frame status
- · Fiber link indication
- 10/100 Speed indication
- Ethernet Full Duplex/Collision indication
- · Ethernet Link activity
- T1/E1/J1 Signal Presence
- T1/E1/J1 Indication
- Optical Power Level

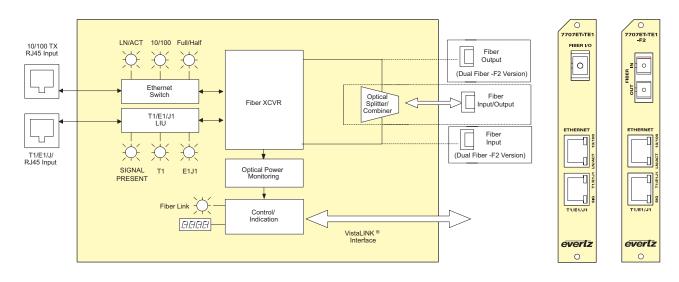

### ▶Specifications

### Ethernet Input/Output:

Standard: IEEE 802.3 (10 BaseT), IEEE 802.3u

(100 BaseTX) Connector: 1 RJ45

Cable Requirements:

UTP category 3,4 or 5 cable up to 328ft/100m (2 pairs) 10 BaseT

100 BaseTX

UTP category 5 cable up to 328ft/100m

(2 pairs)

### T1/E1/J1 Input/Output:

Standard: Connector: 1 RJ45

Cable Requirements:

0.63mm (22 AWG) cable up to 1000m

### Optical Input/Output: Connector:

Single Fiber versions:

1 Female SC/PC, ST/PC or FC/PC

Dual Fiber (F2) versions:

2 Female SC/PC, ST/PC or FC/PC Max. Input Power: 0dBm

Input Wavelength: 1270nm-1610nm

Optical Sensitivity WDM (-w version) -30dBm

Standard: -32dBm

Wavelengths:

Standard:

1310nm, 1550nm 1270nm - 1610nm

CWDM:

C-Band (ITU-T G.694.1 compliant) DWDM: Output Power:

1310nm FP: -7dBm ±1dBm

1310nm (-W): -10dBm ±1dBm

1550nm, CDWM (DFB):

0dBm + 1dBm DWDM (DFB): +7dBm ± 1dBm

### Electrical:

Voltage: Power:

6W (Non DWDM) 8W (DWDM)

### Physical: Number of slots:

### Compliance: Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

### Ethernet & T1/E1/J1 Fiber Transceiver

### **▶▶▶**Ordering Information

7707ET13-TE1-W Ethernet & T1/E1/J1 Fiber Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK® 7707ET15-TE1-W Ethernet & T1/E1/J1 Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLiNK®
7707ET13-TE1-F2 Ethernet and TI/EI/J1 Fiber Transceiver, Dual Fiber, 1310 nm, FP

For CWDM, please refer to the end of the fiber section for ordering information
7707ETxx-TE1-F2 Ethernet and TI/EI/J1 Fiber Transceiver, Dual Fiber, CWDM, DFB

Laser, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 770/E1Dxx-TE1-F2 Ethernet & T1/E1/J1 Fiber Transceiver, dual fiber, DWDM TX,

VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix +3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST +FC SC/PC ST/PC FC/PC

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 350FR 7700FR-C 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure











The 7707ET-4 is a VistaLINK® -capable Quad Ethernet Fiber Transceiver that transmits up to four separate 10/100BaseT Ethernet channels over optical fiber. Monitoring of card status and parameters is provided locally at the card edge and remotely via VistaLINK®. A pair of 7707ET-4 transceivers permit full duplex communication of all four channels over a single or dual optical fiber(s).

The 7707ET-4 provides four RJ45 input connectors and either one or two fiber optic output connectors. Multiple versions of the 7707ET-4 are available to address single-mode/multi-mode fiber, single/dual fiber and CWDM/DWDM applications (See Application Configuration chart below).


The 7707ET-4 occupies one or two card slots can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds . 1 module.


### ▶ Features & Benefits

- · Four completely independent and isolated Ethernet streams
- · Auto negotiation for 10/100 speeds on all ports
- · Built-in Ethernet switches for isolation of each transmission end
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Fully hot-swappable from front of frame
- SC/PC, ST/PC, FC/PC Connector options

### Status Indication

- Frame status
- 10/100 Speed indication on copper ports
- Full Duplex/Collision indication on copper ports
- · Link activity on copper ports
- · Received optical power level

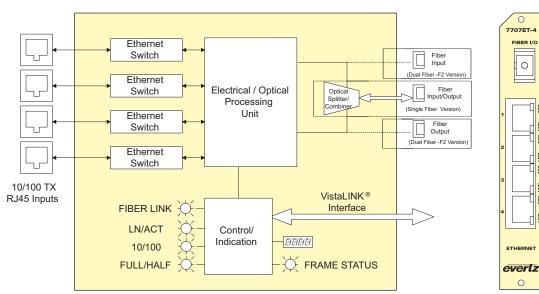

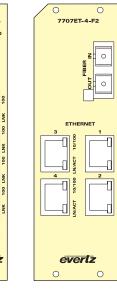

### ▶ Specifications

### Ethernet Input/Output:

Standard: IEEE 802.3 10BASE-T 802.3u 100BASE-TX 4 RJ45 ports

Connectors:

Cable Requirements

UTP category 3, 4, or 5 cable up to 10Base-T 328ft/100m

100Base-T: UTP category 5 cable up to

328ft/100m

Optical Input/Output: Connector

Single Fiber Version:

1 Female SC/PC, ST/PC, FC/PC **Dual Fiber Version:** 

2 Female SC/PC, ST/PC, FC/PC

Input Wavelengths: 1270nm to 1610nm Rise & Fall Time: 200ps nominal Wide Band Jitter: < 0.2 UI

Maximum Input Power: Standard: -1dBm F2-H Versions: -8dBm Input Optical Sensitivity -21dBm WDM (-w version) Standard: -23dBm High Sensitivity (-H): -32dBm

Wavelengths:

Standard: 1310nm. 1550nm CWDM: 1270nm - 1610nm

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power:

1310nm FP: -7dBm ±1dBm 1310nm (-W): -1dBm ±1dBm 1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Electrical:

Voltage: +12V DC 12W (Non DWDM) Power: 14W (DWDM) EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots: Single Fiber: Dual Fiber:

Compliance:

Laser Safety

CSA Listed to UL 60065-03. Electrical Safety

IEC 60065 Complies with CE Low voltage

Directive Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1



### Quad Ethernet Fiber Transceiver

### **▶▶▶**Ordering Information

7707ET13M-4-W Quad Ethernet Fiber Transceiver, single fiber, WDM, 1310nm FP TX,

Quad Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm 7707ET15-4-W

7707ET13-4-F2 Quad Ethernet Fiber Transceiver, dual fiber, 1310nm FP TX & RX

For CWDM, please refer to the end of the fiber section for ordering information

7707ETxx-4-F2-H Quad Ethernet Fiber Transceiver, dual fiber, CWDM TX Quad Ethernet Fiber Transceiver, dual fiber, CWDM TX, High

Sensitivity RX

For DWDM, please refer to the end of the fiber section for ordering information

7707ETDxxx-4-HD-F2

Quad Ethernet Fiber Transceiver, dual fiber, DWDM TX 7707ETDxxx-4-HD-F2-H Quad Ethernet Fiber Transceiver, dual fiber, DWDM TX, High

Sensitivity RX

350FR 7700FR-C 7701FR S7701FR

+SC +ST SC/PC ST/PC +FC FC/PC

Ordering Options

Rear Plate Suffix

Connector Suffix

+3RU

+1RU

+SA

Enclosures

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3 single or dual slot modules

Rear Plate and Fiber Connector must be specified at time of order

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Standalone enclosure

Eg. Model +3RU +SC









Multiple versions of the 7707GT are available to address single-mode/multi-mode fiber, single/dual fiber and CWDM/DWDM applications (See Application Configuration chart below).

The 7707GT occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module.

### ▶Features & Benefits

- Auto negotiation for 10/100/1000 speeds and half/full duplex modes
- Auto equalization for up to 100m at Gigabit ethernet rates
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®

The 7707GT is a VistaLINK® -capable Gigabit Ethernet Fiber Transceiver that


optical fibers. Diagnostic LEDs provide indication of power, linkage and data reception.

- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1of the frame
- · Local display of optical signal strength and link status
- Optical output available in 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

- Supports single-mode and multi-mode fiber optic cable
- Fully hot-swappable from front of frame
- · SC/PC, ST/PC or FC/PC connector options

### Status Indication

- Frame status
- Copper Interface Status
- 10/100/1000 Speed Indication
- Fiber Link Status
- · Optical Power Level

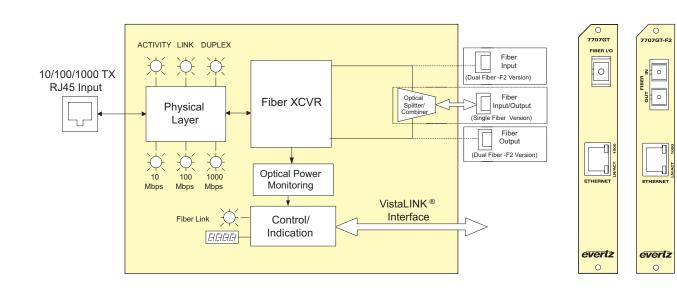

### ▶ Specifications

### Ethernet Input/Output:

IEEE 802.3 (10 BaseT), IEEE 802.3u Standard:

(100 BaseTX), IEE 802.3ab

(1000baseTX) 1 R.I45

Connector:

Cable Requirements: 10 BaseT

UTP category 3,4 or 5 cable up to 328ft/100m (2 pairs)

UTP category 5 cable up to 328ft/100m 100 BaseTX:

(2 pairs) 1000 BaseTX: UTP category 5 cable up to 328ft/100m

(4 pairs)

Optical Input/Output:

Connector:

Single Fiber version: 1 female SC/PC, ST/PC or FC/PC

Dual Fiber (F2) version:

2 female SC/PC, ST/PC or FC/PC Input Wavelengths: 1270nm-1610nm

Maximum Input Power

Standard: -1dBm

-H versions: -8dBm Input Optical Sensitivity:

WDM (-w version) -21dBm Standard: -23dBm High Sensitivity (-H): -32dBm

Output Wavelengths:

Standard: 1310nm, 1550nm (nominal) 1270nm to 1610nm (ITU-T G.694.2 CWDM:

compliant)

DWDM: C-Band (ITU-T G.694.1 compliant)

Output Power:

-7dBm +1dBm 1310nm FP

1310nm (-W): -1dBm ±1dBm

1550nm, CDWM (DFB):

0dBm ± 1dBm DWDM (DFB): +7dBm ± 1dBm Electrical:

Voltage: Power:

8W (Non DWDM) 10W (DWDM)

Physical: Number of slots:

Compliance:

CSA Listed to UL 60065-03. IEC 60065 Electrical Safety:

Complies with CE Low voltage

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

## 7700 Modular - Fiber - Datacom/Telecom Transport

### **>>>**Ordering Information

7707GT13M-W Gigabit Ethernet Fiber Transceiver, single fiber, WDM, 1310nm DFB TX, RX on 1550nm, VistaLINK®

7707GT15-W Gigabit Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB

TX, RX on 1310nm, VistaLINK®

7707GT13-F2 Gigabit Ethernet Fiber Transceiver, dual fiber, 1310nm FP TX & RX,

VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information
7707GTxx-F2
Gigabit Ethernet Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®
Gigabit Ethernet Fiber Transceiver, dual fiber, CWDM TX, High

Sensitivity RX, VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information
7707GTDxxx-F2 Gigabit Ethernet Fiber Transceiver, dual fiber, DWDM TX, VistaLINK® 7707GTDxxx-F2 7707GTDxxx-F2-H Gigabit Ethernet Fiber Transceiver, dual fiber, DWDM TX, High Sensitivity RX, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate +3RU +1RU

+SA

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure










- Transports GPS data signals from two Trimble Accutime 2000 Smart
- Antennas simultaneously
- · Allows user to run 1 or 2 Accutime 2000 GPS heads for primary and redundant links
- GPS power at +17V DC with built-in current limiting
- · All configuration settings are controllable through the card-edge user interface, or VistaLINK®
- Optical output wavelength of 1310nm or 1550nm provides a 2km transmission distance of GPS data signal
- Low latency

- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- · Compatible with multi-mode and single-mode fiber
- · SC/PC, ST/PC, or FC/PC fiber connector options
- · Fully hot-swappable from front of frame
- · Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

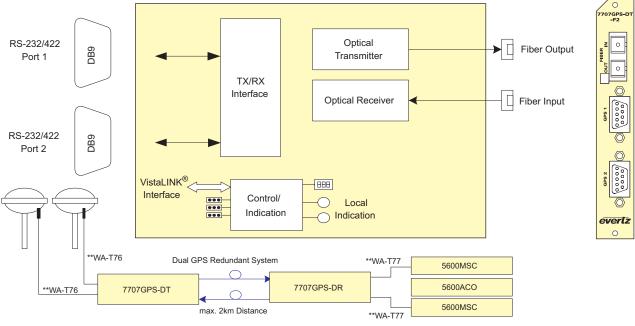

<sup>\*\*</sup>Evertz recomends that only these cables be used for connecting the specified equipment to the 7707GPS-DT and 7707GPS-DR. See Accessories for ordering details.

### ▶ Specifications

### GPS Serial Data:

Number of Signals: 2 bi-directional GPS signals Connector: 2xDB-9 connectors RS-232 or RS-422 (selectable) Type:

Bit Rate

RS-232/RS-422: 115kb/s

### Optical Input/Outputs:

Number of Connections

Female SC/PC, ST/PC or FC/PC Connector:

Max. Input Power: 0dBm Input Optical Sensitivity: -22dBm Fiber Size and Type

9μm core/single mode on TX,

62.5μm core/multi-mode on RX Output Wavelength: 1310nm,1550nm (nominal)

### Output Power:

1310nm FP -7dBm ±1dBm (Standard): 1550nm DFB: 0dBm ±1dBm

### Electrical: Voltage:

Power: GPS Power +17V DC Voltage:

7W Power: 200mA

Connecting Cables\*\* (see Ordering Options): Number of cables 2

+12V DC

### Physical (Number of Slots):

7700 Frame Mounting: 7701 Frame Mounting:

### Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive

Class 1 laser product Laser Safety:

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

### **>>>**Ordering Information

Dual GPS Data Fiber Transmitter, 1310nm FP Tx and Rx Dual GPS Data Fiber Transmitter, 1550nm DFB Tx and Rx

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU rear plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

Accessories WA-T76 WA-T77

Notes\*\*

100' IF cable for 5600MSC, GPSII and 7707GPS-DT 100' IF cable for 7707GPS-DR to 5600MSC

\*\*Please specify the quantity of WA-T76 and WA-T77 cables required to connect the 7707GPS-DT and 7707GPS-DR to the Accutime Head and 5600MSC or 5010-GPSII respectively. The 7707GPS-DT and 7707GPS-DR are only compatible with the WA-T76 and WA-T77 cables. See diagram and Accessories for more information.

**Enclosures** 350FR 7700FR-C 7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules


Standalone Enclosure



### ▶ Features & Benefits

- · Transports GPS data signals from two Trimble Accutime 2000 Smart Antennas simultaneously
- · Allows user to run 1 or 2 Accutime 2000 GPS heads for primary and redundant links
- · All configuration settings are controllable through the card-edge user interface, or VistaLINK
- Optical output wavelength of 1310nm or 1550nm provides a 2km transmission distance of GPS data signal
- Low latency

- · Compatible with multi-mode and single-mode fiber
- SC/PC, ST/PC, or FC/PC fiber connector options
- Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

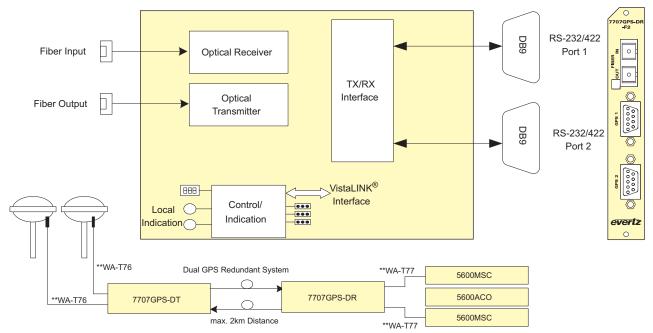

<sup>\*\*</sup>Evertz recomends that only these cables be used for connecting the specified equipment to the 7707GPS-DT and 7707GPS-DR. See Accessories for ordering details.

### ▶Specifications

### GPS Serial Data:

Number of Signals: 2 bi-directional GPS signals 2xDB-9 connectors Connector:

RS-232 or RS-422 (selectable)

Bit Rate RS-232/RS-422:

### Optical Input/Outputs:

Number of Connections:

Connector: Female SC/PC, ST/PC or FC/PC

Max Input Power: 0dBm Input Optical Sensitivity: -22dBm

Fiber Size and Type: 9µm core/single mode on TX,

62.5µm core/multi-mode on RX

Output Wavelength: 1310nm,1550nm (nominal)

### Output Power:

1310nm FP (Standard):

-7dBm ±1dBm 1550nm DFB: 0dBm ±1dBm

Electrical:

Voltage: +12V DC

Power: 6W

GPS Power:

+17V DC Voltage: 7W Power: 200mA Current

Connecting Cables\*\* (see Ordering Options):

Number of cables 2

### Physical (Number of Slots):

7700 Frame Mounting: 7701 Frame Mounting:

Compliance:

EMI/RFI:

Electrical Safety:

CSA Listed to UL 60065-03. IEC 60065 Complies with CE Low voltage Directive

Class 1 laser product Laser Safety:

Complies with 24 CFR 1040.10 and

1040 11

IEC 60825-1 Complies with FCC Part 15, Class A

EU EMC Directive

### **▶▶▶**Ordering Information

7707GPS-DR13-F2 Dual GPS Data Fiber Receiver, 1310nm FP Tx and Rx Dual GPS Data Fiber Receiver, 1550nm DFB Tx and Rx

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU rear plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

WA-T76

100' IF cable for 5600MSC, GPSII and 7707GPS-DT 100' IF cable for 7707GPS-DR to 5600MSC WA-T77

Notes\*\*

\*\*Please specify the quantity of WA-T76 and WA-T77 cables required to connect the 7707GPS-DT and 7707GPS-DR to the Accutime Head and 5600MSC or 5010-GPSII respectively. The 7707GPS-DT and 7707GPS-DR are only compatible with the WA-T76 and WA-T77 cables. See diagram and Accessories for more information.


Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure

### ▶ Features & Benefits

- Electrical to optical converter for DS3 (44.736Mb/s)
- Automatic cable equalization for up to 300m of high quality  $75\Omega$  coaxial cable
- Signal reclocking and jitter attenuation
- · Output wave shaping for G.703 standards compliance
- Loss of signal (LOS) detection/indication (ANSI T1.231-1999 and ITU G.775)
- · Electrical output drive level control for enhanced distance
- Transformer coupled inputs/outputs
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports single-mode and multi-mode fiber optic cable

- · Fully hot-swappable from front of frame
- Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

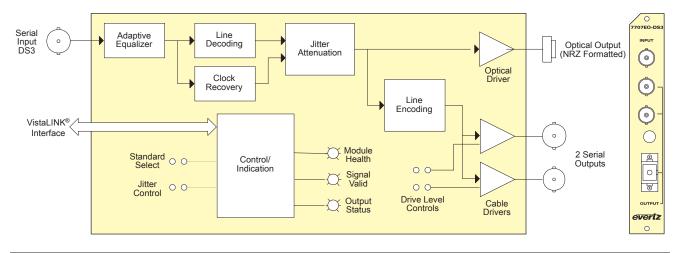

### ▶ Specifications

Inputs:

Standard: G.703 @ 44.736Mb/s 1 Isolated BNC input Connector:

Equalization: Automatic to 300m with Belden 8281

or equivalent cable

Return Loss: > 20dB up to 44Mb/s

Outputs:

Standard: G.703 @ 44.736Mb/s Number of Outputs: 2 Per Card-Reclocked

1 BNC per IEC 61169-8 Annex A Connector: Waveform: Conforms to G.703 compliant masks > 15dB up to 44.736Mb/s

Return Loss: Drive Level:

High:

For driving cable lengths > 70m For driving cable lengths < 70m Optical Output:

Number of Outputs: 1 Scrambled DS3 @ 44.736Mb/s Female SC/PC, ST/PC or FC/PC Connector:

Return Loss:

Fiber Size: 9μm core/125μm overall Wavelengths: (See ordering information) Output Power:

1310nm FP: -7dBm ±1dB

1550nm/CWDM DFB:

0dBm ±1dB DWDM DFB:

7dBm ±1dBm

Electrical:

+12V DC Voltage:

6W (Non-DWDM), 9W (DWDM) Power: Complies with FCC Part 15, Class A EU EMC Directive EMI/RFI:

Physical:

Number of slots:

Compliance:

EMI/RFI:

Electrical Safety

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1

Complies with FCC Part 15, Class A

CSA Listed to UL 60065-03, IEC 60065

EU EMC directive

### **>>>**Ordering Information

7707EQ13-DS3 DS3 Electrical to Optical Converter, VistaLINK®, 1310nm, FP Laser 7707EO15-DS3 DS3 Electrical to Optical Converter, 1550nm DFB Laser, VistaLINK®

r CWDM, please refer to the end of the fiber section for ordering information DS3 Electrical to Optical Converter, CWDM DFB Laser, VistaLINK® 7707EOxx-DS3

or DWDM, please refer to the end of the fiber section for ordering information 7707EODxx-DS3 DS3 (45Mb/s) Electrical to Optical Converter, DWDM Laser, +7dBm, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA

Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C 7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure

#### ▶ Features & Benefits

- · Optical to electrical converter for DS3 (44.736Mb/s)
- Signal reclocking and jitter attenuation
- Output wave shaping for G.703 standards compliance
- Output 1010 pattern generation upon loss of lock to an input signal
- · Electrical output drive level control for enhanced distance
- Transformer coupled outputs
- · Display of received optical power provides a pre-emptive indication of link integrity
- Wide range optical input (1270nm-1610nm)
- · Supports single-mode and multi-mode fiber optic cable

- Fully hot-swappable from front of frame
- Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

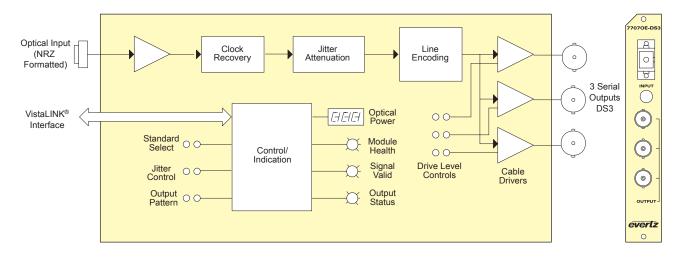

## ▶Specifications

Optical Input:

Number of Inputs: 1 Scrambled DS3 @ 44.736Mb/s Connector: Female SC/PC, ST/PC or FC/PC

Wavelength: 1270nm-1610nm Optical Sensitivity: -31dBm Max. Input Power: 0dBm

Fiber Size 62μm core/125μm overall Outputs:

Number of Outputs: 3 per card-reclocked Connector: 1 BNC per IEC 61169-8 Annex A Waveform: Conforms to G.703 compliant masks

> 15dB up to 44.736Mb/s Return Loss Drive Level:

For driving cable lengths > 70m High: Low: For driving cable lengths < 70m Electrical:

Voltage: +12V DC 6W

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

77070E-DS3 Optical to Electrical Converter, VistaLINK® Monitoring

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eq: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU rear plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

**Enclosures** 


350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



- Automatic cable equalization for up to 300m of high quality  $75\Omega$  coaxial cable
- · Signal reclocking and jitter attenuation
- · Output wave shaping for G.703 standards compliance
- Loss of signal (LOS) detection/indication (ANSI T1.231-1999 and ITU G.775)
- · Electrical output drive level control for enhanced distance
- Transformer coupled inputs/outputs
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Supports single-mode and multi-mode fiber optic cable

- Fully hot-swappable from front of frame
- · Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

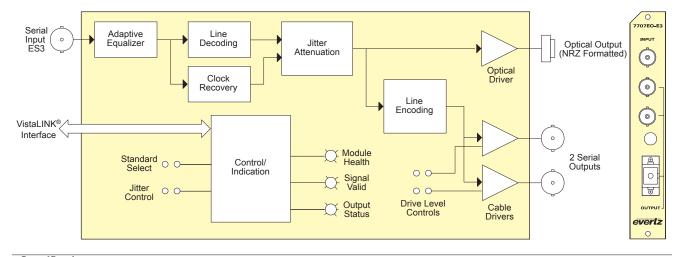

# **▶**Specifications

Inputs: Standard:

G.703 @ 34.368Mb/s 1 Isolated BNC input Connector

Equalization: Automatic to 300m with Belden 8281 or equivalent cable

> 20dB up to 34MHz Return Loss:

Outputs:

G.703 @ 34.368Mb/s Standard: Number of Outputs: 2 Per Card-Reclocked

Connector 1 BNC per IEC 61169-8 Annex A Waveform: Conforms to G.703 compliant masks

> 15dB up to 34MHz

Return Loss Drive Level:

High: For driving cable lengths > 70m For driving cable lengths < 70m Low

Optical Output:

Number of Outputs: 1 Scrambled E3 @ 34.368Mb/s Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 14dB

9um core/125um overall Fiber Size: Wavelengths: (See ordering information)

Output Power: 1310nm FP:

-7dBm ±1dB 1550nm/CWDM DFB: 0dBm ±1dB DWDM DFB: 7dBm ±1dBm

Electrical:

+12V DC Voltage 6W (Non-DWDM) Power:

9W (DWDM) EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical: Number of slots:

Compliance:

CSA Listed to UL 60065-03. IEC 60065 Electrical Safety Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

#### **>>>**Ordering Information

7707EO13-E3 E3 Electrical to Optical Converter, VistaLINK®, 1310nm, FP Laser

For CWDM, please refer to the end of the fiber section for ordering information E3 Electrical to Optical Converter, CWDM DFB Laser, VistaLINK® 7707EOxx-E3

For DWDM, please refer to the end of the fiber section for ordering information 7707EODxxx-E3 E3 Electrical to Optical Converter, DWDM Laser, +7dBm, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eq: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR










# 7700 Modular - Fiber - Datacom/Telecom Transport

#### ▶ Features & Benefits

- · Optical to electrical converter for E3 (34.368Mb/s)
- · Signal reclocking and jitter attenuation
- Output wave shaping for G.703 standards compliance
- Output 1010 pattern generation upon loss of lock to an input signal
- · Electrical output drive level control for enhanced distance
- · Transformer coupled outputs
- · Display of received optical power provides a pre-emptive indication of link integrity
- Wide range optical input (1270nm-1610nm)
- · Supports single-mode and multi-mode fiber optic cable

- · Fully hot-swappable from front of frame
- · Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

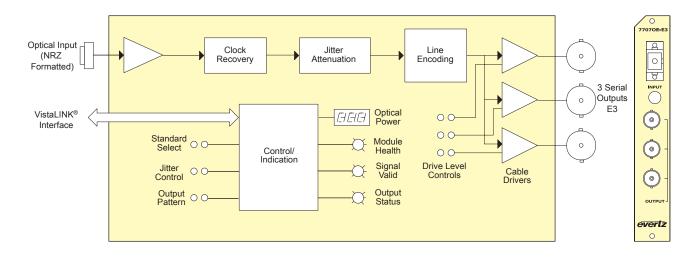

#### **▶** Specifications

Optical Input: Number of Inputs: 1 Scrambled E3 @ 34.368Mb/s Connector: Female SC/PC, ST/PC or FC/PC

Wavelength: 1270nm-1610nm Optical Sensitivity: -31dBm 0dBm Max. Input Power:

Fiber Size: 62μm core/125μm overall Outputs:

Number of Outputs: 3 per card-reclocked

Connector: 1 BNC per IEC 61169-8 Annex A Waveform: Conforms to G.703 compliant masks Return Loss > 15dB up to 34MHz

Drive Level:

High: For driving cable lengths > 70m For driving cable lengths < 70m Electrical:

Voltage: +12V DC Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical: Number of slots: 1

#### >>> Ordering Information

77070E-E3 E3 Optical to Electrical Converter, VistaLINK® Monitoring Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU rear plate for use with 7701FR Multiframe

+1RU +SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +ST +FC ST/PC FC/PC Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Enclosures 350FR

7700FR-C S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

## Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver

#### ▶ Features & Benefits

- · Transports signals at the OC-12/STM-4 rate
- Single card TDM multiplexer for two bi-directional asynchronous SDI, DVB-ASI & SDTi signals
- Built-in Ethernet transceiver with one 10/100/1000 Base-T compatible port with FBM (Fiber Bandwidth Management) technology
- Interfaces directly to the SONET/SDH infrastructure
- Signal transport over fiber uninterrupted by loss of any input feed
- · Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (±50ppm)
- · Fully hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · SC/PC, ST/PC, FC/PC connector options
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies two card slots and is housed in a 3RU frame that holds up to 15 modules and a 3RU portable frame that holds up to 3 modules

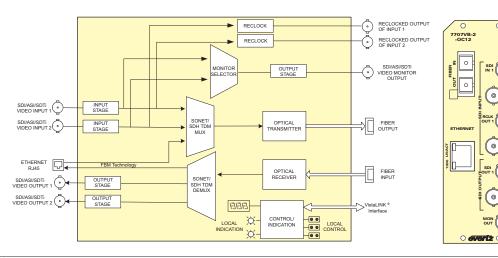

#### **▶** Specifications

#### Serial Video Input:

SMPTE 259M-C, DVB-ASI, Standards

SMPTE 305M

Number of Inputs: Connector:

BNC per IEC 61169-8 Annex A Automatic to 250m @ 270Mb/s with Equalization: Belden 1694A or equivalent cable

Return Loss: >15dB up to 270Mb/s

Frequency Offset Tolerance: +50ppm

#### Serial Video Output:

Connector:

SMPTE 259M-C, DVB-ASI, Standards

SMPTE 305M

Number of Outputs: 2+1 monitor with user selectable

source BNC per IEC 61169-8 Annex A

800mV nominal Signal Level:

DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270 Mb/s Overshoot: <10% of amplitude

Return Loss >12dB Widehand Jitter <0.2111

#### Serial Video Monitor Output:

SMPTE 259M-C, DVB-ASI, Standards:

SMPTE 305M (SDTi) Number of Outputs: 1 signal user-selectable from the 2

Standards:

BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270Mb/s < 10% of amplitude Overshoot:

> 12dB to 270Mb/s Return Loss: Wideband Jitter: < 0.2 UI

Optical Output:

Standards: OC-12/STM-4

Number of Outputs

Connector: Female SC/PC, ST/PC or FC/PC

>14dB Return Loss:

Wideband Jitter: <0.2 UI 9μm core/125μm overall

Fiber Size:

Wavelength: Standard: 1310nm, 1550nm (nominal) 1270nm to 1610nm (See Ordering

CWDM: Information)

DWDM: C-Band (ITU-T G.694.1 compliant)

(See Ordering Information)

1310nm FP (Standard): -7dBm +1dBm

1550nm & CWDM DFB: 0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Optical Input:

OC-12/STM-4

Number of Inputs:

Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 25dB

1270nm to 1610nm Wavelength: Maximum Input Po

-1dBm Standard: Optical Sensitivity:

-28dBm Standard

Electrical:

Voltage: +12V DC Power:

10W (non DWDM) 13W (DWDM)

Physical:

Number of Slots:

# Compliance:

EMI/RFI:

Electrical Safety: CSA Listed to CSA C22.2 No. 60065-

03IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

directive 93/68/EEC

Laser Safety: Complies with 24 CFR 1040.10 and

1040.11 except for deviations pursuant to LN No. 50, dated July 26,

2001Complies with IEC 60825-1, Am. 2

Complies with FCC regulations for

class A devices

Complies with EU EMC directive

89/336/EEC

#### >>> Ordering Information

7707VB13-2-OC12 Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver,

1310nm FP laser, VistaLINK®

Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver,

1550nm DFB laser (0dBm), VistaLINK®

For CWDM applications please refer to the end of the fiber section for details 7707VBxx-2-OC12

Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver, CWDM DFB laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707VBDxxx-2-OC12

Dual SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver DWDM DFB laser, VistaLINK®

Ordering Options

Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules











Maximum Input Power Standard: -1dBm Optical Sensitivity:

-21dBm Standard:

Electrical:

Optical Input:

Number of Inputs:

Standards

Connector:

Return Loss

Wavelength:

Voltage: +12V DC 10W (non DWDM), 13W (DWDM) Power:

Physical:

Number of Slots:

Compliance:

FMI/RFI

Electrical Safety:

CSA Listed to CSA C22.2 No. 60065-03IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

directive 93/68/EEC

Laser Safety: Complies with 24 CFR 1040.10 and 1040.11 except for deviations

OC-48/STM-16

1270nm to 1610nm

Female SC/PC, ST/PC or FC/PC

pursuant to LN No. 50, dated July 26, 2001Complies with IEC 60825-1, Am. 2

Complies with FCC regulations for class A devices

Complies with EU EMC directive

89/336/EEC


#### ▶ Features & Benefits

- Transports signals at the OC-48/STM-16 rate
- · Single card TDM multiplexer for three bi-directional asynchronous HD-SDI, SDI, DVB-ASI & SDTi signals
- Built-in Ethernet transceiver with 10/100/1000 Base-T compatible port with FBM (Flexible Bandwidth Management) technology
- · Interfaces directly to the SONET/SDH infrastructure
- · Signal transport over fiber uninterrupted by loss of any input feed
- · Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (±50ppm)
- · Fully hot-swappable from front of frame

- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available

Triple HD/SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver

- · SC/PC, ST/PC, FC/PC connector options
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies two card slots and is housed in a 3RU frame that holds up to 15 modules and a 3RU portable frame that holds up to 7 modules

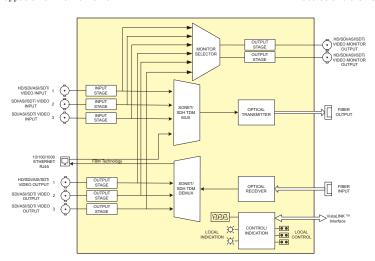

# ▶Specifications

Serial Video Input:

SMPTE 292M, SMPTE 259M-C, DVB-ASI, SMPTE 305M Standards:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 250m @ 270Mb/s with Belden 1694A or equivalent cable

>15dB up to 270Mb/s Return Loss:

Frequency Offset Tolerance:

+50ppm

#### Serial Video Output:

Standards: SMPTE 292M, SMPTE 259M-C, DVB-ASI, SMPTE 305M

Number of Outputs: 3+2 monitor with user selectable

source

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

900ps nominal @ 270 Mb/s Rise and Fall Time:

Overshoot: <10% of amplitude

>12dB Return Loss Wideband Jitter: <0.2 UI

#### Serial Video Monitor Output:

Standards: DVB-ASI, SMPTE 305M (SDTi)

# SMPTE 292M, SMPTE 259M-C,

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal Fiber Size: Wavelength: Standard:

DC Offset:

Overshoot:

. Standards:

Connector:

Return Loss:

Wideband Jitter:

Return Loss:

Wideband Jitter:

Optical Output:

Number of Outputs:

Rise and Fall Time:

1310nm, 1550nm (nominal) CWDM: 1270nm to 1610nm (See Ordering Information) C-Band (ITU-T G.694.1 compliant) DWDM:

0V ±0.5V

< 0.2 UI

>14dB

900ps nominal @ 270Mb/s

Female SC/PC, ST/PC or FC/PC

9μm core/125μm overall

< 10% of amplitude

> 12dB to 270Mb/s

OC-48/STM-16

(See Ordering Information)

1310nm FP

(Standard): -7dBm ±1dBm 1550nm & CWDM DFB: 0dBm ±1dBm DWDM DFB +7dBm ±1dBm

Number of Outputs: 2 signals user-selectable from the 3 inputs and 3 outputs

# >>> Ordering Information

Triple HD/SDI/ASI/SDTi + Ethernet SONET/SDH Fiber Transceiver

7707VB13-3-HS-OC48 1310nm DFB laser (0dBm), VistaLINK® 7707VB15-3-HS-OC48 1550nm DFB laser (0dBm), VistaLINK®

For CWDM applications please refer to the end of the fiber section for details 7707VBxx-3-HS-OC48 CWDM DFB laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707VBDxxx-3-HS-OC48 DWDM DFB laser, VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eq: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Connector Suffix +SC

SC/PC +ST ST/PC +FC FC/PC

**Enclosures** 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules


7700 Modular - Fiber - Ethernet SONET/SDH Transport

# Eight Channel SDI + Ethernet SONET / SHD Fiber Transceiver

#### ▶ Features & Benefits

- Transports signals over OC-48/STM-16 data rates (2.488Gb/s)
- Single card TDM multiplexer for eight bi-directional asynchronous SD-SDI, SDTi and DVB-ASI signals
- Built-in Ethernet transceiver with one 10/100/1000 Base-T port with FBM (Fiber Bandwidth Management) technology
- · Interfaces directly to SONET/SDH infrastructure
- · Uncompressed, full-rate video transport
- · Signal transport over fiber uninterrupted by loss of any input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (±50ppm)
- Fully hot-swappable from front of frame
- Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelength (ITU-T G.694.1 compliant) support
- SC/PC, ST/PC, FC/PC connector options
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies two card slots and is housed in a 3RU frame that holds up to 5 modules and a 3RU portable frame that holds up to 3 modules

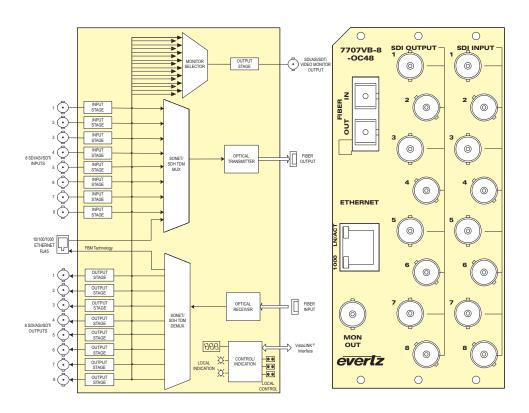













# Eight Channel SDI + Ethernet SONET / SHD Fiber Transceiver

# ▶Specifications

Serial Video Input:

SMPTE 259M-C, DVB-ASI, SMPTE Standards:

305M (SDTi)

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector: Automatic to 250m @ 270Mb/s with Equalization:

Belden 1694A or equivalent cable > 15dB up to 1.5Gb/s

Return Loss: Frequency Offset Tolerance:

±50ppm

Serial Video Output:

SMPTE 259M-C, DVB-ASI, Standards:

SMPTE 305M (SDTi) Number of Outputs: 8 (+1 monitor with user selectable

source) 1 BNC per IEC 61169-8 Annex A

Connector: 800mV nominal Signal Level:

DC Offset:  $0V \pm 0.5V$ 

Rise and Fall Time: 900ps nominal @ 270 Mb/s Overshoot: <10% of amplitude

Return Loss Wideband Jitter: <0.2 UI

Serial Video Monitor Output:

SMPTE 259M-C, DVB-ASI, SMPTE

305M (SDTi)

Number of Outputs: 1, signal user-selectable from the 8

inputs & 8 outputs 1 BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude Overshoot:

Return Loss: > 12dB Wideband Jitter: < 0.2 UI

Optical Output:

Standards: OC-48/STM-16

Number of Outputs:

Female SC/PC, ST/PC or FC/PC Connector:

> 14dB Return Loss: Wideband Jitter: < 0.2 UI Fiber Size:

9μm core/125μm overall

1310nm, 1550nm (nominal)

1270nm to 1610nm (See Ordering

Information)

C-Band (ITU-T G.694.1 Compliant) (See Ordering Information)

DWDM:

Wavelength:

Standard:

CWDM:

1310nm FP (Standard):

-7dBm ±1dBm 1550nm & CWDM DFB:

0dBm ±1dBm

DWDM DFB: +7dBm ±1dBm

Optical Input: Number of Inputs:

OC-48/STM-16 Standards:

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 25dB

1270nm to 1610nm Wavelength:

#### Maximum Input Power:

-1dBm Standard: Optical Sensitivity: Standard: -23dBm

Electrical:

Voltage: +12V DC

13W (non DWDM) 15W (DWDM) Power:

Physical:

EMI/RFI:

Number of Slots: 3

Compliance:

Electrical Safety: CSA Listed to CSA C22.2 No. 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage directive 93/68/EEC

Laser Safety: Complies with 24 CFR 1040.10 and

1040.11 except for deviations pursuant to LN No. 50, dated July 26, 2001 Complies with IEC 60825-1, Am. 2

Complies with FCC regulations for class A devices

Complies with EU EMC directive

89/336/EEC

# **>>>**Ordering Information

7707VB13-8-OC48 Eight Channel SDI + Ethernet SONET/SDH Fiber Transceiver,

1310nm FP laser, VistaLINK®

For CWDM applications please refer to the end of the fiber section for details 7707VBxx-8-OC48 Eight Channel SDI + Ethernet SONET/SDH Fiber Transceiver,

CWDM DFB laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707VBDxxx-8-0C48 Eight Channel SDI + Ethernet SONET/SDH Fiber Transceiver DWDM DFB laser, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order Eq: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

Connector Suffix

+SC SC/PC +ST ST/PC FC/PC +FC

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C

3RU Multiframe which holds up to 15 single slot modules










#### ▶ Features & Benefits

- Transports signals over OC-48/STM-16 data rates (2.488Gb/s)
- Single card TDM multiplexer for eight asynchronous SD-SDI, SDTi and DVB-ASI signals
- Built-in Ethernet transceiver with one 10/100 Base-T port
- Interfaces directly to SONET/SDH infrastructure
- · Uncompressed, full-rate video transport
- Signal transport over fiber uninterrupted by loss of any input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (±50ppm)
- · Fully hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelength (ITU-T G.694.1 compliant) support
- SC/PC, ST/PC, FC/PC connector options
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK<sup>®</sup>
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies three card slots and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, 350FR portable frame that holds up to 3 modules or a standalone frame which will hold 1 module

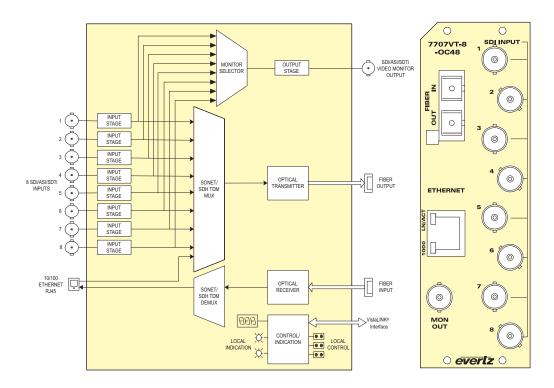













# Eight Channel SDI + Ethernet SONET / SDH Fiber Transmitter

# ▶Specifications

Serial Video Input:

SMPTE 259M-C, DVB-ASI, SMPTE Standards:

305M (SDTi)

Number of Inputs:

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 250m @ 270Mb/s with Equalization:

Belden 1694A or equivalent cable

Return Loss: > 15dB up to 1.5Gb/s

Frequency Offset Tolerance: ±50ppm

Serial Video Monitor Output:

SMPTE 259M-C, DVB-ASI, SMPTE Standards:

305M (SDTi)

Number of Outputs: 1, signal user-selectable from the 8

inputs Connector:

1 BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal
Overshoot: < 10% of amplitude

Return Loss: > 12dB Wideband Jitter: < 0.2 UI

Optical Output:

OC-48/STM-16 Standards

Number of Outputs: 1

Female SC/PC, ST/PC or FC/PC Connector:

> 14dB Return Loss Wideband Jitter < 0.2 UI

Fiber Size: 9μm core/125μm overall Wavelength:

DWDM:

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm (See Ordering

Information)

C-Band (ITU-T G.694.1 Compliant) (See Ordering Information)

Power

1310nm FP (Standard):

-7dBm ±1dBm

1550nm & CWDM DFB:

0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Optical Input:

Number of Inputs:

OC-48/STM-16 Standards:

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 25dB

Wavelength: 1270nm to 1610nm Maximum Input Power:

-1dBm Standard: High Sensitivity (-H):

-8dBm Optical Sensitivity:

-21dBm Standard: High Sensitivity (-H):

-28dBm

Electrical: Voltage: Power:

+12V DC

10W (non DWDM) 13W (DWDM)

Physical:

Number of Slots:

Compliance:

EMI/RFI:

CSA Listed to CSA C22.2 No. 60065-03 Electrical Safety:

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

directive 93/68/EEC

Complies with 24 CFR 1040.10 and Laser Safety:

1040.11 except for deviations

pursuant to LN No. 50, dated July 26, 2001 Complies with IEC 60825-1, Am. 2 Complies with FCC regulations for class

Complies with EU EMC directive

89/336/EEC

# >>> Ordering Information

7707VT13-8-OC48 Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter.

1310nm FP laser, VistaLINK®

For CWDM applications please refer to the end of the fiber section for details

7707VTxx-8-OC48

Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter,

CWDM DFB laser, VistaLINK®

7707VTxx-8-0C48-H

Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter, CWDM DFB laser, high sensitivity receiver, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707VTDxx-8-OC48 Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter,

DWDM DFB laser, VistaLINK® 7707VTDxxx-8-OC48-H

Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter, DWDM

DFB laser, high sensitivity receiver, VistaLINK®

Ordering Options

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR

S7701FR Standalone enclosure










- Single card TDM multiplexer for eight asynchronous SD-SDI, SDTi and DVB-ASI signals
- Built-in Ethernet transceiver with one 10/100 Base-T port
- Interfaces directly to SONET/SDH infrastructure
- · Uncompressed, full-rate video transport
- Signal transport over fiber uninterrupted by loss of any input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (±50ppm)
- Fully hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelength (ITU-T G.694.1 compliant) support
- · SC/PC, ST/PC, FC/PC connector options
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies three card slots and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, 350FR portable frame that holds up to 3 modules or a standalone frame which will hold 1 module

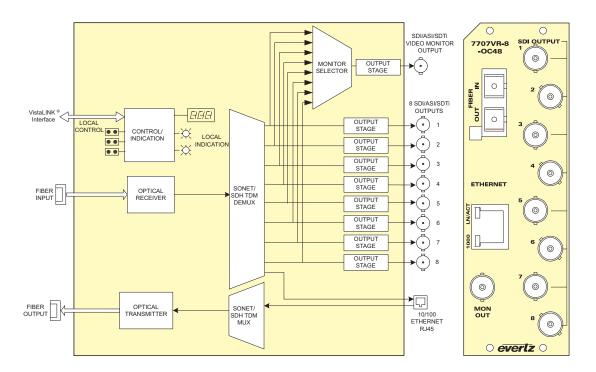

# 7707VR-8-OC48

# ▶Specifications

#### Serial Video Output:

SMPTE 259M-C. DVB-ASI, SMPTE Standards:

305M (SDTi)

Number of Outputs: 8 (+1 monitor with user-selectable

source)

1 BNC per IEC 61169-8 Annex A 800mV nominal Connector: Signal Level:

DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal at 270Mb/s Overshoot: < 10% of amplitude

> 12dB Return Loss: Wideband Jitter: < 0.2 UI

Serial Video Monitor Output:

SMPTE 259M-C, DVB-ASI, SMPTE Standards:

305M (SDTi)

Number of Outputs: 1, signal user-selectable from the 8 inputs

Connector: 1 BNC per IEC 61169-8 Annex A Signal Level: DC Offset: 800mV nominal

0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude

Return Loss > 12dB Wideband Jitter: < 0.2 UI

Optical Output: OC-48/STM-16 Standards:

Number of Outputs: 1

Connector: Female SC/PC, ST/PC or FC/PC > 14dB

Return Loss: Wideband Jitter: < 0.2 UI

Fiber Size: 9μm core/125μm overall

Wavelength:

1310nm, 1550nm (nominal) 1270nm to 1610nm (See Ordering Standard: CWDM:

Information)

DWDM: C-Band (ITÚ-T G.694.1 compliant) (See Ordering Information)

Power:

1310nm FP (Standard): -7dBm ±1dBm

1550nm & CWDM DEB

0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Optical Input:

OC-48/STM-16 Standards:

Number of Inputs:

Connector: Female SC/PC, ST/PC or FC/PC

Return Loss: > 25dB

Wavelength: 1270nm to 1610nm Maximum Input Power: -1dBm Standard: High Sensitivity (-H): -8dBm Optical Sensitivity: . Standard: -21dBm

Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver

High Sensitivity (-H): -28dBm

Electrical:

Voltage +12V DC 10W (non DWDM) Power

13W (DWDM)

Physical: Number of Slots 2

Compliance: Electrical Safety:

CSA Listed to CSA C22 2 No. 60065-

03IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage

directive 93/68/EEC

Complies with 24 CFR 1040.10 and Laser Safety:

1040.11 except for deviations pursuant to LN No. 50,

dated July 26, 2001 Complies with IEC 60825-1, Am. 2

Complies with FCC regulations for

class A devices

Complies with EU EMC directive

89/336/EEC

#### >>> Ordering Information

7707VR13-8-OC48 Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver, 1310nm FP laser, VistaLINK®

For CWDM applications please refer to the end of the fiber section for details 7707VRxx-8-OC48

Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver, CWDM

DFB laser, VistaLINK®

7707VRxx-8-OC48-H

Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver, CWDM

DFB laser, high sensitivity receiver, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details

Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver, DWDM DFB laser, VistaLINK®

7707VRDxxx-8-OC48-H

Eight Channel SDI + Ethernet SONET/SDH Fiber Receiver, DWDM DFB

laser, high sensitivity receiver, VistaLINK®

Ordering Options

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

EMI/RFI

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR

S7701FR Standalone enclosure










# Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter

#### ▶ Features & Benefits

- Transports signals at the OC-48/STM-16 rate
- Single card TDM multiplexer for one HD-SDI and two asynchronous SDI or three asynchronous SDI signals
- Supports SDTi and DVB-ASI signals
- Built-in Ethernet transceiver with one 10/100 Base-T port
- · Interfaces directly to the SONET/SDH infrastructure
- · Uncompressed, full-rate video transport
- Signal transport over fiber uninterrupted by loss of any input feed
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (+/- 50ppm)
- Fully hot-swappable from front of frame
- Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- SC/PC, ST/PC, FC/PC connector options
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 350FR or 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies two card slots and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 7 modules, 350FR portable frame that holds up to 3 modules or a standalone frame which will hold 1 module

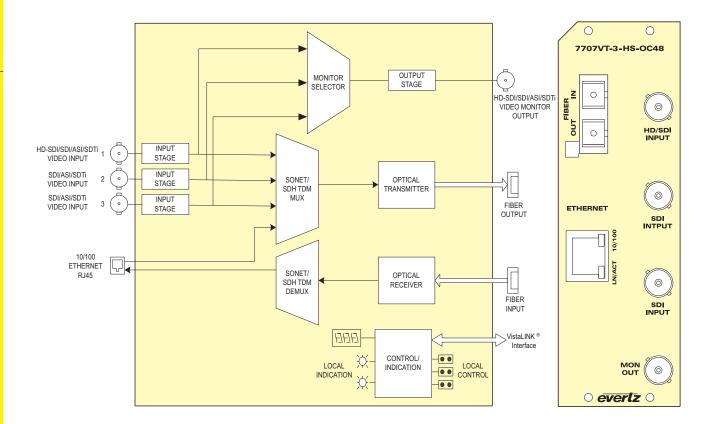











# Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter

## ▶Specifications

Serial Video Input:

Standards:

SMPTE 292M, SMPTE 259M-C, Input 1

DVBASI, SMPTE 305M

Inputs 2 & 3 SMPTE 259M-C, DVB-ASI, SMPTE

305M

Number of Inputs:

BNC BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 250m @ 270Mb/s or

100m @ 1.5Gb/s with Belden 1694A

or equivalent cable Return Loss: > 15dB up to 1.5Gb/s

Frequency Offset

+ 50ppm Tolerance:

Serial Video Monitor Output: Standards: SMPTE 292M, SMPTE 259M-C. Standards: DVB-ASI, SMPTE 305M (SDTi) Number of Outputs: 1 signal user selectable from the 3

inputs BNC BNC per IEC 61169-8 Annex A Connector: 800mV nominal

Signal Level: DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270Mb/s

<270ps @ 1.5Gb/s <10% of amplitude Overshoot:

> 12dB to 1.5Gb/s Wideband Jitter: < 0.2111

Return Loss:

Optical Output:

OC-48/STM-16 Standards Number of Outputs: 1

Connector: Female SC/PC, ST/PC or FC/PC > 14dB

Return Loss Wideband Jitter: < 0.2UI

Fiber Size: 9μm core / 125μm overall

Wavelength:

Standard 1310nm, 1550nm (nominal) CWDM 1270nm to 1610nm (See Ordering Information) DWDM C-Band (ITU-T G.694.1 compliant)

(See Ordering Information)

Power:

1310nm FP (Standard):

-7dBm +1dBm

1550nm & CWDM DFB:

0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Optical Input:

Standards OC-48/STM-16

Number of Inputs:

Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: > 25dB

Wavelength: 1270nm to 1610nm Maximum Input Power:

-1dBm Standard Optical Sensitivity:

Standard -21dBm Electrical: Power:

+12V DC Voltage:

10 W (non DWDM) 13 W (DWDM)

Physical:

Number of Slots:

Laser Safety:

EMI/RFI:

Electrical Safety CSA Listed to CSA Compliance: C22.2 No. 60065-03IEC 60065-(2001-

12) 7th Edition

Complies with CE Low voltage

directive 93/68/EEC

Complies with 24 CFR 1040.10 and 1040.11 except for deviations

pursuant to LN No. 50, dated July 26, 2001

Complies with IEC 60825-1, Am. 2 Complies with FCC regulations for

class A devices

Complies with EU EMC directive 89/336/EEC

# **>>>**Ordering Information

7707VT13-3-HS-OC48

Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber

Transmitter, 1310nm FP laser, VistaLINK® 7707VT15-3-HS-OC48

Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, 1550nm DFB laser, VistaLINK

For CWDM, please refer to the end of the fiber section for ordering information

7707VTxx-3-HS-OC48

Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, CWDM DFB laser, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707VTDxxx-3-HS-OC48 Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, DWDM DFB laser, VistaLINK°

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Ea: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC

Enclosures 7700FR-C 7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules








# Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Receiver

#### ▶ Features & Benefits

- Transports signals at the OC-48/STM-16 rate
- Single card TDM multiplexer for one HD-SDI and two asynchronous SDI or three asynchronous SDI signals
- Supports SDTi and DVB-ASI signals
- Built-in Ethernet transceiver with one 10/100 Base-T port
- · Interfaces directly to the SONET/SDH infrastructure
- · Uncompressed, full-rate video transport
- Transparently passes embedded AES or any other data in the horizontal or vertical ancillary data space
- · Stratum 3 wander/holdover/jitter compliance
- Wide input frequency range tolerance (+/- 50ppm)
- Fully hot-swappable from front of frame
- · Supports single-mode and multi-mode fiber optic cable

- Optical output wavelengths of 1310nm, 1550nm, and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- SC/PC, ST/PC, FC/PC connector options
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 350FR or 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

o evertz o

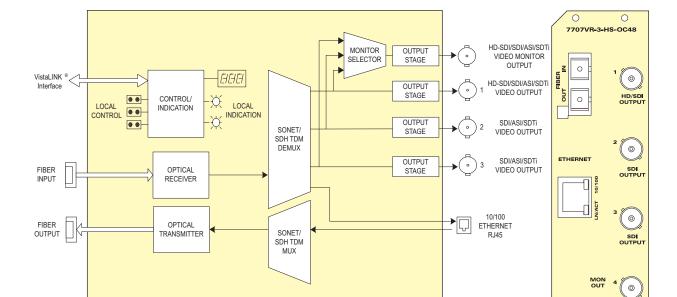









2

# Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Receiver

## ▶Specifications

Serial Video Output:

Standards:

Output 1 & Monitor: SMPTE 292M, SMPTE 259M-C, DVBASI, SMPTE 305M

Outputs 2 & 3: SMPTE 259M-C, DVB-ASI,

SMPTE 305M Number of Outputs: 3 + 1 monitor with user selectable

source

Connector: BNC per IEC 61169-8 Annex A 800mV nominal Signal Level:

DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal @ 270 Mb/s, <

270ps @ 1.5Gb/s Overshoot: <10% of amplitude Return Loss:

Wideband Jitter: < 0.2UI

Optical Output:

Number of Outputs: Standards: OC-48/STM-16

Female SC/PC, ST/PC or FC/PC Connector:

Return Loss: Wideband Jitter: < 0.2UI

Fiber Size: 9μm core / 125μm overall

Wavelength:

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm (See Ordering

Information) DWDM: C-Band (ITU-T G.694.1

compliant)(See Ordering

Information)

Power 1310nm FP (Standard):

-7dBm ±1dBm

1550nm & CWDM DFB

0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Optical Input:

Number of Inputs OC-48/STM-16 Standards:

Female SC/PC, ST/PC or FC/PC Connector

Return Loss: > 25dB

Wavelength: 1270nm to 1610nm

Maximum Input Power: -1dBm Standard: -8dBm

High Sensitivity (-H): Optical Sensitivity:

-21dBm Standard:

Electrical:

+12V DC Voltage:

10 W (non DWDM) 13 W (DWDM)

Physical:

Laser Safety:

EMI/RFI:

Number of Slots

Compliance:

Electrical Safety CSA Listed to CSA C22.2 No. 60065-03IEC 60065-(2001-12) 7th Edition

Complies with CE Low voltage directive 93/68/EEC

Complies with 24 CFR 1040.10

and 1040.11 except for deviations pursuant to LN No. 50,

dated July 26, 2001

Complies with IEC 60825-1, Am. 2 Complies with FCC regulations for

class A devices

Complies with EU EMC directive

89/336/EEC

# **>>>**Ordering Information

7707VR13-3-HS-OC48

Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber

Receiver, 1310nm FP laser, VistaLINK®

7707VR15-3-HS-OC48 Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber

Receiver, 1550nm DFB laser, VistaLINK®

For CWDM, please refer to the end of the fiber section for ordering information

Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Receiver, CWDM DFB laser, VistaLINK® 7707VRxx-3-HD-OC48

For DWDM applications please refer to the end of the fiber section for details
7707VRDxxx-3-HS-OC48 Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber

Receiver, DWDM DFB laser, VistaLINK®

**Ordering Options** 

Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU

+1RU

+SA

+SC

+ST

Connector Suffix

SC/PC ST/PC

+FC

**Enclosures** 350FR

7700FR-C 7701FR S7701FR

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

FC/PC

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules










# 70/140MHz IF Fiber Transmitter

The 7705IFTA is a fiber optic transmitter for 70/140MHz IF signals. The 7705IFTA accepts one 70/140MHz coaxial input and provides a fiber optic output signal at 1310nm. An additional electrical output is also provided for monitoring or further signal distribution.

The 7705IFTA occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR which will hold up to 7 modules or a standalone enclosure which will hold 1 module.

#### ▶ Features & Benefits

- 30-200MHz bandwidth
- Wide dynamic range RF input (-5 to -65dBm)
- Protocol transparent transmits all video, audio and data modulation formats
- · Supports manual and automatic gain control on IF input
- Wide AGC hold range (45dB) using 7705IFTA + 7705IFRA
- · Additional electrical output for monitoring or distribution
- · Available with BNC or F-Type connector options
- Supports single-mode and multi-mode fiber optic cable
- Available in SC/PC, ST/PC, FC/PC and APC connector options
- Fully hot-swappable from front of frame

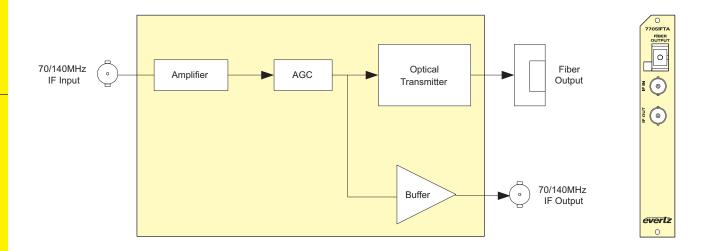

#### **▶**Specifications

RF Input:

Connector: 1 BNC per IEC 61169-8 Annex A

(F-type optional)

I/O Impedance:  $75\Omega$  (50 $\Omega$  optional) (See Ordering

Return Loss: 18dB (min)
Frequency Range: 30MHz-200MHz
Input Power Range: 5 to -65dBm
AGC Hold Range: -10 to -35dBm

IF Monitoring Output:

Connector: 1 BNC per IEC 61169-8 Annex A

(F-type optional)

I/O Impedance:  $75\Omega$  (50 $\Omega$  optional) (See Ordering

Output Signal Level:

AGC mode: -20dBm constant (within AGC range

-10 to -35dBm total RF input power)

Manual mode: (Input signal) +15dB

Intermodulation Products: -50dBc (-10dBm RF in, ACG mode) Optical Output: Number of outp

Number of outputs: 1

Connector: Female SC/PC, ST/PC, FC/PC,

SC/APC, FC/APC Operating Wavelength:

1310nm

Output Power: 0dBm ±1dBm

Electrical:

Voltage: +12V DC

Power: 4W

Physical:

Number of slots:

#### **>>>**Ordering Information

7705IFTA13 70/140MHz IF Fiber Transmitter

Note: 75 $\Omega$  I/O impedance ships standard

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

**+SA** Standalone Enclosure Rear Plate

Impedance Suffix

+50 50 $\Omega$  I/O Impedance

Connector Suffix

+SC SC/P

+AP+SC SC/APC (Angle polished)

+ST ST/PC

**+FC** FC/PC

**+AP+FC** FC/APC (Angle polished) **+F75**  $75\Omega$ , F-Type rear connector

Enclosures 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe, which holds up to 15 single slot modules 1RU Multiframe, which holds up to 3 single or dual slot modules

7701FR 1RU Multiframe, whi \$7701FR Standalone enclosur

The 7705IFRA is a fiber optic receiver for 70/140 MHz IF signals. The 7705IFRA accepts a fiber optic input from the companion 7705IFTA and provides two 70/140 MHz IF output signals.

The 7705IFRA occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules or a standalone enclosure which will hold 1 module.

#### ▶ Features & Benefits


- 30-200MHz bandwidth
- Protocol transparent receives all video, audio and data modulation formats
- Supports manual & automatic gain control (AGC)
- Wide AGC hold range (45dB) using 7705IFTA + 7705IFRA
- Two IF outputs for extra signal distribution or monitoring functions
- · Available with BNC or F-Type connector options

- Wide range optical input (1270nm to 1610nm)
- IF output power independent of optical loss (within AGC range)
- Supports single-mode and multi-mode fiber optic cable
- · Available in SC/PC, ST/PC, FC/PC & APC connector options

Physical:

Number of slots:

• Fully hot-swappable from front of frame

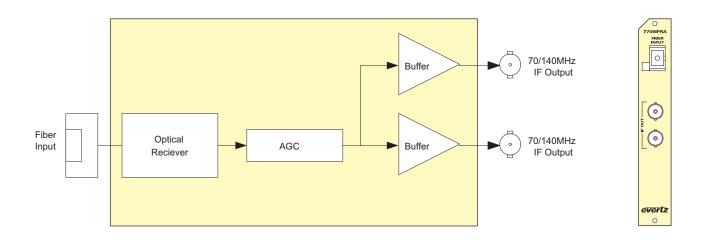

# ▶Specifications

RF Output:

Number of Outputs: 2

Connector: 1 BNC per IEC 61169-8 Annex A

(F-type optional)  $75\Omega$  (50 $\Omega$  optional) (See Ordering

I/O Impedance: Information)

18dB (min) Return Loss:

30MHz-200MHz Frequency Range:

±1dB @ 30 MHz-200MHz Flatness:

±.2dB @ 36MHz BW Output Signal Level:

AGC:

-10dBm constant (within AGC range) -5 to -65 (depends on RF input level & Manual

optical loss)

Intermodulation Products:

-50dBc (-10dBm at IFTA input & 3dB

optical loss)

Optical Input:

Number of Inputs:

Connector Female SC/PC, ST/PC, FC/PC,

SC/APC, FC/APC

Operating Wavelength:

1270nm-1610nm

+3dBm (max) Optical Input Power: Optical Sensitivity: -14dBm @35dB C/N @36MHz BW

Optical Attenuation:

AGC Hold Range: 10dB optical

Electrical:

+12V DC Voltage: 5W

Power:

#### **▶▶▶Ordering Information**

7705IFRA13

70/140MHz IF Fiber Receiver

Note: 75Ω I/O impedance ships standard

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

Impedance Suffix

+3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+1RU Standalone Enclosure Rear Plate

50Ω I/O Impedance

Connector Suffix

SC/PC +SC

+AP+SC SC/APC (Angle polished) +ST ST/PC

+FC FC/PC

+AP+FC FC/APC (Angle polished) +F75 75Ω, F-Type rear connector

**Enclosures** 

350FR 3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR


# L-Band Satellite Fiber Transmitter

The 7705LTA is a fiber optic transmitter for L-Band satellite signals. The 7705LTA accepts one L-Band coaxial input and provides a fiber optic output signal at 1310nm. A buffered output is also provided for monitoring or further signal distribution.

The 7705LTA occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

#### ▶ Features & Benefits

- Broadband operation 950 to 2250MHz
- Wide dynamic range RF input (-20 to -65dBm)
- Protocol transparent transmits all video, audio and data modulation formats
- · Supports manual and automatic gain control (AGC)
- Wide AGC hold range (50dB) using 7705LTA + 7705LR
- Additional L-Band BNC output for monitoring or distribution
- LNB power at +13 or +17 V DC with built-in current limiting
- · Available with BNC or F-Type connector options
- · Supports single-mode and multi-mode fiber optic cable
- Available with SC/PC, ST/PC, FC/PC and APC connector options
- · Fully hot-swappable from front of frame

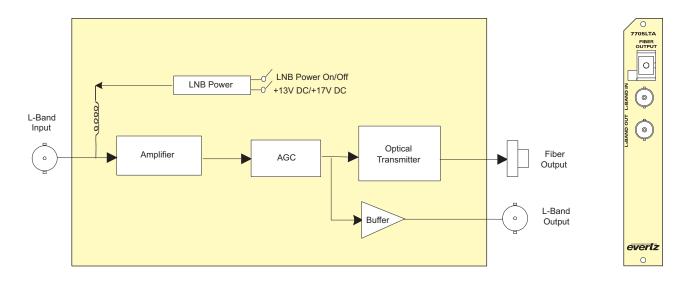

#### ▶ Specifications

RF Input: Connector

1 BNC per IEC 61169-8 Annex A

(F-type optional)

 $75\Omega$  (50 $\Omega$  optional) (See Ordering I/O Impedance:

Information) Return Loss: > 10dB Frequency Range: 950MHz-2250MHz Input Power Range: -20 to -65dBm AGC Hold Range: -20 to -50dBm

RF Monitoring Output: Number of outputs:

I/O Impedance:

1 BNC per IEC 61169-8 Annex A Connector:

(F-type optional)  $75\Omega$  (50 $\Omega$  optional)

Return Loss: > 10dB 950MHz-2250MHz Frequency Range: Flatness:

±1.5dB @ 1000MHz-2250MHz ±0.25dB @ any 36MHz BW

Output Signal Level: AGC Mode:

-20dBm constant (within AGC range) Manual Mode: Input Level +25dB

Intermodulation Products

-55dBc (AGC mode, RF input - 20dBm)

Optical Output:

Number of outputs: 1

Female SC/PC, ST/PC, FC/PC, Connector:

SC/APC, FC/APC Operating Wavelength:

, 1310nm

0dBm ±1dBm Optical Power:

Electrical:

+12V DC Voltage: Power: 4W

Physical:

Number of slots: 1

## **▶▶▶**Ordering Information

L-Band Satellite Fiber Transmitter 7705LTA13

Note: 75 $\Omega$  I/O impedance ships standard

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Impedance Suffix

+50  $50\Omega$  I/O Impedance Connector Suffix

SC/PC

+AP+SC SC/APC (Angle polished) +ST

ST/PC +FC FC/PC

+AP+FC

FC/APC (Angle polished) +F75 75Ω, F-Type rear connector

**Enclosures** 

350FR 7700FR-C 3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR

7700 Modular - Fiber - L/Band & 70/140MHz IF Transport

L-Band Satellite Fiber Receiver

The 7705LR is a fiber optic receiver for L-Band satellite signals. The 7705LR accepts a fiber optic input from the 7705LTA and provides two L-Band RF output signals.

The 7705LR occupies one card slot and can be housed in either a 1RU frame. which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules or a standalone enclosure which will hold 1 module.

#### ▶ Features & Benefits

- · Broadband operation 950 to 2250MHz
- Supports manual and automatic gain control (AGC)
- Wide AGC hold range (50dB) using 7705LTA + 7705LR
- Protocol transparent receives all video, audio and data modulation formats
- Two L-Band RF outputs for extra signal distribution or monitoring functions
- RF output independent of optical loss (within AGC range)
- Available in SC/PC, ST/PC, FC/PC and APC connector options


· Available with BNC or F-Type connector options

- · Supports single-mode and multi-mode fiber optic cable

Physical:

Number of slots:

• Fully hot-swappable from front of frame

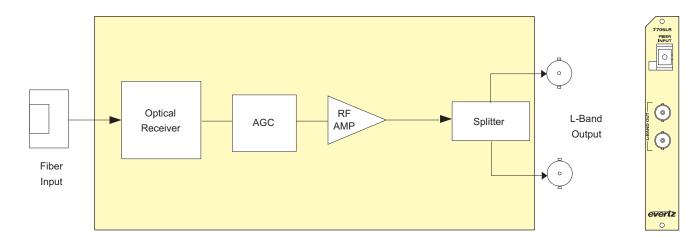

#### ▶ Specifications

RF Output:

Number of outputs: 2 Connector

1 BNC per IEC 61169-8 Annex A

(F-type optional)  $75\Omega$  (50Ω optional) I/O Impedance: Return Loss: > 10dB

Frequency Range: 950MHz-2250MHz ±1.5dB (max) @ 950MHz-2250MHz Flatness:

±0.25dB @ any 36MHz BW

Output Signal Level:

AGC Mode -20dBm constant (within AGC range) Manual Mode: -20 to -65dBm (depends on RF level

and optical loss)

Intermodulation Products

-55dBc (-20dBm RF input to TX, 1m

fiber, AGC mode on TX & RX)

Optical Input:

Number of inputs:

Connector Female SC/PC, ST/PC, FC/PC, SC/APC, FC/APC

Operating Wavelength:

, 1270nm-1610nm Optical Input Power: +3dBm (max) Optical Sensitivity: -14dBm @ 35dB S/N

Optical Attenuation:

AGC Hold Range: 10dB optical

Electrical:

Voltage: +12V DC

Power: 4W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

#### **>>>**Ordering Information

7705LR L-Band Satellite Fiber Receiver

Note: 75Ω I/O impedance ships standard

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Impedance Suffix

 $50\Omega$  I/O Impedance +50

Connector Suffix

+SC SC/PC +AP+SC

SC/APC (Angle polished) +ST ST/PC

+FC FC/PC

FC/APC (Angle polished) +AP+FC 75Ω, F-Type rear connector +F75

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

# 70/140MHz IF Fiber Transmitter with VistaLINK® Monitoring

The 7707IFTA is a VistaLINK® -capable fiber optic transmitter for 70/140MHz IF signals. The 7707IFTA accepts one 70/140MHz coaxial input and provides a fiber optic output signal at 1310nm, 1550nm, CWDM or DWDM wavelengths. An IF BNC output is also provided for monitoring or further signal distribution. Monitoring and control of card status is provided locally at the card edge and remotely via Vistal INIK®

The 7707IFTA occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone module which will hold 1 module.

#### ▶ Features & Benefits

- 30-200MHz bandwidth
- Wide dynamic range RF input (-5 to -65dBm)
- Protocol transparent transmits all video, audio and data modulation formats
- · Supports manual and automatic gain control on IF input
- Wide AGC hold range (45dB) using 7707IFTA + 7707IFRA
- · Additional IF BNC output for monitoring or distribution
- Available with BNC or F-Type connector options
- Available with output wavelengths of 1310nm, 1550nm, CWDM (ITU-T G.694.2 compliant) and DWDM (ITU-T G.694.1 compliant)
- Supports single-mode and multi-mode fiber optic cable
- · Available in SC/PC, ST/PC, FC/PC and APC connector options
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

| APPLICATION             | OPTICAL/LINK    | TRANSMITTE               | R SIDE   | RECEIVER                 | RSIDE             | DESCRIPTION   |  |
|-------------------------|-----------------|--------------------------|----------|--------------------------|-------------------|---|--|
|                         | BUDGET          | ORDERING<br>PRODUCT INFO | TX POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |  |
| ONE SIGNAL PI           | ER FIBER        |                          |          |                          |                   |   |  |
| Short to<br>Medium Haul | 14dB/40km       | 7707IFTA13               | 0dBm     | 7707IFRA -14dBm          |                   | 1310nm FP laser on Tx   |  |
| Medium Haul             | 16dB/45km       | 7707IFTA13L              | +2dBm    | 7707IFRA                 | -14dBm            | 1310nm DFB laser on Tx  |  |
| Long Haul               | 16dB/64km       | 7707IFTA15               | +2dBm    | 7707IFRA                 | -14dBm            | 1550nm DFB laser on Tx  |  |
| Long Haul               | 25dB/71km       | 7707IFTA13L              | +2dBm    |                          |                   | 1310nm DFB laser on Tx, High<br>Sensitivity RX                                      |  |
| Long Haul               | 25dB/100km      | 7707IFTA15               | +2dBm    | 7707IFRA-H               | -23dBm            | 1550nm DFB laser on Tx, High<br>Sensitivity RX                                      |  |
| MULTI-SIGNAL            | PER FIBER (WAVI | ELENGTH MUX/DE           | MUX)     |                          |                   |   |  |
| Medium Haul             | 12.5dB/50km*    | 7707IFTAxx               | +2dBm    | 7707IFRA                 | -14dBm            | 1470nm-1610nm CWDM DFB<br>laser on Tx, with 8 Ch CWDM<br>Mux/Demux*                 |  |
| Long Haul               | 21.5dB/86km*    | 7707IFTAxx               | +2dBm    | 7707IFRA-H               | -23dBm            | 1470nm-1610nm CWDM DFB<br>laser on Tx, High Sensitivity RX, 8<br>Ch CWDM Mux/Demux* |  |
| Long Haul               | 16dB/70km**     | 7707IFTADxxx             | +7dBm    | 7707IFRA                 | -14dBm            | DWDM DFB laser on Tx, with 8 Ch DWDM Mux/Demux**                                    |  |
| Long Haul               | 25dB/100km**    | 7707IFTADxxx             | +7dBm    | 7707IFRTA-H -23dBm       |                   | DWDM DFB laser on Tx, High<br>Sensitivity RX, 8 Ch DWDM<br>Mux/Demux**              |  |

\*Assumes 8 Channel upper band CWDM Mux/Demux loss of 3.5dB


\*\*Assumes 8 Channel DWDM Mux/Demux loss of 5dB







# 70/140MHz IF Fiber Transmitter with VistaLINK® Monitoring

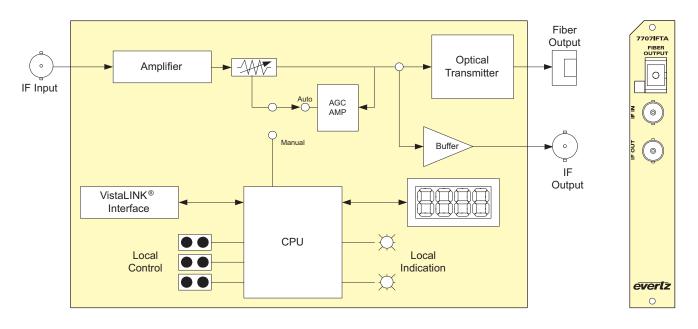

## **▶**Specifications

RF Input:

1 BNC per IEC 61169-8 Annex A Connector (F-type optional)

I/O Impedance:  $75\Omega$  (50 $\Omega$  optional) (See Ordering

Information) Return Loss: 18dB (min) Frequency Range: 30MHz-200MHz Input Power Range: -5 to -65dBm AGC Hold Range: -10 to -35dBm

IF Monitoring Output:

Connector 1 BNC per IEC 61169-8 Annex A

(F-type optional)

 $75\Omega$  (50 $\Omega$  optional) (See Ordering I/O Impedance:

Information) 18dB (min) 30MHz-200MHz Return Loss: Frequency Range: ±1dB @ 30MHz-200MHz Flatness: ±.2dB @ 36MHz BW

Output Signal Level:

-20dBm constant (within AGC range AGC mode: -10 to -35dBm total RF input power) Manual mode: (Input signal) + (manual Gain setting)

Intermodulation Products -50dBc (-10dBm RF in, ACG mode)

Optical Output: Number of outputs:

Female SC/PC, ST/PC, FC/PC, Connector:

SC/APC, FC/APC

Operating Wavelengths

DWDM

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm

Output Power:

0dBm ±1dBm 1310nm FP: 1310nm, 1550nm & CWDM DFB: +2dBm ±1dBm DWDM DFB +7dBm ±1dBm

Electrical:

Voltage: +12V DC Power: 6W 9W (DWDM)

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

#### 70/140MHz IF Fiber Transmitter, with VistaLINK®

(Replaces the 7707IFT and offers improved performance and wider operating range)

Note: 75W I/O impedance ships standard

7707IFTA13 1310nm FP Laser, Short to Medium Haul 7707IFTA13L 1310nm DFB Laser, Medium Haul 1550nm DFB Laser, Long Haul 7707IFTA15

For CWDM, please refer to the end of the fiber section for ordering information 7707IFTAxx 70/140 MHz IF Fiber Transmitter, CWDM wavelength, with

VistaLINK®

For DWDM, please refer to the end of the fiber section for ordering information 7707IFTADxxx 70/140 MHz IF Fiber Transmitter, DWDM wavelength, with

VistaLINK®

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate +SA

Impedance Suffix

C-Band (ITU G.694.1 compliant)

+50 50Ω I/O Impedance

Connector Suffix +SC

SC/PC

+AP+SC SC/APC (Angle polished available with 7707IFTA13 only) +ST ST/PC

+FC FC/PC

+AP+FC FC/APC (Angle polished available with 7707IFTA13 only) +F75 75 $\Omega$ , F-Type rear connector

350FR 7700FR-C 7701FR S7701FR

Enclosures

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

# 70/140MHz IF Fiber Receiver with VistaLINK® Monitoring

The 7707IFRA is a VistaLINK® -capable fiber optic receiver for 70/140 MHz IF signals. The 7707IFRA accepts a fiber optic input from the companion 7707IFTA and provides two 70/140 MHz IF output signals via BNCs. Monitoring and control of card status and parameters is provided locally at the card edge and remotely via VistaLINK® capability.

The 7707IFRA occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone module which will hold 1 module.

#### ▶ Features & Benefits


- 30-200MHz bandwidth
- Protocol transparent receives all video, audio and data modulation formats
- · Supports manual and automatic gain control (AGC)
- Wide AGC hold range (45dB) using 7707IFTA + 7707IFRA
- Two IF outputs for extra signal distribution or monitoring functions
- IF output power independent of optical loss (within AGC range)
- · Available with BNC or F-Type connector options
- Wide range optical input (1270nm to 1610nm)


- · Supports single-mode and multi-mode fiber optic cable
- Available in SC/PC, ST/PC, FC/PC and APC connector options
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

| APPLICATION             | OPTICAL/LINK      | TRANSMITTER SIDE         |          | RECEIVER                 | RSIDE             | DESCRIPTION   |  |
|-------------------------|-------------------|--------------------------|----------|--------------------------|-------------------|---|--|
| APPLICATION             | BUDGET            | ORDERING<br>PRODUCT INFO | TX POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |  |
| ONE SIGNAL PER          | R FIBER           |                          |          |                          |                   |   |  |
| Short to Medium<br>Haul | 14dB/40km         | 7707IFTA13               | 0dBm     | 7707IFRA                 | -14dBm            | 1310nm FP laser on Tx   |  |
| Medium Haul             | 16dB/45km         | 7707IFTA13L              | +2dBm    | 7707IFRA                 | -14dBm            | 1310nm DFB laser on Tx  |  |
| Long Haul               | 16dB/64km         | 7707IFTA15               | +2dBm    | 7707IFRA                 | -14dBm            | 1550nm DFB laser on Tx  |  |
| Long Haul               | 25dB/71km         | 7707IFTA13L              | +2dBm    | 7707IFRA-H               | -23dBm            | 1310nm DFB laser on Tx, High<br>Sensitivity RX                                |  |
| Long Haul               | 25dB/100km        | 7707IFTA15               | +2dBm    | 7707IFRA-H -23dBm        |                   | 1550nm DFB laser on Tx, High<br>Sensitivity RX                                |  |
| MULTI-SIGNAL PI         | ER FIBER (WAVELEN | IGTH MUX/DEMUX)          |          |                          | -                 | -   |  |
| Medium Haul             | 12.5dB/50km*      | 7707IFTAxx               | +2dBm    | 7707IFRA                 | -14dBm            | 1470nm-1610nm CWDM DFB laser on Tx, with 8 Ch CWDM Mux/Demux*                 |  |
| Long Haul               | 21.5dB/86km*      | 7707IFTAxx               | +2dBm    | 7707IFRA-H               | -23dBm            | 1470nm-1610nm CWDM DFB laser on Tx, High Sensitivity RX, 8 Ch CWDM Mux/Demux* |  |
| Long Haul               | 16dB/70km**       | 7707IFTADxxx             | +7dBm    | 7707IFRA -14dBm          |                   | DWDM DFB laser on Tx, with 8 Ch DWDM Mux/Demux**                              |  |
| Long Haul               | 25dB/100km**      | 7707IFTADxxx             | +7dBm    | 7707IFRTA-H -23dBm       |                   | DWDM DFB laser on Tx, High<br>Sensitivity RX, 8 Ch DWDM<br>Mux/Demux**        |  |

\*Assumes 8 Channel upper band CWDM Mux/Demux loss of 3.5dB

\*\*Assumes 8 Channel DWDM Mux/Demux loss of 5dB

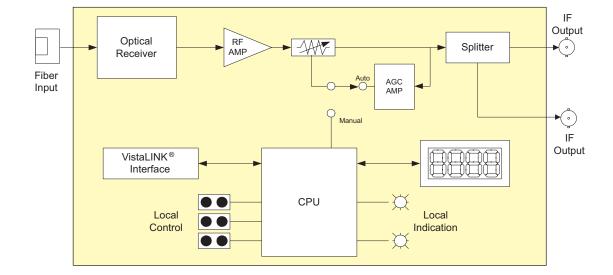



7707**I**FRA

FIBER INPUT

0







# 70/140MHz IF Fiber Receiver with VistaLINK® Monitoring

## **▶**Specifications

IF Output:

2 BNC per IEC 61169-8 Annex A 75 $\Omega$  (50 $\Omega$  optional) (See Ordering Connector: I/O Impedance:

Information) 18dB (min)

Return Loss: Frequency Range: Flatness: 30MHz-200MHz ±1dB @ 30 MHz-200MHz ±0.2dB @ 36MHz BW

Output Signal Level

-10dBm constant (within AGC range) AGC mode: -5 to -65 (depends on RF input level, Manual mode: optical loss & gain setting)

Intermodulation Products:

-50dBc (-10dBm at IFTA input & 3dB

optical loss)

Optical Input:

Number of Inputs: Connector:

Female SC/PC, ST/PC, FC/PC, SC/APC, FC/APC

Operating Wavelength:

1270nm - 1610nm

Maximum Input Power: Standard Version: +3dBm -H Version: -7dBm

Optical Sensitivity:

Standard Version: -14dBm @35dB C/N @36MHz BW -H Version: -23dBm @35dB C/N @36MHz BW

-29dBm @25dB C/N @36MHz BW Optical Attenuation:

AGC Hold range: 10dB optical

Electrical:

+12V DC Voltage: 5W Power:

Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical:

Number of slots:

#### **>>>**Ordering Information

(Replaces the 7707IFR and offers improved performance and wider operating range)

Note: 75W I/O impedance ships standard

7707IFRA 70/140MHz IF Fiber Receiver, VistaLINK® Monitoring 70/140MHz IF High Sensitivity Fiber Receiver, VistaLINK® Monitoring 7707IFRA-H

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg. Model +3RU +SC

Impedance Suffix

50Ω I/O Impedance

Connector Suffix

SC/PC +SC

+AP+SC SC/APC (Angle polished)

+ST ST/PC +FC FC/PC

+AP+FC FC/APC (Angle polished) +F75 75Ω, F-Type rear connector Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C

7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules









# L-Band Fiber Receiver with VistaLINK® Monitoring

The 7707LR and 7707LR-WB are VistaLINK® -capable fiber optic receivers for L-Band Satellite signals. The 7707LR-WB offers extended bandwidth from 250 to 2250MHz vs 950 to 2250MHz for the 7707LR version. Both 7707LR and 7707LR-WB accept a fiber optic input from the companion L-Band transmitters and provide L-Band RF output signals. Monitoring and control of card status is provided locally at the card edge and remotely via VistaLINK®.

The 7707LR and 7707LR-WB occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone module which will hold 1 module.

#### ▶ Features & Benefits


- · Band operation:
- 7707LR: 950 to 2250MHz
- 7707LR-WB: 250 to 2250MHz
- Protocol transparent receives all video, audio and data modulation formats
- · Supports manual and automatic gain control (AGC)
- Wide AGC hold range (50dB) using 7707LTA/LTA-WB + 7707LR/LR-WB
- Two L-Band RF outputs (7707LR only) for extra signal distribution or monitoring functions
- RF output independent of optical loss (within AGC range)
- Available with BNC or F-Type connector options

- Wide range optical input (1270nm to 1610nm)
- Supports single-mode and multi-mode fiber optic cable
- Available in SC/PC, ST/PC, FC/PC and APC connector options
- Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

|                         | OPTICAL/LINK      | TRANSMITTE               | R SIDE   | RECEIVER SIDE            |                   |   |  |
|-------------------------|-------------------|--------------------------|----------|--------------------------|-------------------|---|--|
| APPLICATION             | BUDGET            | ORDERING<br>PRODUCT INFO | TX POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |  |
| ONE SIGNAL PER          | R FIBER           |                          |          |                          |                   |   |  |
| Short to Medium<br>Haul | 14dB/40km         | 7707LTA13                | 0dBm     | 7707LR                   | -14dBm            | 1310nm FP laser on Tx   |  |
| Medium Haul             | 16dB/45km         | 7707LTA13L               | +2dBm    | 7707LR                   | -14dBm            | 1310nm DFB laser on Tx  |  |
| Long Haul               | 16dB/64km         | 7707LTA15                | +2dBm    | 7707LR                   | -14dBm            | 1550nm DFB laser on Tx  |  |
| Long Haul               | 25dB/71km         | 7707LTA13L               | +2dBm    | 7707LR-H                 | -23dBm            | 1310nm DFB laser on Tx, High<br>Sensitivity RX                                |  |
| Long Haul               | 25dB/100km        | 7707LTA15                | +2dBm    | 7707LR-H                 | -23dBm            | 1550nm DFB laser on Tx, High<br>Sensitivity RX                                |  |
| MULTI-SIGNAL PI         | ER FIBER (WAVELEN | IGTH MUX/DEMUX)          |          |                          |                   |   |  |
| Medium Haul             | 12.5dB/50km       | 7707LTAxx                | +2dBm    | 7707LR                   | -14dBm            | 1470nm-1610nm CWDM DFB laser on Tx, with 8 Ch CWDM Mux/Demux*                 |  |
| Long Haul               | 21.5dB/86km*      | 7707LTAxx                | +2dBm    | 7707LR-H                 | -23dBm            | 1470nm-1610nm CWDM DFB laser on Tx, High Sensitivity RX, 8 Ch CWDM Mux/Demux* |  |
| Long Haul               | 16dB/64km**       | 7707LTADxxx              | +7dBm    | I //0/ID I 1/dRm I       |                   | DWDM DFB laser on Tx, with 8 Ch DWDM Mux/Demux**                              |  |
| Long Haul               | 25dB/100km**      | 7707LTADxxx              | +7dBm    | 7707LR-H -23dBm Se       |                   | DWDM DFB laser on Tx, High<br>Sensitivity RX, 8 Ch DWDM<br>Mux/Demux**        |  |

'Assumes 8 Channel upper band CWDM Mux/Demux loss of 3.5dB

\*Assumes 8 Channel DWDM Mux/Demux loss of 5dB

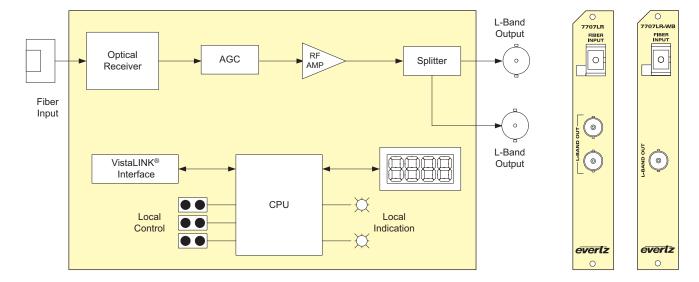

# **▶**Specifications

RF Outputs:

Flatness:

Number of Outputs: 2 (7707LR) 1 (7707LR-WB)

Connector: 2 BNCs (F-type optional)

I/O Impedance:  $75\Omega$  (50 $\Omega$  optional) (See Ordering

Information) > 10dB Return Loss:

Frequency Range: 950MHz-2250MHz (7707LR) 250MHz-2250MHz (7707LR-WB) ±1.5dB @ 950MHz-2250MHz

(7707LR)

±2dB @ 250MHz-2250MHz (7707LR-WB)

±0.25dB @ any 36MHz BW

Output Signal Level:

-20dBm constant (within AGC range) AGC Mode: -20 to -65dBm (depends on RF level Manual Mode:

and optical loss)

OIP3 +10dBm (-40dBm input level)

Intermodulation Products:

-55dBc (-20dBm RF in on TX, 1m fiber, AGC mode on TX & RX)

Optical Input:

Number of inputs Female SC/PC, ST/PC, FC/PC, Connector:

SC/APC, FC/APC

Operating Wavelength:

1270nm-1610nm

Maximum Input Power: Standard Version: +3dBm -H Version: -7dBm

Optical Sensitivity:

Standard Version: -14dBm @ 35dB S/N -H Version: -23dBm @ 35dB S/N -29dBm @ 25dB S/N

Optical Attenuation:

AGC Hold Range: 10dB optical

Electrical: Voltage: Power:

+12V DC 5W

Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical:

Number of slots:

## **>>>**Ordering Information

L-Band Satellite Fiber Receiver with VistaLINK®

Note: 75Ω I/O impedance ships standard

7707LR L-Band Satellite Fiber Receiver

L-Band High Sensitivity Satellite Fiber Receiver 7707LR-WB L-Band Satellite Fiber Receiver, Wideband

7707LR-H-WB L-Band High Sensitivity Satellite Fiber Receiver, Wideband

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** 

Eg. Model +3RU +SC

Impedance Suffix

 $50\Omega$  I/O impedance

Connector Suffix

+SC SC/PC

SC/APC (Angle polished) +AP+SC

+ST ST/PC +FC FC/PC

+AP+FC FC/APC (Angle polished) +F75 75 $\Omega$ , F-Type rear connector

Rear Plate Suffix

+3RU +1RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate +SA

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 350FR 7700FR-C 3RU Multiframe, which holds up to 15 single slot modules 7701FR 1RU Multiframe, which holds up to 3 single or dual slot modules

S7701FR Standalone enclosure










# L-Band Fiber Receiver with VistaLINK® Monitoring

The 7708LRA/7708LR-H are VistaLINK® -capable fiber optic receivers for extended L-Band signals. They accept a fiber optic input from a companion L-Band transmitter and provide an electrical output signal. Monitoring and control of card status is provided locally at the card edge and remotely via VistaLINK®.

The 7708LRA/7708LR-H occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

#### ▶ Features & Benefits

- · Protocol transparent receives all video, audio and data modulation formats
- · Supports manual, automatic (AGC), and intelligent (IGC) gain control modes
- Two buffered RF outputs for extra signal distribution or monitoring functions
- · RF output independent of optical loss (within AGC range)
- · Available with BNC or F-Type connector options
- Wide range optical input (1270nm to 1610nm)
- · Supports single-mode and multi-mode fiber optic cable
- Available with SC/UPC, ST/UPC, FC/UPC, SC/APC and FC/APC connector options
- · 7708LR-H with high-sensitivity input for long-haul applications
- · Fully hot-swappable from front of frame
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR portable frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- SmartMON<sup>™</sup> capability for display of monitored parameters from companion SmartMON™ capable fiber transmitters

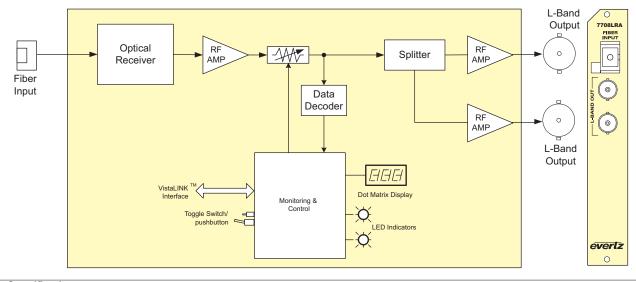

#### ▶ Specifications

RF Outputs: Number of Outputs: 2

Connector: BNC per IEC 61169-8 Annex A

(F-type Optional)

I/O Impedance  $75\Omega$  (50 $\Omega$  optional) (See Ordering Information)

Return Loss: > 15dB

Frequency Range: 250MHz-2250MHz +28 dBm

Output IP3:

Output Signal Level:

-10 to -65 dBm (depending on input

AGC mode: -10 to -40 dBm (adjustable, within

30dB AGC hold range)

signal level, gain setting and optical

7708I R-H-Optical Sensitivity:

Optical Input:

Connector

Operating

Wavelength:

7708LRA:

Number of inputs:

Maximum Input Power:

. 7708LRA: -14dBm @ 35dB S/N on a 36MHz

+3dBm

-7dBm

7708LR-H: -20dBm @ 35dB S/N on a 36MHz

SC/APC, FC/APC

1270nm-1610nm

carrie

Electrical: Voltage:

+12V DC 6W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Number of slots: 1

See System Performance Specifications of the chosen companion transmitter for more details.

#### >>> Ordering Information

7708LRA L-Band Fiber Receiver with VistaLINK® and SmartMON™ 7780LRA-B50 I -Band Fiber Receiver with Vistal INK® and SmartMON™ 500 BNC

7708LR-H High Sensitivity L-Band Fiber Receiver with VistaLINK® and SmartMONT 7708LR-H-B50 High Sensitivity L-Band Fiber Receiver with VistaLINK® and SmartMON™

50Ω BNC connectors

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eq. Model +3RU +SC

Connector Suffix

SC/UPC

+AP+SC SC/APC (Angle polished)

ST/UPC +ST FC/UPC

+AP+FC FC/APC (Angle polished) +F75 75Ω F-type connectors

Note: 75Ω BNC connectors are standard

Rear Plate Suffix +3RU

Female SC/UPC, ST/UPC, FC/UPC,

+1RU +SA

1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe



# L-Band Satellite Fiber Transmitter with VistaLINK<sup>™</sup> and SmartMON<sup>™</sup>


The 7708LT is a fiber optic transmitter for RF signals in the extended L-Band frequency range. It accepts a single RF input on coaxial cable and provides a single output for optical transmission. An RF monitor output provides a convenient means of obtaining peak satellite signal strength, or additional signal distribution.


Gain may be adjusted manually or managed automatically via AGC. With SmartMON™, incoming RF signal strength, LNB current, and other data are relayed over the fiber output for monitoring through SNMP/VistaLINK® (requires SmartMON™ capable companion fiber receiver) provides 13/17VDC adjustable LNB power with 22kHz tone is also provided.

#### ▶ Features & Benefits

- · Extended frequency response
- · Protocol independent design transports all modulation formats
- LNB power with selectable 13/17VDC
- LNB current limit & short circuit protection
- · LNB current monitoring
- 22kHz tone on/off for LNB local oscillator control
- RF monitor output for signal peaking and signal distribution
- · Manually adjustable gain
- AGC mode

- The 7708LT occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules or a standalone enclosure which holds 1 module
- SmartMON<sup>™</sup> capability provides remote status monitoring via SNMP without a separate data connection
- VistaLINK® capability is available for monitoring and control when modules are used in a 3RU 7700FR-C frame and a 7700FC VistaLINK® frame controller is installed in slot 1 of the frame.

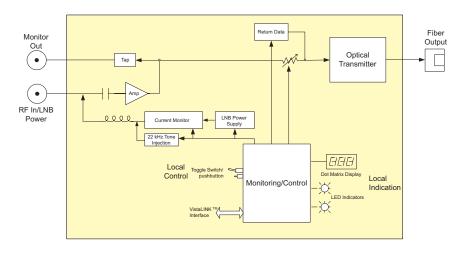



## **▶**Specifications

RF Input:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: (F-Type Optional)

 $75\Omega$  (50 $\Omega$  Optional) Input Impedance: > 15dB

Return Loss: Frequency Range: 250MHz-3000MHz Input Power Range: -10dBm to -60dBm AGC Hold Range: -5 to -40dBm

Input IP3: LNB Power: Voltage:

13VDC, 17VDC, off (selectable)

Current: 400mA

Protection: Short Circuit, current limited LO Control: 22kHz on/off (selectable)

+10dBm

RF Monitor Output:

Number of Outputs: BNC per IEC 61169-8 Annex A Connector:

(F-Type Optional)

Output Impedance:  $75\Omega$  ( $50\Omega$  Optional) Return Loss: > 15dB

250MHz to 3000MHz Frequency Range:

Output Level: within -1.5dB of input signal

Optical Output:

Number of Outputs:

Connector: Female FC/UPC, ST/UPC, FC/UPC, SC/APC, FC/APC

Operating Wavelength: , 1310nm Standard:

1270-1610nm

Output Power

Standard 1310nm: +2dBm CWDM: +2dBm RF System Performance 7708LT13+7708LRA pair:

Frequency Range: 250MHz-3000MHz Flatness: ±1.5dB @ 850MHz-2250MHz

Electrical:

Voltage: +12VDC

6W max excluding LNB Power Power:

Physical: Number of slots:

Compliance:

Class 1 laser product Laser safety

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

7708LT13 L-Band Fiber Transmitter, 1310nm FP laser, SmartMON™,

7708LT13-B50 L-Band Fiber Transmitter, 1310nm FP laser, 50. BNC Connectors, SmartMON™, VistaLINK®

7708LT27 to 61

L-Band Fiber Transmitter, CWDM DFB laser, SmartMON™,

7708LT27 to 61-B50

L-Band Fiber Transmitter CWDM DFB laser, 50. BNC Connectors, SmartMON™, VistaLINK®

Ordering Options Rear Plate and Fiber Connector must be specified at time of order Eg. Model +3RU +SC

Connector Suffix

+SC

SC/UPC +AP+SC SC/APC (Angle polished)

+ST ST/UPC +FC

+AP+FC FC/APC (Angle polished) +F75 75Ω, F-Type rear connector

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

1RU Rear Plate for use with 7701FR Multiframe +1RU

+SA Standalone Enclosure Rear Plate

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone Enclosure

Note:  $75\Omega$  BNC Connectors are standard

For companion receiver see the 7708LRA/7708LR-H catalog page









# L-Band Fiber Transmitter with VistaLINK® Monitoring

The 7707LTA and 7707LTA-WB are VistaLINK® -capable fiber optic transmitters for L-Band satellite signals. The 7707LTA-WB offers extended bandwidth from 250 to 2250MHz vs 950 to 2250MHz for the 7707LTA version. The 7707LTA and 7707LTA-WB accept one L-Band coaxial input and provide a fiber optic output signal at 1310nm, 1550nm, CWDM or DWDM wavelengths. An L-Band BNC output is also provided for monitoring or further signal distribution. Monitoring and control of card status is provided locally at the card edge and remotely via VistaLINK®.

The 7707LTA and 7707LTA-WB occupies one card slots and is housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 350FR portable frame that holds up to 7 modules or a standalone frame which will hold 1 module.

#### ▶ Features & Benefits

- · Band operation:
- 7707LT: 905 to 2250MHz
- 7707LTA-WB: 250 to 2250MHz
- Wide dynamic range RF input (-20 to -65dBm)
- Protocol transparent transmits all video, audio and data modulation formats · Supports manual and automatic gain control (AGC)
- Wide AGC hold range (50dB) using 7707LTA/LTA-WB + 7707LR/LR-WB
- · Additional buffered output for monitoring or distribution
- LNB power at +13 or +17V DC with built-in current limiting
- Available with BNC or F-Type connector options

- Available with wavelengths of 1310nm, 1550nm, CWDM (ITU-T G.694.2 compliant) and DWDM (ITU-T G.694.1 compliant)
- Supports single-mode and multi-mode fiber optic cable
- Available in SC/PC, ST/PC, FC/PC and APC connector options
- Fully hot-swappable from front of frame
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

|                         | ODTIOAL /LINK          | TRANSMITTE               | R SIDE   | RECEIVER                 | RSIDE             |   |
|-------------------------|------------------------|--------------------------|----------|--------------------------|-------------------|---|
| APPLICATION             | OPTICAL/LINK<br>BUDGET | ORDERING<br>PRODUCT INFO | TX POWER | ORDERING<br>PRODUCT INFO | RX<br>SENSITIVITY | DESCRIPTION   |
| ONE SIGNAL PER          | R FIBER                |                          |          |                          | •                 |   |
| Short to Medium<br>Haul | 14dB/40km              | 7707LTA13                | 0dBm     | 7707LR                   | -14dBm            | 1310nm FP laser on Tx   |
| Medium Haul             | 16dB/45km              | 7707LTA13L               | +2dBm    | 7707LR                   | -14dBm            | 1310nm DFB laser on Tx  |
| Long Haul               | 16dB/64km              | 7707LTA15                | +2dBm    | 7707LR                   | -14dBm            | 1550nm DFB laser on Tx  |
| Long Haul               | 25dB/71km              | 7707LTA13L               | +2dBm    | 7707LR-H                 | -23dBm            | 1310nm DFB laser on Tx, High<br>Sensitivity RX                                |
| Long Haul               | 25dB/100km             | 7707LTA15                | +2dBm    | 7707LR-H                 | -23dBm            | 1550nm DFB laser on Tx, High<br>Sensitivity RX                                |
| MULTI-SIGNAL PI         | ER FIBER (WAVELEN      | IGTH MUX/DEMUX)          |          |                          |                   |   |
| Medium Haul             | 12.5dB/50km            | 7707LTAxx                | +2dBm    | 7707LR                   | -14dBm            | 1470nm-1610nm CWDM DFB laser on Tx, with 8 Ch CWDM Mux/Demux*                 |
| Long Haul               | 21.5dB/86km*           | 7707LTAxx                | +2dBm    | 7707LR-H                 | -23dBm            | 1470nm-1610nm CWDM DFB laser on Tx, High Sensitivity RX, 8 Ch CWDM Mux/Demux* |
| Long Haul               | 16dB/64km**            | 7707LTADxxx              | +7dBm    |                          |                   | DWDM DFB laser on Tx, with 8 Ch<br>DWDM Mux/Demux**                           |
| Long Haul               | 25dB/100km**           | 7707LTADxxx              | +7dBm    |                          |                   | DWDM DFB laser on Tx, High Sensitivity RX, 8 Ch DWDM Mux/Demux**              |

Fiber loss = 0.35/0.25dB per km @ 1310nm/1550nm

Assumes 8 Channel upper band CWDM Mux/Demux loss of 3.5dB

\*Assumes 8 Channel DWDM Mux/Demux loss of 5dB

















Directive Class 1 laser product Class 1M laser product (DWDM

9W (Non DWDM not including LNB

10W (DWDM not including LNB load)

versions only) Complies with 24 CFR 1040.10 and

CSA Listed to UL 60065-03, IEC


Complies with CE Low voltage


1040.11. IEC 60825-1 Complies with FCC Part 15, Class A

EU EMC directive

+12V DC

60065

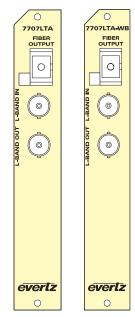

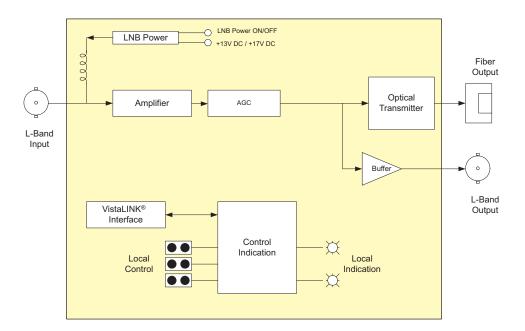

# ▶ Specifications

RF Input:

Number of Inputs:

1 BNC per IEC 61169-8 Annex A Connector: (F-type optional)

I/O Impedance:  $75\Omega$  (50 $\Omega$  optional) (See Ordering

Information)

Return Loss > 10dB

950MHz-2250MHz (7707LTA) Frequency Range: 250MHz-2250MHz (7707LTA-WB)

Input Power Range: -20 to -65dBm AGC Hold Range: -20 to -50dBm

RF Monitoring Output: Number of Outputs: 1

1 BNC per IEC 61169-8 Annex A Connector:

(F-type optional)

 $75\Omega$  (50 $\Omega$  optional) (See Ordering I/O Impedance:

Information)

Return Loss:

950MHz-2250MHz (7707LTA) Frequency Range: 250MHz-2250MHz (7707LTA-WB) Flatness: ±1.5dB @ 950MHz-2250MHz

(7707LTA-WB)

±0.25dB @ any 36MHz BW

Output Signal Level:

AGC mode: -20dBm constant (within AGC range) Manual mode (Input signal) + (manual Gain setting)

+10dBm (-40dBm input level)

Intermodulation Products:

-55dBc (-20dBm RF in, AGC mode)

Optical Output:

OIP3:

Number of outputs: Connector: Female SC/PC, ST/PC, FC/PC,

SC/APC, FC/APC

Operating Wavelengths:

1310nm, 1550nm (nominal) Standard:

1270nm to 1610nm C-Band (ITU G.694.1 compliant) CMDW-DWDM:

Output Power:

1310nm FP: 0dBm ±1dBm 1310nm, 1550nm &

CWDM DFB: DWDM DFB:

+2dBm ±1dBm +7dBm ±1dBm

#### >10dB

(7707LTA) ±2.0dB @ 250MHz-2250MHz

Connector Suffix

+SC SC/PC +AP+SC SC/APC (Angle polished available with 7707LTA13 only)

Electrical:

Physical:

Number of slots:

Electrical Safety:

Compliance:

Laser Safety:

EMI/RFI:

Voltage:

Power:

ST/PC

+FC +AP+FC FC/APC (Angle polished available with 7707LTA13 only)

75 $\Omega$ , F-Type rear connector

Rear Plate Suffix

+ST

+F75

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

+1RU

+SA Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR

S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone Enclosure

# >>> Ordering Information

L-Band Satellite Fiber Transmitter with VistaLINK® Note: 75Ω I/O impedance ships standard

7707LTA13 1310nm, FP Laser, Short to Medium Haul 1310nm, DFB Laser, Medium Haul 7707LTA13L 1550nm, DFB Laser, Long Haul 1310nm, FP Laser, Short to Medium Haul, Wideband 1310nm, DFB Laser, Medium Haul, Wideband 7707I TA13-WB

7707LTA13L-WB 7707LTA15-WB 1550nm, DFB Laser, Long Haul, Wideband For CWDM, please refer to the end of the fiber section for ordering information

L-Band Satellite Fiber Transmitter, CWDM wavelength 7707LTAxx 7707LTAxx-WB L-Band Satellite Fiber Transmitter, CWDM wavelength, Wideband For DWDM, please refer to the end of the fiber section for ordering information

L-Band Satellite Fiber Transmitter, DWDM wavelength,

Rear Plate and Fiber Connector must be specified at time of order **Ordering Options** Eg. Model +3RU +SC


Impedance Suffix


50Ω I/O impedance

7700 Modular - Fiber - L/Band & 70/140MHz IF Transport

#### ▶ Features & Benefits

- Can be used as optical regenerator/repeater, E to O converter, O to E converter, O to O wavelength converter
- Auto-rate selection, reclocking and indication for all SMPTE 259M standards from 143-540Mb/s
- Supports additional standards of SMPTE 305M(SDTi), SMPTE 310M (19.4Mb/s) and M2S or DVB-ASI (270Mb/s)
- · Can also support Datacom/Telecom rates up to 540Mb/s
- Coaxial or optical input (jumper selectable)
- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- · Independent isolated output drivers to ensure no cross channel loading effects and to maintain polarity from input to output for DVB-ASI applications
- Comprehensive signal and card status monitoring via four digit card edge display
- Detection and display of optical input power, video format and EDH errors
- · Fully hot-swappable from front of frame
- Two BNC serial digital outputs

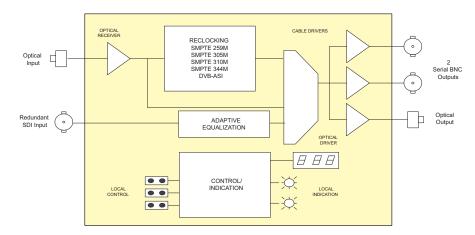



#### ▶ Specifications

Standards:

SMPTE 259M A, B, C, D, SMPTE 297M, SMPTE 305M, SMPTE 310M, DVB-

ASI, M2S

Optical Input:

Female SC/PC, ST/PC, FC/PC Connector

Operating Wavelength: 1270nm to 1610nm

0dBm Max Input Power: Optical Sensitivity: -31dBm

Electrical Video Input:

SMPTE 259M (143 to 540Mb/s) or Normal:

DVB/ASI

Jumper Selectable: SMPTE 310M (19.4Mb/s) Connector: 1 BNC per IEC 61169-8 Annex A Equalization: Automatic to 275m @ 270Mb/s with Belden 8281 (or equivalent)

> 15db to 540Mb/s

Return Loss:

Optical Outputs:

77070015

770700Dxxx

SC/PC, ST/PC, FC/PC female housing Connector

Return Loss

< 0.15 UI (Reclocked) Jitter: < 0.20 UI (Non-reclocked)

Nominal Wavelength: 1310nm, 1550nm CWDM Wavelengths: See Ordering Information DWDM Wavelengths: See Ordering Information

Output Power

1310nm FP: -7dBm ±1dBm 1550nm DFB: 0dBm ±1dBm CWDM DFB: 0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Electrical Video Outputs:

Wide Band Jitter:

2 per card - reclocked (both outputs Number of Outputs:

maintain polarity from input to output for DVB-ASI applications)

1 BNC per IEC 61169-8 Annex A Connectors:

Impedance:  $75\Omega$  (nominal) Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 540Mb/s

< 0.15 UI (Reclocked) < 0.20 UI (Non-reclocked) Electrical: Voltage: Power:

+12V DC 6W (Non DWDM) 9W (DWDM)

Physical:

Number of Slots

Compliance:

Electrical Safety:

CSA Listed to UL 60065-03, IEC 60065 Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040.11

IEC 60825-1

Complies with FCC Part 15, Class A EU EMC directive FMI/RFI:

# **>>>**Ordering Information

77070013 Optical Regenerator / Wavelength Converter for rates to 540Mb/s,

1270nm to 1610nm input, 1310nm FP output

Optical Regenerator / Wavelength Converter for rates to 540Mb/s,

1270nm to 1610nm input, 1550nm DFB laser output

For CWDM, please refer to the end of the fiber section for ordering information Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, CWDM output 770700xx

For DWDM, please refer to the end of the fiber section for ordering information Optical Regenerator / Wavelength Converter for rates to 540Mb/s,

1270nm to 1610nm input, DWDM output

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix

+SC +ST SC/PC ST/PC FC/PC


Enclosures 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

#### Optical Regenerator / Wavelength Converter, 19.4Mb/s to 1.485Gb/s

#### ▶ Features & Benefits

- Can be used as optical regenerator/repeater, O to E converter or O to O wavelength converter
- Auto rate selection, reclocking and indication for all SDI (SMPTE 259M) and HD-SDI (SMPTE 292M) data rates from 143Mb/s to 1.485Gb/s
- · Also supports SMPTE 305M (SDTi), SMPTE 310M (19.4Mb/s) and M2S or DVB-ASI (270Mb/s)
- · Supports other Telecom/Datacom rates up to 1.5Gb/s
- Optical output wavelengths of 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- DWDM wavelengths (ITU-T G.694.1 compliant) also available
- Wide range optical input (1270nm-1610nm)
- BNC outputs maintain polarity from input to output for DVB-ASI applications
- · Supports single-mode and multi-mode fiber optic cable
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® -capable resources
- Detection & display of optical input power, video format, and EDH errors (SDI only)
- · Fully hot-swappable from front of frame

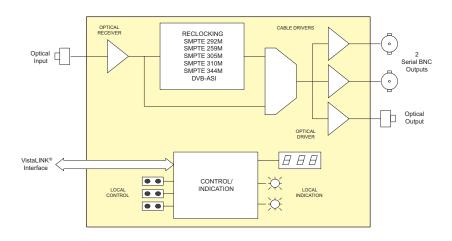



#### ▶ Specifications

Standards:

SMPTE 292M, SMPTE 259M A, B, C, D, SMPTE 344M, SMPTE 305M, Reclocked:

SMPTE 310M (19.4Mb/s), DVB-ASI, M2S

Non-Reclocked: Any bi-level signal type at rates of

19.4Mb/s-1.485Gb/s

Optical Input:

Female SC/PC, ST/PC or FC/PC Connector

Operating Wavelength: 1270nm-1610nm

Max. Input Power:

-1dBm High Sensitivity (-H):-7dBm

Optical Sensitivity:

-23dBm @ 1.485Gb/s Standard: High Sensitivity (-H):-28dBm @ 1.485Gb/s

Optical Output:

7707OOxx-HD-H

7707OODxxx-HD-H

Connector: SC/PC, ST/PC or FC/PC female housing

Return Loss: < 14dB

Wide Band Jitter: < 0.2 UI (reclocked) Nominal Wavelength: 1310nm, 1550nm CWDM Wavelengths: See Ordering Information DWDM Wavelengths: See Ordering Information

Output Power:

1310nm FP: -7dBm ±1dBm 1550nm DFB: 0dBm ±1dBm CWDM DFB: 0dBm ±1dBm DWDM DFB: +7dBm ±1dBm

Electrical Video Outputs:

Number of Outputs: 2 per card reclocked (both outputs

maintain polarity from input to output

for DVB-ASI applications)
1 BNC per IEC 61169-8 Annex A Connectors:

75 $\Omega$  (nominal) Impedance: Signal Level: 800mV (nominal) DC Offset: 0V +0.5V Rise and Fall Time: < 270ps

Overshoot: < 10% of amplitude

Return Loss > 12dB to 1.5GHz Wide Band Jitter: < 0.2 UI (Reclocked) Electrical Voltage:

+12V DC 8W (Non-DWDM version) Powers

11W (DWDM version)

Physical:

7700 or 7701 frame mounting:

Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC 60065

Complies with CE Low voltage

Directive Class 1 laser product Laser Safety:

Complies with 24 CFR 1040.10 and

1040.11 IFC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### >>> Ordering Information

77070013-HD Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s. 1270nm to 1610nm input, 1310nm FP output

77070015-HD

Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input,1550nm DFB Laser output

or CWDM, please refer to the end of the fiber section for ordering information 7707OOxx-HD

Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, CWDM output

Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s,

High Sensitivity (-28 dBm) input, CWDM output

For DWDM, please refer to the end of the fiber section for ordering information 7707OODxxx-HD

Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, DWDM output

Optical Regenerator/Wavelength Converter for rates to 1.5Gb/s, High Sensitivity (-28dBm) input, DWDM output

Ordering Options

Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Connector Suffix +SC

SC/PC +ST ST/PC +FC FC/PC

Enclosures 350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

S7701FR Standalone enclosure


# Optical to Optical Wavelength Shifter/Regenerator


The 7707OO-2-OC and 7707OO-2L-OC are VistaLINK $^\circ$ -capable, optical to optical wavelength shifter/regenerator for telecom and datacom signals. Monitoring and control of card status and parameters is provided locally at the card edge and remotely via VistaLINK $^\circ$ .

The 7707OO-2-OC and 7707OO-2L-OC accepts two fiber inputs and provides two optical outputs. All versions accept 1270nm to 1610nm optical input signals on multi-mode or single-mode fiber. The 7707OO-2-OC and 7707OO-2L-OC are available in 1310nm, CWDM and DWDM configurations.

#### ▶ Features & Benefits

- Reclocking for OC-3/STM-1, OC-12/STM-4 and OC-48/STM-16 and a number of other telecom and datacom rates (see specifications)
- Non-reclocking mode for support of additional signal rates (125Mb/s-3.187Gb/s)
- Full-Duple
- Wide range optical input (1270nm 1610nm)
- 1310nm, 1550nm and CWDM wavelengths available for optical outputs
- DWDM wavelengths (ITU-T G.694.1 compliant) also available for optical outputs
- Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Detection and display of optical input power and data rate
- Fully hot-swappable from front of frame
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or a 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

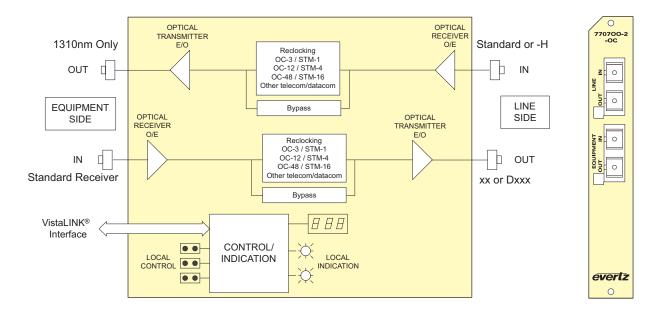

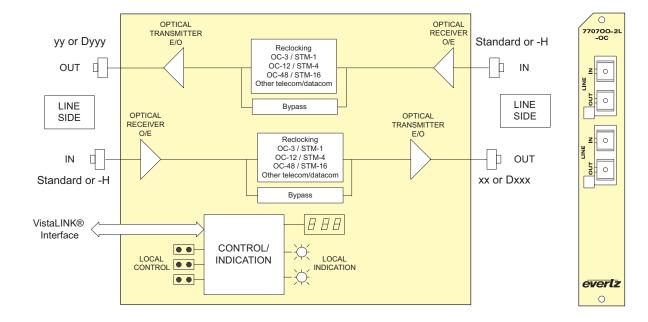









# 770700-2-OC, 770700-2L-OC

# Optical to Optical Wavelength Shifter/Regenerator

# ▶Specifications

Standards (reclocked):

| Standard         | Data Rate |  |  |
|------------------|-----------|--|--|
| Tele             | com       |  |  |
| OC48/STM16       | 2.488Gb/s |  |  |
| OC12/STM4        | 622Mb/s   |  |  |
| OC3/STM1         | 155Mb/s   |  |  |
| Gigabit Ethernet | 1.25Gb/s  |  |  |

| Datacom       |           |  |  |  |  |  |
|---------------|-----------|--|--|--|--|--|
| Fiber Channel | 2.125Gb/s |  |  |  |  |  |
| Fiber Channel | 1.062Gb/s |  |  |  |  |  |
| Fiber Channel | 531Mb/s   |  |  |  |  |  |
| Fiber Channel | 266Mb/s   |  |  |  |  |  |
| Fiber Channel | 133Mb/s   |  |  |  |  |  |
| Fast Ethernet | 125Mb/s   |  |  |  |  |  |
| XAUI          | 3.125Gb/s |  |  |  |  |  |
| XAUI          | 3.187Gb/s |  |  |  |  |  |
| ESCON         | 200Mb/s   |  |  |  |  |  |

Optical Inputs: Number of Inputs:

Rates (non-reclocked): 125Mb/s-3.187Gb/s Connector: Female SC/PC, ST/PC, FC/PC, SC/APC Wavelength: 1270nm -1610nm

Optical Sensitivity

Standard & Equipment Side -21dBm High Sensitivity (-H): -28dBm Max. Input Power: Standard & Equipment Side:

-1dBm High Sensitivity (-H): -7dBm

Fiber Size: 62mm core / 125mm overall

Optical Outputs:

Standards: Same as optical input Number of Outputs:

Connector: SC/PC, ST/PC, FC/PC, SC/APC female housing

Return Loss: Fiber Size: 9mm core / 125mm overall

Equipment Side: Wavelengths Standard: 1310nm Output Power 1310nm FP:-7dBm ± 1dBm Line Side Wavelengths:

1310nm, 1550nm (nominal) Standard: CWDM: 1270nm to 1610nm (See ordering information) DWDM: C-Band/L-Band (ITU-T G.694.1 compliant)

Output Power:

 $-7dBm \pm 1dBm$ 1310nm FP: CWDM: 0dBm ± 1dBm DWDM: +7dBm ± 1dBm

Electrical:

Voltage: +12VDC 6W (Non DWDM) Power: 9W (DWDM) EMI/RFI: Complies with FCC

Class A devices regulations for Complies with EU EMC directive

Physical:

7700 or 7701 frame mounting: Number of slots:

#### >>> Ordering Information

77070013-2-0C 1310nm FP laser and standard receiver (line side), VistaLINK® 77070015-2-OC 1550nm DFB laser and standard receiver (line side),

VistaLINK®

77070015-2L-OC 1550nm FP laser, dual line, VistaLINK®

For CWDM applications please refer to the end of the fiber section for details 770700xx-2-0C CWDM DFB laser and standard receiver (line side),

Vistal INK®

7707O0xx/yy-2L-OC CWDM DFB laser, dual line, standard receiver, VistaLINK® 7707OOxx-2-OC-H CWDM DFB laser, high sensitivity receiver (line side),

CWDM DFB laser, high sensitivity receiver, VistaLINK® 7707O0xx/vv-2L-OC-H

For DWDM applications please refer to the end of the fiber section for details 770700Dxxx-2-0C DWDM DFB laser and standard receiver (line side).

VistaLINK®

7707OODxxx/Dyyy-2L-OC DWDM laser, dual line, standard receiver, VistaLINK® 7707OODxxx-2-OC-H DWDM DFB laser, high sensitivity receiver (line side),

VistaLINK® 7707OODxxx/Dyyy-2L-OC-H

DWDM laser, high sensitivity receiver, VistaLINK®

NOTE: Contact factory for clarification on laser ordering options

Ordering Options

Connector Suffix +SC +ST ST/PC

Rear Plate Suffix +3RU

+SA Enclosures

+1RU

350FR 7700FR-C 7701FR S7701FR

Rear Plate and Fiber Connector must be specified at time of order Eg: Model +SC +3RU

SC/PC

FC/PC

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules



The 7707OO-2L-3G accepts 2 fiber inputs and provides 2 optical outputs respectively. All versions accept 1270nm to 1610nm optical input signals on multi-mode or single-mode fiber. The 7707OO-2L-3G is available in 1310nm, CWDM and DWDM configurations.

#### ▶ Features & Benefits

- · See below chart for Reclocking Rates
- Non-reclocking mode for support of additional signal rates (125Mb/s-3.187Gb/s)
- Wide range optical input (1270nm 1610nm)
- 1310nm, 1550nm and CWDM wavelengths available for optical outputs
- DWDM wavelengths (ITU-T G.694.1 compliant) also available for optical outputs
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK®
- · Detection and display of optical input power and data rate
- · Fully hot-swappable from front of frame
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

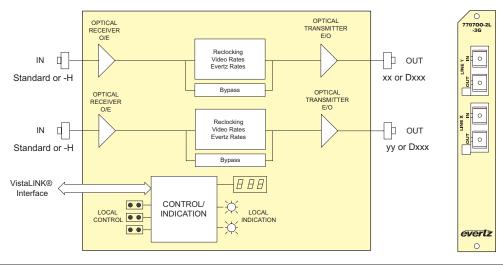

#### **▶** Specifications

| Video Rates  |           |  |  |  |  |  |
|--------------|-----------|--|--|--|--|--|
| SMPTE 259M-L | 270Mb/s   |  |  |  |  |  |
| SMPTE 292M   | 1.5Gb/s   |  |  |  |  |  |
| DVB ASI      | 270Mb/s   |  |  |  |  |  |
| SMPTE 305M   | 270Mb/s   |  |  |  |  |  |
| SMPTE 424M   | 2.970Mb/s |  |  |  |  |  |
| EVERT        | Z Rates   |  |  |  |  |  |
| 7707VT8      | 2.5Gb/s   |  |  |  |  |  |
| 7707VT2-HD   | 3.125Gb/s |  |  |  |  |  |
| 7707VT4-HS   | 3.125Gb/s |  |  |  |  |  |

Standards (reclocked): Optical Inputs:

Number of Inputs: Rates (non-reclocked): Connector

Wavelength: Standard & Equipment Side: -21dBm High Sensitivity (-H): Max. Input Power:

Standard & Equipment Side: -1dBm High Sensitivity (-H):

-7dBm Fiber Size: 62mm core / 125mm overall

Optical Outputs:

Standards: Same as optical input Number of Outputs: Connector: SC/PC, ST/PC,

FC/PC, SC/APC female housing < 14dB

Return Loss: Fiber Size: 9mm core / 125mm overall Line X/Line Y: Standard:

CWDM: DWDM:

Output Power: 1310nm FP:

-7dBm ± 1dBm CWDM: 0dBm ± 1dBm DWDM: +7dBm ± 1dBm

Electrical: Voltage:

+12VDC 6 W (Non DWDM) Power: 9 W (DWDM) EMI/RFI: Complies with FCC

regulations for class A devices Complies with EU EMC Directive

1310nm, 1550nm (nominal)

1270nm to 1610nm (See

ordering information)

G.694.1 compliant)

C-Band/L-Band (ITU-T

Physical:

7700 or 7701 frame mounting: Number of slots:

#### **▶▶▶**Ordering Information

77070013-2L-3G 77070015-2L-3G 1310nm FP laser standard receiver, VistaLINK® 1550nm FP laser standard receiver, VistaLINK®

For CWDM applications please refer to the end of the fiber section for details CWDM DFB laser, standard receiver, VistaLINK® 7707OOxx/yy-2L-3G 7707OOxx/yy-2L-3G-H CWDM DFB laser, high sensitivity receiver, VistaLINK®

For DWDM applications please refer to the end of the fiber section for details 7707OODxx/Dyyy-2L-3G DWDM laser, standard receiver, VistaLINK® 7707OODxxx/Dyyy-2L-3G-H

DWDM laser, high sensitivity receiver, VistaLINK®

**Ordering Options** 

Rear Plate and Fiber Connector must be specified at time of order Ea: Model +SC +3RU

Connector Suffix +SC

125Mb/s-3.187Gb/s Female SC/PC,

ST/PC, FC/PC,

Optical Sensitivity

SC/APC 1270nm -1610nm

-28dBm

+ST

SC/PC ST/PC

Rear Plate Suffix +3RU

+1RU +SA

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure Rear Plate

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure

Combined with Evertz optical transmitters, receivers and DWDM multiplexing products, the 9000EDFA series amplifiers offer a complete solution for long-

• 9000EDFA-L inline amplifier combines high input sensitivity and high output

power for amplifying optical signals at points within a long-haul path

• 9000EDFA-B boost amplifier provides high optical launch power at the















▶ Features & Benefits · Low noise figure

• Low Power Consumption

• Wide Operating Wavelength Range

signals at the end of the optical path \*9000EDFA is strictly for DWDM applications

\*\*9000EDFA to be used ONLY in Single Mode Fiber applications \*\*\*Always consult Evertz for applications assistance when specifying EDFA's

everlz

|   | 9000EDFA-B  |            | 9000EDFA-L |        |      | 9000EDFA-P |      |      |      |
|---|-------------|------------|------------|--------|------|------------|------|------|------|
|   | MIN         | TYP        | MAX        | MIN    | TYP  | MAX        | MIN  | TYP  | MAX  |
| Operational Wavelength (nm)             | 1530        | 1550       | 1560       | 1530   | 1550 | 1560       | 1530 | 1550 | 1560 |
| Signal Input Power (dBm)                | -6          |            | 3          | -25    |      | -8         | -35  |      | -25  |
| Signal Output Power (dBm)               | 13          | 17         |            | 3      | 15   |            |      |      | -5   |
| Small Signal Gain @-35dBm input         |             |            |            |        |      |            |      |      | 30   |
| Noise Figure @ 1550nm, -0dBm input (dB) |             | 5.0        | 5.5        |        | 4.8  | 5.5        |      | 4.5  | 5.0  |
| In/Output Isolation (dB)                | 30          |            |            | 30     |      |            | 30   |      |      |
| Return Loss                             | 50          |            |            | 50     |      |            | 50   |      |      |
| Connectors                              | SC/PC, FC/F | PC, ST/PC, | FC/APC or  | SC/APC |      |            |      |      |      |

Power:

85-240V AC auto ranging, Voltage (standard)

50/60 Hz

The 9000EDFA series are high quality, erbium doped fiber amplifiers used to

extend signals in long-haul optical communications applications. Available in boost, inline, and pre-amp configurations, the different models cover various

transmission scenarios at points all along the optical communications path.

• 9000EDFA-P pre-amplifier has high input sensitivity for amplifying weak

Physical: 17"W x 10.25"D x 1.74"H Dimensions (434mmW x 260mmD x

44mmH) 1RU, Standard 19" rack Mounting

# **>>>**Ordering Information

9000EDFA-B Erbium Doped Fiber Boost Amplifier 9000EDFA-L 9000EDFA-P Erbium Doped Fiber Inline Amplifier Erbium Doped Fiber Pre-Amplifier

Ordering Options: Connector must be specified at time of order

Eg: Model +SC

Connector Suffix

+SC +ST SC/PC ST/PC +FC FC/PC +AP+SC SC/APC +AP+FC FC/APC

haul signal transmission.


beginning of a long-haul path


• Expandable from 4 or 8 to 12 or 16 channel systems

- Passive design for any bit rate
- · Low insertion loss to conserve system power
- · High optical isolation for low crosstalk
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect
- SC/PC, ST/PC, FC/PC\* connector options
- Fiber protector to prevent connector damage
- Occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module
- \*7705CWDM to be used ONLY in Single Mode Fiber applications


#### **Applications**

- Multi-channel transport of video, audio, data, control in fiber limited applications
- Cost reduction exercises through fewer leased fibers
- Studio and Facility extension/expansion
- STL and TSL links
- Signal aggregation for outdoor and event coverage
- · Signal aggregation for security and monitoring

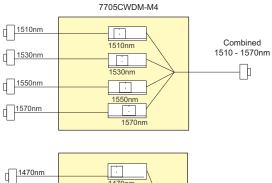

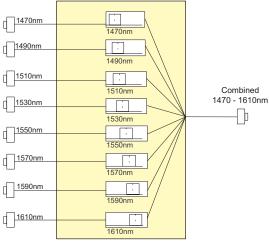

7705CWDN

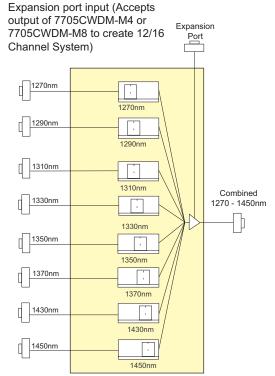

| И-M8 | 7705CWDM-M |
|------|------------|
|      |            |

| Function              | Ordering Information        | Description                           | Slots Occupied |
|-----------------------|-----------------------------|---------------------------------------|----------------|
| 4 Channel CWDM Mux    | 7705CWDM-M4                 | 4 Channel CWDM Mux (1510nm-1570nm)    | 1              |
| 4 Channel CWDM Demux  | 7705CWDM-D4                 | 4 Channel CWDM Demux (1510nm-1570nm)  | 1              |
| 8 Channel CWDM Mux    | 7705CWDM-M8                 | 8 Channel CWDM Mux (1470nm-1610nm)    | 2              |
| 8 Channel CWDM Demux  | 7705CWDM-D8                 | 8 Channel CWDM Demux (1470nm-1610nm)  | 2              |
| 12 Channel CWDM Mux   | 7705CWDM-M4 & 7707CWDM-M8LB | 12 Channel CWDM Mux (1270nm-1570nm)   | 3              |
| 12 Channel CWDM Demux | 7705CWDM-D4 & 7705CWDM-D8LB | 12 Channel CWDM Demux (1270nm-1570nm) | 3              |
| 16 Channel CWDM Mux   | 7705CWDM-M8 & 7707CWDM-M8LB | 16 Channel CWDM Mux (1270nm-1610nm)   | 4              |
| 16 Channel CWDM Demux | 7705CWDM-D8 & 7705CWDM-D8LB | 16 Channel CWDM Demux (1270nm-1610nm) | 4              |



















### Optical Input/Output:

Connector: SC/PC, ST/PC or FC/PC\* female housing

Wavelength: 7705CWDM-4:

1510-1570nm 7705CWDM-8: 1470-1610nm 7705CWDM-8LB: 1270-1450nm 20nm

Channel Spacing: Passband @ 0.5dB: > 13nm Channel Uniformity:

### Isolation Adjacent Channel:

> 30dB Directivity: > 50dB

Fiber Size: 9μm core/125μm overall

0

0

0

0

0

0

0

Ш

1510

Ē

evertz

7705CWDM-M8

0

0

0

0

0

1590

0

0

0

0

0

0

1430

7705CWDM-M8-LB

0

0

0

0

0

0

Ē

1310

everlz

Return Loss: > 45dB

### Link Loss with Mux and Demux Combination:

7705CWDM-4: < 2.5dB Maximum Loss 7705CWDM-8: < 3.5dB Maximum Loss 7705CWDM-8LB: < 5.5dB Maximum Loss Expansion Port: < 3.5dB Maximum Loss 7707CWDM-4 + 7707CWDM-8LB:

< 6.0dB (1270nm-1570nm)

7705CWDM-8 + 7705CWDM-8LB:

< 5.5dB (1270nm-1450nm) < 7.0dB (1470nm-1610nm)

### **>>>**Ordering Information

7705CWDM-D4 4 Channel CWDM Demux (1510nm-1570nm) 7705CWDM-D8

8 Channel CWDM Demux (1470nm-1610nm) 8 Channel Low Band CWDM Demux (1270nm-1450nm) 7705CWDM-D8LB

7705CWDM-M4 7705CWDM-M8

4 Channel CWDM Mux (1510nm-1570nm) 8 Channel CWDM Mux (1470nm-1610nm) 8 Channel Low Band CWDM Mux (1270nm-1450nm) 7705CWDM-M8LB

\*\*Note: Retention screws have been added to the rear panels of these units. Please note that rear panels from older MUX DEMUX units will not be backwards compatible with newer rear panel units. (See block diagram for rear panel drawings)

0

7705CWDM

-M4 8

딩

0

0

0

everlz

0

COMMON  $\circ$ 

1510 0

1530

1550

Ordering Options Rear Plate and Fiber Connector must be specified at time of order

Eq: Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure (with power supply)

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC\*

\*Note: ST/PC & FC/PC connector options available on 'COMMON' and "EXPANSION" ports only (SC/PC on remaining fiber I/O ports)

### Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

### **Enclosures** 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure


### ▶ Features & Benefits


- · Separates one optical input into 4 or 8 optical outputs
- Wideband operation from 1270nm 1610nm
- · Passive splitter design for any bit rate
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- Supports single mode fiber


\*7705DS-4 & 7705DS-8 to be used ONLY in Single Mode Fiber applications

- Available in SC, ST & FC\* connector options
- 7705DS-4 occupies one card slot, 7705DS-8 occupies two card slots and both can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

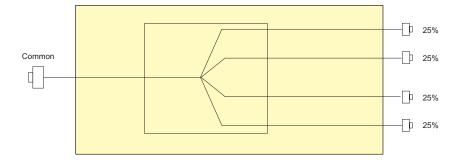

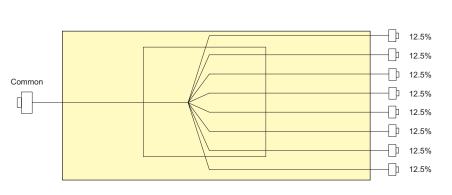



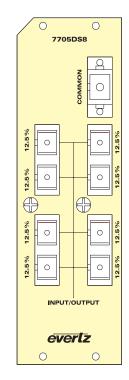

### ▶ Specifications

Optical Input/Output: Connector:

SC/PC, ST/PC & FC/PC\* female housing

Wavelength: 1270nm to 1610nm

Insertion Loss: 7705DS-4:

7dB typical, < 8.5dB maximum

7705DS-8: 10dB typical, < 11.0dB maximum

Uniformity: 7705DS-4:

7705DS-8: Directivity: 7705DS-4:

> 50dB

7705DS-8: > 55dB

Fiber Size: 9μm, single mode fiber

< 2.5dB

### Physical:

Number of Slots: 7705DS-4

7705DS-8

### **>>>**Ordering Information

Four Channel Optical Splitter 7705DS-8 Eight Channel Optical Splitter

\*\*Note: Retention screws have been added to the rear panels of these units. Please note that rear panels from older MUX DEMUX units will not be backwards compatible with newer rear panel units. (See block diagram for rear panel drawings)

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC +3RU

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU

+1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

\*Note: ST/PC & FC/PC connectors option is available only on 'COMMON' port (SC/PC on remaining fiber I/O ports)

### Accessories

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

Connector Suffix

+SC +ST SC/PC ST/PC\* FC/PC\* +FC

**Enclosures** 

3RU Portable Multiframe which holds up to 7 single slot modules 350FR 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR

Standalone enclosure

0

7705DS

Д

0

0

멍

9

7

OUTPUT

everlz

20 0















# 7705WDM, 7705WDM13/15, 7705DS & 7705MS 1310/1550nm WDM & Optical Splitters

7705MS

Д

0

귱

Д

0

귱

9

0

80%

20%

### ▶ Features & Benefits

- Bi-directional operation handles 1310nm and 1550nm bands
- · Passive design for any bit rate
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect required
- · Low insertion loss to conserve system power
- · Supports single mode fiber
- Available in SC, ST & FC connecter options

\*7705WDM, 7705DS and 7705MS to be used ONLY in Single Mode applications

### **Functions**

 7705WDM - Combines/separates 1310nm and 1470nm-1610nm wavelengths on/from a single fiber

7705WDN 13/15

А

 $\circ$ 

딩

Р

0

ਰ

Д


0

0


1310

- 7705WDM13/15 Combines/separates 1310nm and 1550nm wavelengths on/from a single fiber
- 7705DS Splits one signal into two signals of 50% power or combines two signals into one output signal.
- 7705MS Splits input signal into two signals of 80%/20% power used for fiber confidence monitoring


### ▶7705WDM, 7705WDM 13/15

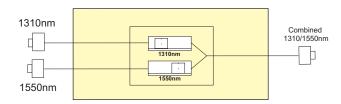

### ▶7705DS



### ▶7705MS



# 1550

# 7 귱 everlz evertz

Physical: Number of Slots:

### ▶ Specifications

### Optical Input/Output:

SC/PC, ST/PC, FC/PC female housing 1310nm and 1550nm bands Connector: Wavelength: Fiber Size: 9μm core/125μm overall Insertion Loss:

1310nm port, 2dB Maximum Loss 1550nm port, 3dB Maximum Loss 7705WDM

(1470nm-1610nm)

1310nm port, 2dB Maximum Loss 1550nm port, 2dB Maximum Loss 7705WDM13/15:

7705DS: 7705MS:

Isolation: 7705WDM: > 50dB between 1310nm/1550nm ports with 1470nm-1610nm on

1550nm port

7705WDM13/15: > 25dB between 1310nm/1550nm

ports at center wavelength ±20nm

50% port, 4dB Maximum Loss

80% port, 2dB Maximum Loss 20% port, 9dB Maximum Loss

### **>>>**Ordering Information

7705WDM Wideband wavelength Division Multiplexor Standard Wavelength Division Multiplexor 7705WDM13/15 Fiber Distribution Splitter 7705MS Fiber Monitoring Splitter

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC

Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

### Enclosures 350FR

7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

# 7700 Modular - Fiber - Optical Combiners/Splitters/Multiplexors

· Capable of being inserted into CWDM wavelength slots adding an additional 8 or 16 DWDM wavelengths to existing CWDM systems

Passive design for any bit rate

· Low insertion loss to conserve system power

· High optical isolation for low crosstalk

• Fully hot-swappable from front of frame with no fiber disconnect/reconnect required


SC/PC, ST/PC\*, FC/PC\* connector options


· Fiber protector to prevent connector damage

\*7705DWDM to be used ONLY in Single Mode Fiber applications


### Applications


- · Multi-channel transport of video, audio, data, control in fiber limited applications
- · Cost reduction exercises through fewer leased fibers
- · Studio and Facility extension/expansion
- · L-Band & IF Link transport
- STL and TSL Links
- · Signal aggregation for outdoor and event coverage
- · Signal aggregation for security and monitoring



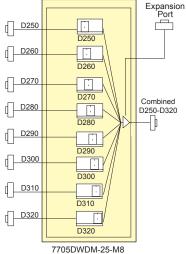

Expansion port input accepts output of 7705DWDM-33-M8 to create a 16 Channel System





### ▶ Specifications

Optical Input/Output:
SC/PC, ST/PC or FC/PC\* female

7705DWDM-33-M8

Wavelength: C-Band (ITU G.694.1 compliant) ITU C25-C32 (1557.36 - 1551.72nm) ITU C33-C40 (1550.92 - 1545.32nm) 7705DWDM-25: 7705DWDM-33:

100GHz (0.8nm nominal) Channel Spacing:

Passband @ 0.5dB: ±0.11nm

Channel Uniformity: < 1.5dB

Isolation:

Adjacent Channel: > 25dB Non-Adjacent Channel: > 35dB

Directivity: > 40dB Max. Optical Power 300mW or +25dBm

9μm core/125μm overall Fiber Size: Return Loss: > 45dB

Max Input Power: +25dBm

### Link Loss with Mux and Demux Combination: 7705DWDM-8

< 4.5dB maximum loss (7705DWDM-25/33)

7705DWDM-16: < 7.5dB maximum loss (7705DWDM-33 + 7705DWDM-25)

### >>> Ordering Information

7705DWDM-25-M8 8 Channel Cascadeable DWDM Mux, 100GHz Spacing, ITU Channel

8 Channel Cascadeable DWDM Demux, 100GHz Spacing, ITU 7705DWDM-25-D8 Channel C25-C32

7705DWDM-33-M8 8 Channel Cascadeable DWDM Mux, 100GHz Spacing, ITU Channel

C33 to C40 7705DWDM-33-D8 8 Channel Cascadeable DWDM Demux, 100GHz Spacing, ITU Channel

C33 to C40

+SC SC/PC +ST ST/PC FC/PC +FC

Fiber Optic Patch Cable

Connector Suffix

See CWDM & DWDM Ordering Information Page

Enclosures 350FR

S7701FR

7700FR-C 7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

\*\*Note: Retention screws have been added to the rear panels of these units. Please note that rear panels from older MUX DEMUX units will not be backwards compatible with newer rear panel units. (See block diagram for rear panel drawings)

Rear Plate and Fiber Connector must be specified at time of order Ordering Options

Eg: Model +3RU + SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe Standalone Enclosure (with power supply)

\*Note: ST/PC & FC/PC connectors option is available on 'COMMON' and 'EXPANSION' ports only (SC/PC on remaining fiber I/O ports)










7700 Modular - Fiber - Optical Combiners/Splitters/Multiplexors

The 9000DWDM are bi-directional Multiplexors/De-multiplexors that combine/separate 32 or 40 DWDM wavelengths over a single fiber. The 9000DWDM are housed in an Evertz 1RU unit.

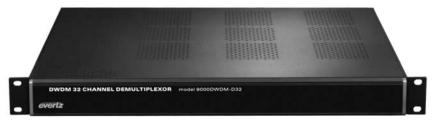



### ▶ Features & Benefits

- Bi-directional mux/demux of 32 or 40 wavelengths in the C-Band DWDM spectrum (ITU-T G.694.1 compliant)
- 0.8nm (100GHz) channel spacing
- Passive design for any bit rate
- · Low insertion loss to conserve system power
- · High optical isolation for low crosstalk
- SC/PC, ST/PC, FC/PC connector options

\*9000DWDM to be used ONLY in Single Mode Fiber applications

- · Multi-channel transport of video, audio, data, control in fiber limited applications
- · Cost reduction exercises through fewer leased fibers
- Studio and Facility extension/expansion
- L-Band & IF Link transport
- STL and TSL Links
- · Signal aggregation for outdoor and event coverage
- · Signal aggregation for security and monitoring

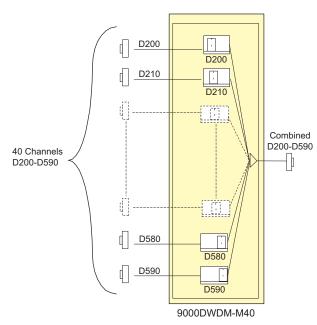

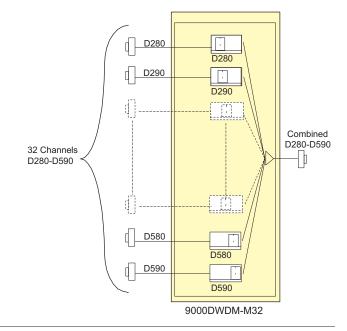

### ▶Specifications

### Optical Input/Output:

SC/PC, ST/PC or FC/PC Connector:

Wavelength:

9000DWDM-32: ITU C28-C59 (1554.94-1530.33nm) 9000DWDM-40: ITU C20-C59 (1561.42-1530.33nm)

Channel Spacing: 0.8nm (100GHz) Passband @ 0.5dB:±0.11nm Channel Uniformity: < 1.5dB

Adjacent Channel: > 25dB Non-Adjacent Channel:

> 40dB

Directivity: > 40dB

Fiber Size: 9μm core/125μm overall

Return Loss: > 45dB

Max Optical Power: < 300mW (+25dBm)

### Link Loss with Mux and Demux Combination:

9000DWDM-M32 & 9000DWDM-D32:

< 8dB Maximum Loss 9000DWDM-M40 & 9000DWDM-D40:

< 10dB Maximum Loss

### Physical:

19"W x 1.75"H x 18.75"D Dimensions: (483mm W x 45mm H x 477mm D)

Weight: 8lbs (3.5kg)

### **>>>**Ordering Information

Dense Wave Division Multiplexing Optical Modules

32 Ch DWDM Mux, 100Ghz spacing, 1RU enclosure 40 Ch DWDM Mux, 100Ghz spacing, 1RU enclosure 32 Ch DWDM Demux, 100Ghz spacing, 1RU enclosure 9000DWDM-M32 9000DWDM-M40 9000DWDM-D32 9000DWDM-D40 40 Ch DWDM Demux, 100Ghz spacing, 1RU enclosure

Ordering Options

Fiber Connector must be specified at time of order

### Connector Suffix +SC

+ST32 ST/PC Fiber connectors on all ports for 9000DWDM-X32 ST/PC Fiber connectors on all ports for 9000DWDM-X40 +ST40 +FC32 FC/PC Fiber connectors on all ports for 9000DWDM-X32 +FC40 FC/PC Fiber connectors on all ports for 9000DWDM-X40

### Accessories Fiber Optic Patch Cable

See CWDM & DWDM Ordering Information Page

### 2x1 Optical Bypass Protection Switch

The 7707BPX is a wide hand 2x1 optical protection switch that provides autochangeover functionality by detecting changes in the optical input power level.

The 7707BPX has integrated VistaLINK® technology for remote control and monitoring capability via SNMP. This provides the user with the ability to locally or remotely configure and monitor parameters such as module status, selected input, power level and switching threshold.


In the application of auto-changeover, the 7707BPX can be configured to have a MAIN input and a STANDBY input. In this configuration, it will automatically switch to the Standby input when the Main input power is weak or lost. It can also be configured to have auto or manual switch back to the Main input when the signal is re-established.


The 7707BPX occupies one card slot and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 15 modules, a 350FR portable frame that will hold up to 7 modules or a standalone enclosure which holds 1 module

### ▶ Features & Benefits

- · Intelligent auto-switching with input power detection and user-definable thresholds
- · Supports automatic or manual control via SNMP or GPI
- Fully hot-swappable from front of frame with no fiber disconnect/reconnect
- Accepts any wavelength in the 1270nm to 1610nm range
- · Supports single-mode fiber optic cable
- · SC/PC, ST/PC or FC/PC fiber connector options
- · Comprehensive signal and card status monitoring via four digit card edge display or remotely through SNMP and VistaLINK® capability

\*7707BPX to be used ONLY in Single Mode Fiber applications

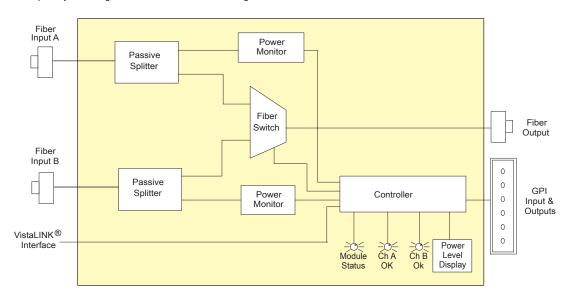



### ▶ Specifications

### Optical Input/Output:

3 Bi-directional optical signals Number SC/PC, ST/PC, FC/PC Female Housing Connector

Insertion Loss: < 3dB Switch Time: < 30ms Max. Input Power: 5dBm Input Optical Sensitivity: -40dBm Operating Wavelength:

, 1270nm to 1610nm Fiber Size: 9μm core/125μm overall

### General Purpose Inputs:

Number of Inputs:

Opto-isolated, active low with internal Type: pull-ups to +5V

Connector: 2 pins plus ground on 6-pin terminal strip Signal Level:

+5V Pullup: Low: -5 to +2.5V DC, High: 3.5 to 10V DC +12V Pullup: Low: -5 to +9.5V DC, High: 10.5 to 15V DC

Max Sink Current: (input shorted to ground) 15 mA Max Leakage Current

for input High: 200μΑ

### General Purpose Outputs:

Number of Outputs:

"Dry Contact" relay contacts -Type: normally open & normally closed

contact provided

3 pins on 6-pin terminal strip Connector:

### Electrical:

+12V DC Voltage:

Power

Complies with FCC Part 15, Class A EMI/RFI

**EU EMC Directive** 

### Physical:

Number of Slots: 1

### **>>>**Ordering Information

| 7707BPX           | 2x1 Optical Bypass Protection Switch   | Connector Suffix<br>+SC |
|-------------------|--|-------------------------|
| Ordering Options  | Rear Plate and Fiber Connector must be specified at time of order Eg. Model +3RU +SC | +ST<br>+FC              |
| Rear Plate Suffix |  | Enclosures              |

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

SC/PC ST/PC FC/PC

350FR

3RU Portable Multiframe which holds up to 7 single slot modules 7700FR-C 3RU Multiframe which holds up to 15 single slot modules 7701FR 1RU Multiframe which holds up to 3 single or dual slot modules S7701FR Standalone enclosure

+3RU

+1RU

### Multi-Channel Passive Splitter/Combiner

The SRF1 and SRF3 are compact, high performance, multi-channel, passive splitter/combiner arrays, designed for expansion of RF routing systems and other applications requiring high-density, rackmount splitter packages. The wide pass bandwidth includes the extended L-band range. The SRF series may be used in any L-Band signal distribution system where multiple channels of passive 1x2 or 1x4 splitter/combiners are needed.

The module functions as a splitter or combiner depending on the RF connections. The SRF unit can be configured as a splitter by injecting an RF signal to the common port. The outputs will be a reduced amplitude replica of the input signal. Injecting RF signals into the combiner input ports (splitter outputs) results in the summation at the common port with reduced amplitude. The monitor port allows monitoring of the common port without interruption of the signal path.






SRF1 Front Panel • Common & Monitor Ports

SRF3 Front Panel • Common & Monitor Ports

### ▶ Features & Benefits

- Passes all signal modulation formats in the 40MHz-3000MHz frequency range
- · Functions as a high-density passive splitter or combiner
- · Completely passive design for high reliability

- · Compact design, may be front or rear rack mounted
- Passes LNB power
- · Monitor port allows for monitoring of Common port signal without interruption of signal path

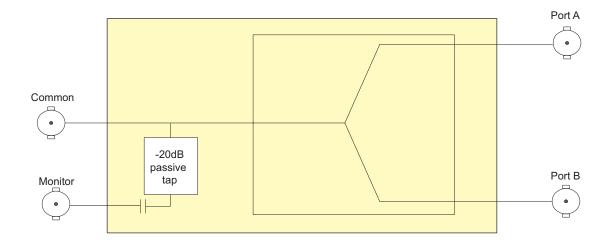

### ▶Specifications

### Unit Specifications:

Frequency Range: 40MHz-3000MHz Insertion Loss:

4.2 ±0.5dB 1x4: 7.6 ±0.75dB Impedance:  $75\Omega$ Isolation (channel-channel) 1x2: > 60dB 1x4: > 55dB

1 BNC per IEC 61169-8 Annex A, Connector: (F type optional)

Return Loss (inputs & outputs): 250MHz-3000MHz > 15dB

### SRF1 Series:

Number of Channels: SRF1-16-1x2: 16, 1x2s SRF1-8-1x4: 8, 1x4s

### SRF3 Series:

Number of Channels: SRF3-64-1x2: 64, 1x2s SRF3-32-1x4 32, 1x4s

### Monitor Port:

1 BNC per IEC 61169-8 Annex A, Connector: (F type optional)

Level: -20dB ± 2dB referenced to the Common Port

### Physical:

SRF1 series: 19"W x 1.75"H x 5.5"D SRF3 series: 19"W x 5.25"H x 5.5"D

### **>>>**Ordering Information

SRF1-16-1x2LB 16-channel 1x2 splitter/combiner in 1RU chassis SRF1-8-1x4LB

8-channel 1x4 splitter/combiner in 1RU chassis

SRF3-32-1x4LB

64-channel 1x2 splitter/combiner in 3RU chassis SRF3-64-1x2LB 32-channel 1x4 splitter/combiner in 3RU chassis

### **Ordering Options**

+F75

"F" type connectors,  $75\Omega$ 



### RF Passive Splitters


The 7702 series RF passive splitters provide distribution of RF signals in a 1x2 or 1x4 configuration (designated by SP2 or SP4 in the part number). The operating frequency range is 40MHz to 2200MHz allowing both 70/140Mhz IF and L-band signal distribution. When equipped with the "-LNB" option, DC power can be passed through any of the outputs to the input for LNB power (input frequency range limited to 400MHz-2200MHz). Diode protection ensures that no conflicts arise in the event that multiple connections provide DC power.

The 7702SP2 and 7702SP4 occupy one card slot and can be housed in a 1RU frame which will hold up to three modules, a 3RU frame which will hold up to 15 modules a 350FR portable frame that will hold up to 7 modules or a standalone enclosure

### ▶ Features & Benefits

- Passes all signal modulation formats in the 40-2200MHz frequency range (400MHz-2200MHz with -LNB option)
- Functions as a splitter or combiner

- · Completely passive design for high reliability
- · Fully hot-swappable from front of frame
- -LNB option passes DC power to LNB

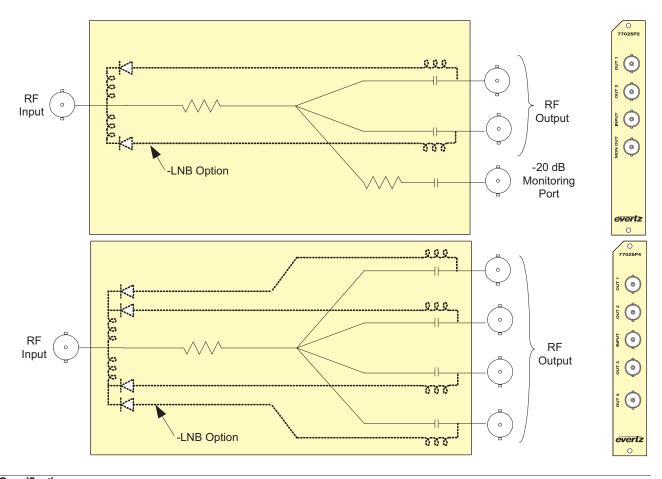

### **▶**Specifications

RF Input:

Number of Inputs: Connector:

BNC, F type optional 75Ω I/O Impedance:

Input Frequency Range:

40-2200MHz -I NB Version: 400-2200MHz

Return Loss:

250MHz-2200MHz: > 12dB

RF Outputs:

Number of Outputs 7702SP2:

2+1 Monitor 7702SP4: BNC, F-Type optional

Connector: Insertion Loss:

7702SP2

7702SP4:

8 ±1dB

Monitor:

-20dB ±2dB referenced to the input port

5 +1dB

I/O Impedance: Return Loss: 250MHz-2200MHz: > 12dB

Frequency Response:

Physical:

Number of slots:

### **>>>**Ordering Information

7702SP2

1x2 Passive RF Splitter

1x4 Passive RF Splitter 7702SP2-I NR

1x2 Passive RF Splitter, passes LNB power 1x4 Passive RF Splitter, passes LNB power

7702SP4-LNB

Rear Plate must be specified at time of order Eg: Model +SC +3RU

**Ordering Options** Rear Plate Suffix:

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU

1RU rear plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

Connector Suffix:

 $75\Omega\,\text{F}$  type connectors

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure



Transmitter Module (Example)

7707EO27

7707EO29

7707EO31

7707EO33

7707EO35

7707EO37

7707EO43

7707EO45

7707EO47

7707EO49

7707EO51

7707EO53

7707EO55

7707EO57

7707EO59

7707EO61

Transmitter Module (Example)









| D200 | 20 | 192,000 | 1561.42 | Contact Factory |
|------|----|---------|---------|-----------------|
| D210 | 21 | 192,100 | 1560.61 | Contact Factory |
| D220 | 22 | 192,200 | 1559.79 | Contact Factory |
| D230 | 23 | 192,300 | 1558.98 | Contact Factory |
| D240 | 24 | 192,400 | 1558.17 | Contact Factory |
| D250 | 25 | 192,500 | 1557.36 | 7707EOD250      |
| D260 | 26 | 192,600 | 1556.55 | 7707EOD260      |
| D270 | 27 | 192,700 | 1555.75 | 7707EOD270      |
| D280 | 28 | 192,800 | 1554.94 | 7707EOD280      |
| D290 | 29 | 192,900 | 1554.13 | 7707EOD290      |
| D300 | 30 | 193,000 | 1553.33 | 7707EOD300      |
| D310 | 31 | 193,100 | 1552.52 | 7707EOD310      |
| D320 | 32 | 193,200 | 1551.72 | 7707EOD320      |
| D330 | 33 | 193,300 | 1550.92 | 7707EOD330      |
| D340 | 34 | 193,400 | 1550.12 | 7707EOD340      |
| D350 | 35 | 193,500 | 1549.32 | 7707EOD350      |
| D360 | 36 | 193,600 | 1548.51 | 7707EOD360      |
| D370 | 37 | 193,700 | 1547.72 | 7707EOD370      |
| D380 | 38 | 193,800 | 1546.92 | 7707EOD380      |
| D390 | 39 | 193,900 | 1546.12 | 7707EOD390      |
| D400 | 40 | 194,000 | 1545.32 | 7707EOD400      |
| D410 | 41 | 194,100 | 1544.53 | Contact Factory |
| D420 | 42 | 194,200 | 1543.73 | Contact Factory |
| D430 | 43 | 194,300 | 1542.94 | Contact Factory |
| D440 | 44 | 194,400 | 1542.14 | Contact Factory |
| D450 | 45 | 194,500 | 1541.35 | Contact Factory |
| D460 | 46 | 194,600 | 1540.56 | Contact Factory |
| D470 | 47 | 194,700 | 1539.77 | Contact Factory |
| D480 | 48 | 194,800 | 1538.98 | Contact Factory |
| D490 | 49 | 194,900 | 1538.19 | Contact Factory |
| D500 | 50 | 195,000 | 1537.40 | Contact Factory |
| D510 | 51 | 195,100 | 1536.61 | Contact Factory |
| D520 | 52 | 195,200 | 1535.82 | Contact Factory |
| D530 | 53 | 195,300 | 1535.04 | Contact Factory |
| D540 | 54 | 195,400 | 1534.24 | Contact Factory |
| D550 | 55 | 195,500 | 1533.47 | Contact Factory |
| D560 | 56 | 195,600 | 1532.68 | Contact Factory |
| D570 | 57 | 195,700 | 1531.90 | Contact Factory |
| D580 | 58 | 195,800 | 1531.12 | Contact Factory |
| D590 | 59 | 195,900 | 1530.33 | Contact Factory |
|      | 60 | 196,000 | 1529.55 | Contact Factory |

Wavelength (nm)

1270

1290

1310

1330

1350

1370

1430

1450

1470

1490

1510

1530

1550

1570

1590

1610

Frequency (GHz)

Wavelength

(nm)

### ▶▶▶Fiber Optic Patch Cables for all 77xx Fiber Cards available as Options

CB-FP1M-SCPC CB-FP1M-STPC CB-FP5M-SCPC

Single mode fiber cable, 1m, SC/PC male termination Single mode fiber cable, 1m, ST/PC male termination Single mode fiber cable, 5m, SC/PC male termination

Laser Ordering Number (xx)

27

29

31 33

35

37

43

45

47

49

51

53

55

57

59

61

**ITU Channel** 

Number


**Laser Ordering Number** 

(Dxxx)

CB-FP5M-STPC CB-FP10M-SCPC CB-FP10M-STPC

Single mode fiber cable, 5m, ST/PC male termination Single mode fiber cable, 10m, SC/PC male termination Single mode fiber cable, 10m, ST/PC male termination Single mode fiber cable, 10m, ST/PC male termination



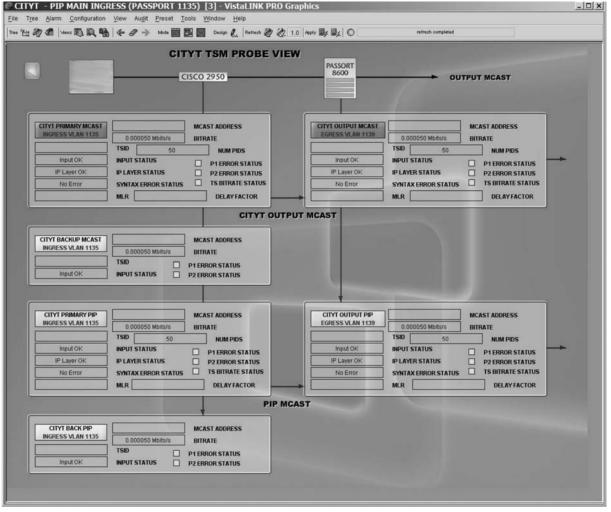

The 7780TSM line of remote probes is a complete embedded hardware based solution for compressed network monitoring. By monitoring the MPEG Transport Stream at strategic points within the distribution network, in conjunction with the industry leading VistaLINK® PRO NMS (Network Management System), the 7780TSM offers service providers the tools to continuously and effectively have the confidence that their MPEG-2/H.264 signals within any IPTV, Satellite, terrestrial or cable network is being delivered properly.

The 7780TSM supports the two most popular interfaces ASI or IP. With support for over 400Mb/s (on ASI), 200Mb/s (on IP) of total MPEG-2/H.264 traffic on a single 7780TSM, these probes can, for example, in no time separate encoder errors from network delivery errors allowing the operator to act quickly and avoid down time.

The industry leading Evertz VistaLINK® PRO NMS offers a new dimension to TS monitoring by allowing a graphical customization of any measurement performed and a quick viewing of the different points in the system. It makes the 7780TSM probe system a valuable system in any operational environment.

### ▶ Features & Benefits

- 2 ASI inputs (7780TSM-ASI) or 1 IP input (7780TSM-IP)
- IGMP subscription and IP layer monitoring including MDI (7780TSM-IP)
- Transport Stream analysis:

Presence, Bitrate analysis, table rate analysis TR101290 Level 1, level 2\*, and partial level 3

- Complete TS and PID bitrate measurement from 100kb/s to 200Mb/s with settable limits
- · Display of Transport Stream tree
- Display of video resolution, audio type, etc.
- Matching of PID assignment with pre-define PID list and TSID verification
- \* Only PCR accuracy and PCR repetition rate supported at this time. No jitter measurement

- Up to 5 hot-swappable 7780TSM modules per chassis
- Fully Integrated with the Industry leading Evertz VistaLINK® PRO NMS
- Auto-Response Scripting Capability
- · Comparing of same stream at different location in network
- SNMP Enabled (control and alarms for monitoring)
- Complete customization of status view and error report in VistaLINK® PRO











Compressed DTV Products & CODECS - Transport Stream Monitor



▶7780TSM-IP

MPEG

VistaLINK® Interface

10/100/ 1000 RJ45

10/100/

▶7780TSM-ASI

IP monitoring and IGMP subscription

Equalize

### inputs and outputs:

- 2xASI input per DVB TR 101 891-270Mb/s (7780TSM-
  - Min ASI TS input bitrate 100kb/s (per input) Max ASI TS input bitrate 210Mb/s (per input)
- 1xRJ45 input 10/100/1000 with 200Mb/s of MPEG over IP traffic (50 multicasts) (7780TSM-IP)
- 1xRJ45 10/100/1000 control port

# Monitored parameters: IP Measurements-(7780TSM-IP)

 MDI-Media Delivery Index DF: MLR (Delay Factor: Media Loss Rate)

### MPEG-2 TS measurements:

TS monitoring

| TR101290 P1                | TR101290 P2            |
|----------------------------|------------------------|
| 1.1 TS_sync_loss           | 2.1 Transport_error    |
| 1.2 Sync_byte_error        | 2.2 CRC_error          |
| 1.3 Pat_error              | 2.3 PCR_error          |
| 1.4 Continuity_count_error | 2.4 PCR_accuracy_error |
| 1.5 PMT_error              | 2.5 PTS_error          |
|                            | 2.6 CAT_error          |

CPU

### Table presence and repetition:

ASI 2 Output 1

- DVB SI repetition error (NIT, SDT, EIT, RST, TDT)
- ATSC PSIP tables repetition error (MGT, TVCT, CVCT, EIT, RRT, STT)

evertz

7780TSM-ASI

everlz

0

 $(\circ)$ 

0

### Template Checking:

ASI 1 Output

- Bitrate Monitor
- TSID Matching PID List Matching
- Electrical:

### Power:

41W

### Physical:

Number of Slots:

### **▶▶▶**Ordering Information

7780TSM-IP MPEG-2/H.264 IP Transport Stream Monitor 7780TSM-ASI MPEG-2/H.264 ASI Transport Stream Monitor

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU

# Rear Plate Suffix +3RU


3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C S7702FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules Standalone enclosure

Controlled by the industry leading VistaLINK® PRO, the 7780ASI-IP2 offers signal providers the capability to encapsulate two MPEG-2 transport stream payload to a unicast or multicast standardized IP stream. For contribution application, the 7780ASI-IP2 offers industry standard FEC encoding to allow data recovery on the de-encapsulation side. The 7780ASI-IP2 offers input monitoring for detecting problems prior to the encapsulator. The 7780ASI-IP2 MPEG over IP encapsulator can be paired to the 7780IP-ASI2 De-encapsulator for an end-to-end solution.


The 7780ASI-IP2 occupies two card slots and can be housed in a 1RU frame which will hold up to three modules, a 3RU frame which will hold up to 7 modules or a standalone enclosure.

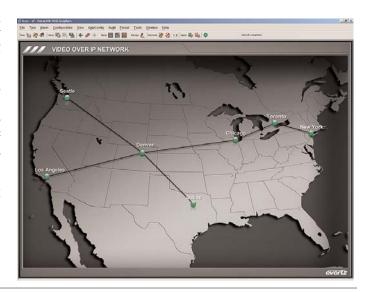


### ▶Features & Benefits

- $\bullet$  Fully integrated with the Industry leading Evertz VistaLINK® PRO NMS system
- 2 ASI inputs and 2 IP outputs
- Bitrate measurement and basic error on both ASI inputs
- · Passive loop through on ASI inputs

- IP output encapsulated over GigaE RJ 45 for up to 2 TS on ASI inputs
- FEC encoding- Pro MPEG forum code of practice #3- release 2<cop3>

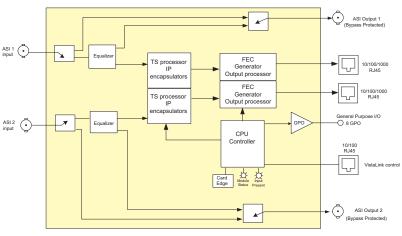



### ▶ Specifications

### Inputs and outputs:

- 2xASI input per DVB TR 101 891 270Mb/s (2 loop through)
- Min ASI TS input bitrate 100kb/s Max ASI TS input bitrate 213Mb/s
- 2xRJ45 10/100/1000 GigaE output for MPEG over IP
- 1xRJ45 10/100 control port
- 1xDB25 Output relay (8 GPO)

### Encapsulation parameters:

- IP encapsulation for each ASI input: MAC 802.3>IPV4>RTP>UDP>MPEG (RTP can be turned on and off) Select 1 to 7 MPEG packets per IP frame
- FEC encoding (Pro MPEG forum code of practice #3release 2<cop3>) with L&D following the following range:
  - L\*D ≤100  $1 \le L \le 20$
  - 4 ≤ D ≤20
- IP address (IP, Subnet mask, Gateway) for the source
- IP address for the destination (Unicast and Multicast)
- · Selection of the source port and destination port Set Local MAC address of the equipment

### Monitored parameters:

- Total Birate
- Null Packet Bitrate
- TS\_sync\_loss Sync\_byte\_error
- Continuity count error
- PID List

### **>>>**Ordering Information

7780ASI-IP2 Dual Channel ASI to IP Encapsulator **Ordering Options** Rear Plate must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

3RU Rear Plate for use with 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +3RU +1RU Standalone Enclosure Rear Plate

**Enclosures** 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone Enclosure

The 7780DLY-ASI is a complete hardware-based solution that can delay a compressed stream on ASI for up to 16 seconds. As more providers are using different sources with various delays, such as satellite, fiber and off-air, they need to be able to match these streams by delaying them by multiple seconds in order to line up in time the different inputs.

Most broadcast equipment offers a few milliseconds of built-in buffering, but in many cases it is not enough delay for stream matching.


The 7780DLY-ASI can delay a full ASI stream up to 213Mb/s. The delay is programmable and adjustable in 1ms increments from 0 to 16 seconds.


The 7780DLY-ASI fits in the 7700 series frame and offers signal input monitoring by sending SNMP traps to the industry leading VistaLINK® PRO NMS.

### ▶ Features & Benefits

- 1 ASI input 100kb/s to 213Mb/s and 2 ASI outputs
- · Delay from few bytes to 16 seconds in 1ms increment
- Support 188 and 204 bytes packets (Autodetect)
- · ASI input test includes:
  - Sync Byte error and Sync loss detection
  - Total Bitrate
  - Useful Bitrate
  - Null packet Bitrate
  - Continuity count error
  - List of active PIDs

- · Controlled by VistaLINK® PRO or Card Edge
- Fully integrated with the industry leading Evertz VistaLINK® PRO NMS system • OSD (On-Screen Display) on SDI output for status and configuration display
- 7 programmable preset delays controllable by GPI and VistaLINK® PRO
- · Passive bypass for increased safety

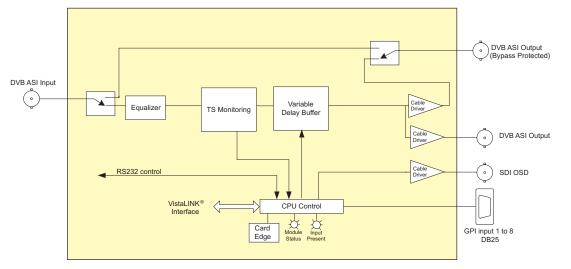



### ▶ Specifications

ASI Input/Output:

DVB TR101 891, 270Mb/s Standard:

Number of Inputs: Number of Outputs: 1 (with relay bypass)

Bitrate: 100kb/s to 213Mb/s

Serial Video Output (OSD):

Number of Outputs: BNC per IEC 61169-8 Appex A Connector:

800mV nominal Signal Level:

0V ±0.5V DC Offset: Rise and Fall Time: 200ps nominal (HD), 740ps

nominal (SD)

Overshoot: < 10% of amplitude

Return Loss: > 15dB up to 1.5Gb/s (HD)

Wide Band Jitter: < 0.2 UI Stand Alone Enclosure:

+12V DC Voltage: Dimensions: 20W Power:

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

Electrical:

7700 frame mounting: 2 slots 7701 frame mounting: 1 slot

14" L x 4.5" W x 1.9" H

(355mm L x 114mm W x 48mm H) Weight: Approx. 1.5lbs (0.7kg)

### **>>>**Ordering Information

7780DLY-ASI ASI Delay **Ordering Options** Rear Plate must be specified at time of order

Eg: Model + 3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe +SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR


3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure



The 7780IP-ASI2 is a complete hardware based solution for de-encapsulating MPEG-2 transport streams from IP to ASI. As more providers are trying to deliver contribution and distribution quality video over IP networks, the 7780IP-ASI2 is capable of bridging traditional compressed world (ASI) with the standard IP networks.

Controlled by the industry leading VistaLINK® PRO, the 7780IP-ASI2 offers signal providers the capability to de-encapsulate two IP streams carrying MPEG-2 transport stream payload to standardized ASI streams. For contribution application the 7780IP-ASI2 offers industry standard FEC decoding to allow data recovery in case of transmission problem in the IP cloud. It offers real time FEC statistics for IP link quality monitoring. The 7780IP-ASI2 offers basic MPEG-2 TS input monitoring for detecting problems prior to the de-encapsulator. The 7780IP-ASI2 MPEG over IP de-encapsulator can be paired to the 7780ASI-IP2 encapsulator for an end-to-end solution.


The 7780IP-ASI2 occupies two card slots and can be housed in a 1RU frame which will hold up to three modules, a 3RU frame which will hold up to 7 modules or a standalone enclosure

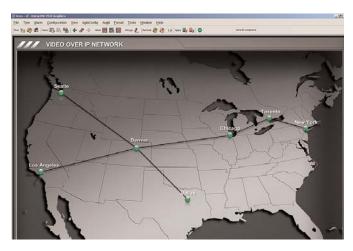


### ▶ Features & Benefits

- Fully integrated with the Industry leading Evertz VistaLINK® PRO NMS system
- 2 IP inputs and 4 ASI outputs
- Bitrate measurement and basic monitoring on MPEG-2 streams
- Subscription to desired multicast using IGMP- V2/V3

- De-encapsulation of MPEG-2 TS to 2 separate ASI outputs.
- FEC decoding- Pro MPEG forum code of practice #3- release 2<cop3>
- Complete customization of status view and error report in VistaLINK® PRO

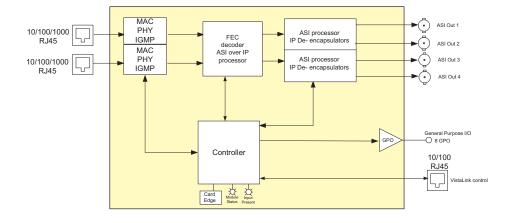



### ▶Specifications

### Inputs and outputs:

- 2xRJ45 10/100/1000 GigaE input for MPEG over IP
  4xASI outputs per DVB TR 101 891-270Mb/s
- Min ASI TS output bitrate 100kb/s
- Max total ASI TS output bitrate 213Mb/s
- 1xRJ45 10/100 control port
- 1xDB25 Output relay (8 GPO)

### De-encapsulation parameters:

- De-encapsulation of MPEG-2 packets following: MAC 802.3>IPV4>(RTP)>UDP>MPEG
- Accept 1 to 7 MPEG packets per IP frame
- FEC decoding (Pro MPEG forum code of practice #3release 2<cop3>) with L&D following the following range:

L\*D ≤100  $1 \le L \le 20$ 4 ≤ D ≤20

- Join Multicast by providing correct messaging using IGMP V2/V3
- · Selection of the UDP ports, IP Addresses
- Set Local MAC address of the equipment

### Basic included monitoring IP input:

FEC statistics:

Uncorrectable packets Corrected packets

Corrected packets per FEC period

TS presence

TR101290 P1.4 Continuity\_count\_error

### >>> Ordering Information

7780IP-ASI2

Dual Channel IP to ASI De-encapsulator

**Ordering Options** 

Rear Plate must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+3RU +1RU

3RU Rear Plate for use with 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe


Standalone Enclosure Rear Plate

**Enclosures** 7700FR-C 7701FR S7701FR

3RU Multiframe, which holds 7 modules 1RU Multiframe, which holds 3 modules Standalone Enclosure

### ▶ Features & Benefits

- Single card TDM multiplexer for four DVB-ASI transport streams
- Inputs may be MPTS or SPTS with a combined bandwidth of up to 210Mb/s
- · Signal transport uninterrupted by loss of any/all DVB-ASI input feeds · Comprehensive signal and card status monitoring via four digit card edge
- display or remotely through SNMP and VistaLINK®
- · VistaLINK® capability is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame
- Automatic coaxial input equalization up to 250m at 270Mb/s (Belden 8281)
- Fully hot-swappable from front of frame
- Output is a single 270Mb/s signal compatible with SMPTE 259M-C transport
- · Monitor port output is user-selectable from the four inputs

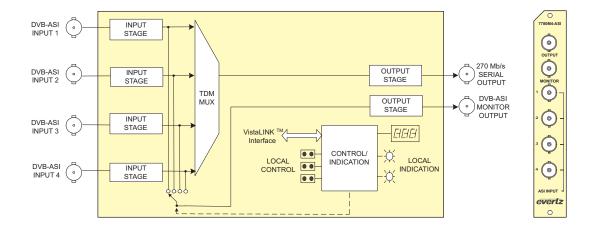

### ▶Specifications

ASI Input:

Equalization:

DVB-ASI: DVB TR 101 891-270 Standard 4 independent DVB-ASI 270Mb/s Number of inputs:

signals

Connector 4 BNC per IEC 60169-8 Amendment

> Automatic to 250m @ 270Mb/s with Belden 8281 or equivalent cable

Return Loss: > 15dB up to 270Mb/s Output: Standards

SMPTE 259M-C framing compatible Output:

Monitor DVB-ASI output Number: 1 + 1 monitor

BNC per IEC 60169-8 Amendment 2 800mV nominal Connector:

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal

< 10% of amplitude Overshoot: > 15dB up to 270Mb/s Return Loss:

Wide Band Jitter: < 0.2UI Electrical:

+12VDC Voltage: 10W Power:

Physical:

Number of slots:

Compliance:

Electrical Safety: CSA Listed to UL 60065-03, IEC

60065

Complies with CE Low voltage

Directive

Complies with FCC Part 15, Class A EU EMC Directive FMI/RFI:

### **▶▶▶**Ordering Information

7780M4-ASI: Quad ASI TDM-Mux, (Companion unit to 7780D4-ASI)

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix:

+3RU 3RU Rear Plate for use with 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

Enclosures: 7700FR-C 7701FR S7701FR

3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure









Controlled by the industry leading VistaLINK® PRO, the 7780R2x1-ASI-CS offers signal providers the capability to design automatic redundancy into their system and alarm the operator the second a problem arises. By constantly monitoring the incoming signals, the 7780R2x1-ASI-CS is capable of knowing when the signals reach a point where they are no longer suitable for broadcast and automatically switches to a backup feed. The user can customize all monitored and switching rules to meet Broadcast, Cable, Satellite and IPTV needs.

- Fully integrated with the Industry leading VistaLINK® PRO NMS system
- 2 ASI inputs and 1 ASI output
- TR101290 monitoring bitrate measurement and component matching test on all inputs
- Smart configuration of error threshold and switching rules to avoid false switching
- Delay of stream up to 3 seconds for perfect synchronization of incoming streams from different paths
- Complete TS data rate measurement from 100Kb/s to 213Mb/s with user settable measurement window
- Each PID bitrate measurement
- · Display of Transport Stream tree
- Matching of PID assignment, with predefined PID list and TSID
- Complete customization of status view and error report in VistaLINK® PRO
- · Fits in 7700 Chassis












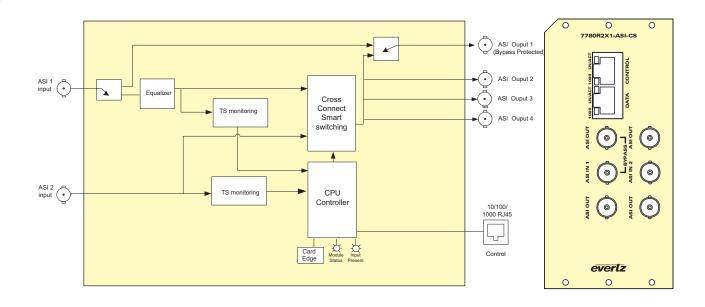

### ▶Specifications

### Inputs and Outputs:

2xASI input per DVB TR 101 891-270Mb/s Min ASI TS input bitrate 100kb/s, Max ASI TS input bitrate 213Mb/s 4xASI output per DVB TR 101 891-270Mb/s Min ASI TS output bitrate 100kb/s, Max ASI TS output bitrate 213Mb/s 1xRJ45 10/100/1000 control port

### Monitored Parameters:

| TR101290 P1                |     | TR101290 P2        |  |  |
|----------------------------|-----|--------------------|--|--|
|                            |     | Transport_error    |  |  |
| 1.2 Sync_byte_error        | 2.2 | CRC error          |  |  |
| 1.3 Pat_error              | 2.3 | PCR_error          |  |  |
| 1.4 Continuity_count_error |     | PCR_accuracy_error |  |  |
| 1.5 PMT_error              |     | PTS_error          |  |  |
|                            | 2.6 | CAT_error          |  |  |

### Tables & Repetition:

DVB SI repetition error (NIT, SDT, EIT, RST, TDT)
ATSC PSIP tables repetition error (MGT, TVCT, CVCT, EIT, RRT, STT)

### PID Template:

TSIP Pidlist Bitrate Limits

Electrical: Power: Physical:

Power: 41W

Number of Slots:

### **>>>**Ordering Information

7780R2x1-ASI-CS Compressed TS automatic Smart Switch

Rear Plate must be specified at time of order

Eg: Model + 3RU

Rear Plate Suffix

**Ordering Options** 

+3RU +SA 3RU Rear Plate for use with 7700FR-C Multiframe

Standalone Enclosure Rear Plate

Enclosures 7700FR-C S7702FR

3RU Multiframe which holds up to 15 single slot modules Standalone enclosure


### Dual Compressed TS Automatic Smart Switch

The 7780R2x1-ASI-CS-2 is a complete hardware base solution for MPEG-2 feed redundancy switching. By providing automatic smart switching of the main signal to a back up signal, the 7780R2x1-ASI-CS-2 offers protection to digital compressed

Controlled by the industry leading VistaLINK® PRO, the 7780R2x1-ASI-CS-2 offers signal providers the capability to design automatic redundancy into their system and alarm the operator the second a problem arises. By constantly monitoring the incoming signals, the 7780R2x1-ASI-CS-2 is capable of knowing when the signals reach a point where they are no longer suitable for broadcast and automatically switches to a backup feed. The user can customize all monitored and switching rules to meet Broadcast, Cable, Satellite and IPTV needs.

### ▶ Features & Benefits

- Two automatic smart switches, each having 2 ASI inputs and 2 ASI outputs
- Fully integrated with the Industry leading VistaLINK® PRO NMS system
- TR101290 monitoring bitrate measurement and component matching test on
- Smart configuration of error threshold and switching rules to avoid false switching
- Delay of stream up to 3 seconds for perfect synchronization of incoming streams from different paths
- Complete TS data rate measurement from 100Kb/s to 120Mb/s with user settable measurement window
- Bitrate measurement on each PID
- · Display of Transport Stream tree
- · Matching of PID assignment, with predefined PID list and TSID
- Complete customization of status view and error report in VistaLINK® PRO
- Fits in 7700 Chassis

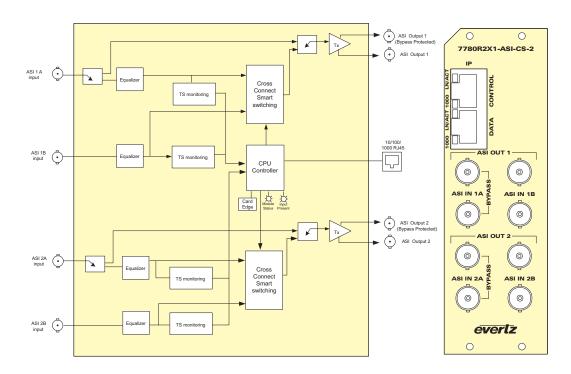

### ▶ Specifications

Inputs and Outputs: 4xASI inputs per DVB TR 101 891-270Mb/s Min ASI TS input bitrate 100kb/s, Max ASI TS input bitrate 120Mb/s 4xASI outputs per DVB TR 101 891-270Mb/s Min ASI TS output bitrate 100kb/s. Max ASI TS output bitrate 120Mb/s 1xRJ45 10/100 control port

### Monitored Parameters:

| TR101290 P1                |     | TR101290 P2        |  |  |
|----------------------------|-----|--------------------|--|--|
| 1.1 TS_sync_loss           | 2.1 | Transport_error    |  |  |
| 1.2 Sync_byte_error        | 2.2 | CRC error          |  |  |
| 1.3 Pat_error              | 2.3 | PCR_error          |  |  |
| 1.4 Continuity_count_error | 2.4 | PCR_accuracy_error |  |  |
| 1.5 PMT_error              | 2.5 | PTS_error          |  |  |
|                            | 2.6 | CAT_error          |  |  |

### Tables & Repetition:

DVB SI repetition error (NIT, SDT, EIT, RST, TDT) ATSC PSIP tables repetition error (MGT, TVCT, CVCT, EIT, RRT, STT)

### Electrical:

41W Power:

### Physical:

Number of Slots: 3

### PID Template:

Pidlist Bitrate Limits

### **>>>**Ordering Information

7780R2x1-ASI-CS-2 Dual Compressed TS Automatic Smart Switch

Rear Plate must be specified at time of order

Eg: Model + 3RU

Rear Plate Suffix

Ordering Options

+3RU +SA

3RU Rear Plate for use with 7700FR-C Multiframe Standalone Enclosure Rear Plate

**Enclosures** 7700FR-C S7702FR

3RU Multiframe which holds up to 15 single slot modules

Standalone enclosure




399


The 7772MED-HD occupies two card slots and can be housed in a 1RU frame that will hold up to 3 modules, a 3RU frame that will hold up to 7 modules or a standalone enclosure which will hold 1 module.

### ▶ Features & Benefits

- Supports 1080i/59.94, 1080i/50, 720p/59.94 and 720p/50 field rates
- Automatic detection of 1080i/720p active lines
- · Handles up to four groups of embedded AES audio
- · Audio delay processing to match video decompression delay
- · Re-embeds original VANC data in outgoing HD-SDI stream
- · Eight separate stereo AES unbalanced outputs

- · Fully hot-swappable from front of frame
- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

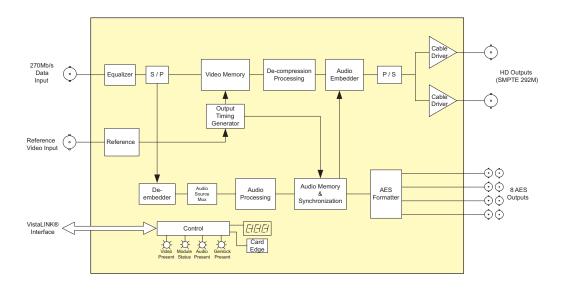

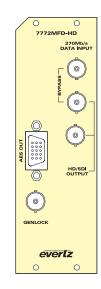

### ▶ Specifications

270Mb/s Data Input:

Standard: SMPTE 259M-C (270Mb/s) Number of Inputs:

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V >15dB @ 270Mb/s Return Loss:

HD Serial Video Output:

SMPTE 292M (1080i/59.94, 1080i/50, Standard:

720p/54.94, 720p/50) Number of Outputs: 2

Connector:

BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: < 200ps nominal Overshoot < 10% of amplitude Wide Band Jitter < 0.2111

**AES Audio Outputs:** 

Standard: SMPTE 276M, single ended AES,

Dolby-E™ Number of Outputs: 8

Connector: BNC per IEC 61169-8 Annex A

Sampling Rate: 48khz

75Ω Impedance: 24-bit Resolution:

Reference Input:

1 BNC per IEC 61169-8 Annex A Connector: Type: HD Tri-level, NTSC/PAL Color Black (1V p-p) or composite bi-level sync

(525i/59.94 or 625i/50) 300mV

Termination: 75Ω iumper selectable

270Mb/s Data Input to HDSDI Output Delay: Delay: ≤ 4 frames interlaced ≤ 8 frames progressive

Electrical: Voltage:

Power. 15W

+12V DC EMI/RFI Complies with FCC Part 15, Class A

EU EMC Directive

Physical:

7700 frame mounting: 2 slots 7701 frame mounting: 1 slot

### **>>>**Ordering Information

7772MFD-HD HD JPEG2000 Decompression Codec

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

The 7772MFC-HD, HDTV Compression Codec utilizes JPEG2000 technology to encode one SMPTE 292M (1.485Gb/s) serial digital video signal with up to four AES groups of embedded or separate audio, into one 270Mb/s compliant data output stream. The 7772MFC-HD also preserves VANC data in the incoming HD-SDI stream and transports this across the 270Mb/s interface. Automatic detection and support of 1080i/59.94, 1080i/50, 720p/59.94 and 720p/50 field rates is provided.


Card functions are controlled from the card edge or through the VistaLINK® interface.


The 7772MFC-HD occupies two card slots and is housed in a 1RU frame which holds up to 3 modules, a 3RU frame which will hold up to 7 modules or a standalone enclosure which will hold 1 module.

### ▶ Features & Benefits

- Supports 1080i/59.94, 1080i/50, 720p/59.94, 720p/50 field rates
- · Automatic detection of 1080i, 720p active lines
- · Accepts up to four groups of embedded or separate AES audio
- No compression applied to AES audio streams
- · Preserves VANC from input HD-SDI stream
- · Fully hot-swappable from front of frame

- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP
- VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the

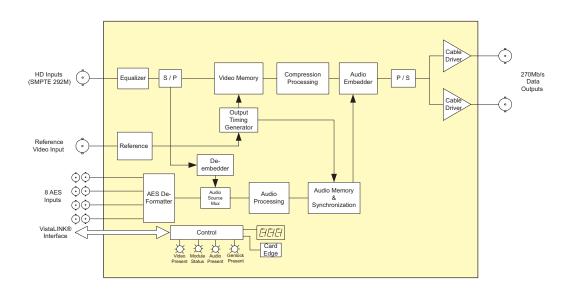



### ▶ Specifications

HD Serial Video Input:

SMPTE 292M, (1080i/59.94, 1080i/50, Standard:

720p/59.94, 720p/50)

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 100m @ 1.5Gb/s with

Belden 1694A or equivalent

270Mb/s Data Output:

Standards: SMPTE 259M-C (270Mb/s) Number of Outputs: 2

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal < 10% of amplitude > 15dB up to 270Mb/s Overshoot: Return Loss

Wide Band Jitter: < 0.2 UI AES Audio Inputs

SMPTE 276M, single ended AES Standard:

Number of Inputs:

Signal Level: 200mv to 1100mv

BNC per IEC 61169-8 Annex A Connector:

Sampling Rate: 48kHz Impedance:  $75\Omega$  balanced Return Loss: > 20dBm Resolution: 24-hit

Reference Input:

1 BNC per IEC 61169-8 Annex A Connector: Type:

HD Tri-level, NTSC/PAL Color Black (1V p-p) or composite bi-level sync

(525i/59.94 or 625i/50) 300mV Termination: 75 $\Omega$  jumper selectable

HD SDI Input to 270Mb/s Data:

≤ 4 frames interlaced Delay: ≤ 8 frames progressive

Electrical:

+12V DC Voltage:

15W Power: EMI/RFI

Complies with FCC Part 15, Class A FU FMC Directive

7700 frame mounting: 2 slots 7701 frame mounting: 1 slot

### **>>>**Ordering Information

7772MFC-HD HD JPEG2000 Compression Codec

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

The 7772MFX-HD is a JPEG2000 SD & HD encoder and decoder card. The 7772MFX-HD is the most versatile JPEG2000 codec on the market. It offers variable JPEG2000 compression rate on SDI or ASI. The 7772MFX-HD can be reconfigured on the fly to be used as a JPEG2000 encoder or JPEG2000 decoder. The 7772MFX-HD also supports pass through of up to 4 AES groups (8 pairs) of audio embeddeded or can do the embedding of the audio. The card functions are controlled from the card edge or though the VistaLINK® interface.

The 7772MFX-HD is the perfect product to back haul or archive high quality contribution video with low end-to-end delay. The JPEG2000 offers superior quality than MPEG-2 codec without the MPEG-2 blocking artifacts.

### ▶ Features & Benefits

- Supports 1080i/59.94, 1080i/50, 720p/59.94, 720p/50, 480i/29.97, 576i/25
- · Automatic detection of input format
- Handles up to 8 embedded AES pairs of audio (Pass through, no compression)
- Built-in audio embedder/de-embedder
- · All VANC & HANC passthrough


### Additional Encoder Features

- Variable video Bitrate from 15 to 50Mb/s for SD and 65 to 160Mb/s for HD
- Offers control over encoding parameters for optimizing encoding depending on application
- · SDI framing with embedded uncompressed audio
- ASI framing with JPEG2000 encapsulated as piped data
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame


### Additional Decoder Features


- · Audio delay processing to match video decompression delay
- · Eight separate stereo unbalanced outputs

### ▶Encoder

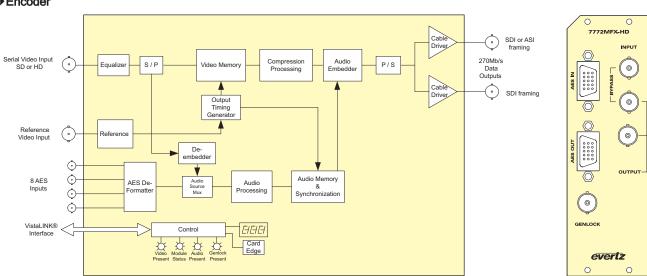

### Decoder

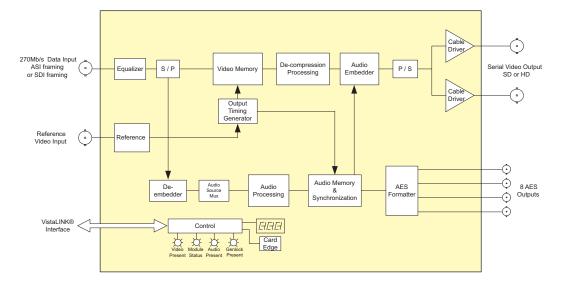



7772MFX-HD



### JPEG2000 SD & HD Encoder and Decoder

### **▶**Specifications

### Serial Video Inputs/Outputs:

Standard:

SMPTE 292M, (1080i/59.94, 1080i/50, HD:

720p/59.94, 720p/50)

SD: SMPTE 259M (480i/29.97, 576i/25)

1 (Encoder) Number of Inputs: Number of Outputs: 2 (Decoder)

BNC per IEC 61169-8 Annex A

JPEG2000 Over SDI Inputs/Outputs:

SMPTE 259M-C (270Mb/s) Standard:

Number of Inputs: 1 (Decoder) Number of Outputs: 2 (Encoder)

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal

JPEG2000 Over ASI Inputs/Outputs:

DVB TR 101 891-270Mb/s Standard:

Number of Inputs: 1 (Decoder) Number of Outputs: 1 (Encoder)

Min ASI TS output bitrate 20Mb/s Max total ASI TS output bitrate 212Mb/s AES Audio Inputs/Outputs:

SMPTE 276M, single ended AES Standard:

Number: Sampling Rate: 48kHz Impedance:  $75\Omega$  balanced SMPTE 272M Embedding:

**Encoding parameters:** 

Control:

CBR or capped VBR mode 15 to 50Mb/s for SD Encoding: Bitrate setting: 65 to 160Mb/s for HD

Control of codec parameters:

Video Bit rate separately adjustable for luma and chroma JPEG2000 Progression Style

Output Code Stream Format VistaLINK® offers setup and remote

monitoring of the card Card edge control for easy setup Reference Input:

1 BNC per IEC 61169-8 Annex A Connector: Type: HD Tri-level, NTSC/PAL Color Black (1V p-p) or composite bi-level sync

(525i/59.94 or 625i/50) 300mV

Termination: 75Ω jumper selectable

Encoding/Decoding Delay:
Total Delay: 4 frames interlaced Total Delay: 6 frames progressive

Electrical:

Voltage: +12V DC

Power:

Complies with FCC Part 15, Class A EMI/RFI

**EU EMC Directive** 

Physical:

7700 frame mounting: 2 slots

### **>>>**Ordering Information

7772MFX-HD JPEG2000 SD & HD Encoder and Decoder

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules 7701FR S7701FR Standalone enclosure









### Transport Stream Generator


The 7750TG-TS Test Signal Generator provides a cost-effective method of generating SMPTE 310M and ASI test signals. The 7750TG-TS is ideal for checking signal path integrity, or to determine system performance over varying cable lengths. The 7750TG-TS generates test signals in either SMPTE 310M or DVB-ASI transport stream formats.

The 7750TG-TS provides an analog genlock input that allows you to synchronize the test signals to your plant horizontal and vertical timing.

### ▶ Features & Benefits

- SMPTE 310M and ASI outputs
- ATSC and MPEG-2 Main Level Main Profile structures multiple bit rates in ASI output mode
- Multiple video test signals, motion and non-motion, each is a fixed loop of GOPs
- · All appropriate tables for ATSC and DVB supported
- Gen locks to bi-level or color black clock or phase lock possible
- · Card edge toggle switch selects test signal

- · On-screen setup menu
- Composite analog output with On-Screen Menu Display on gray
- 8 position DIP switch selects output format
- 2 output drivers
- · Tally output upon loss of gen lock
- · Card edge LEDs indicate gen lock presence, and module status

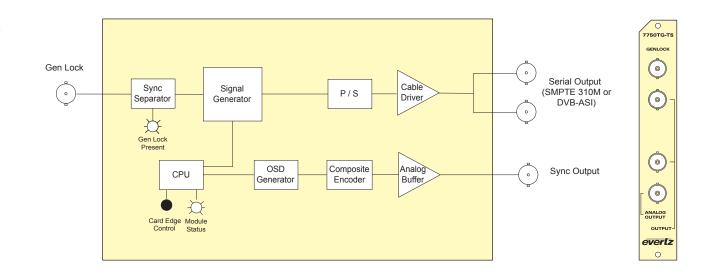

### ▶ Specifications

### Genlock Input:

Menu selectable - depends on output Type: video format NTSC or PAL Color

Black 1V p-p

Composite Bi-level sync (525i) 300mV 1 BNC per IEC 61169-8 Annex A

Connector:  $75\Omega$  (jumper selectable) Termination:

Serial Transport Stream Outputs:

SMPTE 310M (19.4Mb/s) or DVB ASI Standard: (15 to 50Mb/s) (switch selectable)

Number of Outputs:

BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level DC Offset: 0V ±0.5V Rise and Fall Time: 740ps nominal < 10% of amplitude Overshoot:

> 15dB up to 270Mb/s Wide Band Jitter: < 0.2 UI

### Analog Video Output:

NTSC (SMPTE 170M) Standard:

Number of Outputs: 1

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 1V nominal

### Electrical: Voltage:

+12V DC Power

EMI/RFI:

Complies with FCC Part 15, Class A

EU EMC Directive

### Physical:

Number of slots:

### >>> Ordering Information

7750TG-TS SMPTE 310M/DVB-ASI Transport Stream Generator

**Ordering Options** Rear Plate must be specified at time of order

Eg. Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

### Dual HD-SDI Test Signal Generator with Embedded Audio

The 7751TG2-HD Test Signal Generator provides a cost-effective method of generating 1.5Gb/s HDTV 4:2:2 and 4:4:4 test signals. The 7751TG2-HD is ideal for checking signal path integrity, or to determine system performance over varying cable lengths. The 7751TG2-HD generates test signals in a wide variety of SMPTE 292M video formats. In single link mode, the 7751TG2-HD outputs a 4:2:2 black signal on two outputs and the selected 4:2:2 test signal on the remaining two outputs. In dual link mode, the 7751TG2-HD outputs a 4:4:4 test signal on two duallink 4:4:4 outputs. The 7751TG2-HD provides an analog genlock input that allows you to synchronize the test signals to your plant horizontal and vertical timing.


Separate audio tones can be embedded into each channel of the four embedded audio groups. The user can select which of the audio groups the tones will be embedded into. In dual link mode, the selected audio groups will be embedded into each link. The Audio level is fixed at -20dB full scale.

VistaLINK® offers remote monitoring, control and configuration capabilities via Simple Network Management Protocol (SNMP) giving the flexibility to manage operations, including signal monitoring and module configuration from SNMPcapable control systems (Manager or NMS).

### ▶ Features & Benefits

- Wide variety of 1080i, 1035i, 1080p, 480p and 720p output formats
- · 8 position DIP switch selects output format, single or dual link and genlock
- · Card edge toggle switch selects test signal
- Selectable gen lock input format bi-level or tri-level sync, color black
- · Embedded audio tones for 4 groups selectable audio group assignment
- · Closed caption test messages
- 2 black outputs, 2 test gen. outputs in 4:2:2, 2 dual link test gen outputs in 4:4:4
- · On-screen display of test signal names

- · On-screen setup menu
- · Tally output upon loss of gen lock
- · Card edge LEDs indicate gen lock presence, module fault and audio signal presence on the output
- SMPTE 334M EIA 708 advanced captioning test packet
- $\bullet$  VistaLINK  $\!\!^\circ$  -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

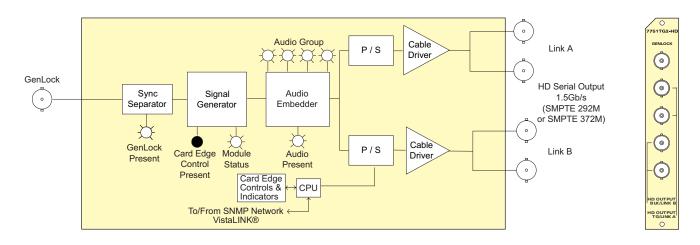

### ▶Specifications

Gen Lock Input:

Type: Menu selectable - depends on output

video format HD Tri-level Sync

NTSC or PAL Color Black 1V p-p

Composite Bi-level sync (525i or 625i)

300 mV

BNC per IEC 61169-8 Annex A Connector: Termination: 75 $\Omega$  (jumper selectable)

**HD Serial Video Outputs:** 

Standard:

Number of Outputs

Single Link Mode:

SMPTE 292M, 4:2:2 YCBCR (single

GBRA (dual link)

SMPTE 372M, 4:4:4 YCBCR or 4:4:4

2 outputs of Black video 2 outputs of selected test signal

Embedded Audio: Up to 4 groups in one audio group as specified in SMPTE 299M. Selectable

tone frequencies (from 60Hz to 10kHz) and audio group. Audio can be embedded on either or both links. Audio Level is set to -20dB Full Scale

Source ID: User-programmable on-screen 15 character source ID message -

selectable position. On-screen message can be displayed on either or both links

4 BNC per IEC 61169-8 Annex A Connectors: Signal Level: 800mV nominal

V Phasing: Infinite lines H Phasing: Infinite samples DC Offset: 0V ±0.5V Rise & Fall Time: 200ps nominal <10% of amplitude

Overshoot: Wide Band Jitter: < 0.2 UI Electrical: Voltage:

+12V DC Power 6W

Complies with FCC Part 15, Class A FMI/RFI

EU EMC Directive

Physical:

7700 or 7701 frame mounting:

Number of slots:

Stand Alone Enclosure:

14"L x 4.5"W x 1.9"H Dimensions:

(355 mm L x 114 mm W x 48 mm H) Weight: approx. 1.5lbs (0.7kg)

Dual Link Mode: 2 dual link outputs of selected test signal

>>>Ordering Information

7751TG2-HD Dual HD-SDI Test signal Generator with embedded audio

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eq. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU 1RU Rear Plate for use with 7701FR Multiframe +1RU

Standalone Enclosure Rear Plate +SA

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

### HD/SD-SDI Test Signal Generator with Trouble Slide


The 7751TG2-CF-HD Test Signal Generator provides a cost-effective method of generating 270Mb/s SDTV 4:2:2 and 1.5Gb/s HDTV 4:2:2 and 4:4:4 test signals. The 7751TG2-CF-HD is ideal for checking signal path integrity, or to determine system performance over varying cable lengths. The 7751TG2-CF-HD generates test signals in a wide variety of SMPTE 292M and SMPTE 259M video formats. In single link mode, the 7751TG2-CF-HD outputs a 4:2:2 black signal on two outputs and the selected 4:2:2 test signal on the remaining two outputs. In dual link mode, the 7751TG2-CF-HD outputs a 4:4:4 test signal on two dual-link 4:4:4 outputs. The 7751TG2-CF-HD provides an analog genlock input that allows you to synchronize the test signals to your plant horizontal and vertical timing.


The 7751TG2-CF-HD provides downloadable bitmaps for trouble or test slides Customers may store their own designed bitmaps (trouble slides, test slides, or test signals) into a directory structure on the compact flash. The module allows users to output one trouble slide on a pair of outputs and another trouble slide on the second pair of outputs. The 7751TG2-CF-HD comes with a 128MB compact flash.

Separate audio tones or user created WAV files can be embedded into each channel of two of the four embedded audio groups. The user can select which of the audio groups the tones will be embedded into. In dual link mode, the selected audio groups will be embedded into each link. The Audio level is fixed at -20dB full

### ▶ Features & Benefits

- Wide variety of 1080i, 1035i, 1080p, 480p, 720p, 525i and 625i output formats · Compact flash for user-created bitmaps (trouble slides, test slides, or test
- Two user-created bitmaps are sent individually on outputs
- User created WAV files can be sent in the embedded audio groups
- 8 position DIP switch selects output format, single or dual link and genlock reference
- · Card edge toggle switch selects test signal
- Selectable gen lock input format bi-level or tri-level sync, color black
- Embedded audio tones for 4 groups selectable audio group assignment
- SMPTE 334M CEA-708 advanced captioning test packet
- · 2 black outputs, 2 test generator outputs
- · On-screen display of test signal names
- On-screen setup menu
- Card edge LEDs indicate gen lock presence, module fault and audio signal presence on the output

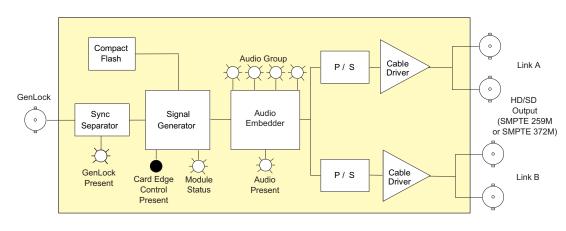



### ▶ Specifications

Gen Lock Input:

Menu selectable - depends on output Type:

video format

HD Tri-level Sync

NTSC or PAL Color Black 1V p-p Composite Bi-level sync (525i or 625i)

Connector: BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

Serial Video Outputs:

SMPTE 259M-C, SMPTE 292M, 4:2:2 Standard:

YCBCR (single link)

SMPTE 372M, 4:4:4 YCBCR or 4:4:4 GBRA (dual link)

Number of Outputs

Single Link Mode: 2 outputs of Black video 2 outputs of selected test signal

Dual Link Mode: 2 dual link outputs of selected test signal

Embedded Audio: Up to 4 groups in one audio group as specified in SMPTE272M or 299M

Selectable tone frequencies (from 60Hz to 10kHz) and audio group. Audio can be embedded on either or both links. Audio Level is set to -20dB Full

Source ID:

User-programmable on-screen 15

character source ID message selectable position. On-screen message can be displayed on either

or both links

Connectors: 4 BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: V Phasing: Infinite lines H Phasing: Infinite samples 0V ±0.5V DC Offset:

200ps nominal (HD) Rise and Fall Time: 740ps nominal (SD) Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

Electrical:

+12V DC Voltage: 6W

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

7700 or 7701 frame mounting:

Number of slots:

### Stand Alone Enclosure

14"L x 4.5"W x 1.9"H Dimensions:

(355mm L x 114mm W x 48mm H)

approx. 1.5lbs (0.7kg) Weight:

### **>>>**Ordering Information

7751TG2-CF-HD HD/SD-SDI Test Signal Generator with Trouble Slide

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe

+1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up tp 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

The 7751SRG-HD generates various analog bi-level & tri-level sync signals for both HD and SD applications. The 7751SRG-HD provides an analog genlock input that allows you to synchronize the sync signals to your plant horizontal and vertical

The 7751SRG-HD generates all analog sync signals defined by SMPTE 274M (1080i/p) and SMPTE 296M (720p) as well as those required for NTSC, PAL and slow PAL (625i/48) applications. Sync signals generated for NTSC, PAL and slow PAL applications are sync signals only and do not incorporate color burst signals.


The four independent sync outputs can be configured to output different sync signals. The common combinations of HDTV and SD analog sync outputs can be selected via card edge control.

In conjunction with the 7700ADA7 Analog Distribution Amplifier and the 7751TG2-HD HDTV Test Signal Generator, this module will fulfill all of your slave sync generation requirements.

### ▶ Features & Benefits

- NTSC or PAL colour black gen lock or free-runs with no gen lock reference
- · Phase adjustment of outputs with respect to gen lock input
- Selectable frame rate divisor of 1 or 1/1.001
- Wide variety of 1080i, 1035i, 1080p, 720p and NTSC/PAL/slow PAL sync output sync signals (excluding burst)
- · HSDL tri level sync for 2K data transfers
- 4 separate analog sync signal outputs

- 6Hz or 1Hz TTL pulse shows relationship between HD & SD Sync outputs
- 8 position DIP switch selects combinations of sync signal available
- · Card edge LEDs indicate gen lock presence, module fault
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

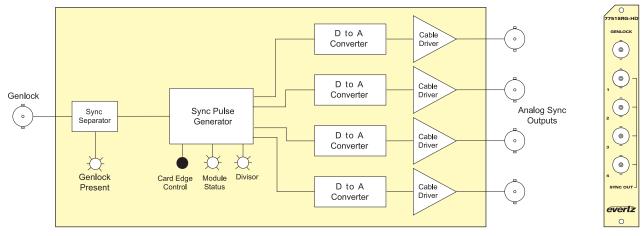

### ▶ Selectable Sync Output Options

|    | Output 1         | Output 2   | Output 3   | Output 4   |
|----|------------------|------------|------------|------------|
| 1  | 1080i/60         | 1080p/24sF | 625i/48    | 6Hz Pulse  |
| 2  | 1080i/50         | 1080p/24sF | 625i/48    | 1Hz Pulse  |
| 3  | 1080p/30         | 1080p/24sF | 625i/48    | 6Hz Pulse  |
| 4  | 1080p/25         | 1080p/24sF | 625i/48    | 1Hz Pulse  |
| 5  | 1080p/24         | 1080p/24sF | 625i/48    | 625i/48    |
| 6  | 1080p/24sF       | 1080p/24sF | 625i/48    | 625i/48    |
| 7  | 720p/60          | 1080p/24sF | 625i/48    | 6Hz Pulse  |
| 8  | 1035i/60         | 1080p/24sF | 625i/48    | 6Hz Pulse  |
| 9  | 1080i/60         | 720p/60    | 525i/59.94 | 525i/59.94 |
| 10 | 1080i/60 V Drive | 1080p/24sF | 625i/48    | 6Hz Pulse  |

### ▶Specifications

Genlock Input:

NTSC or PAL Color Black 1V p-p

Composite Bi-level sync(525i or 625i)

300mV

Connector: 1 BNC per IEC 61169-8 Annex A Termination: 75 $\Omega$  (jumper selectable)

Analog Sync Outputs:

Number of Outputs: 4 Standard:

SMPTE 274M, 296M, NTSC, PAL, 6Hz TTL. HDSL (selectable as per above table)

NTSC/PAL signals are sync signals

only (no burst)
4 BNC per IEC 61169-8 Annex A Connectors:

HD Sync outputs: 600mV nominal tri-level Signal Level: SD Sync outputs: 300mV nominal bi-level

6Hz output: TTL

Electrical:

+12V DC

Voltage 6W EMI/RFI Complies with FCC Part 15, Class A,

EU EMC Directive

Physical:

Number of Slots: 1

### **▶**▶▶Ordering Information

7751SRG-HD HD-SDI Tri-Level Sync Generator

**Ordering Options** Rear Plate and Fiber Connector must be specified at time of order

Eg. Model +3RU +SC

Rear Plate Suffix

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +3RU +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

**Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up tp 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure


The 7750TG Test Signal Generator provides a cost-effective method of generating 270Mb/s serial digital test signals. The 7750TG is ideal for checking signal path integrity, monitor alignment or to determine system performance over varying cable lengths. The 7750TG generates a wide variety of industry standard test signals in 525 line and 625 line SMPTE 259M-C video formats and offers four 270Mb/s outputs. Error detection and handling (EDH) codes are embedded on all the outputs to allow you to verify the performance of your digital signal paths.

The 7750TG provides an analog genlock input that allows you to synchronize the test signals to your plant horizontal and vertical timing.

Separate audio tones can be embedded into each channel of one of the four embedded audio groups. The user can select which of the audio groups the tones will be embedded into. The audio level is fixed at -20dB full scale.

### ▶ Features & Benefits

- 525 line and 625 line formats
- · Card edge toggle switch selects test signal
- · On-screen display of test signal names
- 4 embedded audio tones, selectable audio group assignment
- · 4 output drivers
- On-screen text message can be used for source identification
- · On-screen setup menu
- Card edge LEDs indicate genlock presence and module health

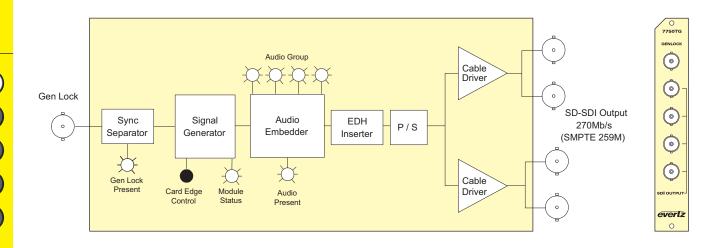

### ▶Specifications

### Genlock Input:

Туре:

NTSC or PAL color black 1V p-p Composite Bi-level sync (525 Line or

625 Line) 300mV

Connector: 1 BNC per IEC 61169-8 Annex A Termination:  $75\Omega$  (jumper selectable)

### Serial Video Output:

Standard: SMPTE 259M-C (270Mb/s)
Embedded Audio: Up to 4 tones in one audio group as

specified in SMPTE 272M. Selectable tone frequencies (from 60Hz to 10kHz) and audio group. Audio level is set to

20dB full scale

Number of Outputs: 4

Connectors: 4 BNC per IEC 61169-8 Annex A
Signal Level: 800mV nominal

Signal Eevel. Soothin Horiman

DC Offset: 0V ±0.5V

Rise and Fall Time: 740ps nominal

Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

### Electrical: Voltage:

oltage: +12V DC

Power: 6W

EMI/RFI: Complies with FCC Part 15, Class A,

EU EMC Directive

### Physical:

Number of Slots:

### >>>Ordering Information

| 7750TG                                   | SD-SDI Test Signal Generator  |
|--|---|
| Ordering Options                         | Rear Plate and Fiber Connector must be specified at time of order Eg. Model +3RU +SC  |
| Rear Plate Suffix<br>+3RU<br>+1RU<br>+SA | 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe<br>1RU Rear Plate for use with 7701FR Multiframe<br>Standalone Enclosure Rear Plate |

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up tp 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

The 350FR Portable Multiframe incorporates today's vast video/audio processing, distribution, and fiber optic needs in one portable package. The 350FR provides backwards compatibility with all existing 77xx series Evertz products. The ability to handle the high-speed requirements of 3G, HD, SD, Analog in both the Electrical and Optical domain makes the 350FR an ideal portable solution.

The 350FR supports hot swapability from the front of the frame without compromising performance or flexibility. The system provides remote monitoring  $\&\,$ control of all 77xx VistaLINK® enabled cards via SNMP for mission critical field applications.

### ▶ Features & Benefits

- · Hot Swappable Power supply and cooling fan
- Houses up to 7 front loading processing modules (77xx)
- Each slot has individually configurable inputs and outputs
- · Monitoring window for verifying modules status and power supply status
- 350FR can house a 7700FC VistaLINK® Frame Controller in slot 1 which will allow for remote control and monitoring of VistaLINK® -capable products via
- · High-speed bussing and control system provided for modular applications
- · No recabling required when hot swapping modules
- Optional redundant external power supply
- · Optional dual unit tray
- · Optional Anton Bauer Quad battery holder



### ▶ Specifications

Module Capacity: 7 single slot modules

Front Panel Indicators:

PSU status LED. Frame Fault LED

Electrical:

Power Supply Configuration:

Dual, redundant, 1 Internal, 1 External Auto ranging, 100 to 240V AC, 50/60Hz Voltage:

Maximum Power Consumption:

105W

2A, 250V time delay Fuses:

5x20mm - line and neutral

(8.25"W x 5.25"H x 14.5"D) Dimensions: (207mm W x 133mm H x 368mm D)

Weiaht: Full: 16lbs (7.25Kg) Empty: 9ibs (4.1Kg)

Physical:

Operating:

Temperature:

0-40°C

Certification:

CSA Listed Safety:

Complies with EU Safety Directive EMC: Complies with FCC part 15,

Class A Complies with EU EMC

Directives

### **>>>**Ordering Information

350FR 3RU Portable Multiframe which holds up to 7 single slot modules with AC power supply

Ordering Options +350PSX

350FR External Power Supply

350BAG

350PS

Optional carrying bag Additional 350FR Internal Power Supply 350PSX Additional 350FR External Power Supply 350FR-RP 350FR-PKIT

Rackmount panel mounts 2 x 350FR enclosures in 3RU rack space Portable kit containing 1 top handle & 4 rubber feet Anton Bauer Quad Pack (no batteries included)



### Compact High Density Balanced Audio Distribution Frame





### **▶**Specifications

Electrical:

AC Mains Input: Auto ranging, 100 to 240V AC, 50/60Hz

Maximum Operating Current: 2.6 A (@ 120V AC), 1.4 A (@ 240V AC)

Maximum Power Consumption: 200W Maximum Module Load:

160W (10W per slot)

Power Supply Configuration

Dual, redundant, separate AC inlets IEC 60320 - 1 per power supply 4 amp, 250 volt time delay 5x20 mm. Connector: Fuses:

- 2 per power supply CSA Listed to CSA C22.2 No. 60065-03, Safety:

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage Directive 93/68/EEC

EMC: Complies with FCC part 15, class A

Complies with EU EMC directive

89/336/EEC

Physical:

Certification:

5.25" (133mm) 19" (483mm) Height: Width: 9.5" (368mm) Depth:

. Module Capacity: 16 slots Weight:

Approx 17lbs (7.7kg) with 2 power supplies, no slots occupied Approx. 32lbs (14.5kg) with 2

power supplies all slots occupied

Safety: CSA Listed

Complies with CE Safety Directive

EMC: Complies with FCC part 15, Class A

EU EMC Directive

Signal Connections: 3-pin removable terminal strips

balanced connection (10 per slot)

Status Indicators:

PSU status LED, Local Error/Failure LED

Tally Output Connector:

4-pin terminal, relay N/O, N/C for status/fault alarm 2A, 12.5VDC max

0-40°C optimal performance Temperature:

0-50°C operating

### **▶▶▶**Ordering Information

400FR Compact High Density Balanced Audio Distribution Frame

Accessories +4PS

Redundant power supply option for 400FR



The 400ADA-AUD Analog Audio Distribution Amplifier is a general-purpose 1x9 amplifier for distributing balanced analog audio signals. It can be operated with either differential or single ended inputs and offers a wide range of gain adjustment to handle a wide variety of input signals.

The 400ADA-AUD is housed in the 3RU 400FR frame that will hold up to 16 modules


### ▶ Features & Benefits

- Differential and single ended input (automatic single ended to differential conversion)
- · High impedance inputs
- · Low impedance outputs
- · Wide gain adjustment range
- · High common mode range and common mode rejection ratio
- Very high SNR

- Very low THD+N
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 400FR frame

### Card Edge LEDs

- Module status/Local Fault
- · Power supply status

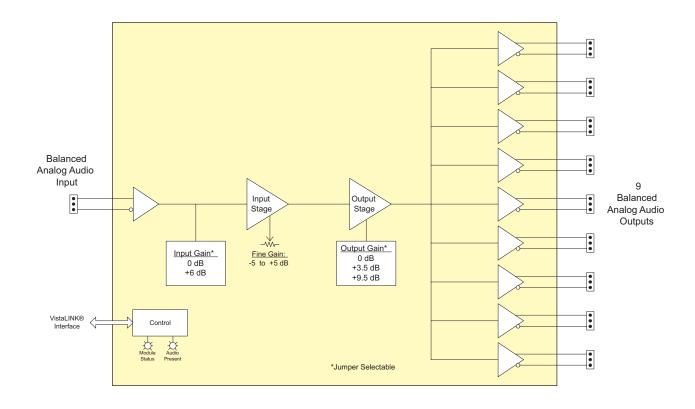

### **▶**Specifications

### Analog Audio Input:

Standards: Any analog audio signal
Number of inputs: 1 (Balanced or Single ended)
Connector: 3-pin removable terminal strips
Input step gain: 0dB or +6dB (configurable with

jumpers)
Fine gain control: -5 to +5dB (card edge pot adjustable)

Maximum input level:
0dB input gain: +34dBu
+6dB input gain: +28dBu
Common mode rejection:

> 105dB @ 60Hz

Common mode range: 0dB input gain:  $> \pm 22V$  +6dB input gain:  $> \pm 7V$  Input impedance: 0dB input gain:  $44k\Omega$  +6dB input gain:  $26k\Omega$ 

## Analog Audio Outputs: 9

Connectors: 3-pin removable terminal strips
Output step gain: 0, 3.5 or 9.5dB (configurable with jumpers)
Max. output level: +28dBu across hi-impedance load

Max. output level: +28 dBu across hi-impedance +24 dBu into  $600\Omega$  load

Output impedance:  $66\Omega$ 

Freq. Response: ±0.03dB 20Hz to 20kHz THD+N: ±0.001% 20Hz to 20kHz @ 28dBu,

unweighted RMS

Output Isolation: > 100dB @ 1kHz, 100 dB @ 20kHz

### Electrical:

Voltage: +12V DC Power: TBD

1

### Physical:

Number of slots:

### **▶** ► ► ► Ordering Information

400ADA-AUD

Analog Audio Distribution Amplifier (1x9)

The 400ADA-AESB is housed in the 3RU 400FR frame that will hold up to 16 modules

### ▶ Features & Benefits

- · Data reclocking provides jitter reduction
- $\bullet \ \mathsf{VistaLINK}^{\circ} \ \mathsf{-capable} \ \mathsf{for} \ \mathsf{remote} \ \mathsf{monitoring} \ \mathsf{via} \ \mathsf{SNMP} \ (\mathsf{using} \ \mathsf{VistaLINK}^{\circ} \ \mathsf{PRO})$ when installed in 400FR frame with 500FC VistaLINK® Frame Controller

### Inputs


- AES3-1992 standard for AES audio on  $110\Omega$  twisted pair cable
- EQ and reclock provide extended cable length compensation (> 300m)
- Transformer coupled  $110\Omega$  balanced input

### Outputs

• Nine  $110\Omega$  balanced

### Card Edge LEDs

- Module Health Status
- · Error LED indication for input PLL out of lock, parity error or biphase coding error
- Reclocked locked

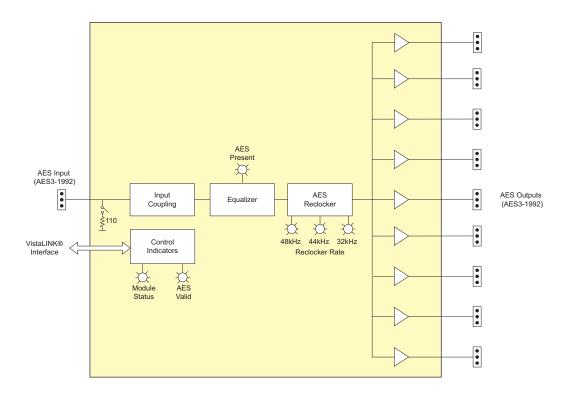

### ▶Specifications

**AES Input:** Standard:

AFS3-1992

Number of Inputs: 1

3-pin removable terminal strip Connector:

Input Level: 2 to 7V p-p Coupling: Transf Input Impedance:  $110\Omega$ Transformer

Return Loss: > 14dB 100kHz to 6MHz

Automatic to 300m with Belden 1800B (or equivalent) @ 48kHz AES signal Equalization:

Sampling Frequency:

32kHz, 44.1kHz, 48kHz and 96kHz

AES Output:

Number of Outputs: 9 Balanced AES reclocked Connector: 3-pin removable terminal strip

5V p-p Output Level: Output Impedance: 110Ω

> 30dB 100kHz to 6MHz Return Loss:

Physical:

Number of Slots: 1 Electrical:

+12V DC Voltage: 5W

Power:

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

### **>>>**Ordering Information

400DA-AESB Balanced AES Audio Distribution Amplifier (1x9) Enclosure 400FR

Compact High Density Balanced Audio Distribution Frame

Accessories +4PS

Redundant power supply option for 400FR



The 400DA2Q-AESB provides an economical method of distribution for your  $110\Omega$ balanced AES digital audio signals. The DAs feature two auto-equalized inputs with four reclocked outputs each. The module can also be configured for one input with eight reclocked outputs for applications where a larger number of outputs are required.

The 400DA2Q-AESB is housed in the 400FR exponent frame that will hold up to 16 modules. The 400DA2Q-AESB card edge LED indicators provide quick and accurate assessment of the incoming signal integrity

### ▶ Features & Benefits

- · Data reclocking provides jitter reduction
- 2 Independent distribution amplifiers with 4 reclocked outputs
- · Can also be configured as 1x8 output distribution amplifier
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 400FR frame with 500FC VistaLINK® Frame Controller

### Inputs


- AES3-1992 standard for AES audio on  $110\Omega$  twisted pair cable
- EQ and reclock provide extended cable length compensation (> 300m)
- Transformer coupled  $110\Omega$  balanced input

### Outputs

Eight 110Ω balanced

### Card Edge LEDs

- · Module Health Status
- Error LED indication for input PLL out of lock, parity error or biphase coding
- · Reclocked locked

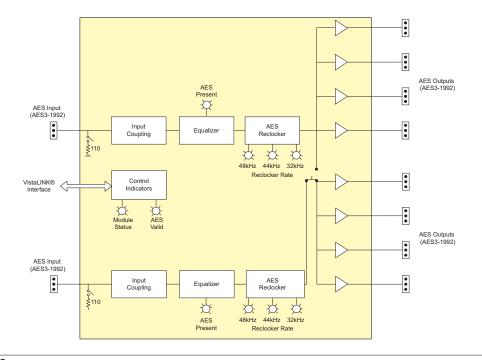

### ▶ Specifications

AES Input:

AES3-1992 Standard:

Number of Inputs:

3-pin removable terminal strip Connector:

Input Level: . 2 to 7V p-p Coupling: Transformer

Input Impedance:  $110\Omega$ 

Return Loss: 14dB 100kHz to 6MHz Equalization: Automatic to 300m with Belden 1800B

(or equivalent) @ 48kHz AES signal

Sampling Frequency:

32kHz, 44.1kHz, 48kHz

**AES Output:** 

Number of Outputs: 4 balanced AES reclocked outputs

per input (2 - 1x4 mode)

8 balanced reclocked outputs (1x8

mode) Connector: 3-pin removable terminal strip

Output Level: 5V p-p Output Impedance:

Return Loss: > 30dB 100kHz to 6MHz Physical:

Number of Slots:

Electrical:

Voltage: +12V DC

Power: 5W

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

### **>>>**Ordering Information

400DA2Q-AESB Dual Balanced AES Audio Distribution Amplifier

+4PS

Redundant power supply option for 400FR

Enclosure 400FR

Compact High Density Balanced Audio Distribution Frame

















Note: The above image shows 3 of the S501FR standalone Compact High Density Distribution Frames mounted into the S501FR-RP Rackmount panel S501FR

### **▶**Specifications

Electrical (500FR):

Auto ranging, 100 to 240V AC, 50/60Hz AC Mains Input: Max. Operating Current:

2.6 A (@ 120V AC), 1.4 A (@ 240V AC)

Max. Power Consumption: 200W

Max. Module Load: 160W (10W per slot)

Power Supply Configuration:

Dual, redundant, separate AC inlets IEC 60320 - 1 per power supply 4 amp, 250 volt time delay 5x20 mm. Connector: Fuses:

- 2 per power supply CSA Listed to CSA C22.2 No. 60065-03, Safety:

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage Directive 93/68/EEC

Complies with FCC part 15, class A Complies with EU EMC directive

89/336/EEC

Electrical (S501FR):

12V DC Nominal Voltage:

Auto ranging, 100 to 240V AC power

adapter

Power Consumption:10W max

Fuse: Internal self resetting fuse Connector: 2.5mm DC power jack

Physical (500FR):

5.25" (133mm) Height: Width: 19" (483mm) Depth: 9.5" (368mm) Module Capacity: 16 slots

Approx 17lbs (7.7kg) with 2 power Weight:

supplies, no slots occupied Approx. 32lbs (14.5kg) with 2 power supplies all slots occupied

Physical (S501FR):

4.9"W x 1.2"H x 10.5"D Dimensions:

(124mm W x 30mm H x 267mm D)

Module Capacity: 1 single slot Weight: 1lb (.45kg)

Certification:

Safety: CSA Listed (500FR)

Power adapter CSA listed (S501FR) Complies with CE Safety Directive EMC: Complies with FCC part 15, Class A EU EMC Directive

Signal Connections: BNC Per IEC 61169-8 Annex A (10 per slot)

Status Indicators: PSU status LED.

Local Error/Failure LED

Tally Output Connector:

4-pin terminal, relay N/O, N/C for status/fault alarm 2A, 125VDC max

Temperature: 0-40°C optimal performance

0-50°C operating

### >>> Ordering Information

500FR Compact High Density Distribution Frame S501FR

Standalone Compact High Density Distribution Frame

Accessories +5PS

EMC:

exponent

Redundant power supply option for 500FR

S501FR-RP

exponent

Rackmount panel mounts 3 S501FR enclosures in 1RU rack space includes two blank panels for unfilled slots)

# An Industry Comparison Based on 6RU of Rack Space Most Dense Available Evertz **exponent** DA Frame Competitor's DA Frame Competitor's 2RU Frame 2RU 3RH Competitor's 2RU Frame 2RU 3RU Competitor's 2RU Frame 2RU Total Number of Output BNCs per 6RU = 288 Total Number of Output BNCs per 6RU = 240-270

- exponent achieves the highest density with 288 BNC outputs (per 6RU)
- · exponent uses less power supplies thus less points of failure (per 6RU)
- exponent provides a direct connection to an SNMP network. Some competitive pseudo SNMP solutions require intermediate application servers or protocol translators which add latency, single point of failure issues, cost, and complexity.


### Compact High Density Analog & Digital Looping Distribution Frame

The 500FR-L-A & 500FR-L-D expand on Evertz current exponent family of Compact High Density Distribution Frames. The 500FR-L-A maintains the ability to provide high-density distribution of analog signals while the 500FR-L-D maintains the ability to provide high-density distribution of digital signals. They also provide the ability to loop a single analog or digital input source through multiple slots on the The 500FR-L-A allows for the looping of up to 16 (Analog) loop thru modules. The 500FR-L-D allows for the looping of up to 16 (SD SDI) 500DA-L modules or up to 12 (HD) 500DA-HD-L modules. Both frames also allow for the hot swapping of modules from the front without any impact on the input signal to the remaining

### ▶ Typical Application

The typical application for the Loop Thru frames are in a broadcast plant or mobile production units, where distribution of reference and test signals from a single timed source is critical.

The complete Evertz Master Clock SPG solution allows for minimal impact of potential module failures and provides maximum reliability.

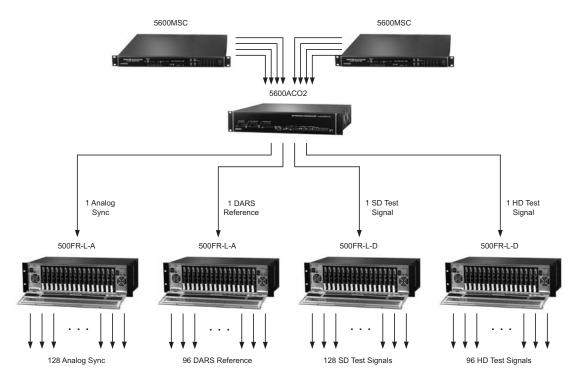

### ▶Specifications

### Electrical:

AC Mains Input: Auto ranging, 100 to 240V AC, 50/60Hz Maximum Operating Current:

2.6 A (@ 120V AC), 1.4 A (@ 240V AC)

200W

Max. Module Load: 160W (10W per slot)

### Power Supply Configuration:

Dual, redundant, separate AC inlets IEC 60320 - 1 per power supply Connector 4 amp, 250 volt time delay 5x20 mm. Fuses - 2 per power supply

CSA Listed to CSA C22.2 No. 60065-03, Safety

UL 60065-03

IEC 60065-(2001-12) 7th Edition Complies with CE Low voltage Directive

93/68/EEC

EMC: Complies with FCC part 15, class A. Complies with EU EMC directive

89/336/EEC

Physical:

Height: 5.25" (133mm) 19" (483mm) Width: 9.5" (368mm) Depth: Module Capacity

Approx. 17lbs (7.7kg) with 2 power Weight: supplies, no slots occupied

Approx. 32lbs (14.5kg) with 2 power supplies all slots occupied

Certification: Safety

CSA Listed Complies with CE Safety Directive

Complies with FCC part 15, Class A EMC:

EU EMC Directive

Signal Connections: BNC Per IEC 61169-8 Annex A

(10 BNC per slot)

Status Indicators: PSU status LED

Local Error/Failure LED

### Tally Output Connector:

4-pin terminal, relay N/O, N/C for status/fault alarm 2A, 125 VDC max

0-40° C optimal performance Temperature:

0-50° C operating

### >>> Ordering Information

500FR-L-A Compact High Density Distribution Frame with Loop Thru (Analog) 500FR-L-D Compact High Density Distribution Frame with Loop Thru (Digital)

Accessories +5PS

exponent


Redundant power supply option for 500FR




The 500FC VistaLINK® Frame Controller handles all SNMP communications between the frame and the network manager (NMS), and serves as a gateway to individual cards in the frame. The 500FC is a true SNMP agent and can be connected directly to your Ethernet/SNMP Network. No external intermediate translator application servers or PC based protocol translators are required.

### ▶ Features & Benefits

- Complies with IEEE 802.3 100Base-TX and 10Base-T Ethernet standards
- 100Mbps Fast Ethernet or 10Mb/s Ethernet data transfer, selected by
- · Full duplex or half-duplex operation, selected by auto negotiation
- RJ-45 connector for network cable connection
- · Front panel LEDs indicate module status
- · Rear panel LEDs indicate Ethernet link, activity and speed
- Provides frame/chassis status information through enabled hardware via SNMP (using VistaLINK $^{\circ}$  PRO) including power supply status, frame status, card insertion/removal counters, 500FC software version number, LED control
- Comprehensive signal and status monitoring through SNMP and VistaLINK®
- · Can be used with 500FR, 500FR-L-A, 500FR-L-D frames

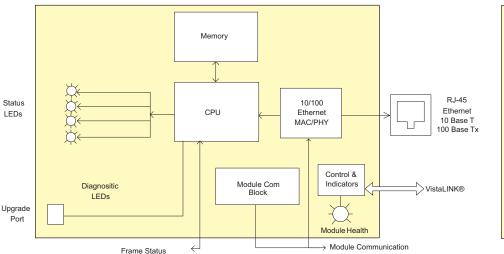



### ▶ Specifications

Ethernet:

Network Type:

Fast Ethernet 100 Base-TX IEEE 802.3u standard for 100 Mbps baseband CSMA/CD local area

Ethernet 10 Base-T IEEE 802.3 standard for 10 Mbps baseband CSMA/CD local area network

Connector: **RJ-45**  Electrical:

Voltage: +12V DC

7W Power: EMI/RFI:

Complies with FCC Part 15 Class A

EU EMC directive

Physical:

Number of slots:

### **>>>**Ordering Information

500FC VistaLINK® Frame Controller

Enclosure 500FR

500FR-L-A

Compact High Density Distribution Frame Compact High Density Distribution Frame with Loop Thru (Analog)

500FR-L-D

Compact High Density Distribution Frame with Loop Thru (Digital)

### VistaLINK® Frame Controller with HD/SD-SDI Reclocking DA


The 500FC-DA-HD Frame Controller with Distribution Amplifier card provides a single point of access to communicate with VistaLINK® -capable 500 series of cards. The 500FC-DA-HD provides a 10Base-T/100Base-TX Ethernet port and communication is facilitated through the use of Simple Network Management Protocol (SNMP). The 500FC-DA-HD handles all SNMP communications between the frame (500FR) and the network manager (NMS), and serves as a gateway to individual cards in the frame. The 500FC-DA-HD also provides an RS-232 serial port at the card edge to set up the network addresses.


In addition the 500FC-DA-HD provides an on board reclocking distribution amplifier for HD/SD video signal at rates of 1.5Gb/s and 143Mb/s to 540Mb/s. The DA features an auto-equalized input with eight reclocked outputs and has been designed for use as a SMPTE 292M (1.5Gb/s), DVB-ASI or SMPTE 259M distribution product.

### ▶ Features & Benefits

- Complies with IEEE 802.3 100Base-TX and 10Base-T Ethernet standards
- · 100Mb/s Fast Ethernet or 10Mb/s Ethernet data transfer, selected by auto-negotiation
- · Full duplex or half-duplex operation, selected by auto negotiation
- RJ-45 connector for network cable connection
- Card edge RS-232 serial control port for configuration

- Front panel LEDs indicate module fault
- · Rear panel LEDs indicate Ethernet link, activity and speed
- · Provides frame/chassis status information through enabled hardware via VistaLINK® including frame status, card insertion/removal counters and 500FC-DA-HD software version number

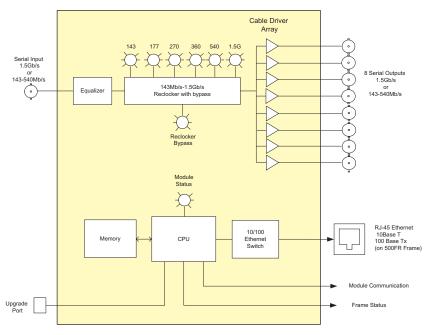



### ▶ Specifications

Serial Video Inputs

Standards: SMPTE 292M, SMPTE 259M-A, B, C, D

(143 to 540Mb/s) or DVB-ASI Connector: 1 BNC per IEC 61169-8 Annex A Automatic to140m @ 1.5Gb/s Equalization: Return Loss: > 15dB up to 1.0Gb/s, > 10dB up to

1.5Gb/s

Serial Video Outputs:

Number of Outputs: 8 (Optionally reclocked)
Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal < 10% of amplitude > 15dB up to 1.0Gb/s Overshoot: Return Loss

> 12dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI Ethernet:

Fast Ethernet 100 Base-TX IEEE Network Type 802.3u standard for 100 Mbps

baseband CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10 Mbps baseband CSMA/CD local area network

Connector: **RJ-45** 

Serial Communications:

Standard: RS-232

9-Pin Female D connector on upgrade Connector: breakout cable (provided with 500FR)

Baud Rate: 57,600

8 bits, no parity, 2 stop bits, no flow Format:

control

Electrical:

Voltage: +12V DC Power 5.5W

EMI/RFI:

Complies with FCC Part 15 Class A and EU EMC directive

Physical:

1 (must be in slot 1 of 500FR) Number of slots

### >>> Ordering Information

500FC-DA-HD VistaLINK® Frame Controller with HD/SD-SDI Reclocking DA (1x8)

Accessories +5PS

exponent

Redundant power supply option for 500FR

Enclosures 500FR S501FR

exponent

Compact High Density Distribution Frame

Standalone enclosure










In addition to the 500FC-DA-HD-L provides an on-board reclocking distribution amplifier for HD/SD-SDI video signals are rates of 1.5Gb/s and 143Mb/s to 540Mb/s. The distribution amplifier features an auto-equalizing input with eight reclocked outputs and a single passive loop thru. It has been designed for use as a SMPTE 292M (1.5 Gb/s), DVB-ASI or SMPTE 259M distribution product.

### ▶ Features & Benefits

- Mode for SMPTE 292M (1.5Gb/s) or SMPTE 259M (143-360Mb/s)
- Fully hot-swappable from front of frame with no BNC disconnect required
- Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · Module health and Status LEDs
- · Carrier Present LEDs for each DA channel
- Tally output on Frame Status bus upon loss of input signal
- Complies with IEEE 802.3 100Base-TX and 10Base-T Ethernet standards
- 100Mb/s Fast Ethernet or 10Mb/s Ethernet data transfer, selected by autonegotiation
- Full duplex or half-duplex operation, selected by auto negotiation
- RJ-45 connector for network cable connection
- · Card edge RS-232 serial control port for configuration
- · Rear panel LEDs indicate Ethernet link, activity and speed
- · Provides frame/chassis status information through enabled hardware via
- VistaLINK® including frame status, card insertion/removal counters, and 500FC-DA-HD-L software version number

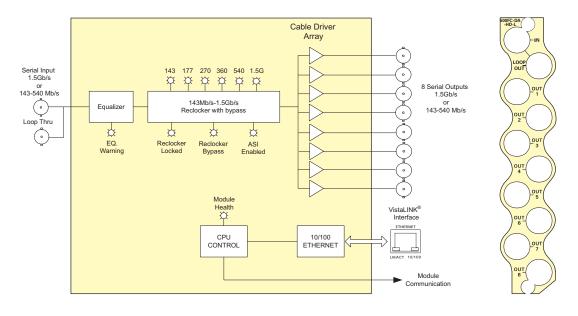

### ▶Specifications

### Serial Video Inputs:

Standards: SMPTE 292M, SMPTE 259M-A, B, C, D (143 to 540Mb/s) or DVB-ASI

1 BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to100m @ 1.5Gb/s

Return Loss: >15dB up to 1.0Gb/s >10dB up to 1.5Gb/s

Serial Video Outputs:

Number of Outputs: 8 (Optionally reclocked)
Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal

<10% of amplitude Overshoot: >15dB up to 1.0Gb/s Return Loss

>12dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI Ethernet:

Network Type Fast Ethernet 100 Base-TX IEEE

802.3u standard for 100 Mbps baseband CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10 Mbps baseband

CSMA/CD local area network

**RJ-45** Connector:

**Serial Communications:** Standard: RS-232

Connector: 9-Pin Female D connector on upgrade breakout cable (provided

with 500FR)

Baud Rate: 57,600

Format 8 bits, no parity, 2 stop bits, no flow

control

Electrical: Voltage:

+12V DC Power 5.5W

EMI/RFI: Complies with FCC Part 15 Class A

and EU EMC directive

Physical:

1 Number of slots:

### >>> Ordering Information

500FC-DA-HD-L

VistaLINK® Frame Controller and HD/SD-SDI Reclocking Distribution

Amplifier with Loop Thru

+5PS Redundant power supply option for 500FR Enclosures 500FR-L-D

exponent

Compact High Density Distribution Frame with loop (digital)

# SD-SDI Reclocking Distribution Amplifier with Loop Thru u

The 500DA-L is a SD-SDI Reclocking Distribution Amplifier for use in the Evertz high density digital looping frame (the 500FR-L-D). The 500DA-L supports all data rates included in SMPTE 259M (143-360Mb/s) and SMPTE 344M (540Mb/s) as well as DVB-ASI. The 500DA-L features auto-equalized inputs with eight serial outputs. When inserted into the 500FR-L-D, a passive loop output is available to enable cascading of multiple DA cards. The passive loop is implemented on the 500FR-L-D back-plane. As result, a failure of any single card or the removal any single card does not affect any other cards being used for signal distribution. Up to 16 500DA-HD-L cards may be cascaded error free in the 500FR-L-D frame. The 500DA-L also features a re-clocker by-pass to support operation with nonstandard data rates like SMPTE 310M and others.

#### ▶ Features & Benefits

- · Automatic equalization, rate detection and re-clocking for all SMPTE 259M (143-360Mb/s) and SMPTE 344M (540Mb/s) data rates
- · Jumper selectable DVB-ASI mode of operation
- Jumper selectable non re-clocked mode for SMPTE 310M and other nonstandard date rates
- · Passive loop output when inserted into the 500FR-L-D
- Error free cascading of up to 16 modules within the 500FR-L-D
- · Fully hot-swappable from front of frame with no BNC disconnect
- Independent isolated output drivers to ensure no cross channel loading effects (ie. no need to terminate unused outputs)
- · Outputs maintain polarity from input to output for DVB-ASI applications
- · Tally output on Frame Status bus upon loss of input signal
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR-L-D with 500FC VistaLINK® Frame Controller

#### Input


- SMPTE 259M (143-360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI and SMPTE 310M (non-reclocked)
- Return Loss > 15dB to 540Mb/s
- Auto equalizing to 400m @ 270Mb/s (Belden 1694A)

## Outputs

- · 8 re-clocked outputs
- 1 passive loop out for cascading multiple cards in 500FR-L-D

#### Card Edge LEDs

- Reclocker rate
- DVB-ASI Enabled
- · Reclocker enabled
- · Max Equalization Warning
- · Module Health Status

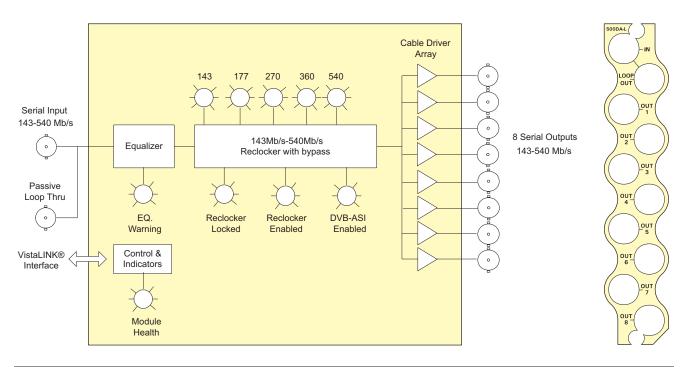

## ▶Specifications

Serial Video Input: SMPTE 259M (143Mb/s-360Mb/s)

SMPTE 344M (540Mb/s) SMPTE 310M (19.4Mb/s) - non reclocked DVB-ASI

Connector: BNC per IEC 61169-8 Annex A Equalization: 1 400m @ 270Mb/s

> 15dB up to 540Mb/s Return Loss:

Serial Video Output:

Reclocked Outputs: 8 Passive Loop Outputs:

Connector: BNC per IEC 61169-8 Annex A DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal

> 15dB up to 540Mb/s Return Loss: Wideband Jitter: < 0.2 U

# >>> Ordering Information

500DA-L SD-SDI Reclocking Distribution Amplifier with Loop Thru

Enclosures

Compact High Density Distribution Frame with Loop Thru (Digital) 500FR-L-D



The 500DA-HD-L features auto-equalized inputs with eight serial outputs. When inserted into the 500FR-L-D, a passive loop output is available to enable cascading of multiple DA cards.

The passive loop is implemented on the 500FR-L-D back-plane. As result, a failure of any single card or the removal any single card does not affect any other cards being used for signal distribution. Up to 12 500DA-HD-L cards may be cascaded error free in the 500FR-L-D frame. The 500DA-HD-L also features a re-clocker bypass to support operation with non-standard data rates like SMPTE 310M and

### ▶ Features & Benefits

- Automatic equalization, rate detection and re-clocking for all SMPTE 292M (1.5Gb/s), SMPTE 259M (143-360Mb/s) and SMPTE 344M (540Mb/s) data rates
- Jumper selectable DVB-ASI mode of operation
- Jumper selectable non re-clocked mode for SMPTE 310M and other non-standard date rates
- · Passive loop output when inserted into the 500FR-L-D
- Error free cascading of up to 12 modules within the 500FR-L-D
- · Fully hot-swappable from front of frame with no BNC disconnect
- Independent isolated output drivers to ensure no cross channel loading effects (ie. no need to terminate unused outputs)
- Outputs maintain polarity from input to output for DVB-ASI applications
- Tally output on Frame Status bus upon loss of input signal
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR-L-D with 500FC VistaLINK® Frame Controller

#### Input


- SMPTE 292M (1.5Gb/s), SMPTE 259M (143-360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI and SMPTE 310M (non-reclocked)
- Return Loss > 15dB to 1.5Gb/s
- Auto equalizing to 140m @ 1.5Gb/s and 400m @ 270Mb/s (Belden 1694A)

#### Outputs

- · 8 re-clocked outputs
- 1 passive loop out for cascading multiple cards in 500FR-L-D

## Card Edge LEDs

- Reclocker rate
- DVB-ASI Enabled
- Reclocker enabled
- · Max Equalization Warning
- · Module Health Status

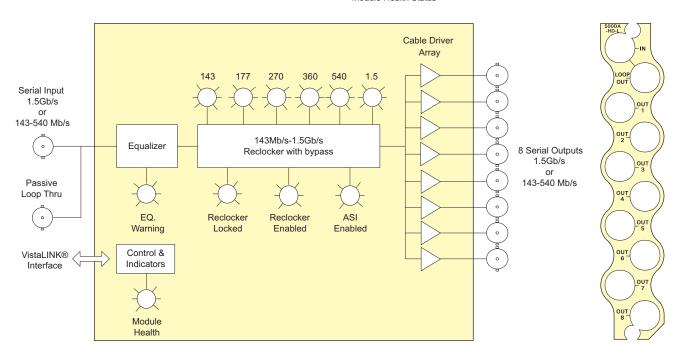

# ▶Specifications

#### Serial Video Input:

Standard: SMPTE 292M (1.5Gb/s)

SMPTE 259M (143Mb/s-360Mb/s) SMPTE 344M (540Mb/s) SMPTE 310M (19.4Mb/s) - non

reclocked DVB-ASI
Connector: BNC Per IEC 61169-8 Annex A
Equalization: 140m @ 1.5Gb/s & 400m @ 270Mb/s

Return Loss: > 15dB up to 1.5Gb/s

Serial Video Output:

Reclocked Outputs: Passive Loop Outputs:

Connector: BNC Per IEC 61169-8 Annex A

DC Offset: 0V ±0.5V
Rise and Fall Time: 200ps nominal
Return Loss: > 15dB

## **▶** ► ► ► Ordering Information

500DA-HD-L HD/SD-SDI Reclocking Distribution Amplifier with Loop Thru

Enclosures 500FR-L-D

exponent

Compact High Density Distribution Frame with Loop Thru (Digital)

# Analog Video Distribution Amplifier with Cable Equalization

The 500ADA-EQ-L is an Analog Distribution Amplifier with cable equalization on 8 outputs. It amplifies composite analog for distributing  $75\Omega$  analog video signals

The 500ADA-EQ-L has a user-selectable Low Pass Filter with an 8MHz corner frequency to eliminate unwanted out of band high frequencies. This is ideal for the distribution of master black throughout the broadcast plant.

The module features one balanced equalized input with 8 unbalanced outputs. The 500ADA-EQ-L can also monitor signal and hardware integrity.


When inserted into a 500FR-L-A (Compact High Density Distribution Frame with Analog Loop Thru), the 500ADA-EQ-L allows for passive loop through of an analog video input to the other modules in the frame. The 500ADA-EQ-L is housed in the 3RU exponent 500FR frame or 500FR-L-A that will hold up to 16 modules.

## ▶ Features & Benefits

- · Passive loop thru
- $75\Omega$  or high impedance input
- High common mode range and common mode rejection ratio (CMRR)
- · Jumper selectable low pass input filtering
- Gain control
- Jumper selectable AC or DC coupling
- Jumper selectable fast or slow back porch clamp
- DC level control when clamp is enabled
- Cable post equalizer adjustment on input. Range: 0 to 300m of 8281 or 1694A
- · Consistent input impedance if card power is lost
- · Signal and hardware integrity monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

### Card Edge LEDs

- Module status/Local Fault
- · Signal Status

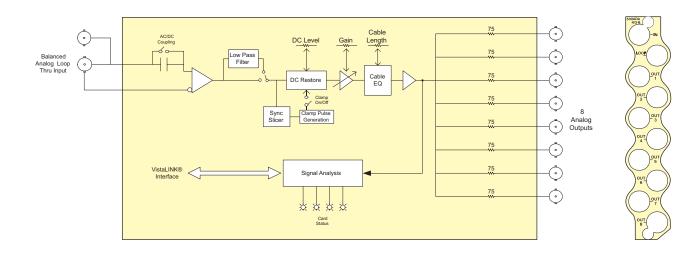

# ▶Specifications

## Analog Video Input:

Standards: NTSC or PAL-B

1 BNC per IEC 61169-8 Annex A Connector: Common mode range:

CMRR: > 70dB to 1kHz Signal amplitude:2.5V p-p max

Cable post, pre- equalizer:

0 to 300m of Belden 8281 or 1694A cable

Hi-Z (Looping) AC or DC (jumper selectable) Impedance: Coupling:

Single Card Return Loss:

> 25dB to 5.5MHz

(De-rate spec. when looping through

multiple 500FR-L-A inputs)

Fast clamp attenuation of 60Hz:

> 20dB

#### Analog Video Outputs:

Number of Outputs: 8 Per Card

BNC per IEC 61169-8 Annex A Connector: Output Impedance:  $75\Omega$ 

Gain control range: +5dB

DC Level: < ±100mV (with DC Coupling active and back porch clamp disabled)

DC Level Control Range:

< ±200mV (with back porch clamp

enabled)

> 42dB to 10MHz, > 32dB to 30MHz Output isolation:

> 40dB to 30MHz Output return loss:

Noise Performance < -70dB RMS 15kHz to 5.5MHz < -78dB RMS NTC7 weighting

Physical:

Number of Slots:

#### Electrical:

Voltage: +12V DC

1.2W Power: EMI/RFI:

Complies with FCC Part 15 Class A

EU EMC Directive

### >>> Ordering Information

500ADA-EQ-L Analog Video Distribution Amplifier with Cable Equalization

**Enclosures** 

500FR-L-A Compact High Density Distribution Frame with Loop Thru (Analog)




16 modules

The 500DA-HD has been designed for use as a SMPTE 292M (1.5 Gb/s), DVB-ASI, SMPTE 259M, or SMPTE 310M distribution product.

The 500DA-HD DA's are housed in the 3RU 500FR frame that will hold up to

### ▶ Features & Benefits

- Normal mode for SMPTE 259M (143 Þ 540 Mb/s) or SMPTE 292M (1.5 Gb/s) signals - autodetects correct bitrate
- · Jumper Selectable mode for DVB-ASI
- Jumper selectable non-reclock mode for SMPTE 310M (19.4Mb/s) signals or any other SDI signal within the 143Mb/s to 1.5Gb/s range
- Fully hot-swappable from front of frame with no BNC disconnect required
- · Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame controller

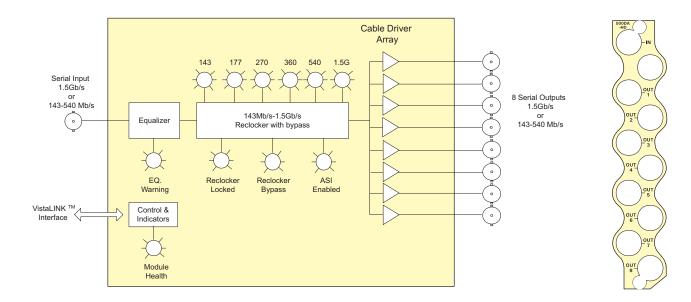

## ▶ Specifications

## Serial Video Inputs:

Standards:

SMPTE 292M (1.5Gb/s), SMPTE 259M (143 to 360Mb/s), SMPTE 344M

(540Mb/s), DVB-ASI

1 BNC per IEC 61169-8 Annex A Connector: Automatic to 350m @ 270Mb/s, 110m Equalization: @ 1.5Gb/s with Belden 1694A (or

equivalent)

> 15dB up to 1.0Gb/s, > 10dB up to Return Loss:

1.5Gb/s

Serial Video Outputs:

Number of Outputs: Connector: Signal Level:

800mV nominal 0V +0.5V DC Offset: Rise and Fall Time: 200ps nominal Overshoot:

< 10% of amplitude Return Loss: > 10dB up to 1.5Gb/s

Wide Band Jitter: < 0.2 UI Electrical:

+12V DC Voltage: Power:

Complies with FCC Part 15 EMI/RFI: Class A and EU EMC directive

Physical:

Number of slots:

### **>>>**Ordering Information

500DA-HD

HD/SD SDI Reclocking Distribution Amplifier (1x8)

**Enclosures** 500FR S501FR

8 (Optionally reclocked)

BNC per IEC 61169-8 Annex A

**exponent**Compact High Density Distribution Frame

# HD/SD SDI Dual Reclocking Distribution Amplifier (2-1x4)

The 500DA2Q-HD Dual HD Reclocking Distribution Amplifier provides the highest density DA in the industry allowing up to 32 HD or SDI Distribution amplifiers in a 3RU rack space. It provides inexpensive distribution of your SMPTE 292M (1.5Gb/s), SMPTE 259M (143 to 360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI or SMPTE 310M (19.4Mb/s) or any other SDI signal within the 143Mb/s to 1.5Gb/s range.

The 500DA2Q-HD features two auto-equalized inputs and can be configured either as a single DA with eight reclocked outputs or as two separate DAs with four outputs each. In the case of dual operation, each DA can be individually set via jumpers for either reclocking or non-reclocking.

The 500DA2Q-HD is housed in the 500FR exponent frame that will hold up to 16 modules.

### ▶ Features & Benefits

- Normal mode for SMPTE 292M (1.5Gb/s) SMPTE 259M (143-360Mb/s) or SMPTE 344M (540Mb/s) signals - autodetects correct bit rate
- Jumper selectable mode for DVB-ASI
- Jumper selectable non-reclock mode for SMPTE 310M (19.4Mb/s) signals or any other SDI signal within the 143Mb/s to 1.5Gb/s range
- · Configurable as 1 DA with 8 outputs or 2 DAs with 4 outputs each
- Fully hot-swappable from front of frame with no BNC disconnect required
- · Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · Module health and 2x4 Mode Status LEDs
- Reclocker(s) Locked, Carrier Present and Video Standard LEDs for each DA channel
- Tally output on Frame Status bus upon loss of input signal
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs


- 2 inputs
- SMPTE 292M (1.5Gb/s), SMPTE 259M (143 to 360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI or SMPTE 310M (19.4Mb/s)
- Auto equalization to 100m Input A, 90m Input B (Belden 1694A) @ 1.5Gb/s

#### Outputs

- · 4 reclocked outputs per input
- Jitter < 0.2 UI

## Card Edge LEDs

- · Module Health Status
- 2x4 mode operation
- Reclocker rate detection
- Reclocker Locked
- Carrier Present

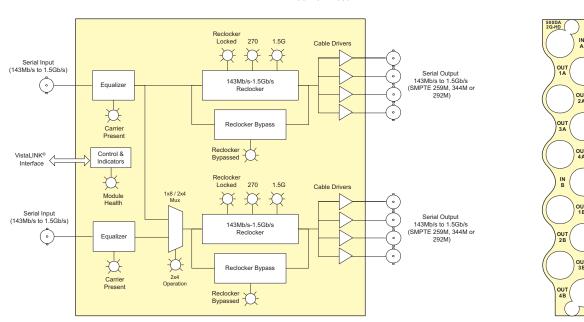

#### ▶ Specifications

#### Serial Video Input: Standards

Non-reclocked:

Reclocked

SMPTE 292M (1.5Gb/s), SMPTE 259M

(143 to 360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI

SMPTE 310M (19.4Mb/s) Any SDI signal in the 143 Mb/s to 1.5 Gb/s

range

Connectors: 2 BNC per IEC 61169-8 Annex A Equalization:

Automatic to 100m @ 1.5Gb/s with Input A: Belden 1694A or equivalent cable

Input B: Automatic to 90m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: > 10dB up to 1.5Gb/s

# Serial Video Outputs:

Number of Outputs: (mode set by jumper) 2x4 Mode:

4 reclocked from each input Reclockers can by bypassed separately

for each input

1x8 Mode: 8 reclocked from Input A (1) Reclockers can by bypassed

BNC per IEC 61169-8 Annex A Connector: Signal Level: 800mV nominal

DC Offset: 0V +0.5V Rise & Fall Time: 200ps nominal < 10% of amplitude Overshoot Return Loss: > 10dB up to 1.5Gb/s

Jitter: < 0.2 UI

#### Electrical: Voltage:

+12V DC 6W Power:

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of slots:

### >>> Ordering Information

500DA2Q-HD HD/SD SDI Dual Reclocking Distribution Amplifier (2-1x4)

exponent Enclosures


500FR Compact High Density Distribution Frame S501FR

The 500ACO2-HD/SD is housed in the 500FR exponent frame that will hold up to 16 modules.

#### ▶ Features & Benefits

- · Auto detection of six signal types
- Five modes of operation (including VistaLINK®)
- Auto changeover two standalone auto changeovers or two link changeovers
- Manual DIP switch control two independently controlled 2x1 switchers
- GPI Control two independently GPI controlled 2x1 switchers
- ACO Extension slave unit of the 5600ACO (requires 5600ACO firmware version 1.2 or higher)
- · Support for VistaLINK® monitoring and control

- Fully hot-swappable from front of frame with no BNC disconnect required
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- · Latching relays maintain the current path on loss of power
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

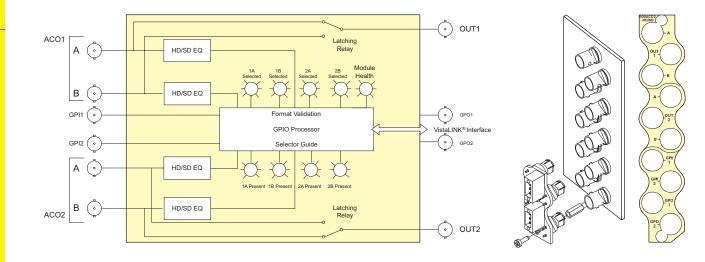

# ▶Specifications

Serial Video Input:

Standards: SMPTE 292M, SMPTE 259M-A, B, C, D

(143 to 540 Mb/s), DVB-ASI, bilevel/tri-level syncs or NTSC/PAL

video

Connector 4 BNC per IEC 61169-8 Annex A Max. Cable Length: 100m of Belden 1694A or equivalent cable combined input and output

Return Loss: 10dB up to 1.5Gb/s

Serial Video Outputs:

Number of Outputs: 2 passive relay outputs Connector BNC per IEC 61169-8 Annex A Max. Cable Length: 100m of Belden 1694A or equivalent cable combined input and output

DC Offset: 0V ±0.5V

Return Loss: 10dB up to 1.5Gb/s **AES Input:** 

Standard: AES-1992 Number of Inputs:

3-pin removable terminal strip Connector:

2V to 7V p-p Level: Coupling: Transformer

Impedance: 1100 Return Loss:

> 14dB 100kHz to 6MHz Equalization: Automatic to 300m with Belden 1800B

(or equivalent) @ 48kHz AES signal

Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

AES Output:

Balanced AES reclocked Type:

Number of Outputs: 4

Connector: 3-pin removable terminal strip (screwdown adapter module included)

Level: 5V p-p

Impedance:  $110\Omega$ 

> 30dB 100kHz to 6MHz Return Loss:

## General Purpose Inputs and Outputs:

Type:

Inputs Opto-isolated input with internal pull-up to

Outputs: Normally 10k internal pull-up to +5V

Ground to rear panel when relay is in active position

Two 3-pin terminal blocks with one

Connector ground each

Signal Level: +5V nominal

Electrical:

Voltage: +12V DC Power. 6W

EMI/RFI:

Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of slots:

# **>>>**Ordering Information

500ACO2-HD/SD Dual HD/SD-SDI Digital Auto Signal (2x1) Changeover

**Enclosures** 500FR S501FR

exponent

Compact High Density Distribution Frame

# HD Downconverter and Distribution Amplifier with Closed Caption Monitoring

The 500DCDA-HD is a reclocking 1.5Gb/s digital video distribution amplifier and a high quality downconverter for HDTV signals. It provides 5 reclocked DA outputs and 4 downconverted SDI or composite analog NTSC/PAL outputs (jumper selectable). It accepts all the popular international SMPTE 292M video formats. When the 500DCDA-HD down converts 1080p/23.98s/59.94 with a 3:2 pulldown, the 3:2 pulldown cadence can free run or lock to embedded SMPTE 12M-2 time

The 500DCDA-HD has color space conversion from ITU rec. 709 to ITU rec. 601, and will provide various down converted formats such as 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze. It supports Widescreen Signaling (WSS).


The module has 10 bit processing and allows for selectable horizontal and vertical filters to control picture sharpness. It also de-embeds two groups of audio and reembeds the audio on the SDI output in time with the video. All parameters may be controlled by use of the on-screen display menu.

The 500DCDA-HD has a closed caption monitoring capability that decodes CEA-608 or CEA-708 captions that have been encoded into the VANC data space of an HD video input, or CEA-608 captions from a SD video input.

## ▶ Features & Benefits

- High quality HD ⇒ SD downconversion
- Serial digital 1.5Gb/s HD input per SMPTE 292M
- · Supports all popular SMPTE 292M formats
- Supports 270 Mb/s SD input in pass-through model (auto-sensing)
- 5 reclocked DA outputs (output follows input)
- 4 Selectable SDI or Composite Outputs (downconverted HD or reclocked SD)
- Supports 16:9 letterbox, 14:9 letterbox, 13:9 letterbox, 4:3 center crop, and 4:3 anamorphic squeeze aspect ratio conversions
- 1080p/23.98sF conversion to 525i/59.94 with 3:2 pulldown sequence
- HD to SD colour space conversion (ITU rec. 709 to ITU rec. 601)
- De-embeds audio from HD and embeds into SD (2 groups)

- Decodes and displays CEA-608 or CEA-708 captions
- · Moves ANC data (e.g. captioning, timecode) from HD to SD
- · Support for Widescreen Signaling (WSS) on output
- On-screen aspect ratio marker
- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP
- VistaLINK® is available when modules are used with the 3RU 500FR-C frame and a 500FC VistaLINK® Frame Controller module in slot 1 of the frame using the Evertz VistaLINK® PRO or other third party SNMP manager software

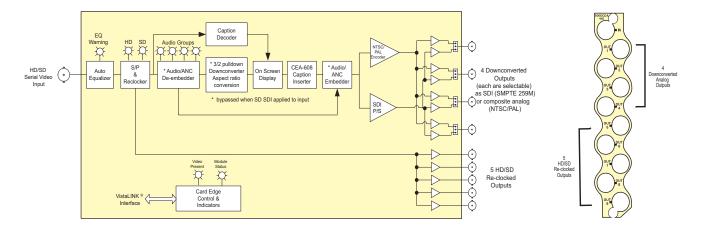

### ▶ Specifications

Serial Video Input:

Standard:

SMPTE 259M - Pass through mode SMPTE 292M (1.5Gb/s), SMPTE260M, 274M, 296M, 349M 1080i/60, 1080i/50, 1080i/50sF, 1080p/30sF,1080p/25sF 1080p/24sF, 1035i/60, 720p/60, 480p/60 and the 1/1.001 divisor versions where applicable software selectable or autodetect

BNC per IEC 61169-8 Annex A Connector Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

> 15dB up to 1.5GHz Return Loss

Reclocked Serial Video DA Outputs:

Same as input (SMPTE 259M or SMPTE 292M) Standard:

Number of Outputs 5 Per Card reclocked Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 200ps nominal for HD 750ps nominal for SD Overshoot: < 10% of amplitude

Return Loss: > 15dB at 1.5Gb/s < 0.2 UI

Downconverted Composite Analog Video Outputs:

Analog composite NTSC (SMPTE Standards: 170M) or Analog composite PAL (ITU-R BT 1700)

Number of Outputs: Up to 4 Per Card (jumper selectable) Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p nominal DC Offset: 0V ± 0.1V > 35dB up to 5MHz Return Loss:

Frequency Response: 0.2dB to 4MHz Differential Phase: < 0.5° (< 0.3° typical) < 0.8% (< 0.5% typical) Differential Gain: SNR: > 78dB to 5MHz (shallow ramp)

Impedance

Downconverted Serial Video Outputs:

SMPTE 259M-C (270Mb/s) Standard: Up to 4 Per Card (jumper selectable) Number of Outputs Connector: BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal Overshoot: < 10% of amplitude > 15dB at 270Mb/s Return Loss:

Jitter:

## Input to Output Processing Delay (HD Input Video):

Just less than 1 to 2 frames depending Video Delay

on input video format, processing mode and phase setting (refer to table 3 in manual)

i.e. with 1080i/59.94 input the delay is < 1 Frame delay

Audio Delay: Audio is delayed and re-embedded in

time with the output picture

Electrical:

Voltage: +12V DC 10W Power:

EMI/RFI: Complies with FCC Part 15 Class A

**EU EMC Directive** 

Physical:

Number of slots

## **▶** ► ► ► Ordering Information

500DCDA-HD

HD Downconverter and Distribution Amplifier with Closed Caption

**Enclosures** 500FR S501FR

**exponent**Compact High Density Distribution Frame

The 500DA has been designed for use as a SMPTE 310M (19.4Mb/s). DVB-ASI or SMPTE 259M distribution product. SMPTE 310M support is selected by setting a rate select jumper.

The 500DA is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

#### ▶ Features & Benefits

- Normal mode for SMPTE 259M (143 to 540Mb/s) or DVB-ASI signals autodetects correct bitrate
- Jumper Selectable mode for SMPTE 310M (19.4Mb/s)
- Fully hot-swappable from front of frame with no BNC disconnect required
- Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- Outputs maintain polarity from input to output for DVB-ASI applications
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

- SMPTE 259M-A, B, C, D (143Mb/s to 540Mb/s), DVB-ASI, SMPTE 310M (19.4Mb/s) (jumper selectable)
- Return loss > 15dB up to 540Mb/s
- 440m auto eq. at 270Mb/s (Belden 1694A)

#### Outputs

- 9 reclocked outputs
- Return loss > 15dB up to 540Mb/s
- Wideband jitter < 0.2 UI

#### Card Edge LEDs


- Reclocker rate (5 LEDs)
- Reclocker Locked
- · Max. Equalization Warning
- 310M Reclocker Enable
- · Module Health Status









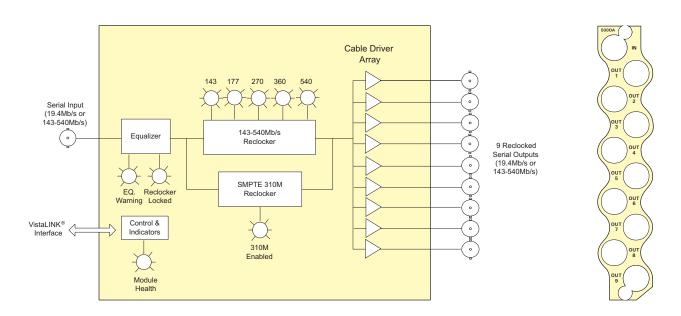

# ▶Specifications

## Serial Video Input:

Standard: 259 Mode:

SMPTE 259M-A, B, C, D (143 to 540Mb/s) or DVB-ASI

310 Mode: Connector: Equalization:

SMPTE 310M (19.4Mb/s) BNC per IEC 61169-8 Annex A Automatic to 440m @ 270Mb/s with

Return Loss

Belden 1694A > 15dB up to 540Mb/s Serial Video Output:

Number of Outputs: 9 Reclocked Connector

BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 470ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 540Mb/s

Wideband Jitter:

Electrical:

Voltage: +12V DC Power 6W

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of Slots:

# >>> Ordering Information

500DA

SD-SDI Reclocking Distribution Amplifier - (1x9)

Enclosures 500FR S501FR

exponent

Compact High Density Distribution Frame

The 500DA2Q Reclocking Distribution Amplifier provides the highest density DA in the industry allowing up to 32 SD distribution amplifiers in a 3RU rack space. It provides inexpensive distribution of your SMPTE 259M (143 to 360Mb/s), SMPTE 344M (540Mb/s), or SMPTE 310M (19.4Mb/s) signals. The 500DA2Q features two auto-equalized inputs and can be configured either as a single DA with eight reclocked outputs or as two separate DAs with four outputs each.

In the case of dual operation, each DA can be individually set via jumpers for either SMPTE 259M/344M or SMPTE 310M reclocking.

The 500DA2Q is housed in the 3RU 500FR **exponent** frame that will hold up

## ▶ Features & Benefits

- Normal mode for SMPTE 259M (143-360Mb/s), SMPTE 344M (540Mb/s) or DVB-ASI signals - autodetects correct bit rate
- Jumper selectable mode for SMPTE 310M (19.4Mb/s) signals
- Configurable as 1 DA with 8 outputs or 2 DAs with 4 outputs each
- Fully hot-swappable from front of frame with no BNC disconnect required
- · Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · Module health and 2x4 Mode status LEDs
- Reclocker(s) Locked, Cable Length Warning and Video Standard LEDs for each DA channel
- · Tally output on Frame Status bus upon loss of input signal
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs

- 2 inputs
- SMPTE 259M (143 to 360Mb/s), SMPTE 344M (540Mb/s), DVB-ASI or SMPTE 310M (19.4Mb/s)


- Return loss > 15dB up to 540Mb/s
- · 300m auto eq. at 270Mb/s (Belden 8281)
- 210m auto eq. at 540Mb/s (Belden 8281)


#### Outputs

- 4 reclocked outputs per input
- Return loss > 15dB up to 540Mb/s
- Jitter < 0.2 UI

### Card Edge LEDs

- · Module Health Status
- · 2x4 mode operation
- · Reclocker rate (detection)
- Reclocker Locked
- · Max. Equalization Warning

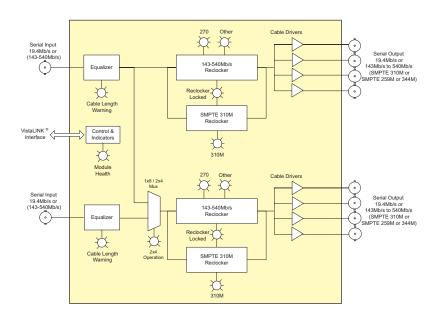

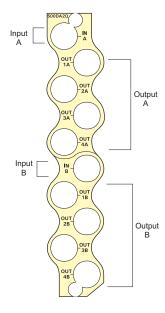

# ▶Specifications

#### Serial Video Input: Standards:

Return Loss:

SMPTE 259M (143 to 360Mb/s) SMPTE 344M (540Mb/s), SMPTE Reclocked 310M (19.4Mb/s) DVB-ASI

Non-reclocked: Any SD signal in the143Mb/s to 540Mb/s range

2 BNC per IEC 61169-8 Annex A Connectors: Equalization:

Automatic to 400m @ 270Mb/s with Belden 1694A or equivalent cable (325m in mixed HD/SD frame

applications) > 15dB up to 270Mb/s Serial Video Output:

Number of Outputs(mode set by jumper): 2x4 Mode: 4 reclocked from each input

1x8 Mode 8 reclocked from Input A (1) BNC per IEC 61169-8 Annex A Connector: Signal Level: 800mV nominal

0V ±0.5V DC Offset: Rise & Fall Time: 740ps nominal < 10% of amplitude Overshoot: Return Loss: > 15dB up to 270Mb/s

< 0.2 UI Jitter:

Physical: Number of slots:

Electrical:

+12V DC Voltage: 6W

Power: EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

## **▶** ► ► Ordering Information

500DA2Q Dual Reclocking Distribution Amplifier (2-1x4) **Enclosures** 500FR S501FR

Compact High Density Distribution Frame



# 3G/HD/SD-SDI Dual Reclocking Distribution Amplifier (32-1x4 DA's in 3RU Rack Space)

The 500DA2Q-3G Dual 3G/HD/SD-SDI Reclocking Distribution Amplifier provides the highest density DA in the industry allowing up to 32-3Gb/s, HD-SDI or SD-SDI Distribution amplifiers in a 3RU rack space. This module provides inexpensive distribution of your SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s), DVB-ASI or SMPTE 310M (19.4Mb/s) or any other SDI signal within the 143Mb/s to 1.5Gb/s range.

The 500DA2Q-3G features two auto-equalized inputs and can be individually set via jumpers for either reclocking or non-reclocking.

The 500DA2Q-3G is housed in the 500FR **exponent** frame that will hold up to 16

#### ▶ Features & Benefits

- Normal reclocked mode for SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s) and SMPTE 259M (270Mb/s)
- Jumper selectable non-reclocked mode for all other SMPTE 344M, SMPTE 259M, SMPTE 310M and DVB-ASI data rates
- · Fully hot-swappable from front of frame with no BNC disconnect required
- Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · Outputs maintain polarity from input to output for DVB-ASI applications
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

- 2 inputs
- SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s) when set to re-clocking mode.


- SMPTE 344M (540Mb/s), SMPTE 259 (360Mb/s, 143Mb/s), SMPTE 310M
- (19.4Mb/s), DVB-ASI when not re-clocking
- Return Loss > 15dB to 1.5Gb/s and > 10dB up to 3Gb/s
- Auto equalization to 80m at 3Gb/s, 140m @ 1.5Gb/s and 350m @ 270Mb/s


#### Outputs

- 4 reclocked outputs per input
- Return Loss > 15dB to 1.5Gb/s
- Wideband jitter < 0.2 UI

#### Card Edge LEDs

- Reclocker rate (3 LEDS)
- Reclocker locked
- · Reclocker bypass
- · Module Health Status

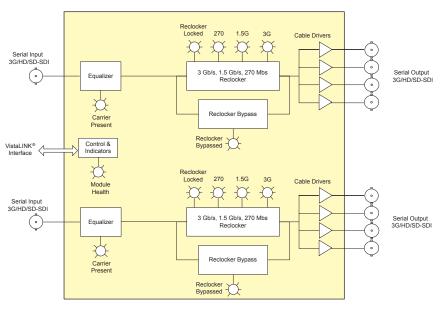



## ▶ Specifications

#### Serial Video Input: Standards

Reclocked Mode:

SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gbs), SMPTE 259M (270Mb/s) Non Reclocked Mode: SMPTE 344M (540Mb/s), SMPTE

259M (360Mb/s, 143Mb/s), SMPTE 310M (19.4Mb/s), DVB-ASI 2 BNC per IEC 61169-8 Annex A

Connector: Equalization:

Input A:

Automatic to 80m @ 3Gb/s, 100m @ 1.5Gb/s and 350m @ 270Mb/s with

Belden 1694A or equivalent cable Automatic to 70m @ 3Gb/s, 90m @ Input B: 1.5Gb/s and 350m @ 270Mb/s with Belden 1694A or equivalent cable

> 10dB up to 3Gb/s Return Loss:

Serial Video Outputs:

Jitter:

Number of Outputs: (mode set by jumper) 2x4 Mode:

4 reclocked from each input. Reclockers can by bypassed separately for each input

BNC per IEC 61169-8 Annex A Connector: 800mV nominal

Signal Level: DC Offset: 0V ±0.5V Rise & Fall Time: 200ps nominal Overshoot: < 10% of amplitude Return Loss: > 10dB up to 1.5Gb/s

< 0.2 UI

Electrical:

Voltage: Power 6W

FMI/RFI Complies with ECC Part 15 Class A

EU EMC Directive

Physical:

Number of slots:

## **▶** ► ► ► Ordering Information

500DA2Q-3G

3G/HD/SD SDI Dual Reclocking Distribution Amplifier (32-1x4 DA's in

**Enclosures** 500FR S501FR

exponent

Compact High Density Distribution Frame Standalone enclosure



# 3G/HD/SD-SDI Dual Non-Reclocking Distribution Amplifier (32-1x4 DA's in 3RU Rack Space)

The 500DA2Q-3G-N dual 3G/HD/SD-SDI Non-Reclocking Distribution Amplifier provides the highest density DA in the industry allowing up to 32 3Gb/s, HD-SDI or SD-SDI Distribution amplifiers in a 3RU rack space. This module provides inexpensive distribution of your SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s), DVB-ASI or SMPTE 310M (19.4Mb/s) or any other SDI signal within the 143Mb/s to 1.5Gb/s

The 500DA2Q-3G-N is housed in the 500FR **exponent** frame that will hold up to 16 modules.

#### ▶ Features & Benefits

- Non-reclocking for SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s) and SMPTE 259M (270Mb/s)
- Fully hot-swappable from front of frame with no BNC disconnect required
- · Independent isolated output drivers to ensure no cross channel loading effects (i.e. no need to terminate unused outputs)
- · Outputs maintain polarity from input to output for DVB-ASI applications
- · Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller


- · 2 inputs
- SMPTE 344M (540Mb/s), SMPTE 259 (360Mb/s, 143Mb/s), SMPTE 310M
- (19.4Mb/s), DVB-ASI non-reclocking
- Return Loss > 15dB to 1.5Gb/s and > 10dB up to 3Gb/s
- Auto equalization to 80m at 3Gb/s, 140m @ 1.5Gb/s and 350m @ 270Mb/s


#### Outputs

- 4 reclocked outputs per input
- Return Loss > 15dB to 1.5Gb/s
- Wideband jitter < 0.2 UI

## Card Edge LEDs

· Module Health Status

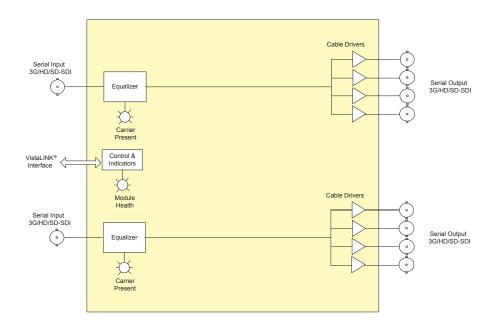



# ▶Specifications

# Serial Video Input:

Standards:

SMPTE 344M (540Mb/s), SMPTE 259M (360Mb/s, 143Mb/s), SMPTE 310M (19.4Mb/s), DVB-ASI

2 BNC per IEC 61169-8 Annex A

Connector: Equalization: Input A:

Automatic to 80m @ 3Gb/s, 100m @ 1.5Gb/s and 350m @ 270Mb/s with Belden 1694A or equivalent cable

Automatic to 70m @ 3Gb/s, 90m @ Input B: 1.5Gb/s and 350m @ 270Mb/s with

Belden 1694A or equivalent cable

> 10dB up to 1.5Gb/s Return Loss:

#### Serial Video Outputs:

Number of Outputs: 4 non-reclocked outputs from each

BNC per IEC 61169-8 Annex A Connector: Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise & Fall Time: 200ps nominal Overshoot: < 10% of amplitude > 10dB up to 1.5Gb/s Return Loss:

< 0.2 UI Jitter

#### Electrical:

+12V DC Voltage: 6W Power:

Complies with FCC Part 15 Class A EMI/RFI:

EU EMC Directive

Physical:

Number of slots:

# >>> Ordering Information

500DA2Q-3G-N

3G/HD/SD SDI Dual Non-Reclocking Distribution Amplifier (32 1x4

DA's in 3RU Rack Space)

Enclosures: 500FR S501FR

#### exponent

Compact High Density Distribution Frame Standalone enclosure



# 3Gb/s SDI Reclocking Distribution Amplifier (1x8)

The 500DA-3G reclocking distribution amplifier provides inexpensive distribution of your SMPTE 424M, SMPTE 292M and SMPTE 259M serial digital video signals at rates of 3Gb/s, 1.5Gb/s and 270Mb/s. The DA supports all other all other SMPTE 344M, SMPTE 259M, SMPTE 310M and DVB-ASI data rates in a non-reclocked mode (540Mb/s, 360Mb/s, 143Mbs/, 19.4Mb/s).

Ideal in applications where a large quantity of outputs are required, the DA features an auto-equalized input with eight isolated reclocked outputs.

The 500DA-3G is housed in in the 3RU 500FR exponent frame that will hold up to 16 cards.

### ▶ Features & Benefits

- Normal reclocked mode for SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s) and SMPTE 259M (270Mb/s)
- Jumper selectable non-reclocked mode for all other SMPTE344M, SMPTE 259M, SMPTE 310M and DVB-ASI data rates
- Fully hot-swappable from front of frame with no BNC disconnect required
- · Independent isolated output drivers to ensure no cross channel loading effects (ie. no need to terminate unused outputs)
- · Outputs maintain polarity from input to output for DVB-ASI applications
- Tally output on Frame Status bus upon loss of input signal for quality monitoring
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Input


- SMPTE 424M (3Gb/s), SMPTE 292M (1.5Gb/s), SMPTE 259M (270Mb/s) when
- SMPTE 344M (540Mb/s), SMPTE 259 (360Mb/s, 143Mb/s), SMPTE 310M (19.4Mb/s), DVB-ASI when not re-clocking
- Return Loss > 15dB to 1.5Gb/s and > 10dB up to 3Gb/s
- Auto equalization to 80m at 3Gb/s, 140m @ 1.5Gb/s and 350m @ 270Mb/s

#### Outputs

- · 8 reclocked outputs
- Return Loss > 15dB to 1.5Gb/s
- Wideband jitter < 0.2 UI

#### Card Edge LEDs

- Reclocker rate (3 LEDS)
- Reclocker locked
- Reclocker bypass
- Max Equalization Warning
- · Module Health Status

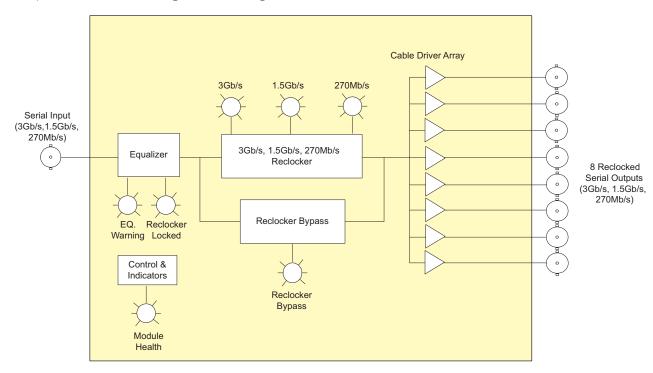

Equalization:

Return Loss

# ▶ Specifications

Serial Video Input:

Reclocked Mode: SMPTE 424M (3Gb/s) SMPTE 292M (1.5Gbs)

SMPTE 259M (270Mb/s)

Non Reclocked Mode: SMPTE 344M (540Mb/s)

SMPTE 259M (360Mb/s, 143Mb/s) SMPTE 310M (19.4Mb/s), DVB-ASI

Connector: BNC per IEC 61169-8 Annex A Serial Video Output:

Number of Outputs: 8 Reclocked

BNC per IEC 61169-8 Annex A Connector: DC Offset: 0V ± 0.5V

Rise and Fall Time:

: 150ps @ 3G/HD, 470ps SD nominal > 15dB up to 1.5Gb/s Return Loss:

Wideband Jitter: < 0.2 UI

#### **>>>**Ordering Information

500DA-3G 3Gb/s SDI Reclocking Distribution Amplifier - (1x8) **Enclosures** 500FR S501FR

Automatic to 80m @ 3Gb/s, 140m @

1.5Gb/s & 350m @ 270Mb/s

> 15dB up to 1.5Gb/s

> 10dB up to 3Gb/s

Compact High Density Distribution Frame

# SD-SDI Monitoring Reclocking Distribution Amplifier

The 500VMDA Reclocking Distribution Amplifier provides inexpensive distribution and monitoring of your SMPTE 259M (270MB/s) serial digital video signal. The DA features an auto-equalized input with nine outputs that can be selected as either SDI or composite analog. The 500VMDA in conjunction with the 500DCDA-HD gives an upgrade path to monitoring future HD-SDI signals without having to re-wire your installation.

The 500VMDA is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules

### ▶ Features & Benefits

- Fully hot-swappable from front of frame with no BNC disconnect required
- Tally output on Frame Status bus upon loss of input signal
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Input


• Supports SMPTE 259M-C (270Mb/s) video with embedded audio

#### Output

- 9 outputs selectable as SD-SDI or composite analog (NTSC/PAL)
- Independent isolated output drivers to ensure no cross channel leading effects (i.e. no need to terminate unused outputs)
- · Selectable NTSC pedestal on/off
- · Passes embedded audio to SD-SDI output

## Card Edge LEDs

- Reclocker Locked
- · Max. Equalization Warning
- Module Health Status
- · Video present, cable length warning and video standard LEDs

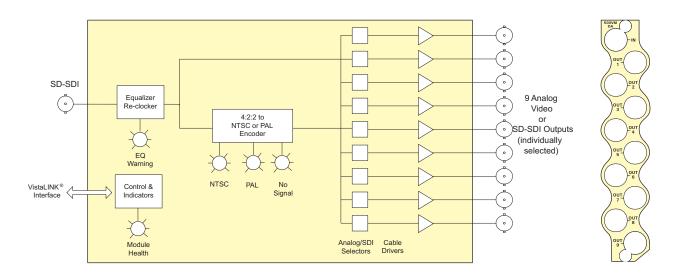

## ▶ Specifications

Serial Video Input:

SMPTE 259M-C (270Mb/s) 525 or

625 line

Connector: 1 BNC per IEC 61169-8 Annex A Automatic to 430m @ 270Mb/s with Equalization:

Belden 1694A or equivalent cable

> 15dB up to 270Mb/s

Return Loss: SMPTE 272M-A Embedded Audio:

#### Serial Video Output:

Number of Outputs: Up to 9 reclocked outputs (jumper

selectable)

Connector: BNC per IEC 61169-8 Annex A Signal Level: DC Offset: 800mV nominal

0V ±0.5V Rise and Fall Time: 470ps nominal Overshoot: < 10% of amplitude Return Loss > 15dB up to 270Mb/s

Wide Band Jitter: < 0.2 UI

## Analog Video Output:

(User selectable as additional SDI Outputs)

Number of Outputs: Up to 9 (jumper selectable)
Standards: NTSC, SMPTE 170M if input is

525i/59.94

PAL-B ITU-RBT 1700 BNC per IEC 61169-8 Annex A

Signal Level: 1V p-p nominal DC Offset:

Return Loss: > 35dB up to 5MHz

#### Electrical:

Connectors:

Voltage: +12V DC Power 6W

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

S501FR

## Physical:

Number of Slots:

## **▶** ► ► Ordering Information

500VMDA SD-SDI Monitoring Reclocking Distribution Amplifier

**Enclosures** exponent 500FR

Compact High Density Distribution Frame



The 500ADA Analog Video Distribution Amplifier is a general purpose amplifier for distributing 75  $\!\Omega$  analog signals. The 500ADA features one balanced input with nine outputs. The 500ADA has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that do not exceed 2V p-p.


The 500ADA is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules.

## ▶ Features & Benefits

- $75\Omega$  or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMRR)
- · Gain control
- · Jumper selectable AC or DC coupling
- · Looping feature with external "T" connector
- Consistent input impedance if card power is lost
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

### Card Edge LEDs

- · Module status/Local Fault
- · Power supply status

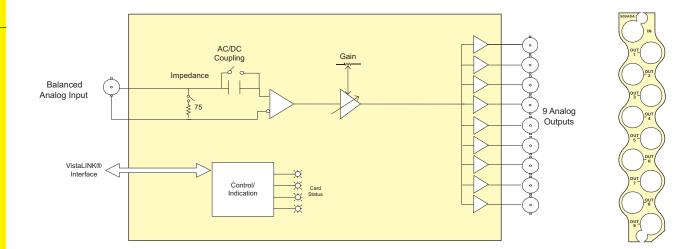

# ▶Specifications

# Analog Video Input:

Any analog video format, up to 2V p-p

and 30MHz bandwidth 1 BNC per IEC 61169-8 Annex A Connector:

Common mode range:

> 6V p-p CMRR. > 70dB to 1kHz 2.5V p-p max Signal amplitude:

Impedance: (jumper selectable)

AC or DC (jumper selectable) > 40dB to 10MHz, > 30dB to 30MHz Coupling: Return loss:

75Ω terminated, 35kΩ Hi-Z C/L gain inequality: < ±0.1% C/L Delay:

< ±2ns Output isolation: 42dB to 10MHz, 32dB to 30MHz

Output return loss: > 40dB to 30MHz

Analog Video Outputs:

Output impedance: 750

Gain control range: ±5dB

Differential Phase: < 0.19°

Connector:

Freq. Response:

Differential Gain:

Number of Outputs: 9 Per Card

Noise performance: < -78dB RMS NTC7 weighting

< -70dB RMS 15kHz to 5.5MHz

BNC per IEC 61169-8 Annex A

< ±0.05dB (to 5.5MHz) < 0.17%

Electrical:

Voltage: +12V DC Power: 1.2W

EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

Physical:

Number of Slots:

# **>>>**Ordering Information

500ADA Analog Video Distribution Amplifier (1x9) Enclosures 500FR S501FR

Compact High Density Distribution Frame Standalone enclosure



# Analog Video Distribution Amplifier with Cable Equalization

The 500ADA-EQ Analog Video Distribution Amplifier is a general purpose amplifier for distributing  $75\Omega$  analog video signals.

The 500ADA-EQ features one balanced equalized input with nine unbalanced outputs. The 500ADA-EQ amplifier has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2V p-p.


The 500ADA-EQ is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules

### ▶ Features & Benefits

- $75\Omega$  or high impedance input (jumper selectable)
- · High common mode range and common mode rejection ratio (CMRR)
- Gain control
- · Jumper selectable AC or DC coupling
- · Jumper selectable fast or slow back porch clamp
- · DC level control when clamp is enabled
- · Cable equalizer adjustment range: 0 to 300m of 8281 or 1694
- · Looping feature with external "T" connector
- · Consistent input impedance if card power is lost
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

### Card Edge LEDs

- · Module status/Local Fault
- Power supply status
- EQ Warning

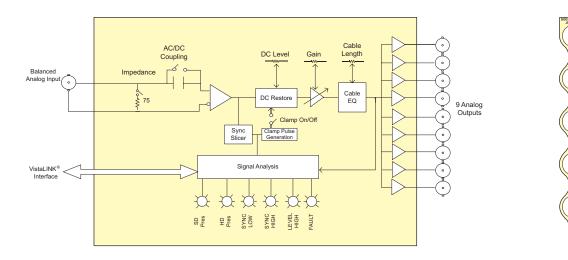

# ▶Specifications

## Analog Video Input:

Standards: Any analog video format, up to 2V p-p and 30MHz bandwidth

1 BNC per IEC 61169-8 Annex A

Connector: Common mode range

> 6V p-p CMRR: > 70dB to 1kHz Signal amplitude: 2.5V p-p max

Cable equalizer: 0 to 300m of Belden 8281 or 1694A

cable

75Ω terminated, 35kΩ Hi-Z (jumper Impedance:

selectable)

Coupling: AC or DC (jumper selectable) > 40dB to 10MHz, > 30dB to 30MHz Return loss:

> ±600mV Clamp range: Fast clamp attenuation of 60Hz: > 36dB

Analog Video Outputs:

Number of Outputs: 9 Per Card

BNC per IEC 61169-8 Annex A Connector:

Output impedance: 75Ω Gain control range: ±5dB

DC Level: < ±100mV (with DC Coupling active

and back porch clamp disabled)

DC Level Control range

< ± 200mV (with back porch clamp

enabled) < ±0.05dB no equalization Frea. Response:

< ±0.09dB for 5 to 100m Belden 8281 or 1694A (to 5.5MHz)

< ±0.15dB for 100 to 300m Belden 8281 or 1694A (to 5.5MHz)

Differential Gain: < 0.17% 0 to 300m < 0.19° 0 to 300m Differential Phase:

C/L gain inequality: < ±0.1% for all cable lengths

C/L Delay: Output isolation: < ±2ns

> 42dB to 10MHz, > 32dB to 30MHz

Output return loss: > 40dB to 30MHz

Noise performance: < -78dB RMS NTC7 weighting, < -70dB RMS 15kHz to 5.5MHz

Electrical:

Voltage: +12V DC Power: 1.2W

EMI/RFI:

Complies with FCC Part 15 Class A EU EMC Directive

Physical: Number of Slots:

### >>> Ordering Information

500ADA-EQ Analog Video Distribution Amplifier with Cable Equalization (1x9)

**Enclosures** 500FR S501FR

exponent

Compact High Density Distribution Frame



The 500ADA-AESB is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

#### ▶ Features & Benefits

- · Data reclocking provides jitter reduction
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

## Inputs


- AES3-1992 standard for AES audio on  $110\Omega$  twisted pair cable
- EQ and reclock provide extended cable length compensation (> 300m)
- Transformer coupled  $110\Omega$  balanced input

#### Outputs

Four 110Ω balanced

## Card Edge LEDs

- · Module Health Status
- · Error LED indication for input PLL out of lock, parity error or biphase coding error
- · Reclocked locked

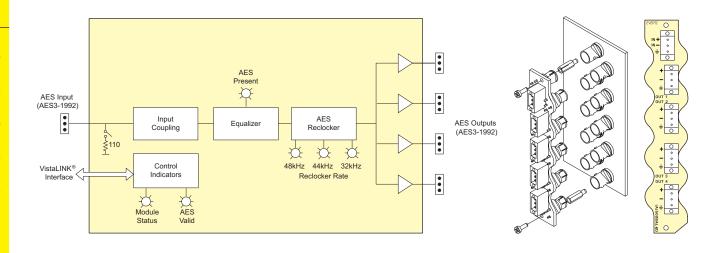

## **▶** Specifications

**AES Input:** 

Standard: AES3-1992

Number of Inputs:

3-pin removable terminal strip Connector:

Input Level: 2 to 7V p-p Coupling: Transformer Input Impedance:  $110\Omega$ 

Return Loss: > 14dB 100kHz to 6MHz Automatic to 300m with Belden Equalization:

1800B (or equivalent) @ 48kHz AES

signal

Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

**AES Output:** 

Number of Outputs: 4 Balanced AES reclocked Connector: 3-pin removable terminal strip

(screwdown adapter module included) 5V p-p Output Level:

Output Impedance:  $110\Omega$ 

Return Loss: > 30dB 100kHz to 6MHz

Physical:

Number of Slots:

Electrical:

Voltage: +12V DC 5W

EMI/RFI: Complies with FCC Part 15 Class A EU EMC Directive

## **▶** ► ► ► Ordering Information

500DA-AESB

Balanced AES Audio Distribution Amplifier (1x4)

**Enclosures** 500FR S501FR

Compact High Density Distribution Frame

The 500DA-AESU is a nine output reclocking and auto equalizing DA for unbalanced 75 $\Omega$  AES signals. The DA automatically equalizes up to 1500m of Belden 1694A coax and provides reclocked outputs with sampling frequencies of 32kHz, 44.1kHz, 48kHz and 96kHz. The 500DA-AESU card edge LED indicators provide quick and accurate assessment of the incoming signal integrity.

The 500ADA-AESU is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

### ▶ Features & Benefits

- · Data reclocking provides jitter reduction
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs


- SMPTE 276M standard for AES audio on 75Ω coax
- EQ and reclock provide extended cable length compensation (> 1500m)
- Transformer coupled  $75\Omega$  unbalanced input


#### Outputs

• Nine  $75\Omega$  coax outputs

## Card Edge LEDs

- · Module Health Status
- Error LED indication for input PLL out of lock, parity error or biphase coding error
- · Reclocker locked

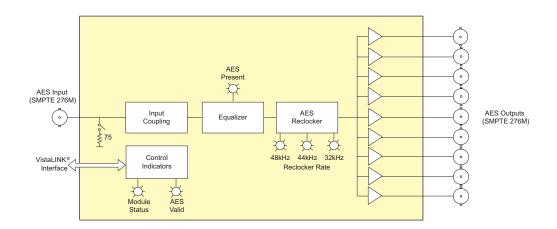



## ▶ Specifications

AES Input:

SMPTE 276M

Standard: Number of Inputs:

BNC per IEC 61169-8 Annex A Connector

Input Level: 1V p-p Coupling: Transformer

Input Impedance:  $75\Omega$ 

> 25dB 100kHz to 6MHz Return Loss:

(or equivalent) @ 48kHz AES signal Sampling Frequency:32kHz, 44.1kHz, 48kHz and 96kHz

Equalization: Automatic to 1500m with Belden 1694A

AES Output: Number of Outputs: Connector:

9 Unbalanced AES BNC per IEC 61169-8 Annex A

Output Level: 1V p-p

Output Impedance:

> 25dB 100kHz to 6MHz Return Loss:

Physical:

Number of Slots: 1

# Electrical:

Voltage: +12V DC

Power: 5W

Complies with FCC Part 15 Class A EMI/RFI:

EU EMC Directive

## **>>>**Ordering Information

500DA-AESU Unbalanced AES Audio Distribution Amplifier (1x9) **Enclosures** exponent

500FR S501FR Compact High Density Distribution Frame Standalone enclosure



Unbalanced AES Audio Distribution Amplifier with Loop Thru

The 500DA-AESU-L is an eight output reclocking and auto equalizing DA for unbalanced  $75\Omega$  AES with passive loop thru designed for use within the Evertz high density analog looping frame (500FR-L-A). The DA automatically equalizes up to 1500m of Belden 1694A coax and provides reclocked outputs with sampling frequencies of 32kHz, 44.1kHz, 48kHz and 96kHz. The 500DA-AESU card edge LED indicators provide quick and accurate assessment of the incoming signal integrity. When installed within the 500FR-L-A, a passive loop output is available to enable cascading of multiple DA cards. The passive

loop is implemented on the 500FR-L-A backplane. As a result, a failure of any single card or the removal of any single card does not affect any other cards being used for signal distribution. Up to 16 500DA-AESU-L cards may be cascaded error free in the 500FR-L-A frame.

The 500ADA-AESU-L is housed in the 3RU 500FR-L-A exponent frame that will hold up to 16 modules.

### ▶ Features & Benefits

• Data reclocking provides jitter reduction

#### Inputs:


- SMPTE 276M standard for AES audio on  $75\Omega$  coax
- EQ and reclock provide extended cable length compensation (> 1500m)
- Transformer coupled  $75\Omega$  unbalanced input

#### Outputs:

Eight 75Ω coax outputs

### Card Edge LEDs:

- · Module Health Status
- Error LED indication for input PLL out of lock, parity error or biphase coding error
- · Reclocker locked

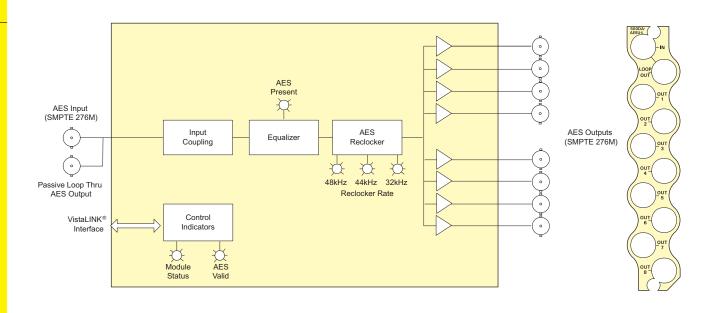

## **▶** Specifications

AES Input:

SMPTE 276M Standard: Number of Inputs:

Connector:

BNC per IEC 61169-8 Annex A

Input Level: 1V p-p Coupling: Transformer

Input Impedance: 75Ω

Return Loss: > 25dB 100kHz to 6MHz

Automatic to 1500m with Belden Equalization: 1694A (or equivalent) @ 48kHz AES

signal

Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

**AES Output:** 

Number of Outputs: 1 passive loop thru, 8 Unbalanced

reclocked AES

Connector: BNC per IEC 61169-8 Annex A

Output Level: 1V p-p Output Impedance: 75Ω

Return Loss: > 25dB 100kHz to 6MHz

Physical:

Number of Slots:

Electrical:

+12V DC Voltage:

Power:

EMI/RFI: Complies with FCC Part 15 Class A

**EU EMC Directive** 

# >>> Ordering Information

Unbalanced AES Distribution Amplifier (1x9) with Loop Thru 500DA-AESU-L

**Enclosures** 500FR S501FR

Compact High Density Distribution Frame Standalone enclosure



# Dual Unbalanced AES Audio Distribution Amplifier

The 500DA2Q-AESU provides an economical method of distribution for your AES digital audio signals. The DAs feature two auto-equalized inputs with four reclocked outputs each. The module can also be configured for one input with eight reclocked outputs for applications where a larger number of outputs is required.

The 500DA2Q-AESU is housed in the 500FR **exponent** frame that will hold up to 16 modules

#### ▶ Features & Benefits

- Supports SMPTE 276M standard for AES audio on  $75\Omega$  coax
- 2 independent distribution amplifiers with 4 reclocked outputs provide jitter
- Can be configured as one 8 output distribution amplifier
- · Automatic equalization provides extended cable length capabilities
- · Card edge indicators for PLL out of lock, parity error or bi-phase coding errors
- Tally output of input error conditions
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs


- 2 inputs
- SMPTE 276M standard for AES audio on  $75\Omega$  coax
- EQ and reclock provide extended cable length compensation (> 1500m)
- Transformer coupled  $75\Omega$  unbalanced input

#### Outputs

• 4 reclocked outputs per input

### Card Edge LEDs

- · Module Health Status
- Error LED indication for input PLL out of lock, parity error or biphase coding error
- Reclocker locked

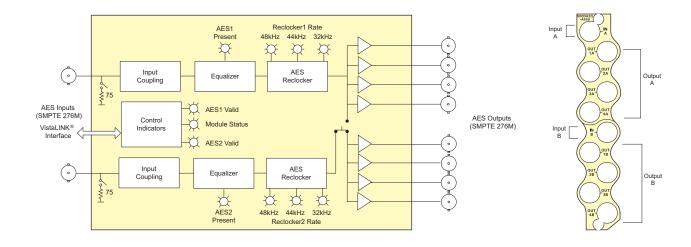

## ▶ Specifications

# AES Audio Inputs:

Number of Inputs:

Standard: SMPTE 276M, single ended AES Connectors: BNC per IEC 61169-8 Annex A

Coupling: Signal Level: Transformer 1V p-p ±0.1V

Equalization:

Automatic 1500m @48kHz with Belden 1694A or equivalent cable

Impedance: 75Ω

> 25dB 100kHz to 6MHz Return Loss:

Sampling Rate: 32kHz, 44.1kHz, 48kHz and 96kHz

#### **AES Audio Outputs:**

Number of Outputs: 4 reclocked outputs per input (normal) 8 outputs from input 1 (jumper selectable)

Standard: SMPTE 276M, single ended AES BNC per IEC 61169-8 Annex A Connectors:

Signal Level: 1V p-p ±0.1V Impedance:  $75\Omega$  unbalanced > 25dB 100kHz to 6MHz Return Loss:

Electrical:

+12V DC Voltage: Power: 1.2W

Physical:

Number of slots:

# **>>>**Ordering Information

500DA2Q-AESU Dual Unbalanced AES Audio Distribution Amplifier

**Enclosures** 500FR S501FR

exponent

Compact High Density Distribution Frame

The 500AMDA-AESU is a five output reclocking and auto equalizing AES Audio DAC & Distribution Amplifier for unbalanced 75 $\Omega$  AES signals. It is also a high quality 24-bit audio DAC. The 500AMDA-AESU automatically equalizes up to 1000m of Belden 1694A coax and provides reclocked outputs. The 500AMDA-AESU also converts AES/EBU digital signal to 2 balanced analog audio outputs. The input sample rates supported are 32kHz, 44.1kHz and 48kHz. Analog audio output levels may be set individually from the front panel.

Level control is provided via a card edge toggle. The full scale digital signal can be calibrated to produce analog peak levels ranging from 12dBu to 24.8dBu with 0.1 dBresolution. The 500AMDA-AESU card edge LED indicators provide quick and accurate assessment of the incoming signal integrity. Balanced analog audio is provided via a terminal strip adapter.

The 500AMDA-AESU is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

### ▶ Features & Benefits

- 24-bit, high-quality D/A conversion
- 44.1kHz, 32kHz and 48kHz sampling rates supported
- 0dBFS programmable from 12dBu to 24.8dBu
- · Support for 2 channels of balanced analog audio (1 AES/EBU)


- AES3-2003 standard for AES audio on  $75\Omega$  coax
- EQ and reclock provide extended cable length compensation (> 1000m)


#### Outputs

- Five 75Ω coax outputs
- · 2 balanced analog audio outputs

## Card Edge LEDs

- · Module Health Status
- · AES signal present
- · Detected AES sample rate
- PCM versus non-PCM data
- · Audio level bargraph with ballistics
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

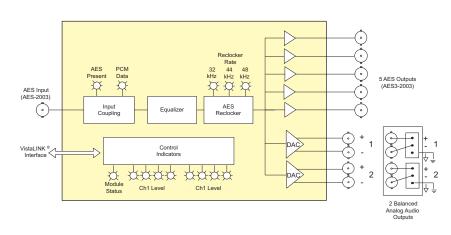

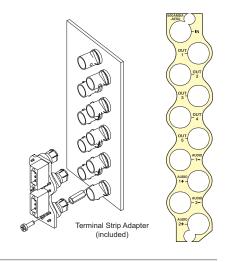

# ▶Specifications

#### AES Audio Input: Number of Inputs:

Standard: AES3-2003, unbalanced AES Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 0.1 to 2.5V p-p

> 1000m @ 48kHz with 1V p-p drive Equalization: and Belden 1694A or equivalent coax

cable

Resolution: 24 bits 32, 44.1, 48 kHz; ±100 ppm Sample Rate: 75 $\Omega$ , AC-coupled Input Impedance: Return Loss:

> 25dB, 100kHz to 6.0MHz AC-coupled (for 60Hz ground loop BNC Grounding:

current protection)

## **AES Audio Outputs:**

Number of Outputs: 5

Standard: AES3-2003, unbalanced AES Connectors: BNC per IEC 61169-8 Annex A

Sample Rate: Same as input Impedance:  $75\Omega$  unbalanced

Return Loss: > 25dB, 100kHz to 6.0MHz Analog Audio Outputs:

Number of Outputs: 2

Balanced analog audio Type: Connector:

Two 3-pin removable terminal strips

on BNC adapter panel

Output Impedance:  $66\Omega$ Output Load:

 $600\Omega$  or high impedance ( $10k\Omega$ ) Signal Level: 0dB FS  $\Rightarrow$  +12 to +24.8dBu into 10kΩ

load (user settable) DC Offset: < ±30mV

Freq. Response: < ±0.05dB (20Hz to 20kHz)

24 bits Dynamic Range:

< -100dB RMS @ 1kHz, with 24dBu THD+N: output SNR: > 110dB RMS (20Hz to 20kHz), "A"

weighted Inter-Channel Phase Error:

< ±1° (20Hz to 20kHz)

Crosstalk Isolation: > 110dB RMS (20Hz to 20kHz),

unweighted Digital to Analog Delay:

0.95ms

Electrical: Voltage:

+12V DC Power:

EMI/RFI: Complies with FCC Part 15 Class A

**FU FMC Directive** 

Physical:

Number of slots:

## **▶** ► ► ► Ordering Information

500AMDA-AESU Unbalanced AES Audio DAC & Distribution Amplifier (5 AES out & 2

balanced analog out)

500FR S501FR exponent

Compact High Density Distribution Frame

The 500ADA-AUD Analog Audio Distribution Amplifier is a general purpose 1x4 amplifier for distributing analog audio signals.

The 500ADA-AUD can be operated with either differential or single ended inputs and offers a wide range of gain adjustment to handle a wide variety of input signals. The 500ADA-AUD is housed in the 500FR **exponent** frame that will hold up to 16 modules


#### ▶ Features & Benefits


- Differential and single ended input (automatic single ended to differential conversion)
- · High impedance inputs
- · Low impedance outputs
- · Wide gain adjustment range
- High common mode range and common mode rejection ratio
- Very high SNR

- Very low THD+N
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Card Edge LEDs

- Module status/Local Fault
- Power supply status

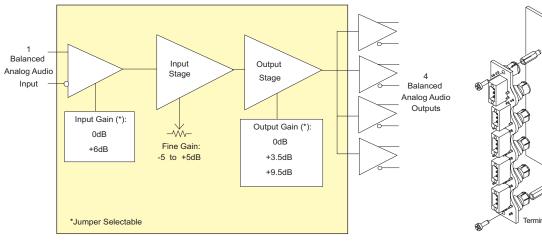



# ▶ Specifications

Analog Audio Input:

Standards: Number of inputs: Any analog audio signal 1 (Balanced or Single ended) 3-pin removable terminal strips Connectors: Input step gain: 0dB or +6dB (configurable with

jumpers)
-5 to +5dB (card edge pot adjustable) Fine gain control:

Maximum input level: +34dBu 0dB input gain: +28dBu +6dB input gain: Common mode rejection:

> 105dB @ 60Hz

Common mode range: > ±22V 0dB input gain: +6dB input gain: Input impedance:

0dB input gain:  $44k\Omega$ 26kΩ +6dB input gain:

#### Analog Audio Outputs:

Number of Outputs: 4

3-pin removable terminal strips Connectors: 0, 3.5 or 9.5dB (configurable with Output step gain:

jumpers)

+28dBu across hi-impedance load Max. output level: +24dBu into  $600\Omega$  load

Output impedance:

Freq. Response:  $\pm 0.03 \text{dB}$  20Hz to 20kHz THD+N:

0.001% 20Hz to 20kHz @ 28dBu,

unweighted RMS

Output Isolation: > 100dB @ 1kHz, 100dB @ 20kHz

#### Electrical:

Voltage: +12V DC 6W Power:

Physical:

Number of slots: 1

# >>>Ordering Information

500ADA-AUD

Analog Audio Distribution Amplifier

Enclosures 500FR S501FR

exponent

Compact High Density Distribution Frame

The 500ADA-W is a SDIF-2 Word Clock distribution amplifier. The input can be configured to be high impedance or terminated to 75  $\!\Omega$  . The 500 ADA-W provides continuous voltage gain adjust from -6dB to +6dB. The module supports a maximum output signal of 5V.


The 500ADA-W is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules.

### ▶ Features & Benefits

- Jumper selectable  $75\Omega$  or high impedance (1k $\!\Omega$  typical) input
- DA has voltage gain adjustment range from -6dB to +6dB
- Outputs can drive into  $75\Omega$  loads

# Card Edge LEDs

- Module status/Local Fault
- Power supply status

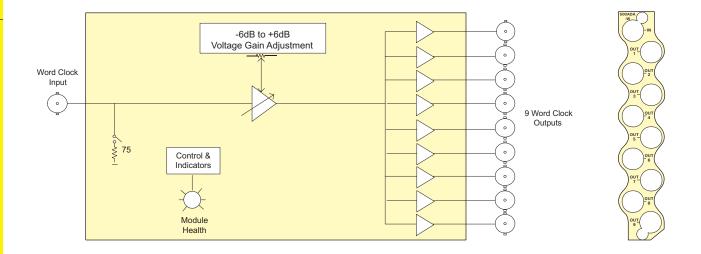

# ▶Specifications

# Word Clock Input:

Standard: Number of Inputs: Connector:

SDIF-2 Word Clock

BNC per IEC 61169-8 Annex A 0 to 5V (terminated or unterminated) Selectable  $75\Omega$  or high impedance Level: Impedance:

 $(1k\Omega \text{ typical})$ 

Word Clock Outputs:

Number of outputs: BNC per IEC 61169-8 Annex A Connector: Output impedance:  $75\Omega$ 

Max. Output levels: 5V into  $75\Omega$  load

10V into high impedance load Min. Output Level:

Voltage Gain Range: -6dB to +6dB Frequency range: 28kHz-50kHz Electrical:

+12V DC Voltage: 1.2W Power:

EMI/RFI: Complies with FCC Part 15 Class A, EU EMC Directive

Physical:

Number of Slots:

### >>> Ordering Information

500ADA-W

Word Clock Distribution Amplifier (1x9)

Enclosures 500FR

exponent

Compact High Density Distribution Frame S501FR

Standalone enclosure

# Unbalanced AES Word Clock Extractor Audio Distribution Amplifier


The 520DARS-W provides a compact method of extracting word clock from your AES digital audio reference signals. The 520DARS-W features one auto-equalized input with 4 word clock outputs and 5 reclocked AES audio outputs.

The 520DARS-W can be used in conjunction with the 5600MSC Master Clock/SPG system.

The 520DARS-W is housed in the 3RU 500FR exponent Frame that will hold up to 16 modules.

## ▶ Features & Benefits

- Supports AES audio over 75Ω coax (SMPTE 276M)
- 4 word clock outputs (AES11-2003)
- 5 reclocked AES outputs provides jitter reduction (SMPTE 276M)
- · Automatic equalization provides extended cable length capabilities
- High impedance or  $75\Omega$  termination on input (jumper selectable)
- · Card edge indicators for AES present, reclocker rate, and AES validity bit
- Tally output of input error conditions
- $\bullet \ \mathsf{VistaLINK}^{\circ} \ \mathsf{-capable} \ \mathsf{for} \ \mathsf{remote} \ \mathsf{monitoring} \ \mathsf{via} \ \mathsf{SNMP} \ \mathsf{(using} \ \mathsf{VistaLINK}^{\circ} \ \mathsf{PRO)}$ when installed in 500FR frame with 500FC VistaLINK® Frame Controller

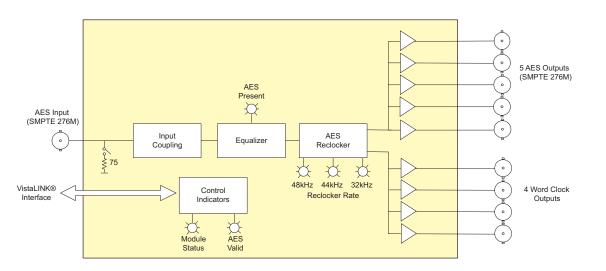



# **▶**Specifications

AES Input:

SMPTE 276M Standard:

Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

1V p-p Transformer Input Level: Coupling:

Input Impedance:  $75\Omega$ > 25dB 100kHz to 6MHz Return Loss: Equalization:

Automatic to 1500m with Belden 1694A (or equivalent) @ 48kHz AES

Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz

AES Output:

Number of Outputs: 5 Unbalanced AES Connector: BNC per IEC 61169-8 Annex A

Output Level: 1V p-p Output Impedance:  $75\Omega$ 

> 25dB 100kHz to 6MHz Return Loss:

Word Clock Outputs

Standard: A Number of Outputs: 4 AES11-2003

Connectors:

BNC per IEC 61169-8 Annex A Signal Level:  $^{\cdot}$  5V p-p square wave (0-5V)  $\pm 0.5$ V Electrical: Voltage:

+12V DC Power:

FMI/RFI

Complies with FCC Part 15 Class A EU EMC Directive

Physical: Number of Slots: 1

# **>>>**Ordering Information

Unbalanced AES Word Clock Extractor Audio Distribution Amplifier 520DARS-W

**Enclosures** 500FR S501FR

exponent

Compact High Density Distribution Frame



# Dolby-E/AC-3™ Decoder

The 520DD-AESU is a professional Dolby audio decoder that automatically detects Dolby-E™, Dolby Digital (AC3)™, and PCM streams in the AES input, and translates them to PCM (linear) audio. Up to 8 discrete audio channels may be contained in 1 AES stream when encoded as Dolby-E™, yielding up to 4 AES PCM outputs. A fifth stereo pair is obtained as the downmix of the above multi-channel audio. It can be mono, stereo or surround (ProLogic) and may optionally be routed to the output.

So that the multi-channel outputs in PCM form can be re-assembled back into Dolby-E™ or Dolby Digital further downstream, an additional output with metadata is provided. It contains information about the assumed inter-channel relationships (whether they are 5.1, or 4 stereo pairs, etc.), their expected dialogue levels, etc.

Dolby-E™ is capable of carrying LTC data embedded within its stream. It can be selected as an output, instead of metadata.

For lipsync cohesion and ease of editing, Dolby-E™ data is organized in blocks with lengths matching associated video frame. The decoder will match the beginning of each output block with the start of video, as provided with the genlock input. Additional delay can be dialed up by the user, up to 3 seconds. Reference video frame rate must match that assumed by the Dolby-E™ stream. An extra AES input is provided that can be configured as a backup channel, in the event the primary is lost, or as a voice-over source.

The 520DD-AESU is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

#### ▶ Features & Benefits

- · Headphone jack with monitoring stereo down-mix
- · Secondary AES input with backup contents or voice-over
- · Card edge display for Dolby decoder status & audio channel peak levels bargraphs
- Adjustable audio delay up to 3 seconds, independent for all 8 channels
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs

- 1 Unbalanced AES (SMPTE 276M standard version on coax) with Dolby-E™, Dolby Digital or PCM (autodetect)
- 1 Unbalanced AES (SMPTE 276M standard version on coax) with voice over PCM
- · Video genlock composite black or tri-level (autodetects) for lip-sync management, Dolby-E™ style

## Outputs

- · 2 outputs with reshaped AES input
- · 4 AES (SMPTE 276M) output with decoded PCM audio
- · Metadata or LTC
- Available ProLogic downmix


## Card Edge LEDs

- · Module status
- · AES input health
- · Dolby decoder processing status
- · Genlock health







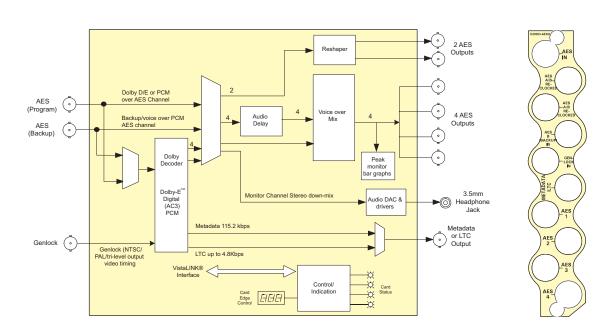

# **▶**Specifications

AES Audio Input:

Number of Inputs: 2 (program, backup)

Standard: SMPTE 276M, unbalanced AES Connectors: BNC per IEC 61169-8 Annex A

Signal Level: 0.1 to 2.5V p-p Auto > 1000m with 1V p-p drive and Equalization:

Belden 1694A or equivalent coax cable

Resolution: 24 bits 48kHz; ±100ppm Sample Rate:

Input Impedance:  $75\Omega$ 

Return Loss: > 25dB, 100kHz to 6.0MHz

AES Audio Outputs:

Number of Outputs: 6 (2 reclocked & 4 PCM decodes) Standard: SMPTE 276M, unbalanced AES BNC per IEC 61169-8 Annex A Connectors:

Sample Rate: 48kHz

Impedance:  $75\Omega$  unbalanced

Return Loss: > 25dB, 100kHz to 6.0MHz

Genlock Input:

NTSC or PAL colour black sync (525 Type:

line or 625 line) or HD tri-level sync

1 BNC per IEC 61169-8 Annex A Hi-Z or 75 jumper configurable Connector: Impedance: Return Loss:

> 40dB to 10MHz

Metadata Output: Number of Outputs: 1

Dolby™ Metadata SMPTE RDD6 Type: Connector: BNC per IEC 61169-8 Annex A

(shared with LTC output as per user

selection)

Signal Level: < ±3V @ 4kΩ load Output Impedance:  $50\Omega,\,D\overline{C}$  coupled

Rise Times: 200ns

LTC Output:

Number of Outputs: 1 Standard: S SMPTE 12M-1

Connector: BNC per IEC 61169-8 Annex A Signal Level: Adjustable from 0.5 to 4.0V p-p

@ 1kΩ load

Output Impedance: 50Ω

Rise Times: 40μs ±10μs

# Headphone Audio Outputs:

Number of Outputs:

Туре: Stereo 3.5mm jack

Output Load:

100mW max, soft adjustable over Signal Level:

40dB range THD+N:

90dB RMS, "A" weighted SNR:

Electrical:

Voltage: +12V DC Power: 6W

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

Physical:

Number of slots:

# **>>>**Ordering Information

Dolby-E/AC-3™ Decoder 520DD-AESU

**Enclosures** exponent

Compact High Density Distribution Frame

S501FR Standalone enclosure











One selected channel is processed by the on-card Dolby Decoder. If the channel contains Dolby- $E^{\text{TM}}$  or Dolby Digital (AC3)<sup>TM</sup>, it will yield up to 8 additional discrete audio channels and the associated Dolby- $E^{\text{TM}}$  metadata. Up to 8 selected channels may be optionally delayed up to 3 seconds and re-embedded into the output video and/or directed to 4 AES outputs. Video output may be optionally delayed up to 7 frames to help with lip sync. If PCM audio is embedded, the device acts as a simple 2 group audio de-embedder.

This device also handles the Dolby-E™ Metadata. Metadata is optionally embedded in VANC and can be provided as an output for downstream devices (i.e. Dolby-Encoders, Multichannel Audio Tool, etc.). Dolby-E™ is capable of carrying LTC data embedded within its stream. It can be selected as an output, instead of metadata.

For lip sync cohesion and ease of editing, Dolby-E™ data is organized in blocks with lengths matching the associated video frame. The decoder will match the beginning of each output block with the start of video, as provided with the genlock input. Additional delay can be dialed up by the user, up to 3 seconds. An extra AES input is provided that can be configured as a backup channel, in the event the primary is lost, or as a voice-over source. This input can be re-configured as a metadata input which can be embedded in VANC, instead of the metadata coming from Dolby Decoder.

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP enabled control systems such as Evertz VistaLINK® PRO locally or remotely.

The 520AD4-DD-HD is housed in the 3RU 500FR *exponent* frame that will hold up to 16 modules.

HD IN

META /LTC OUT

ουτ

4 -OUT AES - 1 OUT

AES

## ▶ Features & Benefits

- · Automatic switchover to backup audio source on loss of selected Dolby stream
- Adjustable video delay to match Dolby decoder audio delay (up to 7 frames)
- · Headphone jack with monitoring stereo down-mix
- Dolby™ Metadata is embedded in HD VANC for downstream device decoding (refer to 520AD4-HD brochure)
- Secondary AES input with backup, voice-over or Dolby-E/AC3™ content
- Card edge display for Dolby decoder status & audio channel peak levels bargraphs
- · Flexible audio channel router
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs

- Program output bypass relay protected
- SMPTE 292M (1.5Gb/s serial digital), or SMPTE 259M
- · Genlock NTSC-M, PAL-B, any tri-level
- · AES input for backup/voice-over source
- Metadata input

## Outputs

- 2 processed HD outputs (1 protected with bypass relay)
- 4 AES de-embedded and processed outputs
- 1 BNC configurable as LTC or Dolby™ metadata (RS422/485)

#### Controls

- · Audio group selection
- · Audio channel selection

### Card Edge LEDs

- Module Status
- · Video Signal presence
- Selected audio group presence/errors
- · Dolby decoder processing status
- · Genlock health/compatibility
- AES signal presence

# HD/SD Audo De-embedder & Dolby-E™ /AC-3 Decoder & Re-embedder

# **▶**Specifications

Serial Video Input:

SMPTE 292M. 1080i/60. 1080i/59.94 Standard:

1080i/50, 1080p/30 (sF), 1080p/29.97 (sF), 1080p/25 (sF), 1080/24 (sF), 1080/23.98 (sF), 720p/60, 720p/59.94, 1035i/60, 1035i/59.94 SMPTE 259M-C (270Mb/s) 525 or

625 line component

Connector: BNC per IEC 61169-8 Annex A Automatic 100m @ 1.5Gb/s with Equalization: Belden 1694A (or equivalent), 25m

with bypass relay active

Processed Serial Video Output:

Standard: Same as input

Number of Outputs:

BNC per IEC 61169-8 Appex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: Per standard
Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

Metadata: Embedded according to SMPTE

RP2020

Metadata Input/Output:

Type: Connector: Dolby-E™ Metadata SMPTE RDD6 \*2 BNC per IEC 61169-8 Annex A

(\*BNC to DB9 dongles are provided)

115,200 baud

AES Audio Input:

Baud Rate:

Standard: SMPTE 276M

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Input Level: 0.1 to 2.5V p-p (5V p-p tolerant) Input Impedance:

Return Loss: > 25dB 100kHz to 6MHz

Automatic to 1000m with Belden 1694A Equalization: (or equivalent) @ 48kHz AES signal

Sample Rate: 48kHz ±100ppm

**AES Audio Output:** 

Standard: SMPTE 276M, single ended AES

Number of Outputs: 4

BNC per IEC 61169-8 Annex A Connector:

Sample Rate: 48kHz Impedance: Resolution: Up to 24-bit Genlock Input:

NTSC, PAL, black or any tri-level, all

autodetect

Connector: 1 BNC per IEC 61169-8 Annex A Impedance: Hi-Z or  $75\Omega$  (jumper configurable)

Return Loss: > 40dB to 10MHz

System Performance:

AC3 Decode Delay: 32ms nominal Dolby-E™ Decode Delay:

1 frame nominal

De-embedding Latency  $600\mu s$  nominal

Additional Audio Delay

0 to 3 seconds (user programmable)

Additional Video Delay

0 to 7 frames (user programmable)

Electrical: Voltage:

+12V DC

Power: 10W

EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

Physical:

Number of Slots:

## **▶** ► ► ► Ordering Information

520AD4-DD-HD HD/SD Audio De-embedder & Dolby-E/AC-3™ Decoder & Re-embedder

**Enclosures** 500FR S501FR

Compact High Density Distribution Frame









Up to 8 selected channels may be delayed up to 3 seconds and re-embedded onto the output video and/or directed to 4 unbalanced AES outputs. An extra AES input is provided as a backup channel, in case of the loss of primary, or as the source of voice-over. The video output may also be delayed up to 5 frames to achieve lip sync with the audio.

The 520AD4-HD also embeds Dolby-E™ Metadata in VANC. The module has multiple sources for this metadata including incoming VANC, and externally supplied metadata. The decoded or de-embedded Dolby-E™ Metadata can be provided as an output for downstream devices (i.e. Dolby-E™ Encoders etc.).


VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP enabled control systems such as Evertz VistaLINK® PRO locally or remotely.

The 520AD4-HD is housed in the 3RU 500FR exponent frame that will hold up to 16 modules.

### ▶ Features & Benefits

- Supports SMPTE 292M (1.5Gb/s) or SMPTE 259M (270Mb/s) serial digital video signals
- · Video input relay bypass for power failure bypass protection.
- · AES input for backup/voice-over source
- · 2 processed video outputs
- · 4 AES de-embedded and processed outputs
- 1 Dolby<sup>™</sup> Metadata output (RS422/485)
- De-embeds and re-embeds 2 audio groups user-selectable
- · Selectable audio sources for AES and embedded outputs

- · Adjustable video (up to 7 frames) and audio delay (up to 3 seconds) to achieve lip sync at output
- · Headphone jack with monitoring stereo down-mix
- Card edge LEDs for module status, Video and Audio present
- Card edge display for card status & audio channel peak levels bar graphs
- Configurable Dolby<sup>™</sup> Metadata input and output
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

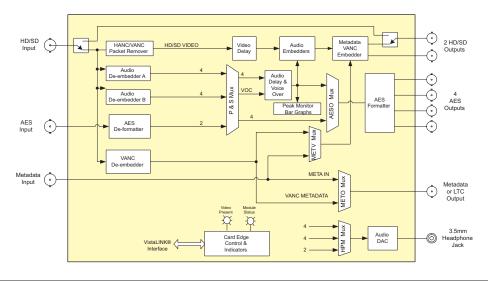



#### ▶ Specifications

## Serial Video Input:

Standard:

SMPTE 292M, 1080i/60, 1080i/59.94, 1080i/50, 1080p/30 (sF),

1080p/29.97 (sF), 1080p/25 (sF), 1080/24 (sF), 1080/23.98 (sF), 720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94 SMPTE 259M-C (270Mb/s) 525 or

625 line component

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic > 200m @ 270Mb/s with Belden 8281 (or equivalent), 25m with

bypass relay installed

Processed Serial Video Output:

Standard: Same as input

Number of Outputs: 2

520AD4-HD

Connector: BNC per IEC 61169-8 Annex A 800mV nominal Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: Per standard Overshoot: < 10% of amplitude Wide Band Jitter: < 0.2 UI SMPTE RP2020

AES Input:

SMPTE 276M Standard: Number of Inputs:

Connector: BNC per IEC 61169-8 Annex A

Input Level 0.1 to 2.5V p-p

Input Impedance:  $75\Omega$ 

> 25dB 100kHz to 6MHz Return Loss: Equalization: Automatic to 1000m with Belden

1694A (or equivalent) @ 48kHz AES signal

48kHz ±100ppm

Sample Rate:

## AES Audio Output:

SMPTE 276M, single ended AES Standard:

Number of Outputs:

BNC per IEC 61169-8 Annex A Connector Sample Rate: 48kHz

Impedance: Resolution: Up to 24-bit

### Metadata Input:

Dolby-E™ Metadata SMPTE RDD6 Type: Connector 1 BNC per IEC 61169-8 Annex A

Baud Rate: 115,200 baud

## System Performance:

Embedding Latency: 600µs nominal Audio Delay Range: 0 to 3 seconds

#### Flectrical:

+12V DC Voltage:

Power: 10W

EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

# Physical:

Number of Slots:

HD/SD-SDI Audio De-embedder with 4 Unbalanced AES Outputs

Enclosures 500FR S501FR

exponent

Compact High Density Distribution Frame

# HD/SD Audio Embedder with 4 Unbalanced AES Inputs

The 520AE4-HD Audio Embedder embeds 4 AES into 2 specified groups as defined by SMPTE 299M in a 1.5Gb/s serial HDTV or as defined by SMPTE 272M in a 270Mb/s serial SDTV video signal.

Several optional processing steps can be applied to the input audio before it is embedded. If needed, the 4 stereo AES input channels can be processed by 4 on-board sample rate converters (SRCs). The SRCs can be configured to automatically respect Dolby-E™ & Dolby Digital adding to ease of use & flexibility. The 8 discrete audio channels can be re-arranged in any arbitrary manner with on-board 8x8 router.

The audio channels may be optionally and independently delayed up to 3 seconds.

This device also handles the Dolby-E™ Metadata. Metadata is optionally embedded in VANC for downstream devices according to SMPTE RP2020.

The 520AD4-HD is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules

# ▶ Features & Benefits

- · Fast locking AES receivers
- · Configurable or automatic SRCs on AES inputs
- · Headphone jack with monitoring stereo channel
- Card edge display for status & audio channel peak levels bargraphs
- Audio channel router (8x8)
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

- SMPTE 292M (1.5Gb/s), or SMPTE 259M (270Mb/s)
- 4 Channel AES (unbalanced)
- 1 BNC for Dolby™ Metadata (RS422/485)

#### Outputs


- · 4 processed HD outputs
- Program output bypass relay protected

#### Controls

- · Audio group selection
- · Audio channel selection

# Card Edge LEDs

- Module Status
- · Video Signal presence
- · AES input presence/errors

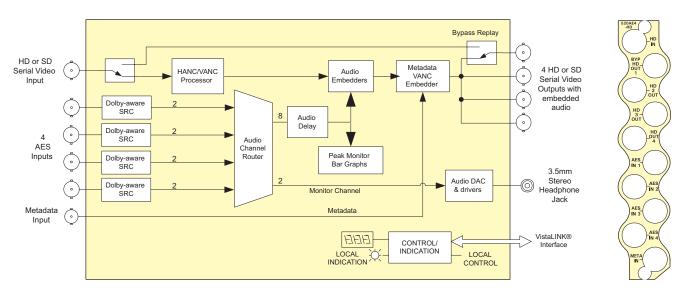

## ▶ Specifications

# Serial Video Input:

SMPTE 292M, 1080i/60, Standard:

1080i/59.94, 1080i/50, 1080p/30 (sF) 1080p/29.97 (sF), 1080p/25 (sF), 1080/24 (sF), 1080/23.98 (sF), 720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94

SMPTE 259M-C (270Mb/s) 525 or 625 line component Connector:

BNC per IEC 61169-8 Annex A Equalization: Automatic 100m @ 1.5Gb/s with Belden 1694A (or equivalent), 25m

with bypass relay installed

# Processed Serial Video Output:

Standard: Same as input Number of Outputs: 4

Connector: BNC per IEC 61169-8 Annex A Embedded Audio SMPTE 272M or 292M

SMPTE RP2020 Embedded Signal Level: 800mV nominal

DC Offset: 0V +0.5V Rise and Fall Time: Per standard Overshoot: < 10% of amplitude Wide Band Jitter: < 0.2 UI

AES Input:

SMPTE 276M Standard:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector Input Level: 0.1 to 2.5V p-p

Input Impedance:  $75\Omega$ 

> 25dB 100kHz to 6MHz Return Loss: Automatic to 1000m with Belden Equalization:

1694A (or equivalent) @ 48kHz AES

48kHz ±100ppm

# Sample Rate: Metadata Input:

Dolby-E™ Metadata SMPTE RDD6 Type: 1 BNC per IEC 61169-8 Annex A Connector:

Baud Rate: 115.200 baud

#### System Performance:

Embedding Latency: 600µs nominal Audio Delay Range: 0 to 3 seconds

## Electrical:

+12V DC Voltage: Power: 10W

Complies with FCC Part 15 Class A, EMI/RFI

EU EMC Directive

## Physical:

Number of Slots: 1

# **>>>**Ordering Information

520AE4-HD HD/SD-SDI Audio Embedder with 4 unbalanced AES inputs

**Enclosures** 500FR S501FR

Compact High Density Distribution Frame



# HD/SD Audio De-embedder with 8 Unbalanced AES Outputs

The 520AD8-HD Audio De-embedder extracts embedded audio from all 4 groups as defined by SMPTE 299M from a 1.5Gb/s serial HD or as defined by SMPTE 272M from a 270Mb/s serial SD video signal. Up to 16 selected channels may be de-embedded and directed to 8 AES outputs.

This device also handles the Dolby-E™ Metadata. Metadata is optionally de-embedded from VANC and can be provided as an output for downstream devices (i.e. Dolby-E™ or Dolby AC3 Encoders etc.).

VistaLINK® enables control and configuration capabilities via Simple Network Management Protocol (SNMP). This offers the flexibility to manage the module status monitoring and configuration from SNMP enabled control systems such as Evertz VistaLINK® PRO locally or remotely.

The 520AD8-HD is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules

## ▶ Features & Benefits

- Flexible de-embedded audio channels router (16x16)
- · Headphone jack with monitoring stereo channel
- · Card edge display for status & audio channel peak levels bargraphs
- VANC decode and output of Dolby<sup>™</sup> Metadata
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

#### Inputs

• SMPTE 292M (1.5Gb/s serial digital), or SMPTE 259M

#### Outputs


- 1 BNC Dolby™ Metadata output (RS422/485)
- 8 AES de-embedded outputs

#### Controls

Audio channel routing selection

## Card Edge LEDs

- Module Status
- · Video Signal presence
- Audio group presence/errors

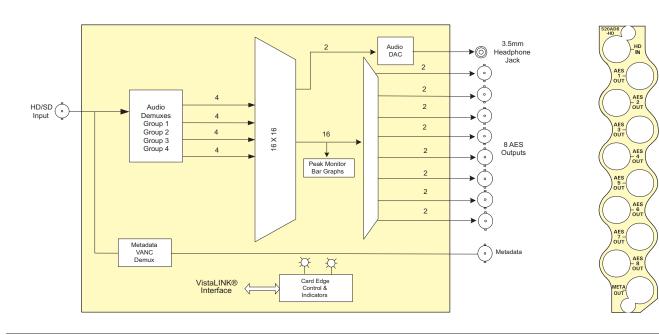

## **▶** Specifications

# Serial Video Input:

Standard:

1080i/50, 1080p/30 (sF), 1080p/29.97 (sF), 1080p/25 (sF), 1080/24 (sF), 1080/23.98 (sF), 720p/23.98, 720p/24, 720p/50, 720p/60, 720p/59.94, 1035i/60, 1035i/59.94

SMPTE 292M. (1080i/60, 1080i/59.94,

SMPTE 259M-C (270Mb/s) 525 or 625 line component

Connector: Equalization:

BNC per IEC 61169-8 Annex A Automatic 100m @ 1.5Gb/s with Belden 1694A (or equivalent) SMPTE RP2020

Metadata

Metadata Output:

Dolby-E™ Metadata SMPTE RDD6 Connector: \*1 BNC per IEC 61169-8 Annex A (\*BNC to DB9 dongles are provided)

Baud Rate: 115,200 baud

AES Audio Output:

Standard: Number of Outputs: SMPTE 276M, single ended AES

Connector: BNC per IEC 61169-8 Annex A

Sample Rate 48kHz Impedance: 750 Up to 24-bit Resolution:

#### System Performance: De-embedding

Latency:

600μs nominal (SD) 200µs nominal (HD)

Electrical:

+12V DC Voltage: Powe 10W

EMI/RFI: Complies with FCC Part 15 Class A.

EU EMC Directive

Physical:

Number of Slots: 1

## **>>>**Ordering Information

520AD8-HD

HD/SD-SDI Audio De-embedder with 8 unbalanced AES outputs

**Enclosures** 500FR

exponent

Compact High Density Distribution Frame Standalone enclosure

# HD/SD Audio Embedder with 8 Unbalanced AES Inputs

The 520AE8-HD Embedder embeds 8 AES input signals (16 channels) as 4 groups into a 1.5Gb/s HD video signal (as specified in SMPTE 299M) or into a 270Mb/s serial SD video signal (as defined by SMPTE 272M).

Several optional processing steps can be applied to the input audio before it is embedded. If needed, the 8 AES input signals can be processed by 8 on board sample-rate converters (SRCs). This processing will automatically detect Dolby-E™ /AC3 inputs and bypass the SRCs to maintain the integrity of the non-PCM audio data. Also, audio channels can be independently rearranged (using on-board 16x16 router) in any desired way before embedding.

The 520AE8-HD module also handles Dolbv-E™ Metadata. The module can optionally embed Metadata in the vertical ancillary data space (VANC) of HD/SD signals for downstream devices according to SMPTE RP2020.

The 520AD8-HD is housed in the 3RU 500FR **exponent** frame that will hold up to 16 modules.

## ▶ Features & Benefits

- · Fast locking AES receivers
- · Headphone jack with monitoring stereo channel
- Card edge display for status & audio channel peak levels bargraphs
- Dolby-aware SRC (sample rate converters)
- Flexible audio channel router (16x16)
- VistaLINK® -capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

- SMPTE 292M (1.5Gb/s serial digital), or SMPTE 259M
- 8 Channel AES (unbalanced)
- Dolby™ Metadata (RS422/485)


- Program output bypass relay protected
- 1 processed HD output

#### Controls

- · Audio channel selection
- · Embedded group enable/disable

#### Card Edge LEDs

- Module Status
- · Video Signal presence
- · AES input presence/errors

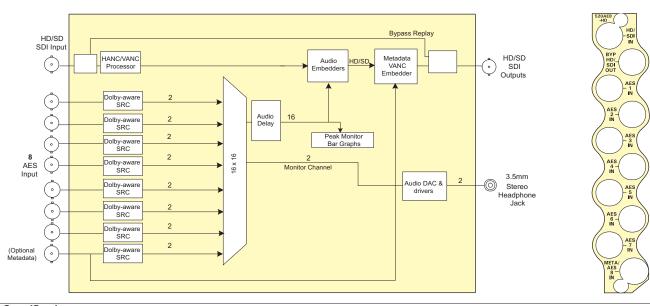

# ▶Specifications

## Serial Video Input:

Standard:

SMPTE 292M, (1080i/60, 1080i/59.94, 1080i/50, 1080p/30 (sF), 1080p/29.97 (sF), 1080p/25 (sF), 1080/24 (sF) 1080/23.98 (sF), 720p/23.98, 720p/24, 720p/50, 720p/60, 720p/59.94,

1035i/60. 1035i/59.94 SMPTE 259M-C (270Mb/s) 525 or 625

Connector Equalization:

line component BNC per IEC 61169-8 Annex A Automatic 100m @ 1.5Gb/s with Belden 1694A (or equivalent), 25m when bypass relay engaged

Processed Serial Video Output:

Standard: Same as input or user controlled Number of Outputs:

BNC per IEC 61169-8 Annex A Connector Signal Level: 800mV nominal

0V ±0.5V Rise and Fall Time: Per standard Overshoot < 10% of amplitude Wide Band Jitter: < 0.2 UI

AES Input:

DC Offset

SMPTE 276M Standard:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector 0.1 to 2.5V p-p

Input Level: Input Impedance:

Return Loss: > 25dB 100kHz to 6MHz Automatic to 1000m with Belden 1694A Equalization:

(or equivalent) @ 48kHz AES signal

Sample Rate: 48kHz ±100ppm

## Metadata Input:

Dolby-E™ Metadata SMPTE RDD6 Type: 1 BNC per IEC 61169-8 Annex A Connector (adapter to DB9 available)

115,200 baud Baud Rate:

#### System Performance:

Embedding Latency: 600µs nominal

3ms (with SRC), 0.2ms (SRC off)

#### Electrical: Voltage:

+12V DC Power 10W

Complies with FCC Part 15 Class A, EMI/RFI:

EU EMC Directive

#### Physical:

Number of Slots:

# >>> Ordering Information

520AE8-HD HD/SD-SDI Audio Embedder with 8 unbalanced AES inputs Enclosures 500FR S501FR

Compact High Density Distribution Frame









# HD-SDI/SD-SDI Closed Caption CEA-608 & CEA-708 Translator

The 7760CCM-HD Closed Caption module is a CEA-608 to CEA-708 closed caption translator, decoder and analyzer that extends the signal monitoring capabilities of the Evertz monitoring product line by focusing on closed captions and extended data services (XDS).

The 7760CCM-HD has the capability to translate CEA-608 closed captions to CEA-708 closed captions and vice versa, providing a flexible and costeffective solution for both caption domains. The module supports the ability to format closed caption data into SMPTE 333M or Grand Alliance format for RS-232 closed caption transfer.

The auto-detecting program input supports both high and standard definition video formats, and comes equipped with a bypass relay, which will maintain the program path in the event of a power failure.


The 7760CCM-HD provides both a CEA-608 and CEA-708 closed caption decoder. The 7760CCM-HD also provides a detailed and comprehensive status display to the current state of the closed caption data. This status display can inform operators quickly if an error was detected.

The 7760CCM-HD occupies one card slot and can be housed in either a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, 3RU portable frame that holds up to 7 modules or a standalone frame which will hold 1 module

#### ▶ Features & Benefits

- · CEA-608 / CEA-708 closed caption translator
- · Support for SMPTE 333M and Grand Alliance Protocol for convenient interface to ATSC Encoders
- · Built in bypass relay on program video output path
- Auto-detecting SMPTE 259M-C and SMPTE 292M program video input
- Monitoring output decodes and displays CEA-608 or CEA-708 closed captions
- · XDS packet insertion onto the program video output
- · Broadcast flag insertion

- Decodes XDS packets containing TSID, CGMS-A, Program ID, Time in Show, Program Name, Program Type, V-Chip Rating, Program Description, Network Name, Station ID, Time of Day and Time of Zone
- · Closed caption line shift (up and/or down) via GPI trigger
- · User configurable presets
- VistaLINK® capability is available when modules are used with the 3RU 7700FR-C or 350FR frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame

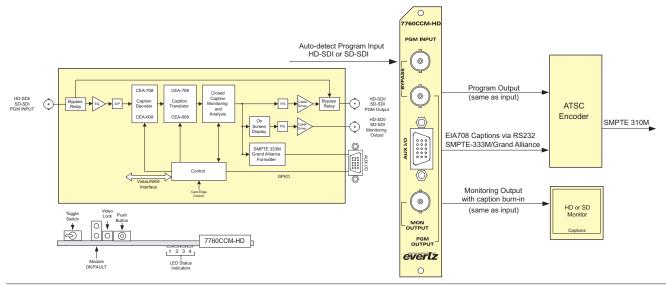

## ▶ Specifications

Serial Video Input:

Standard: Auto-sensing SMPTE 259M-C,

SMPTE 292M

Number of Inputs: BNC per IEC 61169-8 Annex A Connector:

Automatic to 100m @ 1.5Gb/s with Equalization Belden 1694A (or equivalent)

Automatic to 250m @ 270Mb/s with Belden 1694A (or equivalent)

Return Loss: >10dB up to 1.5 Gb/s

Program Output:

Standard: Same as input Number of Outputs:

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal

DC Offset: 0V ±0.5V

Rise and Fall Time: 740ps nominal @ SMPTE 259M-C 200ps nominal @ SMPTE 292M

Overshoot: < 10% of amplitude Return Loss: > 10dB up to 1.5Gb/s Wideband Jitter: < 0.2 UI

Impedance: 75W

General Purpose Interface: Number of Inputs: Number of Outputs:

Opto-isolated, active low with Type: internal pull-ups to +5V

Connector: Female High Density DB-15 Signal Level: +5V nominal

Serial Port:

Standard: RS-232 Connector: Female

Baud Rate: 19200/38400/57600

8-bits, no parity, 1 stop bits and no

flow control

# FMI/RFI Physical:

Electrical:

Voltage:

Number of Slots

### **bbb**Ordering Information

7760CCM-HD HD-SDI/SD-SDI Closed Caption CEA-608 / CEA-708 Translator

**Ordering Options** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR and 7700FR-C Multiframe +1RU

1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure

+12V

EU EMC Directive

Complies with FCC Part 15, Class A


# Closed Caption and XDS Configuration Utility


CaptionWare is an easy-to-use application designed to simplify the encoding of XDS (V-Chip, TSID, CGMS-A, Program ID, etc.), and to deliver a common control access point for Evertz 8000 and 9000 Series Closed Caption products.

CaptionWare also addresses the need for Closed Caption looping requirements, typically required for pledge drives. This simple-to-use software allows users to create and recall existing files, and to set the duration and number of loop intervals to run the Closed Caption message.

The software is also a very helpful test tool when debugging your plant set-up. CaptionWare gives the user an easy way to insert caption test messages, allowing simple debugging of any downstream products or decoders.

# ▶ CaptionWare Screen Shots

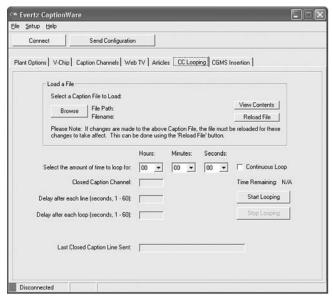

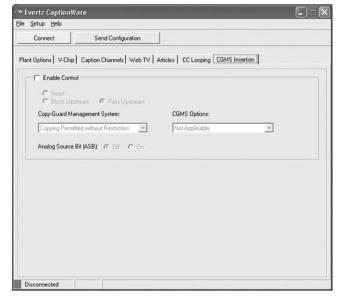

# **▶** Specifications

## PC Hardware Recommendations:

Operating System: Microsoft Windows(TM) (2000, XP)

Memory: Hard Disk: 128MB of RAM

10MB

2MB video card. Super VGA Display:

(800x600) or higher-resolution with

256 colours

Peripherals: 1 RS-232 serial communications port

# **>>>**Ordering Information

Closed Caption and XDS Configuration Utility CaptionWare

Compatible Evertz Hardware 8083XDS-AD 8084 8084-AD 8085 HD9084










- Simultaneous encoding of new CEA-608 and CEA-708 captions onto SD-SDI and HD-SDI video
- Dolby<sup>™</sup> Metadata encode via serial port ingest
- · Port Echo capability for closed caption encoder "daisy chain" set-up
- CEA-608 Line 21 VBI bridge functionability
- · CEA-708 Advance caption bridge functionability
- One SD-SDI, 270Mb/s digital video input, 525 or 625
- One HD-SDI, 1.5Gb/s digital video input, 1080i/720p/480p
- Support for SMPTE 334M, SMPTE 333M & grand alliance transfer formats for both SD-SDI & HD-SDI
- · Support for Line 21 CEA-608 captions on SD-SDI
- · Supports captioning over IP

10

- · Broadcast flag insertion
- RS232/422 serial, telephone modem, Ethernet TCP/IP and parallel GPI communication interface
- · Built-in CEA-708 (HD-SDI) and CEA-608 (SD-SDI) closed caption decoder via NTSC monitoring output
- · Closed caption shifting for both SD and HD captions
- · Easy configuration via front panel or via on-screen display
- Encoding of Extended Data Service Packets into field 2 of the SD-SDI signal including Transmission Signal Identifier (TSID), Copy Generation Management System (CGMS-A) and V-Chip

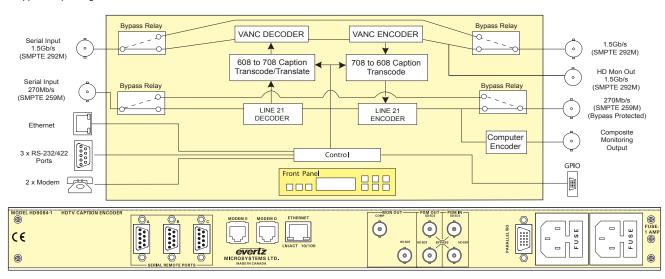

## ▶ Specifications

HDTV Serial Digital Video Input: Standard: SMPTE 292M 1.485 Gb/s, 1080i, 720p, 480p

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic up to 75m @1.5Gb/s with Belden 1694A (or equivalent)

Impedance: 750

#### HDTV Serial Digital Video Output:

Standard: Same as HD input

Number of Outputs: 1 program out (bypass relay protected)

1 monitoring out

Connector: BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: <10% of amplitude

Wide Band Jitter: <0.2 UI Impedance: 75Ω

## SDTV Serial Digital Video Input:

SMPTE 259M-C Standard:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic 200m @ 270Mb/s Belden

1694A (or equivalent)

## SDTV Serial Digital Video Output:

Same as Input Standard:

Number of Outputs: 1 program out (bypass relay protected) Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 470ps nominal Overshoot: < 10% of amplitude

> 15dB Return Loss: Wide Band Jitter: < 0.2 UI

## Composite Monitoring Output with OSD:

NTSC (SMPTE 170M) Standard:

Number of Outputs:

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 1V nominal 75Ω Impedance:

#### General Purpose In/Out: Number of Inputs:

Number of Outputs:

Opto isolated, active low Type: Female High Density DB-15 Connector:

Signal level: +5V nominal

# Communications and Control:

3 DB-9 male Serial:

RS232 /422 selectable 1200 baud to 57.6 kbaud 7 or 8 data bits

2 RJ-11 telephone jacks

(2nd modem optional) 1200 baud to 14.4 kbaud V.32BIS compatible

IEEE 802.3 (10 BaseT) Ethernet: IEEE 802.3u (100 BaseTX)

RJ-45 connector

Physical:

Modem:

Dimensions:

19"W x 1.75"H x 18.75" (483mm W x 45mm H x 477mm D)

Weiaht: 8lbs (3.5kg)

#### Electrical: Power:

115/230V AC 50/60Hz, 40W Safety:

ETL Listed

Complies with EU safety directive EMI/RFI: Complies with FCC part 15, class A

EU EMC Directive

## **>>>**Ordering Information

HD9084 HD/SD-SDI DTV Closed Caption Encoder

**Ordering Options** 

+2PS +MDM2 Optional redundant power supply Second internal modem option

# Analog & SD-SDI Closed Caption Encoder

The 8084 is a full broadcast quality Closed Caption Encoder which generates CEA-608 line 21 caption data directly into the digital bitstream. The 8084AD is a full broadcast quality Closed Caption Encoder which generates line 21 caption data directly into both analog and digital video feeds. The 8084 and 8084AD allow data to be encoded into all caption and text channels in both field 1 and field 2 of the video. It can also encode Extended Data Service (XDS) packets into field 2 supporting such services as Transmission Signal Identifier (TSID), Copy Generation Management System (CGMS-A), station name, call letter identification, program name, classification, remaining air time and content advisory ratings (compatible with V-Chip decoders).

The 8084 and 8084AD are highly configurable to guarantee maximum compatibility with a wide variety of applications and software packages. The encoder can be configured to individually manipulate each data stream independent of the others. It is also compatible with various automation and traffic programs such as Enterprise's "BMS Traffic System".

The built-in bypass relay, fault reporting output and optional redundant power supply ensure robust operation. The analog monitor output displays visible captions from any data channel, including many XDS packet types.



#### ▶ Features & Benefits

- Kevs directly into a 525 line or 625 line component (4:2:2) digital video bitstream
- 8084AD also keys directly into NTSC or PAL composite analog video
- · Can add captions, text, web links or Extended Data Service information to previously captioned programs
- Individual caption and text data streams can be passed, modified or removed from the incomina video
- Support for text insertion from articles stored in the one encoder by the captioning software
- Support for Extended Data Service (XDS) to encode program information including TSID, CGMS-A and V-Chip content advisory ratings
- · V-Chip blocking codes selectable from front panel menus
- · Selectable V-Chip default rating after timeout
- Bypass relay can be activated by GPI, front panel or automatically on power failure to allow the input video to pass through the unit unprocessed
- Three RS-232/RS-422 serial ports allow simultaneous control from three computers, for applications such as in house captioning, XDS insertion and more
- Built in modem interface for dial-up real time captioning
- · Support for an optional second internal modem
- · Built-in composite analog monitoring decoders provide real-time verification of encoded data. The decoded captions, text or XDS data is inserted as open captions on the monitoring video outputs
- · Monitor mode allows caption data to be read directly from line 21 and output on the serial port

- Built in test message inserts data into all 9 data channels
- Composite decoder can display these XDS packet types: Network Name. Call Letters, Program Name, Program Length, Time in Show, Program Type, Program Description and Program Rating
- · Ability to offset the effect of downstream component to composite encoders which add setup to line 21
- VBI Bridge function allows captions to be copied from one video source to another using two 8084 or 8084AD units
- GPI input to provide caption shift. This input can control the shift of rows 12 to 15 up to rows 1 to 4 when activated. Intended to provide compliance with FCC order prohibiting obstruction of weather warning text which often appears on the bottom of the screen
- · Can encode captions on lines other than line 21 for specialized applications
- EDH Packet checksum correction ensures SDI video integrity to downstream equipment
- SMPTE 269M fault reporting output
- Optional LTC input for setting internal clock
- Supports a wide variety of caption software including the following: The Captioning Center - CCSQ and CCMS, Captions Inc. - Smart Encoder V 1.0b, Evertz ProCAP, Cheetah Systems - Captivator Offline Edit Version 2.1, Captivator Offline PostCAP 2.1, VITAC PostCAP 2.1, Computer Prompting and Captioning Co. -CPC-700 Version 6.20, National Captioning Institute - Text Encoding and Display System (TED) version 1.7, Autograph Systems - View level XDS controller, Rapid Caption



## ▶ Specifications

# SDTV Serial Digital Video Input:

Standard: SMPTE 259M-C Number of Inputs:

Connector:

BNC per IEC 61169-8 Annex A Equalization: Automatic 200m @ 270Mb/s Belden

1694A (or equivalent)

24m with bypass relay installed

#### SDTV Serial Digital Video Output: Same as Input

Standard: Number of Outputs:

1 program out (bypass relay protected) BNC per IEC 61169-8 Annex A

Connector: Signal Level: DC Offset: 800mV nominal

0V ±0.5V Rise and Fall Time: 470ps nominal < 10% of amplitude Overshoot:

Return Loss > 15dB Wide Band Jitter: < 0.2 UI

#### Composite Video Monitor:

2 BNC 1V p-p composite analog video Decoder:

outputs with open captions

### Communications and Control:

3 DB-9 male Serial:

RS-232/422 selectable 1200 baud to 38.4 kbaud 7 or 8 data bits

Modem: 2 RJ-11 telephone jacks

(2nd modem optional) 1200 baud to 14.4 kbaud

V.32BIS compatible Parallel GPI: DB-9 female

# Composite Analog Video (8084AD only):

Standard: NTSC SMPTE 170M PAL ITU-R BT.1700 BNC 75 $\Omega$  terminated Input: Output: BNC with bypass relay Preview: BNC output with open captions

Physical:

19"W x 1.75"H x 18.75" Dimensions

(483mm W x 45mm H x 477mm D)

8lbs (3.5kg) Weiaht:

Electrical:

115/230V AC 50/60Hz, 40W Power:

Safety: ETL listed

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15, Class A

EU EMC Directive

#### **▶** ► ► ► Ordering Information

SD-SDI Closed Caption Encoder 88084AD Analog & SD-SDI Closed Caption Encoder Ordering Options

+MDM2 +2PS +LTC

Second internal modem option Redundant power supply Optional LTC input



# Analog & SD-SDI XDS Encoder

The 8083XDS-AD is a full broadcast quality XDS Encoder which generates line 21 XDS data directly into both analog and digital video feeds. The 8083XDS-AD encodes Extended Data Service (XDS) packets into field 2 supporting such services as Transmission Signal Identifier (TSID), Copy Generation Management System (CGMS-A), station name, call letter identification, program name, classification, remaining air time and content advisory ratings (compatible with V-Chip decoders).

The 8083XDS-AD is highly configurable to guarantee maximum compatibility with a wide variety of applications and software packages. The encoder can be configured to individually manipulate each data stream independent of the others. The 8083XDS-AD is also compatible with various automation and traffic programs such as Enterprise's "BMS Traffic System".



Built-in bypass relays on both video paths, a fault reporting output and an optional redundant power supply ensure robust operation. Two separate analog monitor outputs display visible captions from any data channel, including many XDS packet types.

#### ▶ Features & Benefits

- Keys directly into a 525 line or 625 line component (4:2:2) digital video bitstream and composite analog video signal
- Support for Extended Data Service (XDS) to encode program information including TSID, CGMS-A and V-Chip content advisory ratings
- · V-Chip blocking codes selectable from front panel menus
- · Selectable V-Chip default rating after timeout via front panel
- · Bypass relays for both video paths can be activated by GPI, front panel or automatically on power failure to allow the input video to pass through the unit unprocessed
- Three RS-232/RS-422 serial ports allow simultaneous control of the 8083XDS from three computers, for applications such as multi-point XDS insertion
- · Built in test message inserts data into all 9 data channels

- · Separate built-in composite analog monitoring decoders for each video path to provide real-time verification of encoded data. The decoded captions, text or XDS data is inserted as open captions on the monitoring video outputs
- Composite decoders can display these XDS packet types: Network Name, Call Letters, Program Name, Program Length, Time in Show, Program Type, Program Description and Program Rating
- · VBI Bridge function allows captions to be copied from one video source to another using two Evertz closed caption or TSID units
- · EDH Packet checksum correction ensures SDI video integrity to downstream equipment
- · SMPTE 269M fault reporting output
- · Optional LTC input for setting internal clock

# ▶ Specifications

SDTV Serial Digital Video Input:

SMPTE 259M-C Standard:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector Equalization:

Automatic 200m @ 270Mb/s Belden 1694A (or equivalent)

24m with bypass relay installed

## SDTV Serial Digital Video Output:

Standard: Same as Input Number of Outputs:

1 program out (bypass relay protected) Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 470ps nominal

Overshoot: < 10% of amplitude Return Loss > 15dB

Wide Band Jitter: < 0.2 UI

#### Communications and Control:

Serial: 3 DB-9 male

RS-232/422 selectable

1200 baud to 38.4 kbaud

7 or 8 data bits

DB-9 female

#### Composite Analog Video:

NTSC SMPTE 170M Standard: PAL ITU-R BT.1700

Input: BNC 75 $\Omega$  terminated Output: BNC with bypass relay

Preview: BNC output with open captions

#### Physical:

Parallel GPI:

19"W x 1 75"H x 18 75" Dimensions:

(483mm W x 45mm H x 477mm D)

Weight: 8lbs (3.5kg)

## Electrical:

EMI/RFI:

115/230V AC 50/60Hz, 40W Power: Safety:

ETL Listed

Complies with EU safety directive Complies with FCC Part 15, Class A

EU EMC Directive

## **▶▶▶** Ordering Information

Analog & SD-SDI XDS Encoder 8083XDS-AD

Ordering Options +2PS

Redundant Power Supply Optional LTC Input

+LTC

# Multivert (10 SDI to analog Monitoring Converter)

The Multivert, a 10 channel composite encoder was designed for monitor wall applications where multiple SDI component video signals need to be converted to composite analog. The Multivert is the most cost effective method of monitoring on a per channel basis as it houses 10 converters as well as a redundant power supply in a 1RU frame. Each of the ten channels has two composite analog video outputs as well as a single regenerated SDI component video output.

The Multivert proves itself to be a better alternative to the use of awkward dongle based converters that use wall mounted or brick based power supplies.


The Multivert is a compact 1RU, 7.75 inches deep, rack mountable frame with both front and rear panel LED status displays for each of its ten channels. Thanks in part to its compact size, the Multivert is capable of being mounted in the rear of the monitoring wall equipment rack (Multivert was designed with capability to reverse the rack mounting brackets). Further, by having status LEDs on both the rear panel as well as the front panel, it allows the cables to be installed facing the rear of the rack thus providing for both status monitoring as well as convenient cabling.



Having the Multivert mounted in the rear of the monitor racks eliminates the need for long analog cable runs from modular converters in the equipment rack room to the monitors, thus eliminating the need for analog equalizing DAs.

#### ▶ Features & Benefits

- 10 independent converters in a 1RU enclosure
- · 2 NTSC/PAL analog composite color outputs per converter
- · Reclocked SDI output for each channel
- · Ideal for monitoring serial component signals with inexpensive composite analog monitors
- · Reversible rack ears allow for mounting in the back of a rack and with the shallow chassis measuring only 7.75"
- · Can be mounted directly behind other equipment
- · Dual power supply (optional)
- Each channel has front panel LEDs for PAL, NTSC and signal presence
- Video presence LED for each channel, viewable from the rear of each frame

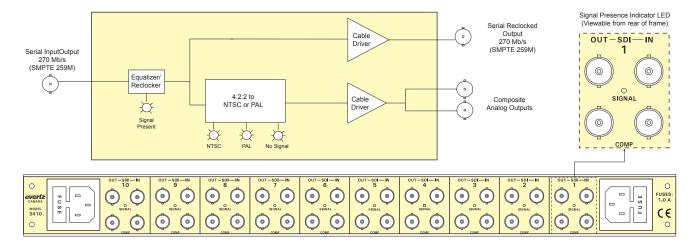

#### ▶ Specifications

Serial Digital Video Inputs:

SMPTE 259M-C 525 line and 625 line Standard:

component Number of Inputs: 10 (1 per converter)

Automatic up to 250m with Belden Input Equalization:

8281(or equivalent) Connector: BNC per IEC 61169-8 Annex A

Return Loss: > 15dB up to 540Mb/s

75Ω Impedance:

Serial Digital Video Outputs:

Standard: Serial component 270Mb/s (SMPTE 259M-C) Number of Outputs: 10 (1 per converter)

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 750ps nominal Overshoot: < 10% of amplitude

> 15dB Return Loss Wide Band Jitter: < 0.2 UI 75Ω Impedance:

I FDs

Signal Presence: 10 Front (NTSC and PAL)

10 Rear 2 Front

Power Supply:

Composite Analog Outputs:

Number of Outputs: 20 (2 per converter) Standard:

Analog composite NTSC if input is 525i/59.94 SMPTE 170M

Analog composite PAL if input is 625i/50 ITU-R BT.1700

Connectors: 2 BNC per IEC 61169-8 Annex A Signal Level: 1V p-p nominal, internally adjustable

DC Offset: 0V ±0.1V

Return Loss: > 45dB up to 6MHz 75Ω

Impedance:

Physical: Dimensions:

19"W x 1.75"H x 7.75"D

(483mm W x 45mm H x 196mm D) Weight: 6.7lbs (3kg) with two power supplies

#### Electrical: Power:

Safety:

Auto ranging 100-240V AC 50/60Hz

FTI listed

Complies with EU safety directive EMI/RFI: Complies with FCC part 15 class A

EU EMC Directive

# **>>>**Ordering Information

3410 Multivert (10 SDI to Analog Monitoring Converter) Ordering Options

455

# Offline Captioning Software



Player

 Using Windows™ XP multimedia subsystem for playback, ProCAP adds caption and subtitle preview over video for WYSI-WYG display, timing and positioning.

#### Editor

· Using Microsoft® Word, ProCAP extends the functionality of the universal word processor allowing users to import or create transcripts & author and edit captions, caption styles, format and positioning.

#### Timeline

· Provides a pictorial view of the caption information. Shot change detection, a film strip and an audio waveform allows for precise alignment of captions and subtitles.



Avid NLE with MetaSync®
• ProCAP Author seamlessly integrates with Avid NLEs. Avid WM9 export clips can be used directly. MetaSync® export scripts can be imported for finishing, or any available transcript used as a starting point. Completed work can be output for Transfer or as a Line 21 Quicktime video clip to be taken back into the Avid project.

ProCAP Authoring Systems
• ProCAP Author saves time by supporting EIA-608 Line 21 captioning, EIA-708 DTV captioning and DVD Subtitling all in the same application - the work done for one standard can be applied to the next. Cheetah, .CAP, TDS, .SCC for DVD Line 21, DVD scripts and Image files are all supported.

100/1000Mb Hub

Video Destination (VTR, NLE, Server)











 Using an industry standard capture card and an SATA II subsystem in a 1RU server, the resulting MPEG1/ WM9 file is a frame-accurate capture of the source video.

Video Source (VTR, NLE, SERVER)

· Lower cost capture solutions combined with the Author station are also available. Burn-in time code on the capture, or optional LTC capture ensures frame-accurate results. Support for external MPEG1/ WM9 file sources

# ProCAP Transfer

LTC/VITC

Time Code

Left Audio Right Audio

Time Code

· ProCAP Transfer ensures accurate and consistent encoding of captions to video. Support for various file formats including .TDS, Cheetah, .CAP, CIN, NCI, and NCI .FLC.

ProCAP Capture/Transfer System

RS-232

EIA-608-708

Encoder

· ProCAP transfer can also capture existing Line 21 streams and export them as .SCC files for DVD. Encoding time code can be changed or started manually.

# Omneon Server Support

10

ProCAP Transfer allows for off-line caption encoding directly into clips residing on an Omneon server. The typical speed is 4 to 6 times real-time.

胸

10

· Because Line 21 data is inserted into the video clip, there is no generation loss. Clip caption status tagging allows simplified automation support.

# ▶ Features & Benefits

· Full customization of keyboard shortcuts and macros to suit the user

Original LTC Time Code

- WYSI/WYG control over caption placement through drag-and-drop and shortcuts.
- Resizeable player window. Windows™ XP allows for multi-monitor display
- · Timeline provides a pictorial view of caption reading rates and any conflicts or errors during authoring, saving revision time and costs
- · Shot scene detection with film strip and audio waveform allows for accurate positioning of captions
- Interfaces to Avid and Avid MetaSync® allowing for rapid captioning of material
- · Omneon Encode support delivers performance of 4 to 6 times real-time encode
- · Automation support through clip tagging

# **▶** ► ► ► Ordering Information

PA-SW-DVD

PA-SW-708 ProCAP Author Software only, 1 Station License,

Adds 708 to Base

Gigabit

Ethernet

ProCAP Author Software only, 1 Station License, PA-SW-BASE

Base CEA-608 Standard ProCAP Author Software only, 1 Station License,

Adds DVD to Base PA-SW-FULL ProCAP Author Software only, 1 Station License,

All Options

Closed Caption Encoder
• ProCAP Transfer supports any new or existing CTRL-A Protocol compliant Closed Caption encoder. · For digital video applications, the Evertz HD9084 is a full broadcast-quality CEA-608 and CEA-708 digital encoder.

ProCAP Capture Hardware and Third Party Software PC-HW ProCAP Transfer PCI Timecode Reader Board PCT-HW-TC ProCAP Transfer Software only, 1 Station License, T-SW

with 1 year support

The 1200DD Series Digital Data Displays are LED digital clocks with 7-segment-digits display. They may operate as a timecode-reading clock or as a digital SMPTE 12M-1 linear timecode reader, simply displaying the input timecode. In addition to SMPTE 12M-1 timecode, the clock can operate on the internal quartz time base LTC, from IRIG-B, a GPS antenna or NTP. This multi-way reference capability allows easy integration into new or existing clock systems.

The 1200DD clock face has 2.25" tall digits that may display HH:MM:SS AM/PM or HH:MM:SS FF, depending on the control settings. The model 1201DD clock face has 1.00" tall digits that may display HH:MM:SS AM/PM or HH:MM:SS FF, depending on the control settings. The brightness of the digital LEDs is adjustable.

Clock installation is simple when one of the time sources is available. Apply power, connect time, select the input source and the clock takes care of the rest, instantly setting to the correct time. If the time source fails, the two small character displays flash twice per second to signal its absence. Any time discrepancy on return of timecode is instantly corrected. This also applies to time changes such as Standard Time to Daylight Saving Time


The 1200DD series displays may be preset to display an offset from local time. This local offset allows the display of any or all time zones at one location. This offset is userprogrammable from -12 hours to +12 hours. When no source of timecode is available,



the 1200DD series displays may be configured as a timecode generator, using its internal quartz crystal or GPS or IRIG-B or NTP. When used as a generator, the 1200DD series displays can drive multiple high impedance, timecode reading devices.

If AC power is lost, the 1200DD series displays maintain time internally via a crystal oscillator powered by a lithium battery. The display will show this time if no input time source is available on power up.

The rear panel input and output connectors for timecode are XLR connectors. The IRIG-B input is a BNC and the NTP is a RJ-45 Ethernet connector. The GPS input is a DB9 connector. The GPS feature requires the +GP option be purchased. When operating with no time source, the clock time can be easily set by means of three miniature pushbuttons on the front panel, which are also used to control the setup menu.

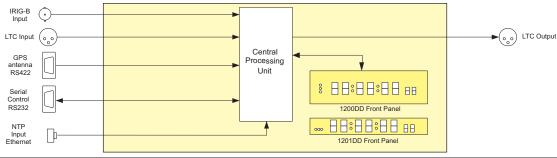

#### ▶ Features & Benefits

- · Completely self-setting with SMPTE/EBU timecode input or battery back-up
- · Built-in quartz time base oscillator with battery back-up
- · May be operated as a timecode reader for use with countdowns
- Digital display is user-selectable between HH:MM:SS, 12/24 hour, HH:MM:SS FF and date
- IRIG reader reads 1kHz IRIG-B format sine wave amplitude modulated code (format B122)
- Optional GPS receiver
- · May be configured as a timecode generator to drive other clocks
- · LED brightness is adjustable
- Runs on 50/60Hz. 115/230V AC power line
- User-programmable time offsets
- Rack mount
- VistaLINK® control for device configuration and status monitoring
- · Programmable daylight saving time start & end times
- NTP client
- · Standard Red LED's (Green Optional -G)

#### ▶ Specifications

#### Linear Time Code Input:

Standard: SMPTE 12M-1 linear time code - 24, 25

or 30 Fps nominal Impedance: 30kΩ, balanced 3-pin female XLR Connector: 1V to 4.5 p-p

#### IRIG Reader Input:

IRIG 200-95 FORMAT B122 Standard: BNC per IEC 61169-8 Annex A Connector Level: 0.2 to 4V p-p unbalanced

#### Linear Time Code Output:

Standard: SMPTE 12M-1 Impedance Lo-Z, balanced 2V p-p nominal unloaded Level: 3-pin male XLR Connector:

#### Serial Port:

Female DB-9 Connector: Level RS-232 Baud Rate: 57.6kBaud

8 data bits, no parity, 2 stop bits Format:

# Time Keeping:

< 2 seconds per day with power on, no Accuracy timecode present

> < 10 seconds/day with power removed 0 to 23% hours in % hour increments

Time Zone Offset: Set with menu

# GPS Receiver (+GP option):

-30°C to +70°C Temperature:

Humidity: 95% R.H. Condensing at 60°C Dimensions 5.8" D x 3.9" H (147mm x 100mm) Max. Cable Length: 400 feet

#### Ethernet: Network Type:

Ethernet 100 Base-TX IEEE 802.3u

standard for 100Mb/s baseband CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10Mb/s baseband CSMA/CD local area network

Connector: **RJ-45** 

NTP Standard: RFC-1305 compliant, client mode support

#### Backup Battery: Type:

CR-2032 3 volt lithium cell. > 5 years Life expectancy:

#### Electrical:

Power 12V DC, 15W auto ranging 100 to 240V AC, 50/60Hz adapter included Power Supply **UL Listed** 

Complies with EU low voltage Safety:

directive.

Complies with FCC Part 15 Class A EU EMC Directive

#### Physical: Dimensions

EMI/RFI:

1200DD

19" W x 3.5" H x 2.75" D (483mm W x 90mm H x 70mm D) 1201DD 19" W x 1.75" H x 2.75" D (483mm W x 45mm H x 70mm D)

#### Weight: 1200DD

3 lbs (1.5kg) 1201DD 2 lbs (1 kg)

## Controls

Front: 3 pushbuttons Rear: Serial port com.

Local Offset Any amount, user selectable

## >>> Ordering Information

1200DD 2RU Rack-mount Digital Display 1201DD 1RU Rack-mount Digital Display 2RU Rack-mount Digital Display - Green LED's 1200DD-G 1201DD-G 1RU Rack-mount Digital Display - Green LED's

#### Ordering Options & Accessories

GPS Option (includes GPS receiver and 50' weatherproof cable) +GP

WA-T76 100' weatherproof cable for GPS receiver 400' weatherproof cable for GPS received



The introduction of Evertz analog time displays takes master and slave clock technology to new levels of convenience and excellence. The clocks are microprocessor controlled and employ separate direct drive motors for each hand. This means that, as well as being able to set the time almost instantaneously, the new displays are also silent in operation. The hands of the clocks can be programmed to move in sweep mode or in steps.

Each slave clock can be programmed for automatic daylight saving time adjustment, as well as for any time zone offset using a laptop computer. It is then only necessary to supply the clock system with Universal Coordinated Time (UTC) from the master clock. Daylight saving time changes will be automatic, as will adjustments for different time zones.

Each clock can be used as a master or slave clock. When used as a master, it generates timecode for distribution to other slave clocks. In fact, any clock in the chain can generate timecode as soon as it looses timecode input from the master. The system is therefore extremely robust and reliable.

The problems of power distribution have also been considerably simplified. With other clock products, it is necessary to install power outlets wherever clocks are to be located. With the Evertz system slave clocks are powered from a single feed that distributes both power and modulated timecode. The power is introduced at one of the 1212 slave clocks and from there it is distributed to the other downstream clocks. If the system is large, power can be introduced at multiple convenient slave clock locations.

Internal crystal oscillators ensure that the clocks will continue to operate in the absence of input timecode. Internal battery back-up ensures that each clock will continue to keep time in the absence of timecode and power. When power resumes, the hands will immediately reset to the correct time.

#### ▶ Features & Benefits

- SMPTE/EBU timecode input
- · Three motors for quiet operation and rapid hand setting
- · Addressable slave clocks with programmable time offsets
- · Automatic Daylight Saving time adjustment
- · Single cable distribution for both power and timecode

- Low voltage (12V) operation
- · Master or Slave operation with battery backed up clock
- · Sweep or Step second hand movement
- · Optional Illumination
- Two sizes 12" or 16"

# ▶ Specifications

# Time Code:

SMPTE 12M-1 Standard: Connectors: Screw terminal block Input Level: 1V p-p nominal Input Impedance:  $40k\Omega$  nominal

Output Level: Powered:

2V p-p with 11V DC nominal offset to drive downstream slave clocks Looped through from input

Non-Powered:

#### Serial Control:

RS-232-C Standard: Baud: 2400

Format: 8-bits, 1 Stop Bit, no flow control Connector:

Female 9-pin D Function:

Control commands for setting time zone offset, daylight savings time, and

operational modes

Commands sent to downstream slave clocks over time code user bits

Time Keeping:

1 second per day free running on Accuracy internal crystal oscillator

3V Lithium

Battery: Time Zone Offset:

Set from DIP switches or serial command 0 to 23.5 hours in 1/2 hour increments

#### Switches/Controls:

Pushbutton and toggle switch for setting time manually 8 DIP switches:

- set sweep/step motion
- · set default time code rate when no incoming time code
- · set timecode offset or allow software

control of time offset

#### Electrical: Power

Safety:

Auto ranging 115/230V AC 50/60Hz 30W or 12V DC from upstream powered clocks Power supply UL listed

Complies with EU safety directive Complies with FCC Part 15 Class A EMI/RFI:

EU EMC Directive

#### Physical:

Dimensions Model 1212

13" W x 13" H x 2.5" D (330mm W x 330mm H x 64mm D)

Model 1216 17" W x 17" H x 2.5" D

(432mm W x 432mm H x 64mm D)

Weight: Model 1212

6.5lbs (2.9kg) Model 1216 10.5lbs (4.75kg)

## **▶** ► ► ► Ordering Information

12" diameter Analog Clock Display 1216

16" diameter Analog Clock Display
12" diameter Analog Clock Display with backlighting
16" diameter Analog Clock Display with backlighting 1212L 1616L

# Digital Clock Display

The 1275A is a multifunction time-of-day display that can act as a slave to a master clock system or as a self-contained, presettable clock.

Sixty bright rectangular LEDs are mounted in a circular arrangement simulating an analog second hand. Twelve individual round LEDs indicate the hour. In addition, the hours, minutes and seconds are displayed in digital format.

As a slave display, the unit will read SMPTE/EBU time code. The user can program time zone offsets from the incoming code. The DQS-B6 code format can be specially ordered.

As a standalone clock, it can be programmed to operate in either 12 or 24 hour mode. Two unobtrusive front panel push-buttons allow presetting and accurate synchronization to a standard time source.

An eight-position DIP switch permits user selection of four different operating and display modes and the time zone off-set.

Beautifully finished with black wood trim, the 1275A is ideally suited for studio, lobby, board room or office mounting.



# **▶** Specifications

Functional:

Code Input:

SMPTE/EBU Time Code

 $20k\Omega$  balanced or unbalanced DQS-B6 available on special order

Accuracy: Approximately 1 second per week on

internal crystal oscillator

Time Zone: ±12 hours

Offset from SMPTE/EBU code input (1

hour increments)

#### Electrical:

Power: 1275A-110:

115V, 60Hz, 15W 220V, 50Hz, 15W 1275A-220:

Safety: ETL Listed EMI/RFI:

Complies with EU Safety directive Complies with FCC Part 15 Class A EU EMC Directive

#### Physical:

Weight:

9.6" W x 9.6" H x 2.125" D (244mm W x 244mm H x 54mm D) 1" (25mm) diameter hole in rear panel to accommodate electrical conduit

# **>>>**Ordering Information

1275A-110 1275A-220 1275-xxx-DQS Digital Clock Display 115V/60Hz Digital Clock Display 220V/50Hz

For DQS-B6









# 5010-GPSII, 5010-VITC-GPSII

#### Time Code Generator / Reader with Character Inserter & GPS Antenna

The 5010-GPSII Time Code Master combines the features of our standard 5010 time code generator with the ability to produce GPS referenced SMPTE/EBU time code anywhere on the face of the globe. The GPS (Global Positioning System) technology provides the 5010-GPSII Time Code Master with an accurate source of time reference. The system is ideally suited for OB or mobile operations and any professional television broadcast applications where accurate time references are a must. The 5010-GPSII system may be programmed to request a time reference from the GPS receiver automatically, daily, or on demand. The 5010-GPSII can be ordered in two configurations. Model 5010-GPSII is an LTC Generator, Reader,



Character Inserter with Accutime GPS receiver. Model 5010-VITC-GPSII comes complete with Vertical Interval Time Code capability.

#### ▶ Features & Benefits

- · Generates Time code in accordance with SMPTE 12M-1 locked to NTSC or PAL video
- Can be operated as standard time code generator/reader or as a GPS referenced time code master
- Date/Time Zone encoded into user bits according to SMPTE 309M
- · Generates and reads universal co-ordinated time (UTC) or local time in time/date mode
- · Automatic daylight saving time adjustment in time/date mode
- High resolution Character Inserter, with three Character sizes, 8, 16 and 32 lines, time and user bits separately positionable on raster
- Reads LTC from 1/30th to 70x play speed. Well proven input circuitry design permits reliable recovery of even severely distorted code
- · Momentary or continuous Jam-sync modes
- · Time and user bits are presettable from the front panel
- · Parallel control of commonly used functions
- · User bit Transfer from Reader Time or User bits

- · On-screen programming menu
- · GPS receiver, 50ft of cable (optional 100 & 400ft. cables for long receiver distances)
- Ideal for OB or Mobile applications
- · Easy mounting and installation
- · 2 General purpose outputs can be assigned to several output modes
- Tally output on loss of lock to GPS receiver

### Additional Features of the 5010-VITC-GPSII

- Optional bypass relay on 5010-VITC-GPSII
- · Vertical Interval Time Code Generator, and Reader
- · Separate genlock and PGM video inputs
- Set VITC Generator Line numbers from the front panel
- Translates LTC to VITC or VITC to LTC
- Reads VITC over the full shuttle range of most VTRs

Electrical:

Power:

Safety:

EMI/RFI:

Auto ranging 100-240VAC 50/60Hz

Complies with EU safety directive

Complies with FCC Part 15 Class A

FTI listed

EU EMC Directive

· Selectable reader line range

## ▶ Specifications

#### LTC Generator:

SMPTE 12M-1

NTSC 2/4 field; PAL 4/8 field menu

selectable

3-pin male XLR type Output: Adjustable, 0.5V to 4.5V p-p Level:

Rise Time: 40 ±10ms Jitter: < 2ms

#### LTC Reader:

Standard: SMPTE 12M-1 Time code 3 pin female XLR type Input:

Level 0.2 to 4V p-p, balanced or unbalanced Speed: 1/30th to 70x play speed, fwd and

rev, machine dependent

# GPS Receiver:

Temperature: -30°C to +70°C

Humidity: 95% R.H. Condensing at 60°C 5.8" D x 3.9" H (147mm x 100mm) Dimensions: Cable Options:

Standard 50'

Optional 100' (order WA-T76) Optional 400' (order WA-T11)

### VITC Generator: (5010-VITC-GPSII):

Composite Video 1Vp-p,  $75\Omega$ 

Outputs:

2 Composite Video + keyed VITC 1 Output bypass relay protected when

+BP option is installed

Differential Gain: < 0.5%

 $< 0.5^{\circ}$ Differential Phase:

#### VITC Reader (5010-VITC-GPSII):

Composite video 1V p-p, Hi-Z, BNC Loop Still frame to > 40x play Speed:

Character Generator Composite video 1V p-p,  $75\Omega$  terminated Input:

> resolution characters, selectable background and sizes

# Physical:

Output:

19"W x 1.75"H x 7.75"D

(483mm W x 45mm H x 196mm D)

Com. video 1V p-p + keved high

Weight: 7lbs (3.5kg)

#### **>>>**Ordering Information

Comes with a standard GPS Receiver and 50ft. weatherproof cable

Time Code Generator with GPSI VITC Time Code Generator with GPSII 5010-VITC-GPSII

Ordering Options

+BP Bypass relay for 5010-VITC-GPSII **WA-T76** 

100 Feet Weatherproof Cable for GPS receiver 400 Feet Weatherproof Cable for GPS receiver WA-T11

• Generates time code in accordance with SMPTE 12M-1 locked to NTSC or

 $\bullet$  High resolution Character Inserter, with three Character sizes: 8,16 and 32

• Well proven input circuitry design permits reliable recovery of even severely

Date/Time Zone may be encoded into user bits according to SMPTE 309M
 Generates and reads universal co-ordinated time (UTC) or local time in

• 25 Fps  $\leftrightarrow$  29.97 Fps SMPTE drop frame time code translator mode

Automatic daylight saving time adjustment in time/date mode
2 General purpose outputs can be assigned to several output modes

PAL video or free run on internal crystal oscillator

• Reads LTC from 1/30th to 70x play speed

Momentary or continuous Jam-sync modes
Time and user bits are presettable from the front panel
RS-232 serial port permits interfacing to computers

Parallel control of commonly used functions
User bit Transfer from Reader Time or User bits

• On-screen programming menu

lines, time and user bits separately positionable on raster

▶ Features & Benefits

distorted code

time/date mode







### Additional Features of the 5010-VITC

- Vertical Interval Time code Generator and Reader
- · Separate genlock and PGM video inputs
- Set VITC Generator Line numbers from the front panel
- Translates LTC to VITC or VITC to LTC
- Reads VITC over the full shuttle range of most VTRs
- Selectable reader line range
- · Optional Bypass Relay on VITC Generator

#### Additional Features of the 5010-24Fps

- Genlocks to 23.98 'slow PAL' or NTSC
- 23.98 Fps  $\leftrightarrow$  29.97 Fps time code translator mode
- Momentary or continuous Jam-sync modes
- Locks to 6Hz reference in 24Fps mode

# Time Code Feature Comparison

|                                     | 5010-GPSII | 5010-VITC-GPSII | 5950     | 5010 | 5010-VITC |
|-------------------------------------|------------|-----------------|----------|------|-----------|
| LTC Generator                       | <b>V</b>   | V               |          | V    | V         |
| Adjustable Output Level             | <b>V</b>   | V               |          | V    | V         |
| VITC Generator                      |            | V               |          |      | <b>✓</b>  |
| LTC Reader                          | <b>V</b>   | V               | V        | V    | V         |
| VITC Reader                         |            | V               | V        |      | V         |
| VITC to LTC Translator              |            | V               | V        |      | V         |
| LTC to VITC Translator              |            | <b>✓</b>        |          |      | <b>✓</b>  |
| LTC Re-shaper                       |            |                 | V        |      |           |
| PAL and NTSC                        | <b>✓</b>   | V               | <b>V</b> | V    | <b>✓</b>  |
| Color Framing                       | <b>V</b>   | <b>✓</b>        |          | · ·  | V         |
| Drop Frame                          | <b>✓</b>   | <b>✓</b>        | V        | · ·  | V         |
| Set User Bits (0-9, A-F)            | <b>✓</b>   | <b>✓</b>        |          | V    | <b>✓</b>  |
| Transfer RDR. Time or UB to GEN, UB | <b>V</b>   | V               |          | · ·  | V         |
| SMPTE ↔ EBU Time Code Translator    |            |                 |          | · ·  | V         |
| Date/Time Zone in User Bits         | <b>✓</b>   | <b>✓</b>        |          | · ·  | V         |
| Momentary and Continuous Jam Sync   | <b>✓</b>   | <b>✓</b>        |          | · ·  | V         |
| Character Generator                 | V          | V               | V        | V    | · ·       |
| On-screen Programming Menu          | <b>✓</b>   | <b>✓</b>        |          | V    | <b>✓</b>  |
| GPS Referenced Time Code            | <b>✓</b>   | V               |          |      |           |
| Serial Remote Control               |            |                 |          | V    | V         |
| GPI Remote Control                  | <b>✓</b>   | V               |          | V    | V         |
| GP Outputs                          | <b>✓</b>   | <b>✓</b>        |          | V    | <b>✓</b>  |

# 5010, 5010-24Fps, 5010-VITC, 5010-VITC-24Fps

# Time Code Generator / Reader with Character Inserter

# **▶**Specifications

LTC Generator:

SMPTE 12M-1 Standard:

NTSC 2/4 field; PAL 4/8 field menu

selectable

NTSC or 24Fps (5010-24Fps only) Output: 3-pin male XLR type Adjustable, 0.5V to 4.5V p-p Level:

40 ±10 ms Rise Time: Jitter: < 2ms

LTC Reader:

Standard: SMPTE 12M-1 Input: 3-pin female XLR type

0.2 to 4V p-p, balanced or unbalanced 1/30th to 70x play speed, fwd and Level: Speed:

rev, machine dependent

VITC Generator (5010-VITC & 5010-VITC-24Fps):

Comp. Video 1V p-p,  $75\Omega$  terminated 2 Comp. Video + keyed VITC Outputs:

1 Output bypass relay protected when

+BP option installed

Differential Gain: < 0.5% Differential Phase: < 0.5°

VITC Reader (5010-VITC & 5010-VITC-24Fps):

Comp. video 1V p-p, Hi-Z, BNC Loop Input: Still frame to > 40x play Speed:

Character Generator:

Comp. video 1V p-p, 75Ω terminated Com. video 1V p-p + keyed high Input: Output:

resolution characters, selectable background and sizes

Serial Remote Control:

RS-232/422 interface, 9-pin "D" connector

Computer control of all functions.

selectable baud rate

Physical:

19"W x 1.75"H x 7.75"D Dimensions: (483mm W x 45mm H x 196mm D)

Weight: 7lbs (3.5kg)

Electrical:

Auto ranging 100-230VAC 50/60Hz Power:

30W ETL Listed

Safety: Complies with EU safety directive EMI/RFI:

Complies with FCC Part 15 Class A

**EU EMC Directive** 

## >>> Ordering Information

5010-24Fps

NTSC/24Fps Time Code Generator/Reader Time Code Generator/Reader with VITC 5010-VITC

NTSC/24Fps Time Code Generator/Reader with VITC

**Ordering Options** 

+RP

Optional bypass relay for 5010-VITC, and 5010-VITC-24Fps










Its power and flexibility are unsurpassed in time code analyzer applications. A 16 digit alpha-numeric display can be quickly delegated to show the required data. The Time Code Analyzer contains an LTC and VITC reader that can be operated independently of each other, or can be linked to form an auto LTC/VITC reader.

#### ▶ Features & Benefits

- · Detects time code counting sequence errors
- · Detects color framing sequence errors with respect to a reference video input
- Detects changes in the status of the color frame input (changing phase, or color/non color changes etc.)
- · Detects Time code dropouts and has a user definable dropout length
- · Compares LTC and VITC numbers and reports differences between them
- · Displays on screen reports of Time code problems
- Audible alarm plus a contact closure to drive an external alarm
- · User definable thresholds for most alarm conditions

- · Error messages available on RS-232 port for computer logging and time code verification
- · On-screen programming and front panel menus
- · Dual standard PAL and NTSC
- · Detects LTC phase problems with respect to video sync
- High resolution character inserter with three character sizes: 8, 16 and 32 lines, time and user bits separately positionable on screen
- · VITC to LTC translator
- Regenerates incoming LTC to correct LTC phase problems

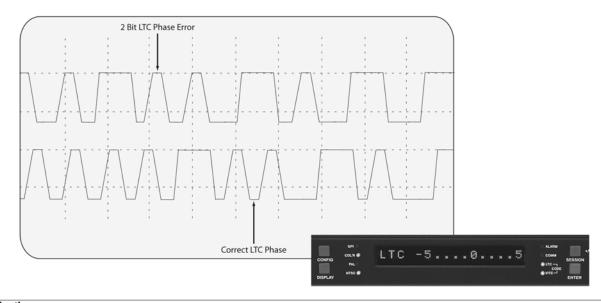

# ▶Specifications

LTC Reader: Standard:

SMPTE 12M-1

Connector: Signal Level: Speed:

25, 30Fps Drop & Non Drop Frame XLR Type 3 pin female connector 0.2 to 4V p-p, balanced or unbalanced 1/30th to 70x play speed, forward and

rev, machine dependent

VITC Reader:

Input: Connector: Speed:

NTSC or PAL 1V p-p, BNC per IEC 61169-8 Annex A Still frame to < 40x play, VTR dependent

BNC per IEC 61169-8 Annex A Connector:

Character Generator:

Input: Output:

Connector:

Char. Input from VITC Reader input NTSC or PAL 1Vp-p + keyed high resolution characters, selectable background and sizes

BNC per IEC 61169-8 Annex A

LTC Translator:

Connector: XLR Type 3-pin male Level: Adjustable 0.5V to 4.5V p-p Rise Time: 40 ±10ms

Jitter:

Gen Lock: Reader input video 1V p-p, Hi-Z,

BNC loop

Parallel Remote Control:

Input: 6 TTL compatible inputs for control of selected functions

Output: 2 open collector general purpose outputs

Physical:

Dimensions: 19" W x 1.75" H x 7.75" D

(483mm W x 45mm H x 196mm D)

Weight: 7lbs (3.5kg)

Electrical:

115/230V AC, 50/60Hz, 30W Voltage:

Safety: ETL Listed

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

5300

Time Code Analyzer

The 5950 is a VITC and LTC Time Code Reader, VITC to LTC Translator and full function Character Inserter with on-screen programming menu. The unit has a 16 digit alpha-numeric display that can be used for displaying Time code, user bits, or operational messages. The 5950 reads SMPTE Drop or Non-Drop Frame or EBU Time code.

The high speed LTC reader in the 5950 employs sophisticated input conditioning and clock/data separator circuits to reliably recover LTC over the full shuttle and wind speed range of most VTRs and ATRs.


The VITC reader employs advanced video processing and data extraction circuitry in combination with intelligent firmware algorithms to accurately decode multi-generation Time code, even off low-end VHS machines. Finely tuned phase locked loop circuits allow the 5950 to recover VITC over the full shuttle range of most VTDs.



The unit can be configured to read either LTC or VITC or can operate in an automatic switchover mode. The 5950 automatically selects valid code from either source and provides accurate Time code reading from still to over 70x play speed. The high resolution Character Inserter can display Time code, user bits, or both. Three character sizes - 8, 16 and 32 lines - are available. The characters can be white with or without a black background, or black with or without a white background. The windows are separately positionable on the raster and can be pushed all the way up into the Vertical Interval if desired.

#### ▶ Features & Benefits

- Reads LTC from 1/30th to 70x play speed
- · Full speed VITC Reader with line select
- · Automatic LTC/VITC switchover mode
- High resolution Character Inserter, with three character sizes: 8, 16, and 32 lines, time and user bits separately positionable on screen
- Dual standard (NTSC and PAL)
- On-screen programming menu
- VITC to LTC TranslatorLTC regenerator
- 16 digit alpha-numeric display

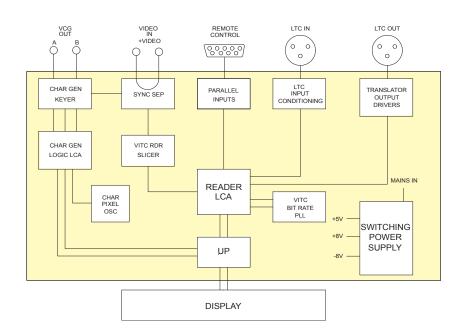

#### **▶**Specifications

LTC Reader:

Standard: SMPTE 12M-1

Connector: 25, 30 Fps Drop & Non Drop Frame XLR Type 3-pin female connector Signal Level: 0.2 to 4V p-p, balanced or unbalanced Speed: 1/30th to 70x play speed, forward and

reverse machine dependent

VITC Reader:

Input: NTSC or PAL 1V p-p,
Connector: BNC per IEC 61169-8 Annex A
Speed: Still frame to < 40x play, VTR

dependent

Impedance: Hi-Z

LTC Translator:

Connector: XLR Type 3 pin male
Signal Level: Adjustable 0.5V to 4.5V p-p

Rise Time:  $40 \pm 10 \text{ms}$ Jitter: < 2 ms

Gen Lock: Reader input video 1V p-p, High,

BNC loop

Character Generator:

Input: Char. Input from VITC Reader input
Output: NTSC or PAL 1V p-p + keyed high

NTSC or PAL 1V p-p + keyed high resolution characters, selectable background and sizes

Connector: BNC per IEC 61169-8 Annex A

Parallel Remote Control:

Input: 6 TTL compatible inputs for control of

selected functions

Physical:

Dimensions: 19" W x 1.75" H x 7.75" D (483mm W x 45mm H x 196mm D)

Weight: 7lbs (3.5kg)

Electrical:

Voltage: Auto ranging 100-240V AC, 50/60Hz, 30 Watts

Safety: ETL listed

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### >>> Ordering Information



The 5600MSC Master Sync and Clock Generator, is both a broadcast quality master sync pulse generator (SPG) and a master clock. It provides all of the synchronizing signals needed in a 21st century TV station or post production facility at the same time as solving the problem of locking the in-house master clock system to the master video sync pulse generator.

A high stability, temperature controlled oscillator, provides the 5600MSC with better than 5.0x10<sup>-9</sup> (or 0.005ppm) frequency reference. The free running drift of this 10MHz reference will be less then 0.1Hz (which amounts to less then 1 millisecond time drift per day). This guarantees that any frequency drift, with time and temperature, will be within the tolerances expected from the best SPGs or master clocks available in the industry. The 5600MSC may also be referenced to an external 5 MHz or 10 MHz master oscillator if higher stability is required. Both the SPG and the Master Clock sections, may be referenced to high stability time and frequency standards present in the Global Position System (GPS) by adding the GPS option. The 5600MSC provides a high stability 10MHz output reference for use by other devices.

The SPG section provides two banks of three timeable outputs. These six BNC outputs may be configured to provide 6 independently timed color black (black burst) outputs or 6 independently timed HDTV tri-level sync outputs, or 3 of each signal type. Each color black output can optionally carry vertical interval time code (VITC) on a user specified set of lines.

When referenced to the optional GPS receiver, the start of the NTSC four field sequence, or the PAL eight field sequence, will coincide with a specific point in the GPS code. In this way, by referencing all the 5600MSCs in a system to GPS, they will all be automatically locked to each other. This is ideal for applications requiring remote facility frequency, phase and time locked! GPS heads may be remoted from the unit with standard 50 ft. cables included or optional 100 ft. & 400 ft. weatherproof cables. For remote GPS head requirements of greater than 400 ft. or fiber optic isolation, GPS Data Fiber Transmitters & Receivers are also available (7707GPS-DT, 7707GPS-DR).

The unit also has absolute time reference support (ATR). ATR is a set of data currently being proposed by SMPTE and will be inserted onto the SMPTE 318M universal reference signal. This information gives the absolute time of the signal in seconds, and fractions of a second since the SMPTE Epoch (midnight, January 1, 1958 UTC). ATR tells when the signal was created, regardless of current time when the signal is received and provides an additional means of locking two 5600MSCs together. (This feature will be implemented when the signal is standardized by SMPTE.)


The master clock section provides a primary linear time code (LTC) output on an XLR connector and a 9 pin D connector, as well as a secondary LTC output available only on the 9 pin D connector. The time code may be set from the front panel or referenced to a number of different sources. Having two LTC outputs provides the ability to drive 24 and 30 Fps, or drop-frame and non-drop frame timecode simultaneously. Time may be externally referenced to GPS, or via modem to a high-level time source or extracted from VITC on the reference input. Time derived from such sources can be offset from UTC to a specific time zone as required. When referenced to GPS or by modem, the 5600MSC can provide RFC-1305 compliant NTP via Ethernet, and operates in broadcast and server mode. GPS, NTP and Modem access are all options for the 5600MSC. The 5600MSC includes a battery backed-up real time clock to maintain its time while power is not applied to the unit.

An optional word clock output is available for the 5600MSC (+WC) and also audio word clock may be generated from DARS with 520DARS-W module (Refer to 520DARS-W brochure)

There are two test signal generator options available. The STG option provides a composite analog video test signal output, AES and balanced analog audio tone generators and a digital audio reference output (DARS). The STG option also provides two standard definition SDI test signal outputs and two SDI black outputs. The HTG option provides two high definition SDI test signal outputs and two HD SDI black outputs.

All versions of the 5600MSC offer an AUX I/O port and a COM port for software upgrades and/or interconnecting two 5600MSC units (when used with the 5600ACO). An optional redundant power supply is also available.

Two 5600MSC units in combination with an Automatic Change Over (model 5600ACO) provide an extra degree off reliability where dual redundant installations are required. The ACO provides relay changeover for the two LTC outputs, the six Sync pulse outputs, the 10 MHz reference output, and the GPI/O interface. A serial cable interconnecting the COM ports of the two 5600MSC units guarantees that the configuration and timing of the units are identical so that changeovers are done with minimal disruption of the plant timing reference. The model 5600ACO2 also provides changeover for the optional test generator signals.



#### ▶ Features & Benefits

- 6 independently timeable reference outputs
- Bi-level or Tri-level outputs selectable (can provide 3 tri-level HD sync outputs and 3 black burst outputs simultaneously)
- 2 Independent LTC Time Code outputs
- (Note: with +L option only 1 LTC Time Code output is available)
- 5MHz/10MHz frequency reference input
- GPS option for frequency and time reference
- 10MHz frequency reference output
- Output frequency stability guaranteed better then 5.0 x 10-9 (or 0.005ppm)
- · Optional Modem for time reference dial up
- 2 GPS based units will be in time and phase even when remotely separated by miles
- · Optional analog TG output, with DARS and analog audio tone outputs
- Optional SD SDI test generator outputs
- Optional HD SDI test generator outputs
- Optional Word Clock output
- Optional Network Time Protocol Server (NTP) server support (GPS option should be ordered with NTP option)

- 16 digit Alpha-numeric display, with 20 pushbuttons
- Rack mountable
- · Optional redundant power supply
- Automatic changeover units available for dual redundant systems applications
- Compatible with Dual GPS Data Fiber Receivers & Transmitters
- 2 factory presets and 3 user presets available
- VITC reader on reference input for time reference
- Ten Field Pulse is available on NTSC sync outputs
- Unused menu items can be hidden from user menu
- VistaLINK® control for device configuration and status monitoring

#### **Application Note:**

 An optional word clock output is available for the 5600MSC (+WC) and also audio word clock may be generated from DARS with 520DARS-W module (Refer to 520DARS-W brochure)

## ▶Specifications

Analog Sync Outputs:

SMPTE 170M (NTSC-M), ITU-R BT 1700-1 (PAL-B), 625i/48Hz/47.95Hz

(Slow-PAL), SMPTE 274M (1080i/60, 1080i/50.1080p/30, 1080p/30sF. 1080p/25, 1080p/25sF, 1080p/24, 1080p/24sF and the 1/1.001 divisor versions where applicable) SMPTE 296M (720/60, 720p/59.94, 720p/50) 1Hz and 6Hz pulse (and the 1/1.001

divisor versions)
6 BNC per IEC 61169-8 Annex A
6 (2 banks of 3) configured as: Connector: Number of Outputs:

6 color black (black & burst) - selectable with VITC On/Off or 6 HD tri-level sync or 3 color black (black & burst) and 3 HD tri-level svnc

All outputs independently timeable

DC Offset 0V +0 1V > 40dB up to 5MHz Return Loss:

> 75dB

10MHz Input and Output:

0.5V p-p min level, 75Ω (Relay Input: Bypass Protected)

1V p-p (75Ω terminated) Output: Connector: BNC per IEC 61169-8 Appex A Signal Type: Sine wave. Harmonics < 40dB typical

Long Term Oscillator Stability: Free Running: 0.01ppm

5 or 10 MHz external reference autodetect External Ref: (max locking range ± 0.1ppm)

GPS with +GP option

LTC Outputs:

Standard: SMPTE 12M-1

Frame Rate: Nominal 24, 25, and 30 (drop frame

and non-drop frame) Number of outputs:

Connectors: 3-pin male XLR type, Female DB9

Level: Adjustable, 0.5V to 4.5V p-p Unpowered: 2V p-p with 11V DC offset to drive Powered: downstream 1200 series slave clocks

Output Impedance: 66Ω balanced (unpowered)

40 ±10µs Rise Time:

#### Communications and Control:

Serial Port:

Connector Female DB-9 Level: RS232 Baud Rate: 57.6 Kbaud

8 data bits, no parity, 2 stop bits Format:

#### GPS Receiver (with "+GP" option installed):

-40°C to +70°C Temperature: 95% R.H. Condensing at 60°C Humidity: Dimensions 5.8" D x 3.9" H (147mm x 100mm)

#### Modem: (with "+M" option installed): RJ-11 telephone jack Baud Rate: 300 baud Bell 103 compatible

Ethernet:

+STG

Network Type Fast Ethernet 100 Base-TX IEEE 802.3u

standard for 100Mb/s baseband CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10Mb/s baseband CSMA/CD local area network

**RJ-45** Connector:

VistaLINK® control

NTP port with +T option installed

#### NTP Port (+T option installed):

RFC-1305 compliant, broadcast and Standard:

server mode support

Time must be referenced to GPS or or VITC or have been synchronized via modem within the last 10 days (as per RFC1305)

#### DARS & AES Test Generator Outputs (with +STG option installed):

Standard: Unbalanced

SMPTE 276M single ended AES (24-bits)

(1V p-p into  $75\Omega$ ) AES3-1992 (24-bits) (4Vp-p unterminated) Balanced Number of Outputs:

DARS: 1 unbalanced, 1 balanced AES Test Gen: 1 unbalanced, 1 balanced

Connector: Unbalanced: BNC per IEC 61169-8 Annex A Balanced: Removable Terminal Strip

Sampling Rate: 48kHz Impedance:

Unbalanced:  $75\Omega$  unbalanced Balanced: 110 $\Omega$  balanced

> 25dB to 10MHz (with external 75 $\Omega$ Return Loss: termination)

AES Tones: Menu selectable

#### Genlock Input:

Autodetects standard SMPTE 170M Type:

(NTSC-M), ITU-R BT.1700-1 (PAL-B) Color Black 1V p-p with optional VITC Composite Bi-level sync (525i/59.94 or 625i/50) 300mV

HD Tri-level Sync (same HD standards

as sync outputs)

Number of Inputs: BNC per IEC 61169-8 Annex A Connector:

Max: 2V p-p video Video: Min: Sync level 150mV

Frequency Lock

Return Loss:

±50ppm from nominal High impedance, isolated, differential Input Impedance:

- external termination required > 25dB to 10MHz (with external 75 $\Omega$ 

termination)

# Analog Composite Video Test Signal Generator (with

"+STG" option installed): SMPTE 170M (NTSC-M) Standard:

ITU-R BT.1700-1 470-6 (PAL-B)

Number of Outputs:

BNC per IEC 61169-8 Annex A Connector:

Signal Level: DC Offset: 1V p-p nominal 0V ±0.1V Output Impedance: 75Ω

>35dB to 10MHz (with external 75 $\Omega$ Return Loss:

termination) SNR:

# SDI Test Generator Outputs (with "+STG"option installed): Standard: SMPTE 259M-C (270Mb/s)

Number of Outputs: 2 outputs of selected test signal 2 outputs of black video

Up to 4 groups as specified in SMPTE 259M BNC per IEC 61169-8 Annex A Embedded Audio: Connectors:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude Return Loss: > 15dB up to 270Mb/s Jitter:

< 0.2 UIGenlock:

Provided internally by 5600MSC

#### Analog Audio Tone Generator (with "+STG" option installed):

Number of Outputs: 2

Type: Balanced analog audio

Connector: 6 pins on 12-pin removable terminal strips

Output Impedance: 660

-20 to +8dBu into 10kW load Signal Level:

**HDTV Test Generator Outputs (with "+HTG" option installed):** Standards: SMPTE 292M 4:2:2, YCbCr

SMPTE 372M dual link 4:4:4 GBRA

YCbCı Same standards as HD sync outputs

Number of Outputs:

4:2:2: 2 outputs of selected test signal 2 outputs of black video

4:4:4: 2 dual link outputs of selected test signal Embedded Audio:

Up to 4 audio groups as specified in SMPTE 299M. Selectable tone frequencies (from 60Hz to 10kHz) and audio group. Audio can be embedded on test signal or black or

both outputs

BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

< 0.2 UI

Genlock Input: HD Tri-level Sync or NTSC or PAL

Color Black 1V p-p, (provided from one of the Sync outputs)

Word Clock Output (with +WC option installed):

Signal: 0.0V-0.5V 48kHz Word Clock BNC per IEC 61169-8 Annex A Connector:

Number of Outputs: 1

#### General Purpose Inputs and Output:

Number of Inputs:

Number of Outputs: 2 (function menu selectable)

Opto-isolated, active low with internal pull-ups to +5 volts

4 pins plus 2 ground pins on 9-pin Connector:

female D connector Signal Level: +5V nominal

Physical:

Jitter:

19" W x 1.75" H x 18.75" D. Dimensions:

(483mm W x 45mm H x 477mm D)

Weiaht: 8lbs (3.5ka)

Electrical:

Safety:

Auto ranging 100 to 240 Volts AC, Voltage:

Configuration: Optional redundant supply available with +2PS option

Power: 90 W max (all options installed)

ETL Listed Complies with EU safety directives Complies with FCC Part 15 Class A EMI/RFI:

Complies with EU EMC Directive

### **▶▶▶**Ordering Information

5600MSC Master SPG/Master Clock System

1RU Automatic Change Over System (see individual brochure) 2RU Automatic Change Over System (see individual brochure) 5600ACO 5600ACO2

# Ordering Options (5600MSC)

+2PS Redundant power supply +M Modem Option

+GP GPS Option (includes GPS receiver and 50' weatherproof cable) Network Time Protocol (Most be ordered with +GP or +M option) +T

 NTSC/PAL test signal generator · Audio tone generator (analog)

DARS generator (balanced & unbalanced)

 AES generator (balanced & unbalanced) PLUS an SD SDI Test Generator with 2 SD SDI test signals and 2 SD SDI black

+HTG HD SDI Test Generator with 2 HD SDI test signals & 2 HD SDI black +WC Optional Word Clock Output LTC Input option +L

Accessories WA-T76 WA-T77 WA-T11

100' weatherproof cable for 5600MSC, GPSII & 7707GPS-DT 100' weatherproof cable for 7707GPS-DR to 5600MSC 400' weatherproof cable for GPS received

For other weatherproof cable lengths, contact factory

ead requirements greater than 400' cables or fiber optic isolation order:

7707GPS-DT Dual GPS Data Fiber Transmitter 7707GPS-DR Dual GPS Data Fiber Receiver







The 5600ACO/ACO2 Automatic Changeovers are intended for use with two 5600MSC Master Clock/Sync Generators. The 5600ACO/ACO2 system uses latching relays to ensure maximum reliability and minimal disruption in the event of any failure. The complete system provides the highest level of security for television station video and time synchronization systems. The 5600ACO is a 1RU device which is an ACO for a subset of the 5600MSC outputs. The 5600ACO2 is a 2RU ACO for all outputs of the 5600MSC. Two power supplies are included as a standard feature, to alleviate any single point of failure concerns.

The front panel has three switches, recessed into the panel for added security. There is an AUTO/MANUAL switch, a GPI/FRONT PANEL switch and an A/B select switch for manual changeover. In automatic mode, all signals from both 5600MSCs are monitored to detect any abnormal signals. For example, if a level, pulse width, phase, time code error or other abnormality is detected, the 5600ACO's circuitry will trigger and the entire bank of signals will be switched to the backup 5600MSC. In manual mode the changeover can be operated from a GPI or from the front panel switch. LEDs provide status information as to the health of the two 5600MSCs, together with indication as to which one is active. In addition, two GPO outputs indicate which master is active and when the inputs from both masters are not the same.

The 5600ACO2 features selectable voting via VistaLINK® for autochangeover feature. Individual inputs may selectively be included or excluded in the voting process to drive autochangeover logic (Feature only available on 5600ACO2

Each 5600MSC is equipped with 2 GPI inputs and 2 GPO outputs. To facilitate installation, these connections are brought through to a 2x6 pin terminal block on the 5600ACO. The outputs from the 5600MSCs are passed straight through the 5600ACOs. The inputs to the 5600MSCs are internally split by a 'Y' connector, to ensure that both 5600MSCs receive the same GPI contact closures.

In the event of a changeover occurrence, it is necessary that all outputs on one 5600MSC have the same timing as those on the other. Identical timing for both 5600MSCs is assured by locking both to the same frequency and phase source (e.g. GPS or by genlocking one 5600MSC to the other). Identical phasing of the independent black outputs is assured by implementing the "Syncro" mode in the 5600MSCs. To use this mode, both 5600MSC communication ports are connected together using the link cable supplied with the 5600ACO. With both 5600MSCs operating in Syncro mode, timing adjustments made to one 5600MSC will be automatically applied to both. The link cable is connected permanently, so that any system re-timing will be applied to both 5600MSC units (See system connection diagram on 5600MSC brochure).

#### ▶ Features & Benefits

- · Three front panel switches select automatic, front panel or GPI activation of changeover
- Front panel switches are recessed to prevent accidental operation
- Front panel status LEDs show the health of each of the inputs
- · Front panel status LEDs show the operational modes of the changeover
- · Redundant power supply standard

- · GPIO input/outputs
- Automatic changeover is a voting system based on which source has the most valid signals and that the valid signals on the present master are also on the backup
- · VistaLINK® control for device configuration and status monitoring (5600ACO2 only)

# 5600ACO Protected Outputs

- 6 video/sync or other coaxial signals
- 10MHz frequency reference
- DARS
- 2 Linear timecode outputs

#### 5600ACO2 Protected Outputs

- 6 video/sync outputs
- 10MHz frequency reference or word
- DARS and AES
- 2 Linear timecode outputs
- 4 HD SD SDI test signal outputs
- 4 SD SDI test signal outputs
- · 1 Analog video test signal output
- · Balanced analog audio output

HD/SD SDI (8 SYNC (6)

ATG

10MHz/Wordclock

Unbalanced AES (2)

Out

Balanced AES (2) Analog Audio (2) Out

GPO from processor (2) GPI Out (2)

VistaLINK® Interface

GPO Interface

**60000** 









# ▶ Specifications

(0)

(0)

LTC Inputs and Outputs:

SMPTE 12M-1 frame rate set by 5600MSC Standard:

2 per 5600MSC Inputs:

(0)

0

Outputs:

Connectors: Female DB9 Inputs:

Outputs: 3-pin male XLR type

Signal Level: Set in 5600MSC

Coaxial Inputs and Outputs:

Depends on signal connected from Type:

5600MSC

(5600ACO) DARS, bi-level or tri-level sync, color

black,10MHz

(5600ACO2) HD SDI, SD SDI, Analog TG, AES, DARS, bi-level or tri-level sync, colour

black, 10 MHz, Word Clock

HD/SD SDI (8)

SYNC (6)

ATG 10MHz/Wordclock

Unbalanced AES (2)

Inputs

Balanced AES (2) Analog Audio (2) Inputs

LTC (2) GPI (2)

 $\overline{\mathsf{A}}$ 

в⊙

В

Α

( (6)

evertz microsystems LTD.

( )

(0)

0

Number: (5600ACO)

8 groups each consisting of two inputs and one output

(5600ACO2) 16 groups each consisting of two inputs and one output

Connector: BNC per IEC 61169-8 Annex A

ACO General Purpose Inputs and Output:

Inputs:

Master select in Manual GPI control mode GPI1:

Low: Selects Master A High: Selects Master B

GPI2: Future use Outputs:

HD/SD EQ, Video Sync Slicer, 10MHz/ Wordcloc

HD/SD EQ, Video Sync Slicer, 10MHz/ Wordclock

AES Rx

(6)

(

0

LTC Slicer, GPI

CPU

ACO CTRL/STATUS

. . . . . . .

(0) (0) 0

(0)

٥

Low: Master A is selected GPO1: High: Master B is selected

GPO2: Low: Master A & Master B differ or

PSU failure

High: Master A and B have equivalent

signals

Type:

Connector:

Opto-isolated input with internal pull-up Inputs:

to +5 Volts

Outputs: Normally closed relay to ground. 10kW internal pull-up to +5Volts when relay is in active position

4 pins plus 2 ground pins on 12-pin removable terminal block

Signal Level: +5V nominal

MSC General Purpose Inputs and Output:

Inputs: 2 GPI inputs connected to both Master A and Master B

Outputs: 2 GPI outputs connected from Master

A through AUXI/O A

2 GPI outputs connected from Master

B through AUXI/O B

Connector: 6 pins on 12-pin removable terminal block Signal Level: As specified in 5600MSC manual

#### Changeover conditions:

Changeover is a voting system based on which source has the most good signals and that the good signals on the current master are also present on the backup master. The input signals are considered good according to the following criteria:

FUSE

USES: 1.0 A

\_ \_ 

Video: Level below 70 IRE Sync: H timing detect 3dB level below 0.3V p-p 10MHz DARS: Sync word error Level below 0.3V p-p Incorrect sync word

Electrical:

Auto ranging 100-240 Volts AC,

50/60Hz, 40W Dual redundant supplies Configuration: Fuse Rating: 250V, 1 amp, time delay

Safety: ETL Listed

Complies with EU safety directives Complies with FCC Part 15 Class A EMI/RFI:

Complies with EU EMC Directive

Physical: 5600ACO:

Dimensions: 19" W x 1.75" H x 18.75" D.

(483mm W x 45mm H x 477mm D)

8lbs (3.5kg) Weight:

5600ACO2: Dimensions

19" W x 3.5" H x 18.75" D.

(483mm W x 90mm H x 477mm D)

Weight: 16lbs (3.5kg)

#### **>>>**Ordering Information

5600ACO 1RU Automatic Changeover System complete with 2 power supplies, 2 power cords and 3 DB9 cables (BNC cables not included)

5600ACO2


2RU Automatic Changeover System complete with 2 power supplies, 2 power cords and 3 DB9 cables (BNC cables not included)

The 8010TM SDI Time Code Master is a full function time code reader/generator system for serial digital video. The 8010TM is a combination generator/reader for Linear Time Code (LTC) and Digital Vertical Interval Time Code (D-VITC), and contains a high resolution character inserter that can burn the generator or reader numbers directly into the digital program output as well as an optional analog monitoring output. A 16 digit alphanumeric display can be quickly delegated to show the required data.

The 8010TM will accept 525 or 625 line component digital video. The 8010TM's time code generator can be preset to lock to the digital program video either by



simple frame locking, or where necessary it will colour lock to an analog Color Reference in accordance with the 4 field NTSC or 8 field PAL color sequence.

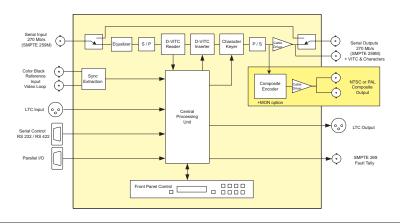

#### ▶ Features & Benefits

- · Accepts 4:2:2 (525 and 625 line) digital video signals
- · Serial digital video input provides automatic cable equalization on cable lengths up to 200 meters of low loss coax such as Belden 8281
- · Optional bypass relay for program path protection on power loss
- Auxiliary serial digital video output (not bypass protected)
- Passes embedded audio and other ancillary data signals
- LTC and D-VITC Time Code Reader with line select
- LTC and D-VITC Time Code generator with line select · Character Inserter displays reader & generator time and user bits in the picture
- · Separate positioning of each character window
- 16 digit Alpha-numeric display, with 16 pushbuttons

- Serial Remote Control of most functions Broadcasts reader data or sends it on request
- Rack mountable
- · Momentary or continuous jam sync modes
- · User bit transfer from reader time or user bits
- Optional composite monitor output converts digital video to analog
- · GPI Remote Control mode allows user to pass remote control contact closure information in VITC user bits
- · Recalculates EDH after VITC and character insertion
- · Optional input bypass relay for power failure bypass protection
- · Optional dual power supply configuration

# **▶** Specifications

Serial Digital Video Input:

SMPTE 259M-C (270Mb/s) Standards Connector 1 BNC per IEC 61169-8 Annex A Equalization: Automatic 200m @ 270Mb/s with Belden 8281 or equivalent cable

150m @ 270Mb/s when bypass relay

is active

> 15dB up to 540Mb/s Return Loss: D-VITC Reader: SMPTE 266M

Serial Digital Video Outputs:

Number of Outputs: 1 with relay bypass (+BP option) 1 additional output

Connector: BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 900 ps nominal

Overshoot: < 10% of amplitude > 15dB up to 540Mb/s Return Loss Wide Band Jitter: < 0.2UI D-VITC Generator: SMPTE 266M

Analog Monitor Video Outputs (with +MON option):

Analog composite NTSC if input is

525i/59.94 video

Analog composite PAL if input is 625i/50 video

2 BNC per IEC 61169-8 Annex A Connectors Signal Level: DC Offset: 1V p-p nominal, internally adjustable

0V ±0.1V Return Loss > 35dB up to 5MHz

Frequency Response: 0.8dB to 4MHz < 0.9°(< 0.6° typical) Differential Phase: Differential Gain: < 0.9% (< 0.5% typical) > 56dB to 5MHz (shallow ramp) SNR:

Impedance

LTC Generator:

SMPTE 12M-1 Standard:

NTSC 2/4 field; PAL 4/8 field menu selectable

NTSC or 24Fps (5010-24Fps only) 3 pin male XLR type Output: Adjustable, 0.5V to 4.5V p-p Level:

Rise Time: 40 ± 10 ms .litter < 2 ms

LTC Reader:

Standard: SMPTE 12M-1

3 pin female XLR type Input: Level: 0.2 to 4V p-p, balanced or unbalanced 1/30th to 70x play speed, fwd and Speed:

rev, machine dependent

General Purpose Inputs and Outputs:

6, programmable control functions Inputs: Outputs: 2, programmable tally functions

9 pin female "D" Connector Opto-isolated, active low Type: Signal Level: Pulled up to +5 volts. 3.3V DC

provided

#### Serial Remote Control:

Standard: RS-232 or RS-422, programmable

baud rate Connector: 9 pin female "D"

Firmware upgrade, serial remote Control:

control of all functions

Electrical:

Auto ranging 100-240VAC 50/60Hz Power:

30W ETL listed

Safety: Complies with EU safety directives

Complies with FCC Part 15 Class A EMI/RFI:

EU EMC Directive

Physical:

Single Power Supply version:

. 19" W x 1.75" H x 7.75" D. Dimensions: (483mm W x 45mm H x 196mm D)

Weiaht: 7 lbs. (3.2 Kg)

Dual Power Supply version:

19" W x 1.75" H x 18.75" D. Dimensions: (483mm W x 45mm H x 477mm D)

Weight: 8 lbs. (3.5 Kg)

## **bbb**Ordering Information

SDI Time Code Generator/Reader with Character Inserter 8010TM

**Ordering Options** +2PS

+MON +BP

Redundant Power Supply Analog Monitoring Option Bypass Relay Option

## SDI Time Code Master with IRIG Reader

The 8010TM-IRIG SDI Time Code Master is a full function time code reader/generator system for serial digital video. It is a combination generator for SMPTE Linear Time Code (LTC) and Digital Vertical Interval Time Code (D-VITC), reader for IRIG-B code and D-VITC (standard SMPTE time code and special IRIG encoded VITC), and contains a high resolution character inserter which can burn the generator or reader numbers directly into the digital program output as well as an optional analog monitoring output.

It reads IRIG-B code commonly in use within the United States government agencies and supporting private industries and provides a display of days, hours, minutes, seconds and milliseconds in the character inserter. This IRIG information is inserted into a special line of vertical interval time code which is protected by a unique cyclic redundancy checkword (CRC) so that tape recorders and other devices do not confuse it with standard SMPTE 12M-1 D-VITC. This special D-VITC can be decoded by the 8010TM-IRIG's D-VITC reader to allow you to encode the IRIG information onto a 'clean' video tape and then display the IRIG information later on playback.

The 8010TM-IRIG SMPTE Time code generator can also be slaved to incoming IRIG code. The millisecond count will be converted to the closest frame number and can also be stored in the generator user bits along with the IRIG day of the year. In the continuous jam sync mode, the generator is slaved to the reader, and will follow code any discontinuities of the reader. The generator may also be momentarily synchronized to the reader, and then it continues to increment normally regardless of the reader code. Momentary jam is the recommended mode when synchronizing to IRIG-B sources so that the resulting SMPTE time code does not contain discontinuities due to the different time bases of 29.97 frame per second video and real time of the IRIG code. In NTSC related video systems, the SMPTE generator should be operated in the Drop Frame counting mode when trying to synchronize the SMPTE generator to IRIG.

The 8010TM-IRIG will accept 525 or 625 line component digital video. It's SMPTE time code generator can be preset to lock to the digital program video either by simple frame locking or, where necessary, it will color lock to an analog Color Reference in accordance with the 4 field NTSC or 8 field PAL color sequence. In NTSC related color systems operation, with a frame rate of 29.97002618Hz where the time of day is used for indexing, the generator may be operated in the drop frame mode. Special indicators in the front panel display and in the character inserter indicate that the unit is operating in the drop frame format.

Both the generator and reader are capable of working with the unassigned user bits. Several modes of operation are possible. The generator may be preset to insert hexadecimal values for each group in the generated code, and the reader will read hexadecimal values for each binary group. In addition, the user may select the transfer of either reader time or reader user bits into the generator user bits, thus allowing pre-edit frame addresses to be preserved when new continuous time code is laid down.

The high-resolution character inserter provides six independently positionable windows to show time and user bits for the generator and readers simultaneously. When the IRIG or VITC readers are operating in the IRIG DAY mode, there are two independently positionable windows for each reader to show the IRIG time to millisecond precision and the IRIG day respectively. Three character sizes and the choice of white or black characters with or without contrasting background mask are selected from the front panel.

#### ▶ Features & Benefits

- · Accepts 4:2:2 (525 and 625 line) digital video
- · Serial digital video input provides automatic cable equalization on cable lengths up to 200 meters of low loss coax such as Belden 8281
- Optional Bypass relay for Serial digital video program output activates on power loss or from the front panel menu
- · Auxiliary serial digital video output (not bypass protected)
- · Passes embedded audio and other ancillary data signals
- LTC and D-VITC SMPTE Time Code generator
- IRIG data encoded to second line of VITC generator with special CRC
- SMPTE D-VITC Time Code or IRIG encoded D-VITC reader
- IRIG reader reads 1kHz IRIG-B format sine wave amplitude modulated and pulse width modulated codes (formats B002 and B122
- IRIG CS-6 compatible serial data output to drive external IRIG displays)
- SMPTE Time Code LTC and D-VITC generators can be slaved momentarily or continuously to IRIG reader - converts milliseconds to closest video frame number
- Milliseconds and days can be transferred to VITC user bits

- · Character Inserter displays IRIG day and time to millisecond resolution in the picture in IRIG modes
- · Character Inserter displays time and user bits in the picture in SMPTE modes
- · Separate positioning of each character window
- 16 digit Alpha-numeric display, with 16 pushbuttons
- · Momentary and Continuous jam sync modes
- · User bit transfer from reader time or user bits
- · Optional composite monitor output converts digital video to analog
- GPI Remote Control mode allows user to pass remote control contact closure information in VITC user bits
- · Recalculates and inserts EDH on the SDI output
- Serial Remote Control of most functions Broadcasts reader data or sends it on request
- Rack mountable
- Optional dual redundant power supply configuration

# ▶Specifications

#### Serial Digital Video Input:

Standards SMPTE 259M (270Mb/s) 1 BNC per IEC 61169-8 Annex A Automatic 200m @ 270Mb/s with Connector: Equalization:

Belden 8281 or equivalent cable 150m @ 270Mb/s when bypass relay

is active

> 15dB up to 540Mb/s Return Loss:

#### Serial Digital Video Outputs:

Number of Outputs: 1 with relay bypass (+BP option), 1

additional output Connector: BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V

Rise and Fall Time: 900 ps nominal Overshoot: < 10% of amplitude > 15dB up to 540Mb/s Return Loss

Wide Band Jitter:

#### Analog Monitor Video Outputs (optional):

Analog composite NTSC if input is Standards

525i/59.94 video Analog composite PAL if input is 625i/50 video

2 BNC per IEC 61169-8 Annex A Connectors: 1V p-p nominal, internally adjustable

DC Offset: 0V ±0.1V Return Loss: > 35dB up to 5MHz Frequency Response: 0.8dB to 4 MHz Differential Phase: <0.9° (<0.6° typical) Differential Gain: <0.9% (<0.5 % typical) SNR: > 56dB to 5MHz (shallow ramp)

 $75\Omega$ 

# Impedance LTC Generator:

Standard: SMPTE 12M-1 Frame Rate: 25 and 30 Fps nominal 3-pin male XLR Connector: Adjustable, 0.5V to 4V p-p

IRIG Reader:

IRIG 200-95 Formats B002 and B122

Connector: 3-pin female XLR

Level: 0.2 to 4V p-p, balanced or unbalanced

#### Inputs and Outputs: General Purpose

Inputs: 6, programmable control functions Outputs: 2, programmable tally functions 9-pin female "D" Connector:

Opto-isolated, active low Type:

Pulled up to +5 volts. 3.3V DC provided Signal Level:

#### Serial Remote Control:

Standard: RS-232 or RS-422, programmable

baud rate 9-pin female "D" Connector

Control: Firmware upgrade, serial remote

control of all functions

Electrical:

Voltage: Autoranging 100-240 Volts AC, 50/60Hz Power:

30W

Fuse Rating: 250V, 1 amp, time delay Safety:

ETL Listed, complies with EU safety directives

Complies with FCC Part 15 Class A

FMI/RFI: EU EMC Directive

# Physical:

Single Power Supply version:
Dimensions: 19" W x 1.75" H x 7.75" D. (483mm W x 45mm H x 196mm D)

Weight: 7lbs (3.2kg)

Dual Power Supply version:

19" W x 1.75" H x 18.75" D. Dimensions: (483mm W x 45mm H x 477mm D)

8lbs (3.5kg) Weiaht:

## >>> Ordering Information

8010TM-IRIG SDI Time Code Generator with IRIG Reader Ordering Options

+2PS Redundant Power Supply +MON

Analog Monitoring Option Bypass Relay Option +BP




The HD9010TM HDTV Time Code Master is a full function time code reader/generator system for high definition serial digital video. The HD9010TM is a combination dual generator/dual reader for Linear Time Code (LTC) and SMPTE 12M-2 Ancillary Time Code (ATC), and contains a high resolution character inserter which can burn the generator or reader numbers directly into the serial digital program output.

The HD9010TM will accept SMPTE 292M (1.5Gb/s) high definition serial digital video. The HD9010TM's time code generators can be preset to lock to the input video or to an analog bi-level or tri-level sync signal. When generating 24Fps timecode it will also lock to a 6Hz pulse.

The HD9010TM generators can be slaved to incoming LTC or ATC or can be set to free run. The generators may also be momentarily synchronized to one of the readers, and then continue to increment normally regardless of the reader code.

The second LTC output normally follows the primary output, however the two generators can be operated at different frame rates to supply both 24Fps and 30Fps time code when used in a 1080p/24 environment. The drop frame conversion mode allows you to generate Drop Frame code on 1080i/59.94 broadcast master tapes when adding 3:2 pulldown to 1080p/23.98sF source material.

The high-resolution character inserter provides independently positionable windows to show time and user bits for the generator and readers simultaneously. One character size and the choice of white or black characters with or without contrasting background mask are available.

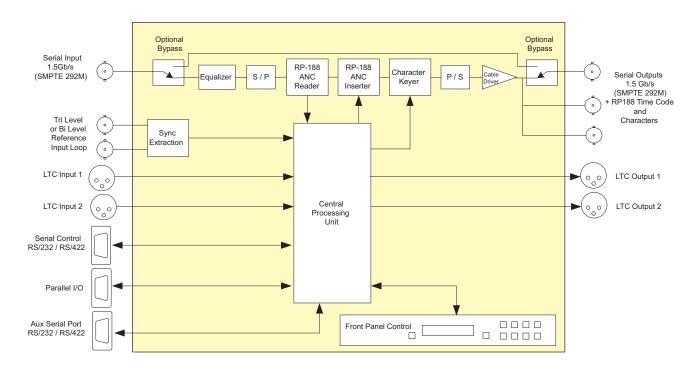

#### ▶ Features & Benefits

- Video formats supported: 1080i/60, 1080i/50, 1080p/30, 1080p/30sF, 1080p/25sF, 1080p/24sF, 1035i/60, 720p/60, 720p/50 and the 1/1.001 divisor versions where applicable
- Reads SMPTE 12M-2 LTC and VITC ancillary time code (ATC) from incoming video - read line auto detected
- Generates SMPTE 12M-2 LTC and VITC ancillary time code on output video
- Two LTC readers and two LTC generators operate at 24, 25 or 30 Fps nominal rate in accordance with SMPTE 12M specification
- Generates 24 Fps and 30 Fps simultaneously
- SMPTE 12M-2 ATC ⇔ LTC translator
- Genlocks to NTSC/PAL colour black or HD Tri-level sync
- Locks to 6 Hz pulse when generating 24 Fps nominal rate code

- Drop frame ⇔ Non drop frame converter
- Character windows for the reader and generator time and user bit data Windows can be positioned and turned off and on independently
- White or black characters on contrasting background
- · Front panel display and control using menu system
- Parallel GPI/O control of common functions
- GPI Remote Control mode allows user to pass remote control contact closure information in SMPTE 12M-2 user bits
- Field upgradeable firmware as new features become available
- Optional input relay bypass for power failure bypass protection
- Optional dual power supply configuration

# HD Time Code Generator and Reader

# **▶**Specifications

#### Serial Video Input:

SMPTE 292M (1.5Gb/s), SMPTE 274M, SMPTE 296M, SMPTE 349M Standard:

1080i/60, 1080i/50, 1080p/30, 1080p/30sF, 1080p/25sF, 1080p/24sF, 1035i/60, 720p/60, 720p/50, and the 1/1.001 divisor versions where applicable software

selectable or autodetect BNC per IEC 61169-8 Annex A Connector: Input Equalization: Automatic to 100m @ 1.5Gb/s with Belden 1694A or equivalent cable

(50m with +HBP option) > 15dB up to 1GHz Return Loss:

> 10dB up to 1.5GHz (with +HBP option)

#### Serial Video Output:

Number of Outputs: 1 relay bypassed (with +HBP option)

2 non bypassed

BNC per IEC 61169-8 Annex A 800mV nominal Connectors: Signal Level:

DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude < 0.2 UI Jitter:

#### LTC Generators:

SMPTE 12M-1 Standard:

Number:

Frame Rate: 24, 25 and 30 Fps nominal 3-pin male XLR type connector Connectors: Adjustable, 0.5V to 4.5V p-p Level:

Rise Time: 40 ±10μs Jitter:

#### LTC Readers:

SMPTE 12M-1 Standard:

Number: Frame Rate: 24, 25 and 30 Fps nominal Connectors: 3-pin female XLR type connector 0.2 to 4V p-p, balanced or unbalanced Level: Speed: 1/30th to 50x play speed, VTR dependent

#### Video Reference:

Type:

Menu selectable - depends on video format NTSC or PAL Color Black 1 V p-p Composite Bi-level sync (525i/59.94

or 625i/50) 300 mV

HD Tri-level sync SMPTE 292M (1.5 Gb/s), SMPTE 274M, SMPTE 296M, SMPTE 349M 1080i/60, 1080i/50, 1080p/30sF, 1080p/25sF,1080p/24sF, 1035i/60, 720p/60, 720p/50, and the 1/1.001 divisor versions where applicable software selectable or

autodetect 2 BNC per IEC 61169-8 Annex A Connectors: Termination: High impedance loop through

#### General Purpose In/Out:

Number: 6 programmable input or output functions Type: Active low with internal pull-ups to +5V Female High Density DB-9 Connector:

Signal Level: +5V nominal

#### Serial Remote Control:

Standard: RS-232, selectable baud rate

Number of ports:

Connector: 9-pin female "D"

Control: Firmware upgrade, timecode data

broadcast

Physical: Dimensions:

19" W x 1.75" H x 18.75" D (483mm W x 45mm H x 477mm D)

8lbs (3.5kg) Weight:

#### Electrical:

Auto ranging 100 to 240V AC 50/60Hz Power:

Safety: ETL listed

Complies with EU safety directive Complies with FCC Part 15 Class A EMI/RFI:

EU EMC Directive









# **>>>**Ordering Information

HD9010TM HD Time Code Generator/Reader **Ordering Options** 

+HBP Bypass Relay Protection +2PS Redundant Power Supply

# HD Time Code Generator with IRIG Reader



The HD9010TM-IRIG HDTV Time Code Master with IRIG-B Reader is a full function time code reader/generator system for SMPTE 292M (1.5Gb/s) high definition serial digital video. The HD9010TM-IRIG is a combination generator/reader for SMPTE 12M-1 Linear Time Code (LTC) and SMPTE 12M-2 Ancillary Time Code (ATC), a reader for IRIG-B code, and a generator/reader of Vertical Ancillary Data (VANC) packets containing the IRIG-B code. The HD9010TM also contains a high resolution character inserter that can burn the generator or reader numbers directly into the serial digital program output.


The HD9010TM-IRIG reads IRIG-B code commonly in use within the United States government agencies and supporting private industries and provides a display of days, hours, minutes, seconds and milliseconds in the character inserter. This IRIG information is inserted into a special ancillary data packet in the vertical ancillary data space (VANC) of the SMPTE 292M serial bitstream. This special VANC packet can be decoded by the HD9010TM-IRIG's VANC reader to allow you to encode the IRIG information onto a 'clean' video tape and then display the IRIG information later on playback.

The HD9010TM-IRIG SMPTE Time code generator is output as LTC and ATC and can also be slaved to incoming IRIG serial time code. The millisecond count will be converted to the closest frame number and can also be stored in the generator user bits along with the IRIG day of the year. In the continuous jam sync mode, the generator is slaved to the IRIG-B reader, and will follow code any discontinuities of the reader.

The generator may also be momentarily synchronized to the IRIG-B reader, and then it continues to increment normally regardless of the reader code. Momentary jam is the recommended mode when synchronizing to IRIG-B sources so that the resulting SMPTE time code does not contain discontinuities due to the different time bases of 29.97 frame per second video and real time of the IRIG code. In NTSC related video systems, the SMPTE generator should be operated in the Drop Frame counting mode when trying to synchronize the SMPTE generator to IRIG.

The HD9010TM-IRIG SMPTE Time code generator can also be slaved to incoming LTC or ATC, or can be set to free run. The generator may also be momentarily synchronized to one of the readers, and then continue to increment normally regardless of the reader code. The second LTC output normally follows the primary output, however the two generators can be operated at different frame rates to supply both 24Fps and 30Fps time code when used in a 1080p/24 environment.

The high-resolution character inserter provides independently positionable windows to show time and user bits for the SMPTE generator and readers simultaneously. When the IRIG or VANC readers are operating in the IRIG DAY mode, there are two independently positionable windows for each reader to show the IRIG time to millisecond precision and the IRIG day respectively. The choice of white or black characters with or without contrasting background mask is available.

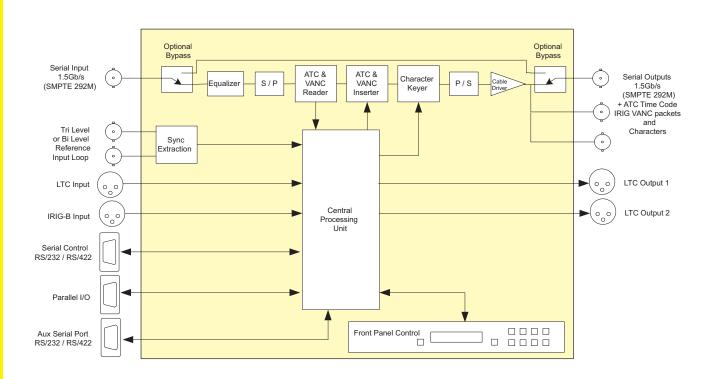





















# • IRIG reader reads 1kHz IRIG-B format sine wave amplitude modulated

- Video formats supported: 1080i/60, 1080i/50, 1080p/30sF, 1080p/25sF, 1080p/24sF, 1035i/60, 720p/60, 720p/50 and the 1/1.001 divisor versions where applicable
- and pulse width modulated codes (formats B122 and B022)
- Encodes IRIG data and optional metadata in VANC packets on output video
- · Reads IRIG data encoded in VANC packet from incoming video
- Generates SMPTE 12M-2 LTC and VITC ancillary timecode packets on
- IRIG CS-6 compatible serial data output to drive external IRIG display
- Reads SMPTE 12M-2 LTC and VITC ancillary time code (ATC) packets
- Insertion line for VANC packets programmable, read line auto detected
- One LTC reader and two LTC generators operate at 24, 25 or 30Fps nominal rate in accordance with SMPTE 12M-1 specification

- · Generates to 24 Fps and 30 Fps LTC simultaneously
- SMPTE 12M-2 ⇔ LTC translator
- · Genlocks to NTSC/PAL color black or HD Tri-level sync
- · Character windows for the reader and generator time and user bit data
- Windows can be positioned and turned off and on independently
- · White or black characters on contrasting background
- · Front panel display and control using menu system
- · Parallel GPI/O and serial remote control
- Field upgradeable firmware as new features become available
- · Optional input relay bypass for power failure bypass protection
- Optional dual power supply configuration

## ▶ Specifications

# HDTV Serial Digital Video Input: Standard: SMPTE 292M (1.5Gb/s), SMPTE

▶ Features & Benefits

274M, SMPTE 296M, SMPTE 349M 1080i/60, 1080i/50, 1080p/30sF, 1080p/25sF, 1080p/24sF, 1035i/60, 720p/60, 720p/50 and the 1/1.001 divisor versions where applicable software selectable or autodetect BNC per IEC 61169-8 Annex A

Connector: Automatic to 100m @ 1.5Gb/s with Equalization: Belden 1694A or equivalent cable

**HDTV Serial Digital Video Outputs:** Standard: SMPTE 292M, same as input 2 Program video with SMPTE 12M-2 Ancillary time code embedded and optional

characters

BNC per IEC 61169-8 Annex A Connectors:

Signal Level: 800mV nominal 0V ±0.5V DC Offset: Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

#### Reference Input:

Menu selectable - depends on video format NTSC or PAL Color Black 1 V p-p

Composite Bi-level sync (525i/59.94 or 625i/50) 300 mV

HD Tri-level sync SMPTE 292M (1.5 Gb/s), SMPTE 274M, SMPTE 296M, SMPTE 349M 1080i/60, 1080i/50, 1080p/30sF, 1080p/25sF,1080p/24sF, 1035i/60, 720p/60, 720p/50, and the 1/1.001 divisor versions where applicable software selectable or autodetect

BNC loop per IEC 61169-8 Annex A Connector:

Termination: High Impedance loop

#### LTC Generator:

Standard: SMPTE 12M-1 Number:

Frame Rate: 24. 25 and 30 Fps nominal 3-pin male XLR type connector Connectors: Level: Adjustable, 0.5V to 4.5V p-p Rise Time:  $40 \pm 10 \, \mu s$ 

.litter < 2 µs

#### LTC Reader:

SMPTF 12M-1 Standard: Frame Rate: 24, 25 and 30 Fps nominal 3-pin female XLR type connector Connector: Level: 0.2 to 4V p-p, balanced or unbalanced 1/30th to 50 x play speed, VTR Speed:

dependent

#### IRIG Reader:

IRIG 200-95 Formats B002 and B122 Standard: 3-pin female XLR type connector Connector Level: 0.2 to 4V p-p, balanced or unbalanced

#### Serial Remote Control:

Standard: RS-232, selectable baud rate Connector: 9-pin female "D" Firmware upgrade Control:

#### Physical:

19" W x 1.75" H x 18.75" D. Dimensions: (483mm W x 45mm H x 477mm D)

8lbs (3.5kg) Weight:

#### Electrical:

Auto ranging 100-240V AC 50/60Hz Power:

FTI listed Safety:

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

#### >>> Ordering Information


HD9010TM-IRIG HD Time Code Master with IRIG Reader


## **Ordering Options**


+HRP +2PS Bypass Relay Protection Redundant Power Supply

- Available in 1310nm, 1550nm and up to sixteen different CWDM wavelengths (ITU-T G.694.2 compliant)
- · Automatic laser shutdown on absence of input signal for extended laser life
- Supports single-mode and multi-mode fiber optic cable
- · Immunity to video Pathological signals
- · Long reach transmission capability
- Rugged, small form factor enclosure
- · Low Power, +12V DC operation
- Backwards compatible with 7705 & 7707OE series modules



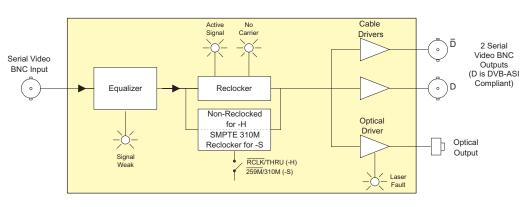





# ▶ Specifications

Standards: SMPTE 259M (A, B, C, D), SMPTE 297M, SMPTE 310M, SMPTE 344M, M2S, & DVB-ASI

Serial Video BNC Input:

Number of Inputs:

BNC per IEC 61169-8 Annex A Connector: Equalization: Automatic to 300m @ 270Mb/s with Belden 8281 (or equivalent)

Return Loss: > 15dB up to 540MHz

Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant) BNC per IEC 61169-8 Annex A 800mV nominal Connector:

Signal Level:

DC Offset: 0V ±0.5V Rise, Fall Time: 900ps nominal < 10% of amplitude Overshoot:

Return Loss: > 15dB up to 540MHz

Wideband Jitter

Optical Output:

Number of Outputs:

SC/PC\_ST/PC\_FC/PC Female Connector:

Return Loss: > 14dB Rise, Fall Time: 400-700ps

.litter < 0.2UI

Optical Power: . 1310nm FP: -7dBm ±1dBm

1550nm DFB: 0dBm ±1dBm CWDM DFB: 0dBm ±1dBm

Physical: Dimensions:

With Flanges: 6"L x 4"W x 1"H (152mm L x 114mm W x 25mm H) 0.5lbs (0.28kg)

Weight:

Electrical: Voltage:

Auto ranging 100-240VAC 12V DC 50/60Hz (adapter included)

Power

Compliance:

Safety: Power supply UL Listed

Complies with EU low voltage

directive

Class 1 laser product Laser Safety:

Complies with 24 CFR 1040.10 and 1040.11 IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

#### Receiver Compatibility Chart:

Single mode fiber cable, 10m, ST/PC male termination

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707OE    | х              |        |
| 2405/7705/7707OE-HD | Х              |        |
| 7705/7707OE-3       | х              |        |
| 7705/7707OE-3-HD    | х              |        |
| 7707ADVR            | Х              |        |
| 7707ADVR-HD         | х              |        |
| 7707VAR-HD          | Х              |        |

#### **▶▶▶**Ordering Information

SDI Miniature Optical Transmitter 1310nm FP, Laser 2405EO5D SDI Miniature Optical Transmitter 1550nm DFB Laser

For CWDM, please refer to the end of the fiber section for ordering information SDI Miniature Optical Transmitter CWDM DFB Laser

All 2405 modules include power supply

Ordering Options Fiber Connector must be specified at time of order

Eg: Model +SC

Connector Suffix

+SC SC/PC +ST +FC ST/PC FC/PC Fiber Optic Patch Cable

CB-FP10M-STPC

CB-FP1M-SCPC Single mode fiber cable, 1m, SC/PC male termination CR-FP1M-STPC Single mode fiber cable, 1m, ST/PC male termination CB-FP5M-SCPC Single mode fiber cable, 5m, SC/PC male termination CB-FP5M-STPC Single mode fiber cable, 5m, ST/PC male termination CB-FP10M-SCPC Single mode fiber cable, 10m, SC/PC male termination


# SDI Miniature Optical Receiver 19.4Mb/s or 143-540Mb/s


#### ▶ Features & Benefits

- Reclocking for all SDTV video rate including SMPTE 259M (143Mb/s-540Mb/s), SMPTE 310M (19.4Mb/s), SMPTE 344M (540Mb/s), M2S and DVB-ASI (270Mb/s)
- · Automatic signal failure switching for optical input
- Immunity to video Pathological signals

- · Supports single-mode and multi-mode fiber optic cable
- Rugged, small form factor enclosure
- Low Power, +12V DC operation
- Backwards compatible with 7705 & 7707EO series modules



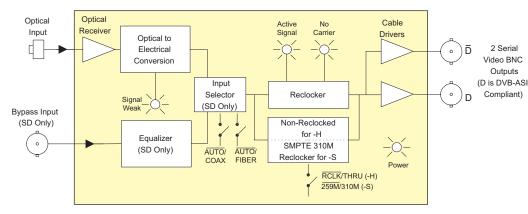



#### ▶ Specifications

SMPTE 259M (A, B, C, D) , SMPTE 297M, SMPTE 310M, SMPTE 344M, Standards

M2S. DVB-ASI

Serial Video BNC Input:

Number of Inputs: Connector

BNC per IEC 61169-8 Annex A Automatic to 300m @ 270Mb/s with Equalization: Belden 8281 (or equivalent)

> 15dB up to 540MHz

Optical Input:

Return Loss:

Number of Inputs: 1 Operating Wavelength:

1270nm to 1610nm

Maximum Input Power: 0dBm -32dBm

Optical Sensitivity: SC/PC, ST/PC, FC/PC Female Housing Connector:

Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant) Connector

BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise, Fall Time: 900ps nominal

Overshoot: < 10% of amplitude > 15dB up to 540MHz Return Loss:

Wideband Jitter: < 0.2 UI

Physical: Dimensions:

With Flanges: 6"L x 4"W x 1"H (152mm L x 114mm W x 25mm H)

Weight: 0.5lbs (0.28kg)

Electrical:

Auto ranging 100-240VAC 12V DC Voltage:

50/60Hz (adapter included)

Power: 6W Compliance:

Power supply UL Listed Safety:

Complies with low voltage directive

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | х              |        |
| 2405/7705/7707EO-HD | х              |        |
| 7705/7707EO-3       | Х              |        |
| 7705/7707EO-3-HD    | х              |        |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              |        |
| 7707VAT-HD          | х              |        |

## **>>>**Ordering Information

24050E SDI Miniature Optical Receiver, 19.4Mb/s or 143-540Mb/s

All 2405 modules include power supply

Fiber Connector must be specified at time of order Ordering Options

Eg: Model +SC

Connector Suffix

+SC SC/PC +ST ST/PC +FC FC/PC Fiber Optic Patch Cable


CB-FP1M-SCPC Single mode fiber cable, 1m, SC/PC male termination CB-FP1M-STPC Single mode fiber cable, 1m, ST/PC male termination CB-FP5M-SCPC Single mode fiber cable, 5m, SC/PC male termination CB-FP5M-STPC Single mode fiber cable, 5m, ST/PC male termination Single mode fiber cable, 10m, SC/PC male termination CB-FP10M-SCPC CB-FP10M-STPC Single mode fiber cable, 10m, ST/PC male termination

477


Miniature Series Mobile

- Reclocking for SMPTE 292M (1.485Gb/s)
- Non-reclocking for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S and DVB-ASI
- Available in 1310nm, 1550nm, and up to sixteen different CWDM wavelengths (ITU-T G.694.2 compliant)
- · Automatic laser shutdown on absence of input signal for extended laser life
- · Supports single-mode and multi-mode fiber optic cable
- Immunity to video Pathological signals
- · Rugged, small form factor enclosure
- · Low Power, +12V DC operation
- Backwards compatible with 7705 & 7707OE-HD series modules



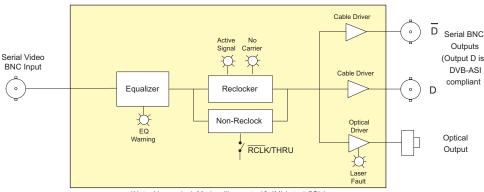





\*Note: Non-reclock Mode will operate 19.4Mb/s to 1.5Gb/s

#### ▶ Specifications

SMPTE 292M 259M 297M 310M Standards:

M2S, DVB-ASI, and any bi-level Telecom/Datacom signal from 19.4Mb/s to 1.5Gb/s

Serial Video BNC Input:

Number of Inputs: Connector

BNC per IEC 61169-8 Annex A Equalization: Automatic to 125m @ 1.485Gb/s with Belden 1694A (or equivalent)

Return Loss: > 15dB up to 1.485GHz

Serial Video BNC Output:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant) Connector: BNC per IEC 61169-8 Annex A

Signal Level 800mV nominal DC Offset: 0V ±0.5V Rise, Fall Time: 270ps nominal Overshoot: < 10% of amplitude > 15dB up to 1.485GHz Return Loss

Wideband Jitter: < 0.2 UI Optical Output:

Number of Outputs: 1

SC/PC, ST/PC, FC/PC Female Housing Connector:

Return Loss: > 14dB Rise, Fall Time: 200ps nominal Jitter: < 0.2 UI reclocked

Nominal Wavelength: Standard:

1310nm, 1550nm 1270nm-1610nm (See Ordering Info) CWDM:

Optical Power:

1310nm FP: -7dBm ±1dBm 1310nm/1550nm DFB: 0dBm ±1dBm CWDM DFB: 0dBm ±1dBm

Physical:

Weight:

With Flanges: 6"L x 4"W x 1"H Dimensions:

(152mm L x 114mm W x 25mm H)

0.5lbs (0.28kg)

Flectrical:

Voltage: +12V DC Power:

Safety: Complies with EU Safety Directive Complies with FCC Part 15, Class A EMI/ŘFI:

EU EMC Directive

#### Receiver Compatibility Chart:

| MODEL #             | SD-SDI | HD-SDI |
|---------------------|--------|--------|
| 2405/7705/7707OE    | х      |        |
| 2405/7705/7707OE-HD | Х      | х      |
| 7705/7707OE-3       | х      |        |
| 7705/7707OE-3-HD    | Х      | х      |
| 7707ADVR            | х      |        |
| 7707ADVR-HD         | х      | Х      |
| 7707VAR-HD          | Х      | Х      |

## **▶▶▶** Ordering Information

2405EO3F-HD HD Miniature Optical Transmitter 1310nm, FP Laser HD Miniature Optical Transmitter 1310nm, DFB Laser 2405EO5D-HD HD Miniature Optical Transmitter 1550nm, DFB Laser

For CWDM, please refer to the end of the fiber section for ordering information HD Miniature Optical Transmitter CWDM DFB Laser

All 2405 modules include power supply

**Ordering Options** Fiber Connector must be specified at time of order

Eg: Model +SC

Connector Suffix

+SC +ST +FC FC/PC

Fiber Optic Patch Cable


CB-FP1M-SCPC Single mode fiber cable, 1m, SC/PC male termination CB-FP1M-STPC Single mode fiber cable, 1m, ST/PC male termination Single mode fiber cable, 5m, SC/PC male termination CB-FP5M-SCPC CB-FP5M-STPC Single mode fiber cable, 5m, ST/PC male termination CB-FP10M-SCPC Single mode fiber cable, 10m, SC/PC male termination CB-FP10M-STPC Single mode fiber cable, 10m, ST/PC male termination

#### ▶ Features & Benefits


- · Operation from 19.4Mb/s to 1.5Gb/s
- Reclocking for SMPTE 292M (1.48Gb/s)
- Non-reclocking for all other rates from 19.4Mb/s to 1.5Gb/s including SMPTE 259M, SMPTE 305M, SMPTE 310M, M2S and DVB-ASI
- Immunity to video Pathological signals

- Supports single-mode and multi-mode fiber optic cable
- Rugged, small form factor enclosure
- Low Power, +12V DC operation
- ${}^{\raisebox{-.4ex}{$\scriptstyle \cdot$}}$  Backwards compatible with 7705 & 7707EO-HD series modules



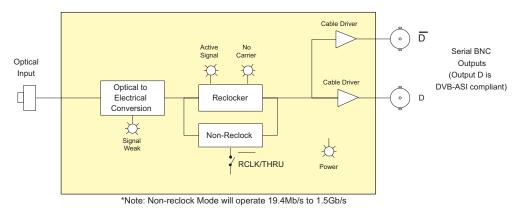





# ▶Specifications

Standards: SMPTE 292M, 259M, 297M, 310M,

M2S, DVB-ASI, and any bi-level Telecom/Datacom signal from 19.4Mb/s to 1.5Gb/s

Optical Input:

Number of Inputs: 1 Operating Wavelength:

1270nm to 1610nm

Max. Input Power: -1dBm Optical Sensitivity: -23dBm

SC/PC, ST/PC, FC/PC Female Housing

Serial Video BNC Outputs:

Number of Outputs: 2 (1 output DVB-ASI/M2S compliant)
Connector: BNC per IEC 61169-8 Annex A

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise, Fall Time: 270ps nominal < 10% of amplitude Overshoot: > 15dB up to 1.485GHz Return Loss

Wideband Jitter: < 0.2 UI

Physical:

Dimensions: With Flanges: 6"L x 4"W x 1"H (152mm L x 114mm W x 25mm H)

Weight: 0.5lbs (0.28kg) Electrical:

Voltage: +12V DC 6W Power:

Complies with EU Safety Directive Safety EMI/RFI: Complies with FCC Part 15, Class A

**EU EMC Directive** 

#### Transmitter Compatibility Chart:

| MODEL #             | SD-SDI/DVB-ASI | HD-SDI |
|---------------------|----------------|--------|
| 2405/7705/7707EO    | х              |        |
| 2405/7705/7707EO-HD | х              | Х      |
| 7705/7707EO-3       | х              |        |
| 7705/7707EO-3-HD    | х              | х      |
| 7707ADVT            | х              |        |
| 7707ADVT-HD         | х              | х      |
| 7707VAT-HD          | х              | Х      |

#### **>>>**Ordering Information

24050E-HD HD Miniature Optical Receiver, 19.4Mb/s to 1.5Gb/s

All 2405 modules include power supply

**Ordering Options** Fiber Connector must be specified at time of order

Eg: Model +SC

Connector Suffix

SC/PC +SC +ST ST/PC +FC FC/PC Fiber Optic Patch Cable CB-FP1M-SCPC Since

Single mode fiber cable, 1m, SC/PC male termination Single mode fiber cable, 1m, ST/PC male termination CB-FP1M-STPC CB-FP5M-SCPC Single mode fiber cable, 5m, SC/PC male termination Single mode fiber cable, 5m, ST/PC male termination
Single mode fiber cable, 10m, SC/PC male termination CB-FP5M-STPC CB-FP10M-SCPC CB-FP10M-STPC Single mode fiber cable, 10m, ST/PC male termination

# DVI /KVM Miniature Fiber Transmitter

The 2407DVIT is a miniature DVI/KVM fiber transmitter for high resolution/high quality DVI video signals. This self-contained module accepts one DVI video input up to WUXGA resolution and transmits it over a single or dual fiber. The 2407DVIT is also available with analog audio, keyboard + mouse + USB + serial options.


The companion 2407DVIR DVI/KVM Fiber Receiver demultiplexes the signals and converts them back to digital DVI. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm and CWDM transmission schemes.


#### ▶ Features & Benefits

- Supports DVI transport over a single or dual fiber
- · VESA video resolutions supported up to WUXGA
- Full 24 bits-per-pixel color resolution
- Backwards compatible with 7707RGB and DVI series cards
- Ideal for use with high resolution LCD, plasma and projection screens
- Superior digital data transmission
- Rugged small form factory enclosure

- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- · Optional 2 channel stereo analog audio
- Optional keyboard + mouse
- Optional USB interface
- Optional copper I/O (Please contact factory)

#### ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

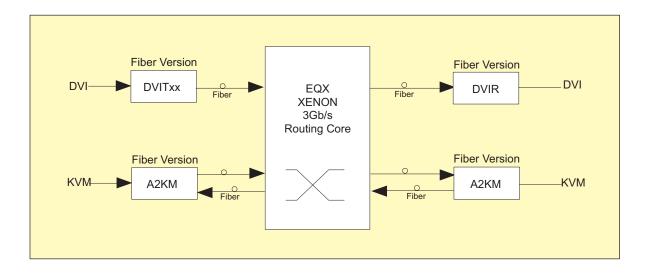

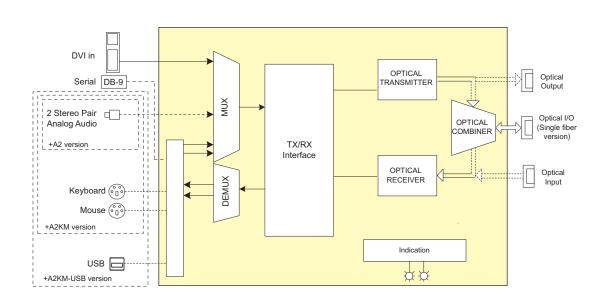



























#### ▶2407DVIT Side Panels









# **▶**Specifications

Video Input:

Standards: **DVI 1.0** Number of Inputs: Connectors: 28-pin DVI

Up to WUXGA (1920x1200) at 75Hz Video Resolution:

Color Resolution: 24 bits

Serial Data:

Number of Signals: 1 Input/Output

Connector: DR-9F

Analog Audio Input (A2, A2KM & A2KM-USB-F2 versions):

Number of Inputs:

Balanced and unbalanced analog audio Type: 3.5mm female stereo (unbalanced) Connector:

DB9F (balanced)

Impedance High Impedance (> 20kW) Frequency Response: ±0.1dB (20Hz to 20kHz) THD: < 0.005% (20Hz to 20kHz)

Channel Phase Diff: < ±1° > 85dB SNR: Maximum Input Level: +24dBu Signal Quantization: 24 bits

USB, Keyboard/Mouse Input/Output (A2KM & A2KM-USB

versions): Standards

USB 1.1 Number: 2 (A2KM), 3 (A2KM-USB) 1 PS2 for each keyboard & mouse,

1 USB type B (A2KM-USB only)

Optical Output:

Number of Outputs:

Female SC/PC. ST/PC or FC/PC Connector:

Wavelengths: Standard: 1310nm, 1550nm CWDM: 1270nm - 1610nm Output Power: 1310nm: -7dBm ± 1dBm 1550nm (-W): -1dBm ± 1dBm

1550nm, CWDM DFB: 0dBm ± 1dBm

Optical Input (A2KM & A2KM-USB-F2 versions):

Number of Inputs:

Connector: Female SC/PC, ST/PC, FC/PC

Wavelength 1270 to 1610nm Maximum Power: 0dBm

Optical Sensitivity: WDM (-W version):-17dBm Standard:

Electrical: Voltage:

e/####)oe/####

Auto ranging 100-240VAC 12V DC 50/60Hz (adapter included)

Power:

Physical:

Dimensions:

7.81"L x 5.63"W x 1.75"H With flanges:

(199mm L x 143mm W x 45mm H)

Compliance:

Electrical Safety: Power supply UL listed

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and 1040 11

IEC 60825-1

EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

# **>>>**Ordering Information

2407DVIT13

DVI Fiber Transmitter, 1310nm FP DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP 2407DVIT13-A2

2407DVIT13-A2KM-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm TX & RX

2407DVIT13-A2KM-USB-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse and USB Fiber Transmitter, dual fiber, 1310nm TX & RX

2407DVIT15-A2KM-W

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse Fiber Transmitter

single fiber, 1550nm TX, RX on 1310nm

2407DVIT15-A2KM-USB-W

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm

For CWDM, please refer to the end of the fiber section for ordering information

2407DVITxx DVI Fiber Transmitter, CWDM Laser

2407DVITxx-A2 DVI + 2 Analog Audio Fiber Transmitter, CWDM Laser 2407DVITxx-A2KM-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, CWDM Laser

2407DVITxx-A2KM-USB-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse and USB Fiber Transmitter, dual fiber, CWDM Laser

**Ordering Options** Fiber connector must be specified at time of order

Eg: Model +SC

Connector Suffix

+SC SC/PC ST/PC +ST FC/PC +FC:

All 2407 models include power supply

Miniature Series Mobile

# DVI / KVM Miniature Fiber Receiver

The 2407DVIR is a miniature DVI/KVM fiber receiver for high resolution/high quality DVI video signals. This self-contained module accepts one DVI video input up to WUXGA resolution and transmits it over a single fiber. The 2407DVIR is also available with analog audio, keyboard + mouse + USB + serial options.


The companion 2407DVIT DVI/KVM Fiber Transmitter demultiplexes the signals and converts them back to digital DVI. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm and CWDM transmission schemes.


#### ▶ Features & Benefits

- · Supports DVI transport over a single or dual fiber
- VESA video resolutions supported up to WUXGA
- Full 24 bits-per-pixel color resolution
- Backwards compatible with 7707RGB and DVI series cards
- · Ideal for use with high resolution LCD, plasma and projection screens
- · Superior digital data transmission
- Rugged small form factor enclosure

- · Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- Optional 2 channel stereo analog audio
- · Optional USB interface
- Optional copper I/O (Please contact factory)

# ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

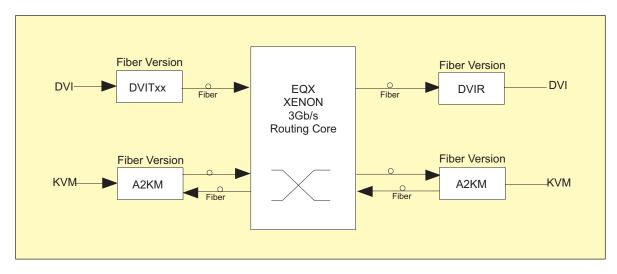

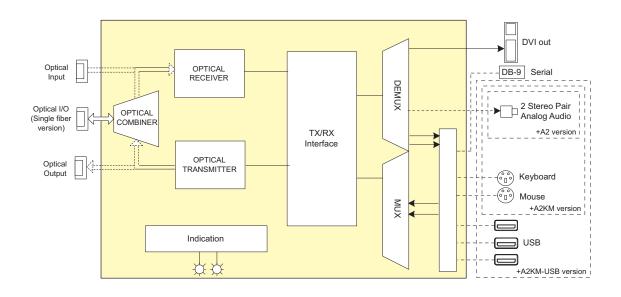

















#### ▶2407 DVIR Side Panels











### ▶Specifications

Video Input:

Standards: Number of Inputs:

28-pin DVI Connectors:

Video Resolution: Up to WUXGA (1920x1200) at 75Hz

Color Resolution: 24 bits

Serial Data:

Number of Signals: 1 Input/ Output Туре: RS232/422 Selectable

Connector: DR-9F

Analog Audio Input (A2, A2KM & A2KM-USB-F2 versions):

Number of Inputs:

Balanced and unbalanced analog audio Type: Connector: 3.5mm female stereo (unbalanced)

DB9F (balanced)

Impedance High Impedance (>  $20k\Omega$ ) Frequency Response:  $\pm 0.1dB$  (20Hz to 20kHz)

< 0.005% (20Hz to 20kHz) Channel Phase Diff: < ±1° > 85dB SNR

Level -20dB to +3dB -24dBu into 10kΩ loads Max Output Level:

Keyboard/Mouse, USB Input/Output (A2KM & A2KM-USB versions):

Standards: **USB 1 1** 2 (A2KM), 5 (A2KM-USB) Number: 1 PS2 for keyboard & mouse, Connector: 3 USB Type A (A2KM-USB only)

Optical Output:

Number of Outputs:

Connector: Female SC/PC, ST/PC or FC/PC

Wavelengths: Standard: 1310nm, 1550nm 1270nm - 1610nm

CWDM: Output Power:

-7dBm ± 1dBm 1310nm: 1550nm (-W): -1dBm ± 1dBm 1550nm, CWDM DFB:

0dBm ± 1dBm

Optical Input (A2KM & A2KM-USB-F2 versions):

Number of Inputs:

Female SC/PC, ST/PC, FC/PC Connector:

Wavelength: 1270 to 1610nm Maximum Power:

Optical Sensitivity:

WDM (-W version) -17dBm Standard:

Physical:

Dimensions: With flanges: 7.81"L x 5.63"W x 1.75"H

(199mm L x 143mm W x 45mm H)

Electrical:

Auto ranging 100-240VAC 12V DC Voltage:

50/60Hz (adapter included)

Power:

Compliance:

Electrical Safety: Power supply UL listed

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product

Complies with 24 CFR 1040.10 and

1040.11 IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

## **>>>**Ordering Information

2407DVIR **DVI Fiber Receiver** 

2407DVIR-A2 DVI + 2 Analog Audio Fiber Receiver

2407DVIR13-A2KM-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber

Receiver, dual fiber, 1310nm TX & RX

2407DVIR13-A2KM-USB-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse and USB Fiber Receiver, dual fiber, 1310nm TX & RX

2407DVIR15-A2KM-W

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse Fiber Receiver,

single fiber, 1550nm TX, RX on 1310nm

2407DVIR15-A2KM-USB-W

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Receiver, single fiber, 1550nm TX, RX on 1310nm

For CWDM, please refer to the end of the fiber section for ordering information 2407DVIRxx-A2KM-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, CWDM Laser

2407DVIRxx-A2KM-USB-F2

DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse and USB Fiber Receiver, dual fiber, CWDM Laser

**Ordering Options** Fiber connector must be specified at time of order

Eg: Model +SC

Connector Suffix

+SC SC/PC +ST: ST/PC FC/PC +FC:

All 2407 models include power supply


The 2408LT is an outdoor fiber optic transmitter for RF signals in the satellite L-Band frequency range. It accepts a single RF input on coaxial cable and provides a single output for optical transmission. Packaged in a compact, standalone enclosure, the 2408LT is ideal for mounting on or near the satellite dish antenna structure. The -WP version features IP65 dust and water protection allowing outdoor mounting without a secondary enclosure. An RF monitor output provides a convenient means of obtaining peak satellite signal strength, or additional signal distribution.

Gain may be adjusted manually or managed automatically via AGC. Using SmartMON™, incoming RF signal strength, LNB current, status of connected 2400PSU-8 power supply and other data are relayed over the fiber output for monitoring through SNMP/VistaLINK® (requires SmartMON™ capable companion fiber receiver). The 2408LT also provides a DC pass through mode for LNB power and comprehensive indicators that provide status information on the input DC power and RF drive level as well as LNB power status.

#### ▶ Features & Benefits

- Directly mount to antenna structure or other outdoor locations
- · -WP Weatherproof version does not require secondary enclosure
- Extended frequency range
- · Protocol independent design transports all modulation formats
- DC pass through and 13VDC modes for LNB power
- LNB current limit & short circuit protection
- · LNB current monitoring

- 22kHz tone on/off for LNB local oscillator control
- · RF monitor output for signal peaking and signal distribution
- · Manually adjustable or AGC gain modes
- · Tri-color LED status indicator for Link RF drive strength, LNB voltage and DC input voltage level
- SmartMON™ capability provides remote status monitoring via SNMP without a separate data connection

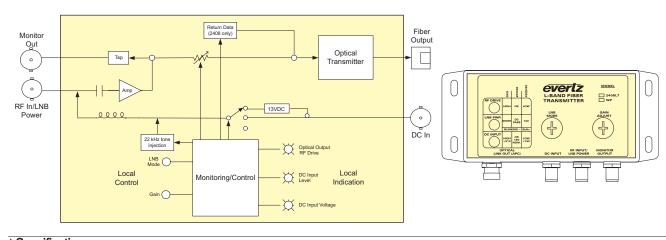

# ▶ Specifications

RF Input:

Number of Inputs: Connector:

F-Type (50 $\Omega$  BNC Optional) 75 $\Omega$  (50 $\Omega$  Optional) Input Impedance: Return Loss: > 15dB

Frequency Range: 250MHz-3000MHz Input Power Range: -10dBm to -60dBm AGC Hold Range: -5 to -40dBm

Input IP3: +10dBm LNB Power

DC Input-0.5VDC, 13.5VDC, off Voltage: (selectable)

Protection: Short Circuit, current limited 22 kHz on/off (selectable) LO Control:

RF Monitor Output: Number of Outputs: 1

Current:

F-Type (50Ω BNC Optional) Connector:

Output Impedance:  $75\Omega$  (50 $\Omega$  Optional)

Return Loss: > 15dB

Frequency Range:

Output Level: Within -1.5dB of input signal Optical Output:

Number of Outputs: Female FC/APC Connector:

Operating Wavelength: Standard:

CMDW-Output Power Standard 1310nm:

+2dBm CWDM: +2dBm

RF System Performance 2408LT13+7708LRA pair:

Frequency Range: 250MHz-3000MHz

±1.5dB @ 850MHz-2250MHz ±2.0dB @ 250MHz-3000MHz Gain variation

1310nm

1270-1610nm

±2dB (from -20°C to +70°C) over temperature:

DC Input: Voltage

Power:

+18VDC typical, +11V DC to +22V DC range (>LNB min input voltage required when

powering an LNB) 2W max excluding LNB Power

Physical: Dimensions

With Flanges: 5.4"L x 2.4"W x 1.2"H

(138mm L x 61mm W x 31mm H)

Compliance:

Class 1 laser product Laser safety:

Complies with 24 CFR 1040.10 and

IEC 60825-1

Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

Environmental:

Temperature: 1310nm:

-20 to +70°C CWDM: -20 to +60°C Dust & Water

IP65 (-WP version only) Protection:

## **▶** ► ► ► Ordering Information

2408LT13 L-Band Standalone Fiber Transmitter with SmartMON™, 1310nm FP laser 2408LT13-WP

L-Band Standalone/Weatherproof Fiber Transmitter with

SmartMON<sup>™</sup>, 1310nm FP laser

2408LT13-B50 L-Band Standalone Fiber Transmitter with SmartMON™, 1310nm

FP laser, 50Ω BNC Connectors

2408LT13-WP-B50 L-Band Standalone/Weatherproof Fiber Transmitter with

SmartMON<sup>™</sup>, 1310nm FP laser, 50Ω BNC Connectors

For CWDM, please refer to the end of the fiber section for ordering information

2408LTxx L-Band Standalone Fiber Transmitter with SmartMON™, CWDM DFB laser 2408LTxx-WP

L-Band Standalone/Weatherproof Fiber Transmitter with

SmartMON™, CWDM DFB laser

L-Band Standalone Fiber Transmitter with SmartMON™, CWDM 2408LTxx-B50

DFB laser, 50Ω BNC Connectors

2408LTxx-WP-B50

L-Band Standalone/Weatherproof Fiber Transmitter with SmartMON<sup>™</sup>, CWDM DFB laser, 50Ω BNC Connectors

Ordering Options: +PS

18VDC external power supply, 100-240V AC auto-ranging input,

indoor mounting with F-Type connector


Note: For weatherproof power supply see 2400PSU-8 catalog page For companion receiver see 7708LRA/7708LR-H catalog page

The 2400PSU-8 is used to supply power for up to eight 2408LT RF fiber optic transmitters including DC power for upstream LNBs. It contains dual, diodeisolated, redundant DC power supplies and provides eight outputs on F-Type connectors.

Packaged in an environmentally protected enclosure suitable for outdoor locations, the 2400PSU-8 can be conveniently mounted on or near the antenna structure.

#### ▶ Features & Benefits

- Provides diode-isolated, redundant DC power for up to eight 2408LT modules and upstream LNBs
- Active short circuit for protection of each DC output
- · Weatherproof does not require a secondary enclosure for outdoor mounting
- · LED indicators display the status of each power supply and DC output
- PSU status signal output for remote monitoring via connected SmartMON™ capable fiber transmitter

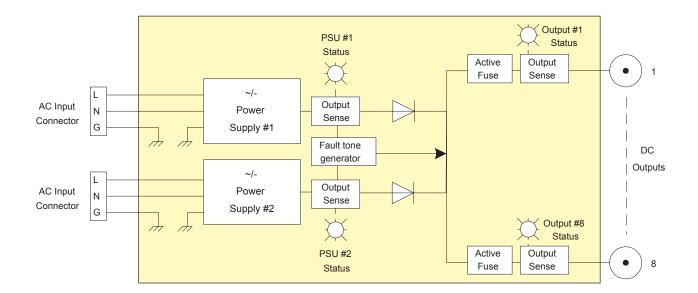

# **▶** Specifications

Power Input Number of Inputs:

Connector:

Male, unterminated and IEC320 inlet connectors included

Auto ranging, 100-264 VAC

Voltage: 47-63Hz

Frequency: Power: 120W max per input Power Output:

Number of Outputs:

Protection: Short circuit, current limit Connector: F-Type

Voltage: 18 ±1 VDC per output Current:

900mA max per output, 4 Amps max total of all outputs

# Physical:

Dimensions (with flanges): 9.9"L x 5.7"W x 2.0"H

(252mm L x 146mm W x 51mm H)

Environmental:

Temperature: -20 to +70°C Dust & Water Protection:

IP65

#### **▶▶▶Ordering Information**

2400PSU-8

Outdoor, eight output power supply for 2408LT









# RGBHV / DVI / KVM Miniature Fiber Transmitter

The 2407RGBT is a miniature RGBHV/DVI/KVM fiber transmitter for high resolution/high quality RGB and DVI video signals. This self-contained module accepts one analog RGBHV or digital DVI video input up to WUXGA resolution and transmits them over a single or dual fiber. The 2407RGBT is also available with analog audio, keyboard + mouse and USB options + serial.


The companion 2407RGBR RGBHV/DVI/KVM Fiber Receiver demultiplexes the signals and converts them back to analog RGBHV and digital DVI. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm and CWDM.


#### ▶ Features & Benefits

- Supports DVI or RGBHV transport over a single or dual fiber
- Both RGBHV and DVI outputs available simultaneously on companion 2407RGBR Receiver
- · VESA video resolutions supported up to WUXGA
- Full 24 bits-per-pixel color resolution
- Backwards compatible with 7707RGB and DVI series cards
- · Ideal for use with high resolution LCD, plasma, and projection screens
- Superior digital data transmission

- · Rugged, small form factor enclosure
- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- Optional 2 channel stereo analog audio
- Optional keyboard and mouse
- Optional USB interface

# ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

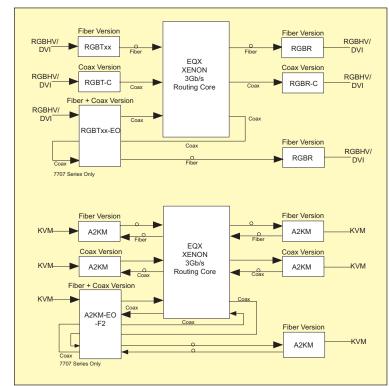

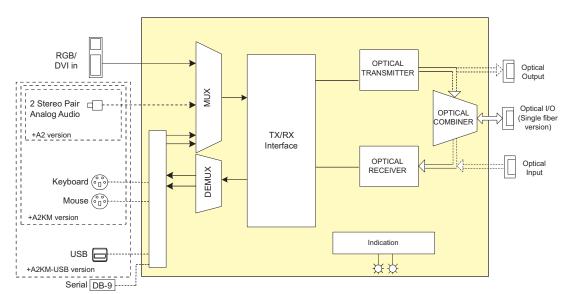

















#### ▶2407RGBT Side Panels











#### ▶ Specifications

Video Input:

DVI 1.0, VESA Standards:

Number of Inputs:

Connectors:

28-pin DVI with Analog Up to WUXGA (1920x1200) at 75Hz Video Resolution: Video Bandwidth: 500MHz

Color Resolution: 24 bits

Analog Output Level: 1V p-p (maximum)

Analog Output Impedance: 75Ω Signal/Noise Ratio: > 55dB

Serial Data:

Number of Signals: 1 Input/ Output RS232/422 Selectable Type:

Connector:

Analog Audio Input (A2, A2KM & A2KM-USB versions):

Number of Inputs:

Balanced and unbalanced analog audio Type: Connector 3.5mm female stereo (unbalanced),

DB9F (balanced) High Impedance (> 20kΩ) Impedance

Frequency Response: ±0.1dB (20Hz to 20kHz) THD. < 0.005% (20Hz to 20kHz)

Channel Phase Diff: < ±1° > 85dB SNR: Maximum Input Level: +24dBu Signal Quantization: 24 bits

Keyboard/Mouse, USB Input/Output (A2KM & A2KM-USB versions):

Standards: USB 1.1

2 (A2KM versions), 3 (USB versions) Number: 2 PS2 for keyboard & mouse Connector

1 USB Type B

Optical Output

Number of Outputs:

Connector: Female SC/PC, ST/PC or FC/PC

Wavelengths: Standard: 1310nm, 1550nm 1270nm - 1610nm CWDM: Output Power: -7dBm ± 1dBm 1310nm:

1550nm (-W): -1dBm ± 1dBm 1550nm, CWDM DFB:

0dBm ± 1dBm

Optical Inputs (A2KM & A2KM-USB-F2 versions): Number of Inputs:

Female SC/PC\_ST/PC\_FC/PC Connector:

Wavelength: 1270 to 1610nm Maximum Power:

Optical Sensitivity: WDM (-W version) -17dBm -19dBm Standard:

Electrical:

Auto ranging 100-240VAC 12V DC Voltage: 50/60Hz (adapter included)

Power: 11W

Physical:

Dimensions:

With flanges: 7.81"L x 5.63"W x 1.75"H

(199mm L x 143mm W x 45mm H)

Compliance:

Electrical Safety: Power supply UL listed

Complies with CE Low voltage

Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1 Complies with FCC Part 15, Class A EMI/RFI:

EU EMC directive

# **▶** ► ► ► Ordering Information

RGBHV/DVI Fiber Transmitter, 1310nm FP RGBHV/DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP laser 2407RGBT13-A2

2407RGBT13-A2KM-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm TX & RX

2407RGBT13-A2KM-USB-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and

USB Fiber Transmitter, dual fiber, 1310nm TX & RX 2407RGBT15-A2KM-W

> RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm

2407RGBT15-A2KM-USB-W

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm

For CWDM, please refer to the end of the fiber section for ordering information RGBHV/DVI Fiber Transmitter, CWDM DFB laser

2407RGBTxx-A2 RGBHV/DVI + 2 Analog Audio Fiber Transmitter, CWDM DFB laser 2407RGBTxx-A2KM-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse

Fiber Transmitter, dual fiber, CWDM DFB laser

2407RGBTxx-A2KM-USB-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, dual fiber, CWDM DFB laser

**Ordering Options** Fiber Connector must be specified at time of order Eq: Model +SC

Connector Suffix SC/PC +SC +ST: ST/PC +FC FC/PC

All 2407 models include power supply

Miniature Series Mobile

# RGBHV / DVI / KVM Miniature Fiber Receiver

The 2407RGBR is a miniature RGBHV/DVI/KVM receiver for high resolution/high quality RGB and DVI video signals. Available in fiber optic versions, this single card module accepts an input from the companion 2407RGBT RGHV/DVI/KVM Transmitter and outputs both analog RGBHV and digital DVI video + serial.


It is also available with analog audio, keyboard + mouse and USB options. The fiber output is available in an assortment of optical wavelengths, accommodating 1310/1550nm and CWDM.


#### ▶ Features & Benefits

- Supports DVI or RGBHV transport over a single or dual fiber
- Both RGBHV and DVI outputs available simultaneously
- VESA video resolutions supported up to WUXGA
- Full 24 bits-per-pixel color resolution
- Backwards compatible with 7707RGB and DVI series cards
- · Ideal for use with high resolution LCD, plasma, and projection screens
- · Superior digital data transmission
- · Rugged, small form factor enclosure

- Supports single-mode and multi-mode fiber optic cable
- Optical output wavelengths at 1310nm, 1550nm and up to sixteen CWDM wavelengths (ITU-T G.694.2 compliant)
- · Optional 2 channel stereo analog audio
- Optional keyboard and mouse
- Optional USB interface
- Optional copper I/O (Please contact factory)

# ▶ Application Drawing with EQX or Xenon 3Gb/s Router for KVM Routing

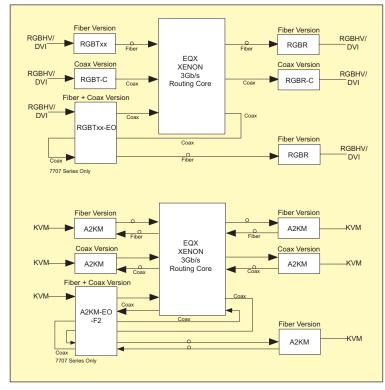

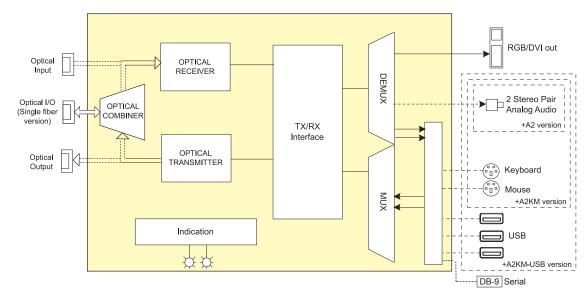











0 (##### )O















# Auto ranging 100-240VAC 12V DC 50/60Hz (adapter included)

# 11W

#### Physical: Dimensions: With flanges:

Electrical:

Voltage:

Power:

7.81"L x 5.63"W x 1.75"H (199mm L x 143mm W x 45mm H)

# Compliance:

Electrical Safety: Power supply UL listed

Complies with CE Low voltage Directive

Laser Safety: Class 1 laser product Complies with 24 CFR 1040.10 and

1040.11

IEC 60825-1 EMI/RFI: Complies with FCC Part 15, Class A

EU EMC directive

# 







# ▶ Specifications

Video Output: Standards DVI 1.0, VESA

Number of Inputs: 28-pin DVI with Analog Connectors:

▶2407RGBR Side Panels

Up to WUXGA (1920x1200) at 75Hz Video Resolution:

Video Bandwidth: 500MHz Color Resolution: 24 hits

Analog Output Level: 1V p-p (maximum)

Analog Output:

Impedance: 75Ω Signal/Noise Ratio: > 55dB

#### Serial Data:

Number of Signals: 1 Input/ Output RS232/422 Selectable Type:

Connector: DB-9F

## Analog Audio Output (A2, A2KM & A2KM-USB versions):

Number of Inputs:

Balanced and unbalanced analog audio Type: Connector: 3.5mm female stereo (unbalanced),

DB9F (balanced)

High Impedance (> 20kΩ)

Impedance Frequency Response:

±0.1dB (20Hz to 20kHz) THD: < 0.005% (20Hz to 20kHz)

Channel Phase Diff: < ±1° SNR: > 85dB Level: +20dBu to +3dB

Maximum Output Level:

+24dBu into 10kΩ loads

# Keyboard/Mouse, USB Input/Output (A2KM & A2KM-USB

Standards: **USB 1.1** Number:

2 (A2KM versions), 5 (USB versions) Connector: 2 PS2 for keyboard & mouse

3 USB Type A

Optical Input:

Number of Inputs:

Connector: Female SC/PC, ST/PC or FC/PC

Operating Wavelength:

1270nm - 1610nm

Max Input Power: Optical Sensitivity: WDM (-W version) -17dBm

Standard: -19dBm

# Optical Output (A2KM & A2KM-USB-F2 versions): Number of Outputs: 1

Connector: Female SC/PC, ST/PC, FC/PC

Wavelengths: Standard: 1310nm, 1550nm

CWDM: 1270nm - 1610nm Output Power: 1310nm: -7dBm ± 1dBm 1550nm (-W): -1dBm ± 1dBm

1550nm, CWDM DFB: 0dBm ± 1dBm

# **▶▶▶** Ordering Information

2407RGBR RGBHV/DVI Fiber Receiver

2407RGBR-A2 RGBHV/DVI + 2 Analog Audio Fiber Receiver

2407RGBR13-A2KM-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, 1310nm TX & RX

2407RGBR13-A2KM-USB-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse +

USB, Fiber Receiver, dual fiber, 1310nm TX & RX

2407RGBR13M-A2KM-W

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse

Fiber Receiver, single fiber, 1310nm RX, TX on 1550nm 2407RGBR13M-A2KM-USB-W

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse USB Fiber Receiver, single fiber, 1310nm RX, TX on 1550nm

For CWDM, please refer to the end of the fiber section for ordering information 2407RGBRxx-A2KM-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, CWDM DFB laser

2407RGBRxx-A2KM-USB-F2

RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, dual fiber, CWDM DFB laser

Ordering Options Fiber Connector must be specified at time of order Eg: Model +SC

Connector Suffix

+SC

SC/PC +ST ST/PC +FC FC/PC

All 2407 models include power supply

# HD Miniature Digital to Analog Converter

The 2430DAC-HD is a professional quality digital to analog converter for HDTV. It supports all signal standards specified in SMPTE 240M, SMPTE 274M and SMPTE 296M.


DIP switch control allows the user to select between YPrPb, RGB or VGA style analog outputs with a variety of sync output options. User-controlled 4:3 alignment markers also allow for convenient framing of the video signal. With the optionally supplied VGA to BNC breakout cable the 2430DAC-HD can easily interface to either standard broadcast monitors or VGA computer monitors.



#### ▶ Features & Benefits

- Support for all SMPTE 240M, 274M and 296M video formats
- 4:3 alignment markers
- Full 10 Bit Broadcast quality
- · 4:4:4 interpolated component output

- DIP switch selectable YPrPb, RGB or VGA outputs with bi-level or tri-level sync
- 15-pin VGA connector for use with VGA computer monitors
- · Front panel LEDs indicate video presence, module faults

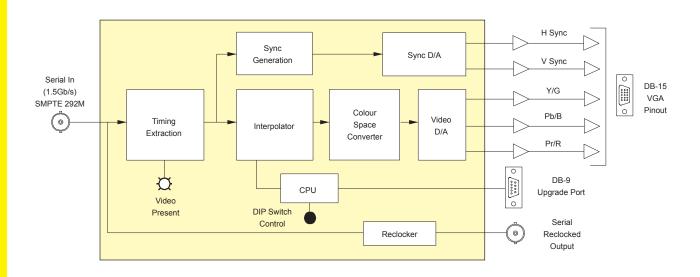

# **▶**Specifications

Serial Video Input:

Standard: SMPTE 292M (1.485Gb/s) SMPTE 240M (1035i) SMPTE 274M (1080i, 1080psF,

1080p (except 1080p/60 & 1080p/59.94)

SMPTE 296M (720p) Connector: 1 BNC per IEC 61169-8 Annex A Automatic 125m @ 1.5Gb/s with Equalization: Belden 1694A (or equivalent)

Serial Video Output Reclocked: Standard: Same as input

Number of Outputs:

Connector

BNC per IEC 61169-8 Annex A Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 200 ps nominal Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

**Ordering Options** 

Analog Video Outputs:

Standard: SMPTE 240M, 274M or 296M - same

as input Connector:

15-pin high density female D type

Signal Level: Video:

1V p-p nominal YPrPb/RGB or 0.7V p-p nominal VGA

Sync: 300mV or 4V Impedance: DC Offset: 0V ±0.1V

> 45dB up to 30MHz Return Loss:

Upgrade Port:

RS-232 Standard: Connector: Female DB-9 Baud Rate:

Format: 8-bits, no parity, 1 stop bits Electrical:

Voltage: Auto ranging 100-240VAC 12V DC

50/60Hz (adapter included) Power:

Complies with EU safety directive Safety: Complies with FCC Part 15 Class A EU EMC Directive EMI/RFI:

Physical:

6" L x 3.5" W x 1" H Dimensions

(152mm L x 89mm W x 25mm H)

With Mounting Flanges: 6" L x 4" W x 1" H

(152mm L x 114mm W x 25mm H)

0.5lbs (0.28kg) Weight:

# **>>>**Ordering Information

2430DAC-HD HD Miniature D to A: YPrPb/RGB/VGA via High Density DB-15 (with

power supply)

Accessories

Note: Enclosure with side mount flanges ships standard

Fiber Connector must be specified at time of order

Eg: Model +SC

WPVGABNC5

Case Option Suffix +NF

VGA to BNC - 6' Monitor Adapter Cable

Enclosure without mounting flanges










The 2430GDAC GLink D to A Converter provides a simple extension to Evertz multi-display systems by converting a GLink video signal over coaxial or fiber optic cable into a digital DVI signal and analog RGB signal that can be displayed on a computer monitor or flat panel screen, thereby eliminating the 5m distance limit of DVI signals. The converter features one GLink fiber optic input, one GLink coaxial input, one reclocked GLink coaxial output, and one DVI-I video output. The 2430GDAC has been designed for use with any Evertz module featuring a GLink output (for example, the MVP® 3000MVP-PPMX16-4G and 7767VIP4-HSN-G modules).

The 2430GDAC-WARP features the same I/O specifications as the standard 2430GDAC but also provides the added capability of "warping" or flipping the output display from landscape mode (16:9) to portrait mode (9:16). The 2430GDAC-WARP rotates the output display 90° counter clockwise. This is ideal for space limited applications.

#### ▶ Features & Benefits

- Display resolution capability up to HD (1920X1080) at 60Hz or 50Hz refresh rate
- · DVI-I digital and analog RGB video output
- · Auto detection of display resolution with manual override.
- One reclocked GLink coaxial output for connection to a second 2430GDAC or other GLink-compatible products
- Standard landscape display (2430GDAC) or portrait display support (2430GDAC-WARP)
- · Auto detection of GLink signal loss
- · Operation with single-mode or multi-mode fiber optic cable
- · SC/PC, ST/PC, or FC/PC fiber connector options
- Low power +12VDC operation

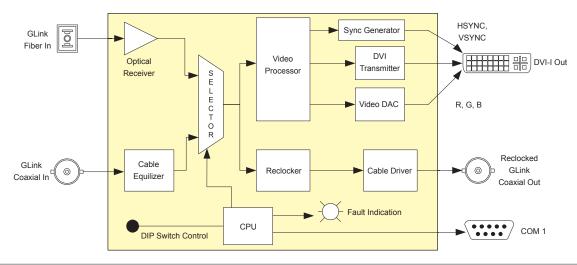

#### ▶ Specifications

#### Coaxial GLink Input:

BNC per IEC 61169-8 Annex A Connector: Automatic up to 10m Equalization:

#### Fiber GLink Input: Connector

SC/PC, ST/PC, or FC/PC female housing Max. Input Power -3dBm

Wavelength: Optical Sensitivity: 1310 nm to 1610nm -25dBm

62mm core/125mm overall Fiber Size

#### Re-clocked Coaxial GLink Output:

BNC per IEC 61169-8 Annex A Connector: Signal Level: 750mV minimum

#### Video Output:

DVI-I (digital + analog) Connector: Output Resolution: Up to HD (1920x1200) @ 60Hz or

50Hz maximum

#### **DVI Digital Video Output:**

Voltage Swing: 400mV minimum Output Clock Jitter: 150ps maximum Differential Skew: 50ps maximum

#### RGB Analog Video Output:

Signal Level: Video:

1V p-p nominal RGB

Sync: Impedance: 75Ω DC Offset: 0V +0 5V

#### Electrical:

Auto ranging 100-240VAC 12VDC Voltage: 10W (power adapter included) Safety: Power adapter UL listed

Complies with EU safety directive Complies with FCC Part 15 Class A EMI/RFI: EU EMC Directive

#### Physical: Dimensions:

7.2" L x 4.3" W x 1.0" H (166mm L x 110mm W x 26mm H)

With mounting flanges

7.2" L x 5.3" W x 1.0" H

(166mm L x 136mm W x 26mm H) Weight:

0.85lbs (0.38kg)

#### **>>>**Ordering Information

2430GDAC GLink to DVI converter 2430GDAC-WARP GLink to DVI converter with WARP (provides landscape to portrait display orientation conversion support)

Note: Enclosure with side mount flanges ships standard

**Ordering Options** Fiber Connector must be specified at time of order

Eg: Model +SC

#### Connector Suffix

+SC +ST SC/PC ST/PC

Case Option Suffix

Enclosure without mounting flanges

In segmented frame mode, the 2410MD-HSN down converts the 1080p/24sF input video to 525i/60 with a 3:2 pulldown or 625i/50 with a 24:25 pulldown. The 2410MD-HSN repeats fields to create the 3:2 or 24:25 pulldown of the picture content with a random pulldown cadence on the downconverted output.



#### ▶ Features & Benefits

#### Indicator LED

- · Signal presence
- Module Status

#### **Down-conversion Format**


- Letter Box
- · Side Crop
- 4x3 Squeeze
- · On-screen markers show 4:3 aspect ratio and safe area

#### Input

- · Serial digital 1.5Gb/s HD
- SMPTE 292M Standards: 1080i/60, 1080i/59.94, 1080i/50, 720p60 & 720p/59.94, 1080p/24sF, 1080i/23.98sF & 1080p/25sF

#### Output

- 2 HD 1.5Gb/s reclocked outputs
- 2 NTSC down converted outputs
- 1 SD down converted output

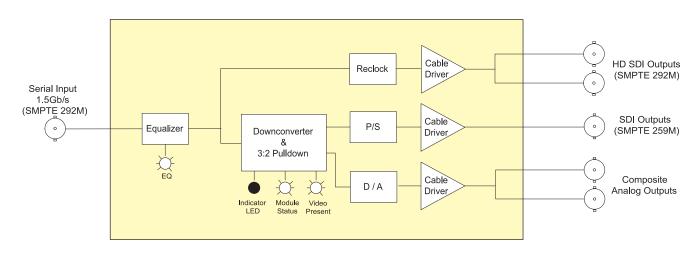

#### ▶ Specifications

#### Serial Video Input: Standard:

SMPTE 292M, 1080i/60, 1080i/59.94,

1080i/50, 1080p/24sF, 1080p/23.98sF 1080/25sF, 720p60 & 720p/59.94, 1 BNC per IEC 61169-8 Annex A

Connector: Impedance: 75Ω

Equalization: Automatic 75m @ 1.5Gb/s with

Belden 1694A (or equivalent)

#### HD Reclocked Video Output: Standard:

Same as input 2 BNC per IEC 61169-8 Annex A 800mV nominal Connectors:

Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude Wide Band Jitter: < 0.2 UI

SD Serial Digital Video Output:

Standard: Serial component 270Mb/s (SMPTE 259M-C)

525i/59.94 or 625i/50 Dip Switch

selectable

1 BNC per IEC 61169-8 Annex A Connectors: Signal Level: 800mV nominal

DC Offset: 0V ±0.5V Rise and Fall Time: 740ps nominal <10% of amplitude Overshoot:

Return Loss: > 15dB

Wide Band Jitter < 0.2 []]

#### Analog Video Output:

Standard: Analog composite NTSC or Analog composite PAL Dip Switch selectable

2 BNC per IEC 61169-8 Annex A Connectors: Signal Level: 1V p-p nominal, internally adjustable

DC Offset: 0V +0 1V

> 45dB up to 6MHz Return Loss:

Impedance:

#### Physical:

Electrical:

Voltage

Safety:

EMI/RFI:

Dimensions:

6" L x4" W x 1" H (152mm L x 115mm W x 25mm H)

Auto ranging 100-240VAC 12VDC

Complies with EU safety directive

Complies with FCC Part 15 Class A

10W (power adapter included)

Power adapter UL listed

EU EMC Directive

Weight: 0.5lbs (0.28kg)

#### >>> Ordering Information

2410MD-HSN HD Miniature Monitoring Downconverter with 24sF processing (with

power supply)

Note: Enclosure with side mount flanges ships standard

**Ordering Options** 

Fiber Connector must be specified at time of order

Eq: Model +SC

Case Option Suffix +NF

Enclosure without mounting flanges



















The 7700PCO is a 1 rack-unit high rack frame designed to fit into a standard 19-inch rack. Special care was taken during the design process to ensure that the unit meets the demanding needs of professional video users and applications.

It is intended to be used only with Evertz line of 7700 Multiframes to provide reliable and high quality back-up power switching. This is ideal for remote applications where main power can be intermittent or where a program feed must be guaranteed at all times

#### ▶ Features & Benefits

- · Seamless, auto switching to external DC supply in case of AC failure
- · Standard AC input cord
- Fused DC input on terminal block
- Direct output connection to 7700 frame power supplies
- 30 minutes operation on fully loaded 7700 frame (200W) with dual Anton Bauer Hytron 100 batteries (requires quad battery holder), 60 minutes operation on 100W load (7700 frame about half full dependent on card types)
- Dual power outlets to 7700 frame
- · Front panel status LEDs

#### NOTE:

- · Operation times dependent upon type of battery used.
- · Operation times will vary

#### **▶**Specifications

Electrical: Power Supply

7700PCO

Configuration:

Input A: Auto ranging, 95 ⇔ 264V AC, 47-63Hz Input B: 10 ⇔ 18V DC

115 ⇔ 370V DC Output:

Maximum Output

Power Dissipation: 300W

Fuse:

DC input fuse - rated for 32V min. at

40 amps

Status Indicators: AC Input Present LED (green)

Valid DC Present LED (green) DC Operate LED (green)
DC/DC OK LED (green)

0 ⇔ 55°C ambient Temperature:

Physical: Height:

Weight:

1.75"H x 19"W x 11.2"D (44.5 mm x 483mm x 285mm) Approx. 7lbs (3.2Kg)

#### >>> Ordering Information

Note: Enclosure with side mount flanges ships standard

Power Changeover Unit

Ordering Options IRCBH+AB

Anton Bauer Quad Battery Holder

#### Tactical Mobile Fiber Optic Cable Reels + Breakout Assemblies










Fiber Optic Cable & Reel MBL-FCR-TAC4-xxx

Plastic Breakout MBL-IRCBP-TAC4-3-ST

Metal Breakout MBL-FS3H-TAC4-3-ST

Fiber Reel Carrying Case MBL-FCR-IRC



- Fiber reels and breakouts offered in 4, 6, or 12 fiber strand configurations
- Up to 320 x SD-SDI or 80 x HD-SDI per fiber strand using Evertz TDM+WDM multiplexing technologies
- Extremely strong, lightweight, rugged, survivable tight-buffered cables designed for military tactical field use and commercial applications
- · Crush-resistant and resilient, with two separate layers of aramid strength members
- Single mode 9µm fiber optic cable

- Polyurethane jacketed for abrasion, cut, and chemical resistance
- Fiber Reel uses rugged steel and aluminum construction throughout.
- Hermaphroditic design for Versatility enables multiple reel assemblies to be daisychained.
- · Durable plastic and metal hermaphroditic fiber breakouts available

All 77xx fiber cards interfacing with the MBL-IRCBP-TAC4-3-ST or MBL-FS3H-TAC4-3-ST must be ordered with ST/PC connectors.

#### **>>>**Ordering Information

| Tactical | Mobile Fiber | r Optic Cable Reels + Breakouts |
|----------|--------------|---------------------------------|
|          |              |                                 |

MBL-FCR-TAC4-300 Cable Reel and 300m TAC4, SMF fiber, Hermaphroditic

MBL-FCR-TAC4-400 Cable Reel and 400m TAC4, SMF fiber, Hermaphroditic

MBL-FCR-TAC4-450 Cable Reel and 450m TAC4, SMF fiber, Hermaphroditic

MBL-FCR-TAC4-500 Cable Reel and 500m TAC4, SMF fiber, Hermaphroditic

MBL-FCR-TAC4-600 Cable Reel and 600m TAC4, SMF fiber, Hermaphroditic

Connectors

Breakouts TAC-4 MBL-IRCBP-TAC4-3-ST

Breakout Cable Delphi Hermaphroditic TAC4 to ST/PC, 1 meter Breakout cable, Hermaphroditic TAC4 to ST/PC, metal MBL-FS3H-TAC4-3-ST

receptacle, SM, 3 foot length Fiber Reels TAC-6

MBL-FCR-TAC6-300

Cable Reel and 300m TAC6, SMF fiber, Hermaphroditic

Connectors

**Breakouts TAC-6** 

Breakout cable, Hermaphroditic TAC6 to ST/PC, metal MBL-FS3H-TAC6-3-ST

receptacle, SM, 3 foot length

Note: plastic breakout not offered

Fiber Reels TAC-12

MBL-FCR-TAC12-300 Cable Reel and 300m TAC12, SMF fiber, Hermaphroditic

**Breakouts TAC-12** 

MBL-FS3H-TAC12-3-ST Breakout cable, Hermaphroditic TAC12 to ST/PC, metal

receptacle, SM, 3 foot length Note: plastic breakout not offered

Fiber Reel Carrying Case

MBL-FCR-IRC


Fiber Cable Reel, Impact Resistant Carrying Case











- The MBL-IRC-420 provides 6RU of Rack mounting space for any 7700, 500, series products
- Unit can also house any other Evertz product needed for mobile applications. (control panels, routers, etc)
- Shock absorbers on all eight corners on inner cage
- Shocks are designed to control the effects of shock and vibration on three axes
- Molded handles on all racks provide an easy and secure grasping point
- Mounting hardware in the racks is easy with the rack rail and provided
- Includes mounting hardware for TAC4 type breakout cable

#### **▶**Specifications

|                                   | INCUES     | OFNERS      |
|-----------------------------------|------------|-------------|
|                                   | INCHES     | CENTIMETERS |
| Exterior Depth                    | 27.5000    | 69.8500     |
| Exterior Width                    | 29.0000    | 73.6600     |
| Rack Space Units Total            | 6          | 6           |
| Rack Depth Front Rail to Back Lid | 22.2500    | 56.5150     |
| Rack Depth Front to Rear Rail     | 20.0000    | 50.8000     |
| Lid Depth                         | 2.2500     | 5.7150      |
| Product Weight                    | 42.0000 lb | 19.0509 kg  |

### **Description** Information

MBL-IRC-420

6RU Mobile Transit Case









The MBL-IRCBH+AB is the ideal accessory for providing portable power for Infield and ENG type applications for use with Evertz 7700FR-C and 350FR frames. The MBL-IRCBH+AB uses Anton Bauer 14.4 volt batteries and allows seamless battery changes, continuously powering the Evertz frames. It is especially valuable in circumstances where 77xx series modules need to be in continuous operation for long periods of time or for high power consuming.

The 7700FR-C and 350FR frames can be operated for as long a period as necessary, substituting fresh batteries for depleted ones without interrupting operation. (as batteries are depleted, unit automatically draws from the second

NOTE: Must be used with Anton/Bauer 14.4 volt batteries. Unit does NOT charge batteries. Batteries Not Included

#### **▶**Specifications

**Dimensions**12.3" x 4.6" x 2.6" (31.37cm x 11.81cm x 6.73cm)

Weight:

2 lbs. (0.92kg)

Power connections:

Three 4 pin XLR outputs @ 14.4 volts Single 2-pin Amphenol output @ 28.8 volts Current rating: Up to 10 amps

Fuse:

10 amp externally replaceable fuse

#### **▶▶▶**Ordering Information

MBL-IRCBH+AB Anton Bauer Quad Battery Holder









The Camera Adapter and Base Stations are available in several models to support a wide variety of cameras as shown below.

The non-fiber version of the camera-back adapter, and the fiber enabled high definition versions operating as a standalone units, provide HDSDI with embedded audio and time code, NTSC/PAL, SDI and IEEE 1394A downconverted video, and 2 analog audio inputs for channels 3 and 4 (on Sony HDCAM models).

When the fiber enabled HD camera adapters are connected to the ECB-HD base station the camera video is transported to the base over fiber and broken out to HDSDI video with embedded audio and time code, analog or AES audio, LTC, NTSC/PAL, SDI and IEEE1394A downconverted video with time code. The base station has inputs for return HD/SDI, NTSC/PAL, 4 channels of analog or AES audio, genlock, time code and IFB. The fiber also transports bi-directional RTS intercom, camera remote control (with view finder menus), and contact closure tallies.

When the Camera power option is installed in the base station (-CP versions), the base station can send DC power over a hybrid copper/fiber optic cable to the camera adapter. This DC voltage is converted to battery voltage by the ECA-PS power module, which mounts on the camera adapter in place of a battery. When power is sent down the hybrid cable, the camera and accessories can be powered at a distance up to 2km.





|              | Camera                                       | Camera Adapter | Base Station |
|--------------|--|----------------|--------------|
| Manufacturer | Models                                       | Model          | Model        |
| Panasonic    | HDC-27, HDX-900, HPX-2000, HPX-500, HPX-3000 | ECAP-HD        | ECB-HD       |
| Sony         | HDW-750, HDW-F900, HDW-F900R, HDCAM          | ECAS-HD        | ECB-HD       |
| Sony         | PDW-350, PDW-355, XDCAM-HD                   | ECAX-HD        | ECB-HD       |

#### ▶ Features & Benefits

#### Camera-Back Adapter - Standalone and Non-Fiber Features

- Sony HDCAM model connects directly to camera multi-pin connector, serial digital video output with embedded camera time code and audio
- Sony XDCAM and Panasonic models connect to serial digital output from camera - extra serial digital outputs
- Serial digital video input for connecting to "pool feeds"
- Monitoring quality SDI and NTSC/PAL camera video out downconverted from input HD and aspect
- ratio converted supports 4:3 center crop, anamorphic squeeze or 16:9 letter box
- Auxiliary serial digital output switchable as second output from camera, or downconverter SDI
- · Sony HDCAM models embed camera time code and audio on serial digital outputs

- IEEE 1394A port for output and control of DV devices
- Sony HDCAM models have inputs for audio 3 & 4 selectable as Line, Microphone (with phantom power) or AES
- Draws power from camera supply (battery connector or 4 pin XLR)
- Sony models available with Sony/IDX, PAG or Anton-Bauer battery connectors
- Panasonic models available with Sony/IDX or Anton-Bauer battery connectors
- 12 VDC accessory power outlet
- On Screen Display menu system











# ECAS-HD, ECAX-HD, ECAP-HD, ECB-HD

#### Fiber Optic Enabled Camera Adapter System

#### ▶ Features & Benefits

#### Additional Features when connected to Base Station

- · Serial digital return video available on Aux SDI output
- 4 channels of AES or Analog Return Audio
- NTSC/PAL Return Video
- Tri-level or bi-level genlock return to camera
- · LTC to and from camera
- · Camera control from control panel connected to base station (camera menu video input when available on camera)
- 2 channel Intercom 5-pin XLR headset connector at camera adapter, RTS beltpack connection at base station
- · IFB return channel to camera adapter
- · Piezo electric speaker with volume control for intercom monitoring
- RS-422/232 channel to base station
- 4 GPI/O channels simple control or tally between camera and base station
- 2 each direction
- · Status LEDs for SDI and NTSC/PAL return video, Intercom Talk and Fiber Link OK
- Available with LEMO 3K or Fischer 1053 HDTV series fiber-optic connector
- contact factory for other connector options

#### **Base Station Features**

- · Camera serial digital video output
- · Return serial digital video input
- NTSC/PAL camera video out, downconverted from HD and aspect ratio converted - supports 4:3 center crop, anamorphic squeeze or 16:9 letter box modes
- · Serial digital output from downconverter
- · 4 channels of analog audio and AES out (de-embedded from camera serial digital video)
- IEEE 1394A port for output and control of DV devices
- · Remote control to camera (camera luminance video output with menus when available on camera
- NTSC/PAL Return Video In
- · Genlock In (Analog black burst or Tri-level)
- 4 channels of analog audio or AES in (return audio to camera adapter-selectable)
- · Support for RTS intercom belt pack 3 pin XLR interface
- · IFB return input to camera adapter
- RS-422/232 channel to camera adapter
- 4 GPI/O channels simple control or tally between camera and base station
- 2 each direction
- · LTC In to camera from external Time code generator
- · LTC Out from camera Time code generator
- · Front panel control via pushbuttons and LED display
- · Status LEDs for Camera Video, Audio and Time code present, Return video, audio and time code, genlock, intercom, IFB present, and fiber links OK
- · Status LEDs for camera power ON and Ground Fault on CP versions
- 1 rack unit main frame with 1 rack unit audio breakout panel
- Auto-ranging 100-240VAC 50/60 Hz power supply
- · Optional high voltage DC supply to send camera power to ECA-PS power converter (-CP version)
- Front panel power switches for Base power and Camera power (-CP versions)
- Available with LEMO 3K or Fischer 1053HDTV series fiber-optic connector contact factory for other connector options
- Ethernet port for network upgrade + configuration

#### **▶▶▶** Ordering Information

CAMERA ADAPTER (Must specify Battery Bracket option and camera model accessory kit option)

For Sony HDCAM Cameras with 50-pin connector

(HDW-750, HDW-F900, HDW-F900R, etc.)
ECAS-HD Camera Adapter for HDCAM Sony cameras

ECAS-1394-HD Camera Adapter with 1394A I/O for HDCAM Sony cameras **ECAS-LEMO-HD** Camera Adapter with fibre optic I/O for HDCAM Sony cameras -

LEMO fiber connector ECAS-1394-LEMO-HD

Camera Adapter with 1394A I/O and fibre optic I/O for HDCAM Sony

cameras - LEMO fiber connector

For Sony XDCAM-HD Cameras with HDSDI outputs (PDW-350, PDW-355 etc.)

Camera Adapter for XDCAM-HD Sony cameras Camera Adapter with 1394A I/O for XDCAM-HD Sony cameras

ECAX-1394-HD ECAX-LEMO-HD Camera Adapter with fibre optic I/O for XDCAM-HD Sony cameras -

ECAX-1394-LEMO-HD

Camera Adapter with 1394A I/O and fibre optic I/O for XDCAM-HD

Sony cameras - LEMO fiber connector

For Panasonic HD Cameras with HDSDI output

(AJ-HDC20A, AJ-HDC27 Varicam, HDX-900, HPX-500, HPX-2000, HPX-3000 etc.) Camera Adapter for high definition Panasonic cameras ECAP-1394-HD Camera Adapter with 1394A I/O for HD Panasonic cameras **ECAP-LEMO-HD** Camera Adapter with fibre optic I/O for HD Panasonic cameras -

LEMO fiber connector

ECAP-1394-LEMO-HD

Camera Adapter with 1394A and fibre optic I/O for HD Panasonic cameras

Base Station (Must Specify same Fiber Optic connector as Camera Adapter):

ECB-LEMO-HD Base Station for HD camera adapters - LEMO fiber connector ECB-CP-LEMO-HD Base Station for HD camera adapters - with DC camera power (requires ECA-PS Power Converter) - LEMO fiber connector

Power Converter (Must specify same Battery Bracket option as Camera Adapter)

ECA-PS 120 Watt output Camera Adapter DC-DC Power Converter - for use with camera adapters with fiber optic I/O and CP version Base

ECA-PS-160 160 Watt output Camera Adapter DC-DC Power Converter - for use

with camera adapters with fiber optic I/O and CP version Base

#### Ordering Options:

**Battery Bracket Options:** 

(Must specify for Camera adapters and ECA-PS power converter)

Bracket for Anton Bauer batteries +IDX Bracket for IDX V-mount batteries +PAG Bracket for PAG lok batteries

#### Camera Model Accessory Kit Options:

(Must specify for Camera adapters )
+HDCAM For Sony HDCAM Cameras For Sony XDCAM-HD camera +XDCAM

+VARICAM For Panasonic Varicam For Panasonic HDX-900, HPX-2000, HPX-500, HPX-3000 +HDX

Fiber Optic Connector Options:

Camera adapters and base stations are also available with the following fiber connectors:

Fischer 1053 HDTV series

(Contact factory for ordering information and availability)

ECAS-ACC-MNT Accessory mounting bracket for wireless microphone, studio

accessory kit for camera remote cables

view finder, etc

ECAS-PAN-MNT-KIT Mounting kit to use Sony HDCAM camera adapter with Panasonic camera - must specify +VARICAM or +HDX

Replacement Cables:

(Original cables included with units)

WPECA-PS-PWR-RA ECAS-PS

ECAS-PS power input cable (Incl. with ECA-PS & ECA-PS-160) WPECA-REM-SONY8P ECAS to Sony 8 pin remote cable (Incl. with +HDCAM & +XDCAM) WPECA-REM-PAN6P ECAP to Panasonic 6 pin remote cable (Incl. with +VARICAM) ECB to Panasonic EC3 adapter cable (Incl. with +VARICAM) ECAP to Panasonic 10 pin remote cable (Incl. with +HDX) WPECB-EC3-PAN6P WPECA-REM-PAN10P WPECB-RC10G-PAN10P ECB to Panasonic RC10G adapter cable (Incl. with +HDX)

**Production Post Production** 

#### HD Dual Link Video Processor


The 7732DVP-HD Dual Link Video Processor module is a multi-purpose module designed to convert between 4:2:2 and 4:4:4 HDTV video signals in a wide variety of applications. The model 7732DVP-HD can be operated in a dual link to single link mode for emerging 4:4:4 high definition applications, or a 4:2:2 to 4:4:4 mode to convert traditional high definition content to 4:4:4.

The 7732DVP-HD occupies one card slot in the 3 RU frame, which will hold up to 15 modules or the 1RU frame, which will hold up to three modules.

#### ▶ Features & Benefits

- Automatically senses between 1080i/60, 1080i/50, 1080p/24sF, 720p/60, 720p/50 video formats and the 1/1.001 divisor versions where applicable
- 4:4:4 Dual Link HDSDI to 4:2:2 HDSDI converter
- 4:2:2 HDSDI to 4:4:4 Dual Link HDSDI converter
- 4:4:4 Dual Link HDSDI to 4:4:4 HDSDI with LUTs
- Two serial digital 1.5Gb/s HD inputs per SMPTE 292M
- Three serial digital 1.5Gb/s HD outputs per SMPTE 292M
- · Bypass relay protection on inputs for power failures
- · Retimed 4:4:4 dual link outputs
- Programmable LUTs for 4:4:4 and 4:2:2 HDSDI to accommodate different colorimetry between monitoring devices
- Factory LUTs handle logarithmic 'filmstream' inputs from VIPER and ARRI D20 cameras
- · Store/recall user presets of common configurations up to 10 presets

- · 6 GPI control inputs to select operating modes or load user presets
- 2 GP0 status outputs indicate operating modes programmable functions
- Card edge menu using OSD on 4:2:2 output to configure the operating modes
- Card Edge LEDs for signal presence, module status
- VistaLINK® -capable offering remote monitoring, control and configuration capabilities via SNMP. VistaLINK® is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller module in slot 1 of the frame using the model 9000NCP Network Control Panel or Evertz VistaLINK® PRO or other third party SNMP manager software

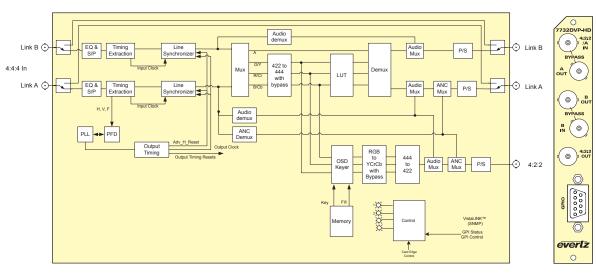

#### ▶ Specifications

#### Serial Video Input:

Standard:

Return Loss:

SMPTE 372M (dual Link 1.5Gb/s) or SMPTE 292M (1.5Gb/s) - autodetects standard using SMPTE 352M

Payload ID

SMPTE 274M, SMPTE 296M -1080i/60, 1080i/50, 1080p/24sF, 720p/60, and 720p/50 and the 1/1.001 divisor versions where

applicable

SMPTE 428-9 - 2048 x 1080p/24sF 1 dual link or 1 single link BNC per IEC 61169-8 Annex A. Number of Inputs: Connector:

Input Equalization: Automatic to 100m @ 1.5Gb/s with

Belden 1694A or equivalent cable >-15dB up to 1.5GHz

Serial Video Outputs:

Standard: Same as input

Number of Outputs: 2 dual link outputs (bypass relay

protected to inputs)

1 single link output BNC per IEC 61169-8 Annex A Connector:

800mV nominal Signal Level: DC Offset: 0V ±0.5V Rise and Fall Time:

200ps nominal <10% of amplitude Overshoot: Return Loss > -10dB at 1.5Gb/s (4:4:4 outputs)

> -6dB at 1.5Gb/s (4:2:2 output) Jitter: < 0.2UI Payload ID: SMPTE 352M

**GPIO Control Port:** 

Number of Inputs:

6 Programmable functions Number of Outputs: 2 Programmable functions Type

Opto-isolated, active low with internal

pull-ups to +5 or +12V (jumper

settable)

Connector: 9 pin female D Signal Level: closure to ground Look Up Tables: Type:

10 bit 1-D LUT Number: 5 factory programmed

5 User loadable

User Upload: RS-232, 57600 baud using card edge

connector

#### Input to Output Processing Delay (HD input video):

Video Delay: 2 lines

Electrical: Voltage:

+12VDC 10 W Power:

EMI/RFI: Complies with FCC regulations for

class A devices

Complies with EU EMC directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7732DVP-HD HD Dual Link Video Processor

Ordering Options Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

Standalone Enclosure Rear Plate

+SA

**Enclosures** 350FR 7700FR-C S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure

13

#### 3D HD Video Processor


The 7732DVP-3D-HD Video Processor module is a multi-purpose module designed specifically to aid in the production and post production of 3D high definition video productions.

This 7700 series module provides for Left eye and Right eye inputs and processed outputs. In addition it also provides a mix output that is a combination of the left eye and right eye.

The 7732DVP-3D-HD occupies one card slot in the 3 RU frame, which will hold up to 15 modules or the 1RU frame, which will hold up to three modules.

#### ▶ Features & Benefits

- Two serial digital 1.5Gb/s HD inputs per SMPTE 292M
- Three serial digital 1.5Gb/s HD inputs per SMPTE 292M
- $\bullet \ Supports \ most \ international \ standards \ including \ 1080i/60, \ 1080i/59.94,$ 1080i/50, 1080p/24sF, 1080p/23.98sF, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24, 1080p/23.98, 720p/60, 720p/59.94, 720p/50
- · Horizontal flip can be applied to left or right eye input
- · Programmable left or right horizontal can be applied to either left or right eve inputs
- · Programmable up or down vertical shift can be applied to either left or right eve inputs
- · Mix output provides a processed combination of the left and right eyes in the following modes - 50/50 linear mix, left - right difference, horizontal 50/50 split
- · Left and right eye source ID embedded in ATC user bits on left and right eye outputs - requires 7760AVM2-HD+SID decoder card to view the source ID codes
- · 8 Programmable GPI control inputs select mix modes, adjust horizontal and vertical shift
- · Card edge menu using OSD on Mix output to configure the operating modes
- Card Edge LEDs for signal presence, module status

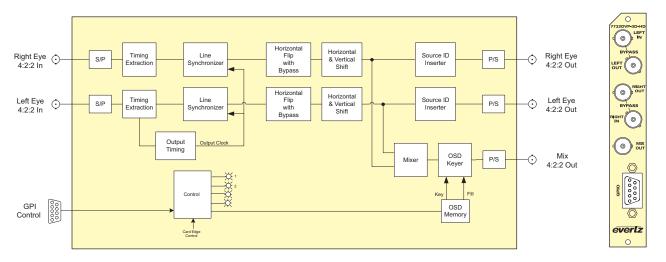

#### ▶Specifications

#### Serial Video Inputs:

Standard: 1.485Gb/s SMPTE 292M

auto-detects standard SMPTE 274M, SMPTE 296M -1080i/60, 1080i/59.94, 1080i/50, 1080p/24sF 1080p/23.98sF, 1080p/30, 1080p/29.97, 1080p/25, 1080p/24,

1080p/23.98, 720p/60, 720p/59.94, 720p/50

Number of Inputs:

2 BNC per IEC 61169-8 Annex A Connector: Input Equalization: Automatic to 65m @ 1.5Gb/s with Belden 1694A or equivalent cable

Return Loss: >12dB up to 1.5GHz

#### Serial Video Outputs:

Standard: Same as input Number of Outputs: 2 Program outputs 1 Mix output

Connector: BNC per IEC 61169-8 Annex A

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time: 200ps nominal <10% of amplitude Overshoot:

Return Loss: > 15dB at 1.5Gb/s Jitter: < 0.16UI (HD)

#### **GPIO Control Port:**

Number of Inputs:

Opto-isolated, active low with Type:

internal pull-ups to +5 or +12V (jumper settable)

Connector: 9 nin female D Signal Level: closure to ground

#### Input to Output Processing Delay (HD Input Video):

Video Delay:

Electrical:

Voltage: +12VDC Powe 10 Watts

EMI/RFI: Complies with FCC regulations for

Class A devices

Complies with EU EMC directive

Physical:

Number of slots:

#### **>>>**Ordering Information

7732DVP-3D-HD 3D HD Video Processor

Rear Plate must be specified at time of order **Ordering Options** 

Ea: Model +3RU

Rear Plate Suffix +3RU

3RU Rear Plate for use with 350FR & 7700FR-C Multiframe +1RU 1RU Rear Plate for use with 7701FR Multiframe

+SA Standalone Enclosure Rear Plate **Enclosures** 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules

Standalone enclosure









#### HDTV Graticule Generator



The HD9690 & HD9690-444 Graticule Generators are multi format High Definition video graticule generators that key various alignment markers and mattes over a source video picture in a wide variety of applications. The HD9690-444 can be operated in a dual link mode for emerging 4:4:4 high definition applications, or a 4:2:2 mode for traditional high definition (1125 and 750 line) digital video. The HD9690 can only be operated in a 4:2:2 mode.

Commonly used configurations, stored as factory presets simplify routine operation to just a few pushbuttons. The ability to customize these factory presets to your application and store them as USER PRESETS, gives the Graticule Generator tremendous flexibility while maintaining simple operation for day to day use.

Both units are a 1RU chassis with integrated control panel. The HD9690 & HD9690-444 are also available in a remote control version, which has a blank front panel and either a rack mountable, or a desktop remote control panel.

#### ▶ Features & Benefits

- Automatically senses between 1080i/60, 1080i/50, 1080p/30, 1080p/25, 1080p/24, 1080p/24sF, 720p/60 and 720p/50 video formats and the 1/1.001 divisor versions where applicable
- Support for 2048 x 1080p/24 and 2048 x 1080p/24sF digital cinema
- HD9690 keys Graticule markers directly into 4:2:2 SMPTE 292M High Definition Serial digital video
- · DVI-I Output for display on flat screen or computer monitors
- Two rectangular boxes that can be independently resized, reshaped and moved anywhere on raster, solid or dashed line
- · A grid consisting of horizontal and vertical line pairs that can be positioned independently or in pairs anywhere on the raster
- Programmable horizontal and vertical matte adjustable opacity
- Two User programmable cross markers, positionable anywhere on the raster (one on DCP version)
- · Ellipse creation for aspect ratio verification
- · Automatic creation of aspect ratios for mask, box and ellipse objects
- · On-screen display shows object size, position and aspect ratio
- · Automatic centering of all objects or individual object by object control of centerina

- · Single button kever on/off control
- · Adjustable object brightness and color
- Front panel lock-out control
- · Easy to operate front panel menu system gives access to advanced object control features for the most demanding application, while limiting normal day to day use to just a few preset buttons
- · Factory Presets allow quick setup to common object placements on the raster
- Ten user-definable presets with user definable labels and individual write protect allow unlimited customization for any requirement
- · Optional Rack mount or Desktop remote control panels

#### Additional Features for the HD9690-444

- Keys Graticule markers directly into SMPTE 372M and SMPTE 292M High Definition Serial digital video
- Can be operated in 4:4:4 RGB or YCbCr dual link mode with 4:2:2 output or 4:2:2 single link mode - manual select or autodetect
- Handles extended range (full scale) 4:4:4 RGB with conversion to full scale or legal ITU-R BT.709 YCbCr on the 4:2:2 single link output
- Optional 3D video mode keys graticule into two separate 292M 4:2:2 video signals

#### ▶ Specifications

#### Serial Digital Video Input:

Standard HD9690

SMPTE 292M 1.5Gb/s HD9690-444

SMPTE 372M Dual link 1.5Gb/s or SMPTE 292M 1.5Gb/s

Number of Inputs:

HD9690

HD9690-444 1 dual link or 1 single link 2 single links (+3D option)

Connector: BNC per IEC 61169-8 Annex A

Automatic up to 50m with Belden Equalization: 1694A or equivalent cable

> 15dB up to 1.0Gb/s, > 10dB up to Return Loss:

1.5Gb/s

#### Serial Video Output:

Same as input Standard:

Number of Outputs:

HD9690

HD9690-444 1 dual link or 1 single link pgm, 2 single link pgm (+3D option)

1 single link monitor

BNC per IEC 61169-8 Annex A Connector:

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time 200ps nominal

Overshoot: < 10% of amplitude Wideband Jitter: < 0.2 UI Output Return Loss: > 10dB up to 1.5Gb/s DVI Video Output:

VESA (DVI-I, for DVI-D and RGBHV Standards:

outputs)

DVI-I female connector Type: 1920x1080 or 720x1280 - same as Resolution:

video input

Signal Level: 1V nominal

GPI Control Port:

8 opto-isolated, active high or active low, Number of Inputs:

programmable functions Connector: Female DB-9

Upgrade Control Port:

Standard: RS 232 Female DB-9 Connector Baud Rate: 115200

8 bits, no parity, and 2 stop bits

Ethernet: Network Type:

Fast Ethernet 100 Base-TX IEEE 802.3u standard for 100Mb/s base band CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10Mb/s baseband CSMA/CD local area

network Connector: RJ-45

FTP firmware upgrade, save or recall Function:

presets via FTP

Remote Control Port (+RCP and +DCP options only): Standard: RS-422, 9600 baud rate

Connector Female DB-9

Remote Control Panel Protocol:

Physical: Main Unit

19" W x 1.75" H x 18.75" D (483mm W x 45mm H x 477mm D)

Rack Mount

19" W x 1.75" H x 4.25" D Control Panel:

(483mm W x 45mm H x 110mm D) Desktop Control Panel:

7.75" W x 2.0" H x 6.5" D.

(197mm W x 50mm H x 160mm D)

8lbs (3.5kg)

Electrical: Main Unit:

Weight:

Voltage: Auto ranging 100 to 240 Volts AC, 50/60Hz 40W

Desktop + Rack Mount Control Panel: Voltage: 12V DC, Auto ranging 100 to 240 Volts

AC, 50/60Hz adapter provided, 10W Safety: ETL Listed, complies with EU safety

Directives

FMI/RFI Complies with FCC Part 15 Class A

regulations

EU EMC directive











#### ▶HD9690 Block Diagram

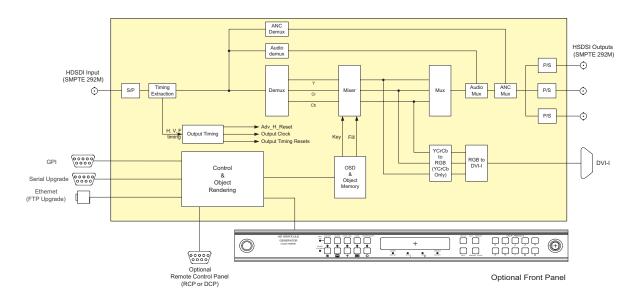

#### ▶HD9690-444 Block Diagram

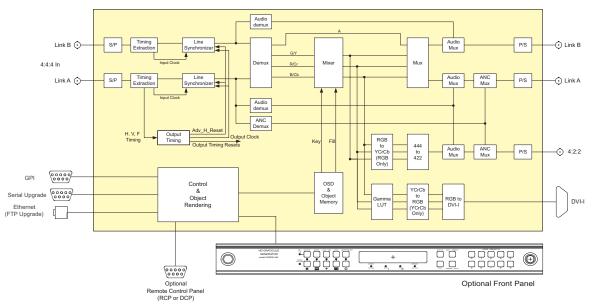

#### **>>>**Ordering Information

HD Graticule Generator 4:4:4 Graticule Generator HD9690 HD9690-444

Ordering Options +RCP

+DCP +3D


Rackmount remote control Desktop remote control unit 3D video option (for HD9690-444 only)

All of the functions of the 9590 are available from the control panel or one of two remote control panels. Choose from the many factory programmed presets or define your own. The 9590 allows for multiple user-defined presets that can be recalled and re-defined at any time.

#### ▶ Features & Benefits

- Keys graticule markers directly into SMPTE 259M-C serial digital video
- · Auto detects between 525i/59.94 and 625i/50 video formats
- Two rectangular boxes that can be independently resized, reshaped and moved anywhere on the raster
- A grid consisting of horizontal and vertical line pairs that can be positioned independently or in pairs anywhere on the raster
- · Programmable horizontal and vertical hard matte
- Adjustable mask starting line in vertical blanking interval to pass VITC or VITS
- Two user-programmable cross markers positionable anywhere on the raster
- · Circle creation for aspect ratio
- · Automatic creation of aspect ratios for matte, box and circle objects
- · On-screen aspect ratio display

- · Automatic centering control for all objects
- Switchable 16:9 or 4:3 pixel aspect ratios to allow easy alignment where anamorphic compression has taken place
- Single button keyer On/Off control
- · Adjustable object brightness (white level)
- Front panel lock-out control
- Easy to operate control panel menu system gives access to advanced object control features for the most demanding application, while limiting normal day to day use to just a few preset buttons
- · Factory presets allow quick setup to common object placements on the raster
- Ten user-definable presets with individual write protection
- · Optional rack mount or desktop remote control unit

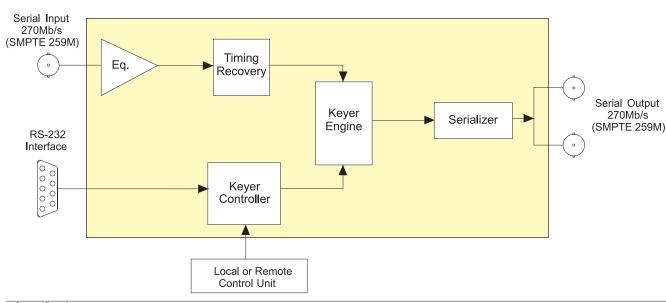

#### ▶ Specifications

#### Serial Video Input:

Standard: Serial component SMPTE 259M-C Connector: BNC per IEC 61169-8 Annex A

Impedance: 75Ω

Signal Level: 800mV ±10%
Equalization: Automatic to 200m @ 270Mb/s with Belden 8281 (or equivalent)

Return Loss: > 15dB up to 270Mb/s

Serial Video Output:

Standard: Serial component SMPTE 259M-C Number of Outputs: 2

Connector: BNC per IEC 61169-8 Annex A Impedance:  $75\Omega$ 

Signal Level: 800mV nominal DC Offset: 0V ±0.5V

Rise and Fall Time: 900ps nominal Overshoot: < 10% of amplitude (All outputs

terminated)

Wide Band Jitter: < 0.2 UI
Serial Remote Ctl: RS-232/422 interface, 9-p

RS-232/422 interface, 9-pin "D" connector for software upgrades

Physical:

Dimensions: 19"W x 1.75"H x 18.75"D. (483mm W x 45mm H x 477mm D)

Weight: 8lbs (3.5kg)

Electrical:

Power:

Auto ranging 100-240V AC 50/60Hz

Safety: ETL listed

Complies with EU safety directive
EMI/RFI: Complies with FCC Part 15 Class A

EU EMC Directive

#### **>>>**Ordering Information

9590 SDI Digital Graticule Generator

Ordering Options

**+RCP** Rackmount remote control Option **+DCP** Desktop remote control unit Option The 7732PFT-HD Progressive Format Translator converts 1.5Gb/s HDTV video in the 1080p/24sF format to 1080i/60 digital video, thus allowing these signals to be viewed at a higher video refresh which eliminates the annoying 24Hz flicker. The 7732PFT-HD inserts extra fields to create a 3:2 pulldown of the picture content to increase the video frame rate from 24 to 30.

When an input video feed of 1080p/24sF is detected, a 3:2 pulldown of the picture is inserted resulting in a 1080i/60 output. Determination of the output sequence of the fields is determined from a 6 Hz input pulse on GPI5, or from ancillary time code if it is present. DIP switches allow the user to determine how the output pulldown aligns to the 6Hz input or ancillary timecode. If an input video feed of 1080i/60 or any other format is detected, it is simply passed through.

When the 3:2 pulldown mode is turned off with a DIP switch or GPI input, the output video remains the same as the input video. An output tally indicates when the 3:2 pulldown mode is active and may be used to control external audio delay devices.

#### ▶ Features & Benefits

- Automatic detection of 1080p/24sF video or 1080i/60 video input
- 3:2 cadence of output set from 6Hz pulse input or incoming SMPTE 12M-2 ANC
- 4:3 and 2.4:1 aspect ratio markers
- · GPI Control of pull-down & aspect ratio markers
- Tally output indicates 3:2 pull-down insertion


- SMPTE 292M 1.5Gb/s serial digital 1080p/24sF (23.98Fps)
- Transparent pass-through input for all other SMPTE 292M HD video formats
- Auto equalization to 130m

#### Outputs

- 2 serial HD SDI processed outputs
- When 3:2 pull-down mode is active the 1080p/24sF (23.98Fps) input video is format converted to 1080i/60 (29.97Fps) on the output

#### Card Edge LEDs

- Video signal presence
- Pull-down active
- · Module status
- · Local fault

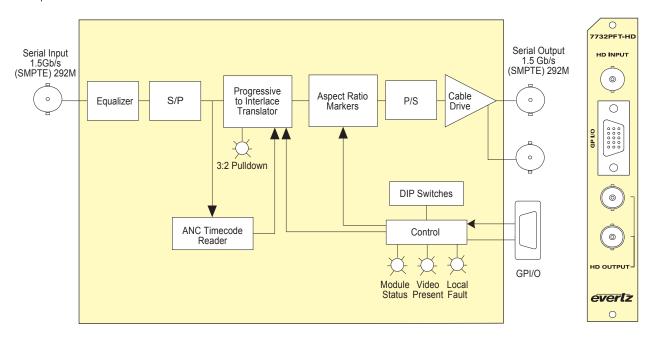

#### **▶** Specifications

Serial Video Input (1080p/24sF): SMPTE 292M Standard:

BNC per IEC 61169-8 Annex A Connector Equalization: Automatic to 130m @ 1.5Gb/s with

Belden 1694A (or equivalent)

Serial Video Outputs with 3:2 pulldown (1080i/60): Connectors: 2 BNC per IEC 61169-8 Annex A

Signal Level: DC Offset: 800mV nominal 0V ±0.5V

Rise and Fall Time: 200ps nominal Overshoot: < 10% of amplitude

Wide Band Jitter: < 0.2 UI

#### Physical: Female High Density dB-15

Number of Slots:

#### Outputs: Electrical:

GPIO:

Inputs:

Connector:

Impedance:

+12V DC Voltage: Power: 6W

EMI/RFI

Complies with FCC Part 15, Class A

EU EMC Directive

Opto-isolated, Hi-Z

2 for Aspect Ratio markers

1 for 3:2 pull-down tally

1 for 6Hz input or pull-down disable

#### >>> Ordering Information

7732PFT-HD **HDTV Progressive Format Translator** Rear Plate must be specified at time of order

Eg: Model +3RU

Rear Plate Suffix

Ordering Options

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe 1RU Rear Plate for use with 7701FR Multiframe +1RU +SA Standalone Enclosure Rear Plate

Enclosures 350FR 7700FR-C 7701FR S7701FR

3RU Portable Multiframe which holds up to 7 single slot modules 3RU Multiframe which holds up to 15 single slot modules 1RU Multiframe which holds up to 3 single or dual slot modules Standalone enclosure









Evertz KeyKode reader heads can be mounted on a telecine or other film transport, to recover KeyKode and Film Time code numbers from 16, super 16, 35 or 65mm film. Operationally the design is absolute simplicity. When switching between 16 or 35mm film, there are no levers, adjustments or realignments involved on most telecines. With the Evertz combination KeyKode reader system, varying film densities, negative and positive material are handled with ease. The Evertz universal decoder unit (model 5550) features a simple to use automatic light and sensor control.

#### ▶ Features & Benefits

- Can be mounted on a variety of film transports including Cintel,
   Thomson/GVG and Flat beds etc. The universal mounting bracket offers easy to use rotational positioning for hassle free installation
- The KeyKode/Film Time code heads can be ordered in different configurations depending on your application
- The head "floats" laterally on precision guides to assure perfect KeyKode tracking at play and shuttle speeds. The Floating design also handles film weave due to oversized rollers (common on many Telecines)
- On Touchless version, the film does not come in contact with the Reader Head assembly
- The optical design improves depth of field, gaining sharpness over the entire film gap
- Highly polished hard anodized surfaces and smooth round edges help protect your valuable film
- The rollers are made from finely machined highly polished stainless steel

- Simple to use diagnostics for monitoring performance and trouble shooting marginal quality code
- Ideal for non-real-time data mode transfers with Thomson/GVG Spirit 2K/4K, Cintel, C-Reality and Millennium
- · Decoder can be located up to 50ft. from the film data reader
- Incorporates FLASH technology for easy software upgrading in the field, ensuring support of new film stocks as quickly as possible
- Ability to read KeyKode and Film Time code at speeds other than play speed in forward and reverse
- Front panel display of KeyKode or Film Time code.
- Automatic sensor intensity control can track various film densities on a single roll
- Separate intensity controls for KeyKode and Film Time code
- 16 digit alpha-numeric front panel display
- 19" rackmountable hardware
- Remote control via RS-232 from Evertz HDSD9045TR and Keylog TRACKER™

#### ▶5550 Universal Film Data Reader

The Evertz Universal Film Data reader system can be used with any of the Evertz Film Footage Encoders to encode KeyKode & Film time code into VITC or VANC data. It can be ordered separately or as a part of a Film Footage Encoder system.

The Evertz Film Reader system can be purchased in a variety of configurations. Because these reader heads cannot be retrofitted in the field, it is important to specify the exact model number at the time of order. See the ordering information chart for a list of model numbers and corresponding

Our Touchless Reader Head recovers KeyKode and Film Time code without coming into contact with the film stock. Please specify the Touchless version when ordering.



|          | 16mm | 35mm | 65mm | KeyKode | AATON I<br>and<br>AATON II | ARRI | Touchless |
|----------|------|------|------|---------|----------------------------|------|-----------|
| KR-65    |      |      | Ø.   | 8       |                            |      |           |
| KR-16/35 | 8    | 8    |      | 8       |                            |      |           |
| UV-3     | *    | 8    |      | 8       | *                          | 8    |           |
| UVT-3    | 8    | 8    | ·    | 8       | 8                          | 8    | 8         |









options.

# **Production Post Production**

#### Universal Data Reader & Decoder

#### **▶**Specifications

(UV series) Multi-Function Reader Head :

Connector: 15-pin High Density female "D" Max. Cable Length: 50 feet

Codes Read: KeyKode, Aaton, Aaton Code II, Arri

KeyKode Reader Head Interface (KR series heads): 8-pin miniature female DIN Connector

Max. Cable Length: 50 feet

Codes Read: KeyKode

LTC Output: SMPTE 12M-1 compliant

Frame Rate: 24, 25 and 30 Fps nominal from film

time code

Connector: 3-pin male XLR type

Level: Adjustable, 0.5V to 4.5V p-p Parallel I/O:

GPI:

9-pin female D 1, 2, 5 or 10 pulses per frame TTL Connector: Biphase Tach:

level biphase quadrature Film Type (negative/print) Film Gauge (16/35 mm)

Serial Ports:

Control:

Number of Ports: Standard: RS-232

Baud Rate: 9600 or 38400 independently settable

Format: 7 bits, even parity Connectors:

9-pin female D Remote control of most formats from

HDSD9045TR and KeyLog

TRACKER™

Physical:

19"W x 1.75"H x 7.75"D Dimensions

(483mm W x 45mm H x 196mm D)

6.7lbs (3kg)

Weight: Electrical:

115/230 V AC 50/60Hz, 30W Power:

Safety: ETL Listed

Complies with EU safety directive Complies with FCC Part 15 Class A, EMI/RFI:

EU EMC Directive

#### **>>>**Ordering Information

Decoder can be ordered separately or as a system which includes the Decoder, Head, Bracket & Cable. Systems may also be ordered with Film Footage Encoders (see Film Footage Encoder data sheets for information).

Universal Decoder

5550/KR-16/35 5550 Decoder with KR16/35 Head & 10 ft. cable 5550 Decoder with UV-3 Head & 20 ft. cable 5550 Decoder with UVT-3 (touchless) Head & 20 ft. cable 5550/UV-3 5550/UVT-3

Accessories EV-BRKT FDL-SHIMS CINTEL-SHIM WA-S19 WA-F49

Universal Reader Mounting Bracket Shim kit for BTS, FDL 60/90, Quadra Shim kit for Cintel C-Reality 16/35 heads C-Reality Cable Harness 50ft extender cable for KR series heads

WA-P57 50ft extender cable for UV series heads KKFILM-16MM KKFILM-35MM 16mm Kodak Keykode Verification Film 35mm Kodak KeyKode Verification Film KKFILM-S16MM Super 16mm Kodak KeyKode Verification Film



















12:45:30:00

As a high quality downconverter the Afterburner provides two clean (characters optional) SDI downconverted outputs with VITC, suitable for creation of high quality viewing copies, and two SDI and one analog monitoring output with VITC and characters suitable for monitoring or creation of tapes for non-linear editing systems. When the input video is in the 1080p/24sF format the Afterburner also creates a 2:3 pulldown on the output video to create a 30 Fps output. The Afterburner automatically generates video timecode for the standard definition VTR that is converted from 24 to 30 Fps, and delayed to match the complete A frame cycle of delay through the Afterburner. When outputting the native HDTV or SDTV input, the Afterburner provides two clean 4:2:2 program outputs (with optional characters for virtual slates, etc.) and two 4:2:2 monitor outputs with characters burned in.

In 'film mode', the Afterburner reads the RP215 VANC (HDTV) or RP201 3-line VITC (SDTV) Film transfer data that was recorded by the Evertz Film Footage Encoder during the telecine transfer, and makes burn-in windows. When operating as a downconverter, the essential timecode and KeyKode data is also converted into RP201 3-line VITC inserted on the SDTV outputs. The 2:3 cadence can be controlled from the VANC data or from the LTC. The 2:3 cadence can also be locked to an external 6 Hz reference where the Afterburner is directly reading the HD Film Footage Encoder output.

In 'video mode' the Afterburner reads the LTC or SMPTE 12M-2 ancillary timecode (ATC) and makes burn-in windows and new timecode that is in sync with the downconverted video. The original 24 Fps timecode numbers can be placed in the user bits of the VITC and displayed as a burned-in window. The 2:3 cadence can be controlled from the input video timecode, or by applying a 6 Hz reference pulse.

The HDSD9155Q can be easily configured using version 3 of Evertz popular KeyLog TRACKER™ software (included) using RS-232 or Ethernet communications. The Tracker graphical interface software allows the user to store multiple configurations for the HDSD9155Q. For stand alone applications the Afterburner can also be controlled from the local front panel using the built-in on screen menu system.

#### ▶ Features & Benefits

#### **HDTV Video Inputs:**

· Accepts 1.5Gb/s SMPTE 292M or dual link SMPTE 372M 1080i/60, 1080i/59.94, 1080i/50, 1080p/30sF, 1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF, 720p/60, and 720p/59.94 serial digital video

with telecine masters or a 'video mode' working with field acquired HDTV.

- Downconverter mode downconverts HDTV input to SDTV and creates VITC and window burns on SDI and analog outputs
- HDTV mode creates window burns on HDSDI outputs

evertz

- Converts 4:4:4 RGB dual link HDSDI to 4:2:2 HDSDI or downconverts to SDI
- Reads RP215 VANC film transfer information in 'Film mode' and generates RP201 3-line VITC on SDTV outputs
- Reads SMPTE 12M-2 ancillary timecode in 'Video mode' and generates SMPTE 12M-1 VITC on SDTV outputs
- · Decodes Panasonic 'active picture flags' in ATC user bits for downconverting 720P video
- · Creates 2:3 pulldown when downconverting 1080p/23.98sF video to 525i/59.94 and NTSC.
- 2:3 cadence is determined from a 6Hz pulse input, ancillary SMPTE 12M-2 ancillary timecode or LTC
- High quality downconverter converts aspect ratio from 16:9 to 4:3 in anamorphic, letterbox or centre crop mode
- · Embedded audio from input video delayed and reinserted on outputs in time with picture
- · Ability to send recovered VANC data to a computer using an RS-232 serial connection or Ethernet.

#### SDTV Video Inputs:

- Accepts 270Mb/s SMPTE 259M-C 525i/59.94 and 625i/50 SDTV serial digital video
- SDTV mode creates window burns on SDI and analog outputs
- Reads RP201 3-line VITC film transfer information in 'Film mode' and creates window burns of Video, and audio time codes and KeyKode
- Reads SMPTE 12M -2 VITC in 'Video mode' and creates time code window burns
- · Embedded audio from input delayed and reinserted on outputs in time with picture

#### General:

- LTC timecode reader and generator converts 24 Fps to 30 Fps and retimes the timecode to the output video
- · Built in signal generator to aid in verifying signal path during installation
- Selectable outputs on loss of input video blue or black with or without characters, or pass input.
- Control from Evertz KeyLog TRACKER™ version 3.0 or later using RS-232 or Ethernet connection
- · Multiple units can be ganged together using Ethernet provides a simple way of configuring multiple units (e.g. multi- camera applications) to the same settings
- Control from integrated front panel using On screen display menus for stand alone applications
- Configurable virtual slate uses double height character windows to enhance visibility of important information
- Three user programmable text character windows and over 30 character displays to display VANC data.














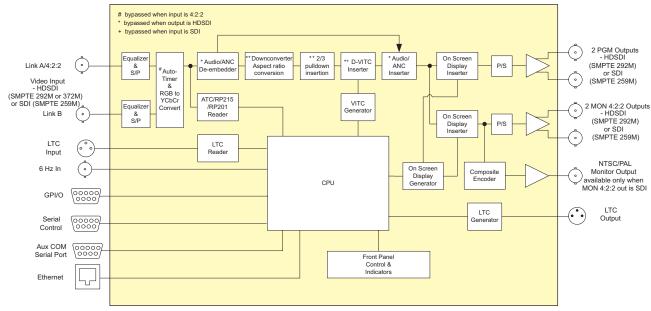

#### ▶Specifications

Standard:

HDTV Mode 4:2:2 HDTV serial digital (SMPTE 292M)

1.485 Gb/s or 4:4:4 RGB dual link HDTV serial digital (SMPTE 372M) 1080i/60, 1080i/59.94, 1080i/50, 1080p/29.97sF, 1080p/30sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF and 720p/59.94

selectable or autodetect SDTV Mode 4:2:2 SDTV serial digital 270Mb/s

(SMPTE 259M-C) 525i/59.94 and 625i/50 - selectable or autodetect BNC per IEC 61169-8 Annex A

Connector: Automatic to 300m @ 270Mb/s with Equalization: Belden 8281 or equivalent cable

Automatic to 130m @ 1.5Gb/s with Belden 1694A or equivalent cable Embedded Audio: SMPTE 272M or SMPTE 299M -

supports up to 4 groups

Serial Digital Video Output:

Standards: Same as input or 4:2:2 serial component

270Mb/s (SMPTE 259M-C) 525i/59.94 if output is 720p/59.94, 1080i/59.94

1080p/23.98sF

625i/50 if input is 1080i/50 BNC per IEC 61169-8 Annex A Connector:

2 program, 2 monitor Number

Embedded Audio: SMPTE 272M or SMPTE299M - up to 4 groups transferred from input video

Signal Level: 800mV nominal

DC Offset: 0V ±0.5V

Rise and Fall Time 200ps (HD) or 470ps (SD) nominal

Overshoot: <10% of amplitude Return Loss > 15dB

Wide Band Jitter: < 0.2 UI

LTC Generator:

SMPTE 12M-1 Standard: Frame Rate: 25 and 30 Fps nominal 3 pin male XLR type connector Adjustable, 0.5V to 4.5V p-p Connector: Level:

LTC Reader: Standard:

SMPTE 12M-1 Frame Rate: 24, 25 and 30 Fps nominal

Connector: 3 pin female XLR type connector Level: 0.2 to 4V p-p, balanced or unbalanced

Analog Monitor Video Output:

Inactive if MON 4:2:2 outputs are HD Standards:

video rate

Analog composite NTSC if MON 4:2:2 outputs are 525i/59.94

Analog composite PAL if MON 4:2:2

outputs are 625i/50

BNC per IEC 61169-8 Annex A Connector: Number of outputs: 1 monitor

1 V p-p nominal, internally adjustable 0V  $\pm 0.1V$ Signal Level:

DC Offset: Return Loss: >35dB up to 5 MHz

Frequency Resp: Differential Phase: 0.8dB to 4 MHz <0.9?(<0.6? typical) Differential Gain: <0.9% (<0.5 % typical) SNR >56dB to 5 MHz (shallow ramp)

Impedance:

VITC Reader (SDTV Inputs):

Standard: SMPTE 12M-1 or RP201, 3 line VITC

Line Select Autodetect valid line or manual

insertion

VITC Generator (Downconverter or SDTV mode):

SMPTE 12M-1 or RP201 (3 line Standard: VITC)

Line Select: 525i/59.94 10-20 625i/50 6-21

Ancillary Data Reader (HDTV Inputs):

SMPTE 12M-2 Ancillary Time code or RP215 Film Transfer Data Standard:

Line Select: Autodetect valid lines in vertical

Frame Rate: 24, 25 and 30 Fps nominal Ethernet:

Fast Ethernet 100 Base-TX IEEE Network Type:

802.3u standard for 100 Mbps baseband CSMA/CD local area network Ethernet 10 Base-T IEEE 802.3 standard for 10 Mbps baseband CSMA/CD local area network

Connector: RJ-45

Firmware upgrades via FTP, control Function:

and monitoring using KeyLog

TRACKER™ software

Serial Communications:

Standard: RS-232, 57600 baud, 8 bits, no parity

Format: 8 data bits, no parity, 2 stop bits

Number or ports:

9 pin female "D" Connector

Function:

Serial Control: Control/monitoring using KeyLog

TRACKER™ software

Aux COM: Transmit VANC data packets, debug

monitoring and control

General Purpose Inputs and Outputs:

3 high impedance inputs, with 1M  $\Omega$ Туре: pull up to +5V

2 open collector outputs, 1M Ω pull

up to +5V

menu selectable functions

Connector 9 pin female "D"

Physical:

Dimensions: 19" W x 1.75" H x 18.75" D.

(483mm W x 45mm H x 477mm D)

Weiaht: 8 lbs. (3.5Kg)

Electrical:

Auto ranging 100-240 VAC 50/60 Hz, 40 Watts, ETL listed Power:

Complies with EU safety directive EMI/RFI: Complies with FCC Part 15 Class A,

EU EMC Directive

#### **>>>**Ordering Information

HDSD9155Q HD/SD Afterburner with high quality downconverter - includes KeyLog

TRACKER™ software version 3

**Production Post Production** 









The Evertz 4:4:4/HD/SD VANC Encoder can be used in a variety of applications such as Video Production Metadata Encoder, Film Metadata Encoder, for both 4:4:4 RGB and 4:2:2 YCrCb high definition video or 4:2:2 YCrCb standard definition video.

When operated as a Film Metadata Encoder, the HDSD9045TR is the heart of the Film post production system and is designed to simplify the management of your film to tape transfers. Under control of the powerful KeyLog TRACKER™ software, the HDSD9045TR permits the seamless integration of video and audio time codes, film KeyKode and production information whether you are transferring to 24, 25 or 30Fps high definition video. During the transfer, KeyLog TRACKER™, Evertz telecine logging and configuration management tool logs the relationships between these important parameters and outputs many industry standard interchange file formats for use by off-line editing systems. The HDSD9045TR can operate in either HDTV or SDTV mode. The HDSD9045TR provides one dual link or single link program output (characters optional) and one single link monitor output with burned in characters.

In 4:4:4 HDTV mode, the HDSD9045TR encodes the time codes, KeyKode and production information into industry standard SMPTE RP215 vertical ancillary (VANC) data packets on its dual link 4:4:4 RGB programme output. In addition the HDSD9045TR converts the 4:4:4 RGB to a 4:2:2 YCrCb serial output with the VANC data and optional burned in characters for monitoring. In 4:2:2 HDTV mode, the HDSD9045TR encodes VANC data packets on its 4:2:2 YCrCb Programme output. In addition the HDSD9045TR has a second 4:2:2 YCrCb serial output with the VANC data and optional burned in characters for monitoring. In SDTV mode, the HDSD9045TR encodes the time codes, KeyKode and production information into industry standard SMPTE RP201 3-line VITC on its 4:2:2 SDI Programme output. The Monitor SDI output provides 3-line VITC and burned in characters. The programmable telecine interface allows the encoder to interface to a wide variety of telecine configurations.

In all HDTV modes, the user can also apply one of 5 user programmable look up tables to either output to modify the "look" of the HDTV output. Separate LTC inputs and outputs for the video and audio timecodes allows handling of mixed timecodes.

When operated as a Video Production Metadata Encoder the HDSD9045TR is designed to simplify the management of your high definition video acquired production material for both 4:4:4 RGB and 4:2:2 YCrCb high definition video. Under control of the powerful KeyLog TRACKER™ software, the HDSD9045TR VANC Encoder permits the seamless integration of video and audio timecodes, and production metadata such as camera, lens and dolly information, scene, take and roll numbers. During acquisition or after during an editorial dubbing process, KeyLog TRACKER™ logs the essential metadata along with the relationships between the source and record timecodes, and outputs many industry standard interchange file formats for use by off-line editing systems.

The HDSD9045TR encodes the timecodes, production metadata into industry standard vertical ancillary (VANC) data packets on its dual link 4:4:4 RGB Programme output... In addition the HDSD9045TR converts the 4:4:4 RGB to a 4:2:2 YCrCb serial output with the VANC data and optional burned in characters for monitoring. Metadata is collected from the production environment using up to 3 serial ports or an Ethernet port.

The HDSD9045TR can be easily configured using version 3 of Evertz popular KeyLog TRACKER™ software (included). The Tracker graphical software allows the user to store multiple configurations for the Film Metadata Encoders and Afterburners. A simple on screen control in the Tracker software performs switching between 4:4:4 and 4:2:2 HDTV and SDTV modes. Toolbar buttons allow the user to quickly choose which device is being addressed. For stand alone applications these devices can also be controlled from the local front panel using the built-in on screen menu system. The new version 3 of Evertz popular KeyLog Tracker software allows the user to store multiple configurations for both the HDSD9045TR and HDSD9155Q and is compatible with most of the previous generations of Evertz film Footage Encoders and Afterburners.

#### ▶ Features & Benefits

#### **HDTV Video Inputs:**

- Accepts 1.485Gb/s SMPTE 292M or dual link SMPTE 372M 1080i/59.94, 1080i/50, 1080p/29.97sF, 1080p/25sF, 1080p/24sF, 1080p/23.98sF serial digital yideo.
- Encodes film transfer information or production metadata in SMPTE RP215 VANC packets programmable insertion line
- Converts dual link 4:4:4 RGB SMPTE 372M to 4:2:2 SMPTE 292M with user programmable colour look up tables
- Character burns and VANC available on Program and Monitor outputs can be independently turned on and off
- 5 user programmable look up tables

#### SDTV Video Inputs:

- Accepts 270Mb/s SMPTE 259M-C 525i/59.94 and 625i/50 SDTV serial digital video
- Encodes film transfer information in SMPTE RP201 3-line VITC programmable insertion lines
- Character burns and 3-line VITC available on Program and Monitor outputs
- can be independently turned on and off

#### General

- Interfaces to Evertz 5550 or 5500 KeyKode Reader in Telecine Mode
- Interfaces to Fujinon lenses and other metadata collection devices using RS-232 ports or Ethernet in Field Acquisition mode
- Separate LTC reader and generator for video and audio time codes operating at 30, 25 and 24 Fps
- Embedded audio from input inserted on Program and Monitor outputs
- Built in signal generator to aid in verifying signal path during installation
- Selectable outputs on loss of input video blue or black with or without characters, or pass input.
- Control from integrated front panel using On screen display menus for stand alone applications
- Control from Evertz KeyLog TRACKER™ version 3 or later using RS-232 or Ethernet connection
- Multiple units can be ganged together using Ethernet provides a simple way of configuring multiple units (e.g. multi- camera applications) to the same settings.
- Up to 33 character windows separately positionable and can be displayed continuously or on virtual slate trigger
- 3 user programmable text character windows for content ownership protection, facility name, etc.
- Two character sizes and double height character windows enhance visibility of important information















#### GPIO Interface:

Frame Pulse:

Cintel:

Sony:

Thomson:

9 pin female "D" Connector

Opto-isolated bi-directional I/O - TTL Type:

(9 pin female D)

Annex A)

Annex A)

level Number:

Function: user programmable

Ethernet:

Network Type: Fast Ethernet 100 Base-TX IEEE

802.3u standard for 100 Mbps baseband CSMA/CD local area

> 1.6 V p-p active low, 1 pulse per

film frame, (BNC per IEC 61169-8

TTL level SOF, 1 edge per film frame

1.6 V p-p active high, 1 pulse per

film frame, (BNC per IEC 61169-8

network

Ethernet 10 Base-T IEEE 802 3 standard for 10 Mbps baseband CSMA/CD local area network

Connector: R.I-45

Firmware upgrades via FTP, computer control using KeyLog

Tracker GUI, Ancillary Data output in Filed Log mode

Dimensions: Weight:

Physical:

Function:

19" W x 1.75" H x 18.75" D. (483mm W x 45mm H x 477mm D) 8 lbs. (3.5Kg)

Electrical: Power:


Autoranging 100 to 240 VAC 50/60 Hz, 40 W

Safety: ETL listed.

Complies with EU safety directive Complies with FCC Part 15 Class A, EMI/RFI:

EU EMC Directive

#### ▶ Typical Telecine Film to Tape Application

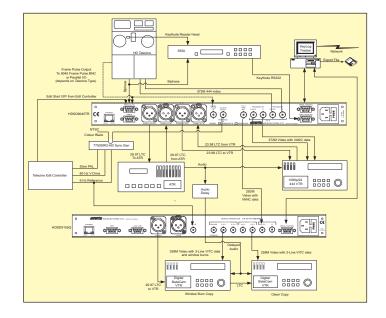

#### ▶Specifications

#### Serial Digital Video Input:

Standard:

HDTV Mode: 1.485Gb/s 4:2:2 HDTV serial

digital (SMPTE 292M)

or 4:4:4 RGB dual link HDTV serial

digital (SMPTE 372M) 1080i/59.94, 1080i/50

1080p/29.97sF, 1080p/25sF, and 1080p/23.98sF - selectable or auto-detect

SDTV Mode: 270Mb/s 4:2:2 SDTV serial digital

(SMPTE 259M-C) 525i/59.94 and 625i/50 - selectable or

auto-detect

Connector: BNC per IEC 61169-8 Annex A. Automatic to 300m @ 270Mb/s with Equalization:

Belden 8281 or equivalent cable Automatic to 130m @ 1.5Gb/s with Belden 1694A or equivalent cable SMPTE 272M or SMPTE 299M -

Embedded Audio:

supports up to 4 groups

#### Serial Digital Video Outputs:

Standard: same as input

Connectors:

HDTV Mode: Program video with RP215 Ancillary

Data embedded and optional

characters

SDTV Mode: Program video with RP201 3-Line

VITC embedded and optional

characters

Number of outputs: 1 Dual Link 4:4:4 RGB or Single Link

4:2:2 program (same as Input) 1 Single link 4:2:2 monitor BNC per IEC 61169-8 Annex A.

Embedded Audio:

SMPTE 272M or SMPTE 299M -up to 4 groups transferred from input video

Signal Level: 800mV nominal DC Offset: 0V ±0.5V Rise and Fall Time 200ps nominal Overshoot <10% of amplitude Wide Band Jitter: < 0.2 UI

LTC Generators: Standard:

SMPTE 12M-1 Frame Rate 24, 25 and 30 Fps nominal

Number of Outputs:

3 pin male XLR type connector. Connectors: Level: Adjustable, 0.5V to 4.5V p-p

LTC Readers:

Speed:

SMPTE 12M-1 Standard: Frame Rate

24, 25 and 30 Fps nominal Number of Outputs: 2

Connectors:

3 pin female XLR type connector 0.2 to 4V p-p, balanced or Level:

unbalanced 1/30th to 50x play speed, VTR

dependent

Serial Remote Control (Com 1):

Standard: RS-232, 57600 baud 9 pin female "D" Connector:

Control: Computer control of all functions,

firmware upgrade

KeyKode Reader Port (Com 2 in CINE Mode); RS-232; 38400 or 9600 baud Standard:

Connector: 9 pin female "D"

Evertz 5550, 5500 KeyKode Decoder, Protocol:

RIM DiaiSvnc

#### MetaData Communications Ports (Com 2 and Com 3 in Field ANC Mode):

Standard: RS-232 or RS-422; 38400, 57600, 115,200 baud

Connector: 9 pin female "D"

Fujinon L10 Lens Protocol compatible Protocol:

Number of Ports:

Connector:

Ancillary data Output Port (Com 3 in Field Log Mode): RS-232 or RS-422; 115,200 baud Standard:

Connector 9 pin female "D"

Number of Ports:

Telecine Interface (Cine Mode): 9 pin female "D"

Tach Input: bi-phase quadrature pulses - 1,2,5, or

10 x film rate, TTL

### **bbb**Ordering Information

HDSD9045TR 4:4:4/HD/SD VANC Encoder including KeyLog TRACKER™ HDSD9045TR/5550/UV-3

4:4:4/HD/SD VANC Encoder system including KeyLog TRACKER™, KeyKode Decoder & UV-3 Head

Ordering Options: Standard unit supports 16mm, 35mm 4 perf and 35mm 3 perf film formats

Vistavision 35mm 8 perf (Vistavision) option for Film Footage Encoders 35mm 2 perf option for Film Footage Encoders

65/70mm 65mm/70mm option for Film Footage Encoders **Production Post Production** 

The Evertz Film Post Production System helps you keep track of all aspects of your Film-to-Tape Transfer session.

KEYLOG TRACKER™ is an intuitive graphical user interface that provides more flexibility to the Evertz Film Post Production System than ever before. KeyLog TRACKER™ runs on standard Window capable computer hardware and gives you access to a host of new capabilities for the system including more character windows, simultaneous KeyKode and Ink number handling and several new Time code modes to mention a few.

The Evertz HD/SD film Post Production System uses function specific hardware units such as the HDSD9045TR Film Footage Encoder, the 5550 KeyKode Reader and the new HDSD9155Q Afterburner Inserter to perform the bulk of the real

time processing. This dedicated hardware reads and generates Video Time code, reads KeyKode and Film Time code, inserts ancillary data or Vertical Interval Time code and character burn-ins into HDSDI or SDI program video, and keeps track of the 3:2 pulldown.

KEYLOG TRACKER™ centralizes the control of your Film Footage Encoder, and Afterburner and performs frame accurate logging of Video and Audio Time code, KeyKode, Ink numbers, 3:2 pulldown and related production data and provides extensive data base management capabilities for the resulting project data.


KEYLOG TRACKER™ connects to Film Footage Encoder & Afterburner units using RS-232 connections or 10/100 Ethernet for HDSD9045TR and HDSD9155Q only.

#### **Character Windows**

KEYLOG TRACKER™ gives you access to 33 separate character windows to display Video Time code, Audio Time code, KeyKode, Ink numbers (feet & frames), Scene, Take, Slate, Lab roll, Camera roll, Sound roll, Date of Production, and three 32 character user definable text windows.

An electronic virtual slate shows all the vital information at the start of each take, for master transfers where you cannot display the normal burn-ins throughout the take.

The status bar at the bottom of the screen allows you to see at a glance how your hardware is configured. In addition, the Encoder Status window constantly monitors KeyKode reading performance, incoming Time codes and other real time status information.

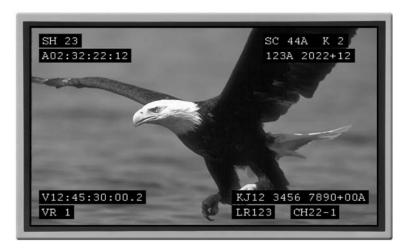

#### Flexible Hardware Control

KEYLOG TRACKER™ works with Evertz complete line of film footage encoders and HD Afterburners. With KEYLOG TRACKER™'s graphical configuration editor you choose the overall operating mode that fits your project. Within each mode you can adjust various hardware settings to achieve

precisely the result your clients demand. An unlimited number of configurations can be saved and recalled, minimizing set up times for repeat clients and virtually eliminating operator error. A project's configuration is automatically recalled when the project is opened.

### Data Logging

KEYLOG TRACKER™ allows you to choose the optimal method of logging transfer elements to the database. You let the project determine whether you will log only the head and tail of each roll for one light transfers, grab KeyKode or time code breaks for select take rolls, grab events on the fly from the keyboard, or interface to external edit controllers with the GPI interface.

Pre-determined tag points can be entered into Daily Roll files to automate data capture on Synced Print transfers. Production data such as Scene and Take, Camera roll, Sound roll can be pre-entered before the telecine session to streamline the transfer process, or can be entered in real time during the transfer.

#### **Data Management Functions**

KEYLOG TRACKER™'s extensive data management capabilities are second to none. Projects can be organized by client, or production, or by operator -you decide. The spreadsheet style preview and editing of logged events allows you to quickly scan the transfer session and edit the database. Project wide viewing and sorting of events facilitates management of data on long form productions such as feature films. Reports can be sorted by VT roll, Camera roll, Scene/Take, KeyKode or Ink numbers to name a few.

The Event Tracker allows you to trim time codes, KeyKode and Ink numbers of in and out points together. Event cleanup functions remove unwanted events and overlaps from the list. KEYLOG TRACKER™ generates Film Transfer list files compatible with most non linear editors.

 KEYLOG FTL, AVID ALE, TLC FLEx and Lightworks ODB formats are supported.

### **Desktop Configurability**

The KEYLOG TRACKER™ desktop groups relevant information into separate windows, which can be positioned and sized to suit the colorist's preferences. A spreadsheet style display of logged events is fully configurable to view only

the information that is needed for a client. Each user can save their favorite layout of the desktop when the system is shared by multiple colorists.

### Minimum System Requirements

- CPU: Pentium III
- Operating System: Win2000, WinXP Pro
- RAM: 256MB or more recommended
- Mouse
- Video: 2MB, 800x600 minimum
- CD-ROM
- Hard Disk: 20MB free
- Serial Ports: 2 available
- Local or network printer for printing reports (recommended)
- Sound card with speakers used to generate system sounds when logging (recommended)
- 10/100 Ethernet (recommended)

#### **▶▶▶**Ordering Information

Included with 9025TR & 9045TR Series Film Footage Encoders and HDSD9155Q Afterburner. Upgrades available for older systems. Contact factory.







Evertz warrants all of its products manufactured by Evertz against defects in materials and workmanship for a period of one (1) year from the date of the original purchase. If you transfer ownership, this warranty is automatically transferred to the new owner and remains in effect for the original (1) year period.

During the warranty period, we will repair or, at our option, replace at no charge any unit that proves to be defective, provided it is returned after proper authorization, with shipping prepaid to an identified Evertz repair center.

This warranty is expressed in lieu of all other warranties including implied warranties of merchantability or fitness. In no event will Evertz be liable for any special incidental or consequential damages.

Evertz's liability under this warranty shall be limited solely to the cost of any necessary repairs to replacements of or refunds of Buyer's purchase price for the Products, components thereof or replacement parts thereof, and Evertz assumes no risk, and shall not in any case be liable for any special, incidental or consequential damages, or any other indirect damages arising from a breach of warranty or contract, negligence or any other legal theory including - without limitation - loss of goodwill, profits or revenue, loss of use of the Products or any associated equipment, cost of capital, cost of any substitute, facilities or services, down-time costs, or claims of any party dealing with Buyer for such damages.

| 1200DD                                       | 2RU Rack-mount Digital Display   |           |
|--|--|-----------|
| 1200DD-G                                     | 2RU Rack-mount Digital Display- Green LED's  | 458       |
| 1201DD                                       | 1RU Rack-mount Digital Display- Green LED's  | 458       |
| 1201DD-G                                     | 1RU Rack-mount Digital Display   | 458       |
| 1212   | 12" Diameter Analog Clock Display  |           |
| 1216   | 16" Diameter Analog Clock Display  |           |
| 1212L  | 12" Diameter Analog Clock Display With Back Lighting   | 459       |
| 1216L  | 16" Diameter Analog Clock Display With Back Lighting   | 459       |
| 1275A-110                                    | 9" Digital Clock Display 115V/60Hz   |           |
| 1275A-220                                    | 9" Digital Clock Display 220V/50Hz   |           |
|  | For DQS-B6   |           |
| 1275-xxx-DQS                                 | Outdoor, eight output power supply for 2408LT series   |           |
| 2400PSU-8                                    |  |           |
| 2405EO3F-HD                                  | HD Miniature Optical Transmitter 1310nm, FP Laser  |           |
| 2405EO3D-HD                                  |  | -316&502  |
| 2405EO5D-HD                                  |  | -316&502  |
| 2405EOxx-HD                                  | HD Miniature Optical Transmitter CWDM DFB Laser  |           |
| 2405EO3F                                     | SDI Miniature Optical Transmitter 1310nm FP, Laser   |           |
| 2405EO5D                                     | SDI Miniature Optical Transmitter 1550nm DFB Laser   | -290&476  |
| 2405EOxx                                     | SDI Miniature Optical Transmitter CWDM DFB Laser   | -290&476  |
| 2405OE-HD                                    |  | -317&503  |
| 2405OE                                       |  | -291&477  |
| 2407DVIT13                                   | DVI Fiber Transmitter, 1310nm FP   | -480-481  |
| 2407DVIT13-A2                                | DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP  | -480-481  |
| 2407DVIT13-A2KM-F2                           | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm TX & RX  | -480-481  |
| 2407DVIT13-A2KM-F2<br>2407DVIT13-A2KM-USB-F2 |  | -480-481  |
|  |  |           |
| 2407DVIT15-A2KM-W                            |  | -480-481  |
| 2407DVIT15-A2KM-USB-W                        |  | -480-481  |
| 2407DVITxx                                   | DVI Fiber Transmitter, CWDM Laser  | -480-481  |
| 2407DVITxx-A2                                | DVI + 2 Analog Audio Fiber Transmitter, CWDM Laser   | -480-481  |
| 2407DVITxx-A2KM-F2                           |  | -480-481  |
| 2407DVITxx-A2KM-USB-F2                       |  | -480-481  |
| 2407DVIR                                     | DVI Fiber Receiver   | -482-483  |
| 2407DVIR-A2                                  | DVI + 2 Analog Audio Fiber Receiver  | -482-483  |
| 2407DVIR13-A2KM-F2                           | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, 1310nm TX & RX   | -482-483  |
| 2407DVIR13-A2KM-USB-F2                       |  | -482-483  |
| 2407DVIR15-A2KM-W                            |  | -482-483  |
| 2407DVIR15-A2KM-USB-W                        |  | -482-483  |
| 2407DVIRTS-A2KM-03B-W                        | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, CWDM Laser   | -482-483  |
|  |  | -482-483  |
| 2407DVIRxx-A2KM-USB-F2                       | DVI/KVM + 2 Analog Audio + Bi-di Keyboard Mouse and USB Fiber Receiver, dual fiber, CWDM Laser   |           |
| 2407RGBT13                                   | RGBHV/DVI Fiber Transmitter, 1310nm FP   | -486-487  |
| 2407RGBT13-A2                                | RGBHV/DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP laser  | -486-487  |
| 2407RGBT13-A2KM-F2                           | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm TX & RX  | -486-487  |
| 2407RGBT13-A2KM-USB-F2                       | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, dual fiber, 1310nm TX & RX  | -486-487  |
| 2407RGBT15-A2KM-W                            | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm                                     | -486-487  |
| 2407RGBT15-A2KM-USB-W                        | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse & USB Fiber Transmitter, single fiber, 1550nm TX, RX on1310nm                                | -486-487  |
| 2407RGBTxx                                   | RGBHV/DVI Fiber Transmitter, CWDM DFB laser  | -486-487  |
| 2407RGBTxx-A2                                | RGBHV/DVI + 2 Analog Audio Fiber Transmitter, CWDM DFB laser   | -486-487  |
| 2407RGBTxx-A2KM-F2                           | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, CWDM DFB laser  | -486-487  |
| 2407RGBTxx-A2KM-USB-F2                       | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, dual fiber, CWDM DFB laser  | -486-487  |
| 2407RGBR                                     | RGBHV/DVI Fiber Receiver   | -488-489  |
| 2407RGBR-A2                                  | RGBHV/DVI + 2 Analog Audio Fiber Receiver  | -488-489  |
| 2407RGBR13-A2KM-F2                           | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, dual fiber, 1310nm TX & RX   | -488-489  |
|  | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse + USB, Fiber Receiver, dual fiber, 1310nm TX & RX  | -488-489  |
| 2407RGBR13-A2KM-USB-F2                       |  | -488-489  |
| 2407RGBR13M-A2KM-W                           | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Receiver, single fiber, 1310nm RX, TX on 1550nm  |           |
| 2407RGBR13M-A2KM-USB-W                       | ,  | - 488-489 |
| 2407RGBRxx-A2KM-F2                           | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, CWDM DFB laser  | - 488-489 |
| 2407RGBRxx-A2KM-USB-F2                       | RGBHV/DVI/KVM + 2 Analog Audio + Bi-di Keyboard and Mouse and USB Fiber Transmitter, dual fiber, CWDM DFB laser  | 488-489   |
| 2408LT13                                     | L-Band Standalone Fiber Transmitter with SmartMON™, 1310nm FP Laser  |           |
| 2408LT13-WP                                  | L-Band Standalone/Weatherproof Fiber Transmitter with SmartMON™, 1310nm FP Laser   |           |
| 2408LT13-B50                                 | L-Band Standalone Fiber Transmitter with SmartMON™, 1310nm FP Laser, 50Ω BNC Connectors  |           |
| 2408LT13-WP-B50                              | L-Band Standalone/Weatherproof Fiber Transmitter with SmartMON™, 1310nm FP Laser, 50Ω BNC Connectors   | 484       |
| 2408LTxx                                     | L-Band Standalone Fiber Transmitter with SmartMON™, CWDM DFB laser   | 484       |
| 2408LTxx-WP                                  | L-Band Standalone/Weatherproof Fiber Transmitter with SmartMON™, CWDM DFB laser  |           |
|  |  |           |
| 2408LTxx-B50                                 | L-Band Standalone Fiber Transmitter with SmartMON™, CWDM DFB laser, 50Ω BNC Connectors   |           |
| 2408LTxx-WP-B50                              | L-Band Standalone/Weatherproof Fiber Transmitter with SmartMON™, CWDM DFB laser, 50Ω BNC Connectors  |           |
| 2410MD-HSN                                   | HD Miniature Monitoring Downconverter with 24sF processing (with power supply)   |           |
| 2430DAC-HD                                   | HDTV Miniature D to A: YPrPb/RGB/VGA via High Density DB-15 (with power supply)  |           |
| 2430GDAC                                     | G-LINK™ to DVI converter. Required for every G-LINK™ output of PPMG and PPMV+G output processor card   |           |
| 2430GDAC-WARP                                | G-LINK™ to DVI converter with WARP   |           |
| 3000MVP-GI                                   | Dual (2) or Quad (4) computer video inputs per input module  |           |
| 3000MVP-AI                                   | Monitor up to 4 analog pairs or 4 AES/EBU audio channels per video input   |           |
| 3000BHP-U                                    | 1RU breakout bulkhead panel to support either balanced stereo analog inputs or balanced AES/EBU audio  |           |
| 3000BHP-BAL                                  | 2RU breakout bulkhead panel to support either balanced stereo analog inputs or balanced AES/EBU audio  |           |
| 3000BHP-AUX                                  | Breakout bulkhead panel for GPI/O, LTC input and serial communications   |           |
| 3000MKT-AUX                                  | Rackmount panel for AUX breakout board   | 32        |
|  | Allows you to change your display's presets from numerous possibilities  | 32        |
| 3000DCP                                      | P-LINK™/G-LINK™ Optical to Electrical/Electrical to Optical converter  | 22        |
| 3000MVP-OE/EO-5                              | Multiport (10 CD) to Angley Manitoring Convertor)  | 4EE       |
| 3410   | Multivert (10 SDI to Analog Monitoring Converter)  | 455       |
| 3400RS                                       | Rear support kit   | 455       |
| 350FR  | 3RU Portable Multiframe  | 409       |
| 400FR  | Compact High Density Balanced Audio Distribution Frame   | 410       |
| 400ADA-AUD                                   | Analog Audio Distribution Amplifier (1x9)  | 411       |
| 400DA-AESB                                   | Balanced AES Audio Distribution Amplifier (1x9)  | 412       |
| 400DA2Q-AESB                                 | Dual Balanced AES Audio Distribution Amplifier   | 413       |
| 500AC02-HD/SD                                | Dual HD & SD Digital Video Signal 2 x 1 Change Over  | 424       |
| 500ADA                                       | Analog Video Distribution Amplifier (1x9)  | 432       |
| 500ADA-AUD                                   | Analog Audio Distribution Amplifier (1x4)  | 439       |
| 500ADA-AOD<br>500ADA-EQ                      | Analog Video Distribution Amplifier with Cable Equalization (1x9)  | 433       |
| 500ADA-EQ-L                                  | Analog Video Distribution Amplifier with Cable Equalization (1x3) Analog Video Distribution Amplifier with Cable Equalization for Looping Analog Frame | 42        |
| 500ADA-EQ-L<br>500ADA-W                      | Word Clock Distribution Amplifier (1x9)  | 440       |
| 500ADA-W<br>500AMDA-AESU                     | Unbalanced AES Audio DAC & Distribution Amplifier  | 139       |



| FOODA                      |   |        |
|----------------------------|---|--------|
| 500DA                      | SDI Reclocking Distribution Amplifier - (1x9)   | 426    |
| 500DA-3G                   | 3Gb/s SDI Reclocking Distribution Amplifier (1x8)                                       | 430    |
| 500DA2Q                    | Dual Reclocking Distribution Amplifier (2 - 1x4)  | 427    |
| 500DA2Q-AESU               | Unbalanced Dual AES Audio Distribution Amplifier (2- 1x4)                               | 437    |
| 500DA2Q-HD                 | HD/SD-SDI Dual Reclocking Distribution Amplifier (2 - 1x4)                              | 423    |
| 500DA2Q-HD-N               | HD/SD-SDI Dual Non-Reclocking Distribution Amplifier (32 - 1x4 DA's in 3RU Rack Space)  |        |
| 500DA2Q-3G                 | 3G/HD/SD-SDI Dual Reclocking Distribution Amplifier (32 1x4 DA's in 3RU Rack Space)     |        |
| 500DA2Q-3G-N               |   |        |
| 500DA2Q-5G-N<br>500DA3Q-HD | 3G/HD/SD-SDI Dual Non-Reclocking Distribution Amplifier (32 1x4 DA's in 3RU Rack Space) |        |
|                            | HD/SD-SDI Three Input Reclocking Distribution Amplifier (2 - 1x4) + (1x3)               |        |
| 500DA-AESB                 | Balanced AES Audio Distribution Amplifier (1x4)   |        |
| 500DA-AESU                 | Unbalanced AES Audio Distribution Amplifier (1x9)                                       |        |
| 500DA-AESU-L               | Unbalanced AES Distribution Amplifier (1x9) with Loop Thru                              |        |
| 500DA-L                    | Reclocking Distribution Amplifier for Digital Looping Frame                             | 419    |
| 500DCDA-HD                 | HD Downconverter & Distribution Amplifier with closed caption monitoring                |        |
| 500DA-HD                   | HD/SD Reclocking Distribution Amplifier (1x8)   |        |
| 500FC                      | VistaLINK® Frame Controller   | 116    |
| 500FC-DA-HD                | Combo HD/SD SDI Reclocking Distribution Amplifier (1x8)                                 |        |
| 500FC-DA-HD-L              |   |        |
|                            | Combo HD/SD SDI Reclocking Distribution Amplifier with Loop Thru (1x8)                  |        |
| 500FR                      | Compact High Density Distribution Frame   |        |
| 500LR-L-A                  | Compact High Density Analog Looping Distribution Frame                                  |        |
| 500FR-L-D                  | Compact High Density Digital Looping Distribution Frame                                 |        |
| 500VMDA                    | SD-SDI Monitoring Reclocking Distribution Amplifier                                     | 431    |
| 510DCDA-HD                 | HD/SD Downconverter and Distribution Amplifier with Closed Caption Monitoring           | 46-447 |
| 520AD4-HD                  | HD/SD Audio De-embedder with 4 unbalanced AES outputs (2 audio groups)                  |        |
| 520AD4-DD-HD               | HD/SD Audio De-embedder & Dolby E™/AC-3 Decoder & Re-embedder                           |        |
| 520AD8-HD                  | HD/SD Audio De-embedder with 8 unbalanced AEs outputs (4 audio groups)                  |        |
| 520AE4-HD                  | HD/SD Audio Embedder with 4 unbalanced AES inputs (2 audio groups)                      |        |
| 520AE8-HD                  | HD/SD Audio Embedder with 8 unbalanced AES inputs (4 audio groups)                      |        |
| 520DD-AESU                 | Dolby E™/AC-3 Decoder   |        |
| 520E2Q-IG                  | SD-SDI Dual Video Input IntelliGain™ Processor  | 42-443 |
| 520E2Q-IG-HD               | HD/SD-SDI Dual Video Input IntelliGain™ Processor                                       |        |
| 520DARS-W                  |   |        |
| 5010                       | Unbalanced AES Word Clock Extractor Audio Distribution Amplifier                        | 441    |
|                            | Time Code Generator/Reader  |        |
| 5010-24Fps                 | NTSC/24Fps Time Code Generator/Reader   | 62-463 |
| 5010-GPSII                 | Time Code Generator with GPSII  |        |
| 5010-VITC                  | Time Code Generator/Reader with VITC  |        |
| 5010-VITC-24Fps            | NTSC/24Fps Time Code Generator/Reader with VITC46                                       |        |
| 5010-VITC-GPSII            | VITC Time Code Generator with GPSII   |        |
| 5300                       | Time Code Analyzer  |        |
| 5550                       | Universal Decoder   | 06-507 |
| 5550/KR-16/35              | 5550 Decoder with KR16/35 Head & 10 ft. cable50   | 06-507 |
| 5550/UV-3                  | 5550 Decoder with UV-3 Head & 20 ft. cable50  | 06-507 |
| 5550/UVT-3                 | 5550 Decoder with UVT-3 (touchless) Head & 20 ft. cable50                               |        |
| 5600MSC                    | Master SPG/Master Clock System  |        |
| 5600ACO                    | 1RU Automatic Change Over System  |        |
| 5600ACO2                   | 2RU Automatic Change Over System  |        |
| 5950                       | VICT/LTC Time Code Reader/ Character Inserter   |        |
| EV-BRKT                    | Universal Reader Mounting Bracket   |        |
| FDL-SHIMS                  |   |        |
| CINTEL-SHIM                | Shim kit for BTS, FDL 60/90, Quadra   |        |
| WA-S19                     | Shim kit for Cintel C-Reality 16/35 heads5(   |        |
| WA-519<br>WA-F49           | C-Reality Cable Harness   | 06-507 |
|                            | 50ft extender cable for KR series heads   | 06-507 |
| WA-P57                     | 50ft extender cable for UV series heads50   |        |
| KKFILM-16MM                | 16mm Kodak Keykode Verification Film  |        |
| KKFILM-35MM                | 35mm Kodak KeyKode Verification Film  |        |
| KKFILM-S16MM               | Super 6mm Kodak KeyKode Verification Film   |        |
| 7700ACO-HD                 | HD/SD SDI 8 Channel AES & RS232/RS422 Auto Changeover                                   | 146    |
| 7700ACO2                   | Dual/SD-SDI Smart Automatic Changeover  | 145    |
| 7700ACO2-HD                | Dual HD/SD-SDI Smart Automatic Changeover   |        |
| 7700ADA6-L                 | Analog Video Distribution Amplifier with Loop Thru                                      |        |
| 7700ADA7                   | Analog Video Equalizing Distribution Amplifier (1X4)                                    |        |
| 7700ADA7-EQ                | Analog Video Equalizing Distribution Amplifier (1X7)                                    | 163    |
| 7700ADA-AUD                | Dual Analog Audio Distribution Amplifier  |        |
| 7700ADA-AUD-MM             | Dual Analog Audio Distribution Amplifier with Mono Mix                                  |        |
| 7700ADA6-EQ-L              | Equalizing Analog Video Distribution Amplifier with Loop Thru                           |        |
| 7700ADA-ETSI               | High Amplitude Analog Distribution Amplifier (1x4)                                      |        |
| 7700DA6-L                  | SD-SDI Reclocking Distribution Amplifier with Loop Thru                                 |        |
| 7700DA7                    | HD/SD SDI Reclocking Distribution Amplifier, 7 output                                   |        |
| 7700DA7-3G                 | 3G/HD/SD-SDI Reclocking Distribution Amplifier  |        |
| 7700DA6-HD-L               | HD/SD SDI Reclocking Distribution Amplifier with Loop Thru                              |        |
| 7700DA7-HD                 | HD/SD-SDI Reclocking Distribution Amplifier (1x7)                                       |        |
|                            |   | 149    |



7707ADVT15

| 7707AD\ (T. N.E.               | Analan an ODI Vida a O A Analan an A AEO Andia Eilan Tananaithan Elantidad antanta anta Viatal INIVO   | 040.040 |
|--------------------------------|--|---------|
| 7707ADVT-NF<br>7707ADVTxx      | Analog or SDI Video & 4 Analog or 4 AES Audio Fiber Transmitter, Electrical outputs only, VistaLINK®   |         |
| 7707ADVTXX<br>7707ADVTDxxx     | Analog or SDI Video & 4 Analog or 4 AES Audio Fiber Transmitter, CWDM Laser, VistaLINK®  |         |
| 7707ADVTDXXX<br>7707ADVT13-HD  | 1310nm FP Laser (-7dBm launch power)   |         |
| 7707ADVT15-HD<br>7707ADVT15-HD | 1550nm DFB Laser   |         |
| 7707ADVT13-HD<br>7707ADVTxx-HD | Analog, HD-SDI or SDI Video & 4 Analog or 4 AES audio Fiber Transmitter, CWDM Laser, VistaLINK®  |         |
| 7707ADVTXX-HD                  | Analog, HD-SDI or SDI Video & 4 Analog or 4 AES audio Fiber Transmitter, CVVDM Laser, VistaLINK®   |         |
| 7707AR-8                       | Eight Channel AES Audio Fiber Receiver Demux, VistaLINK® Monitoring  |         |
| 7707AR-8U                      | Eight Channel Unbalanced AES Audio Fiber Receiver Demux, VistaLINK® Monitoring   |         |
| 7707AR-16                      | Sixteen Channel AES Audio Fiber Receiver Demux, VistaLINK® Monitoring  |         |
| 7707AR-A8                      | Eight Channel Analog Audio Fiber Receiver, Demux VistaLINK® Monitoring   |         |
| 7707AR-A12                     | Twelve Channel Analog Audio Fiber Receiver, Demux VistaLINK® Monitoring  |         |
| 7707AT-312<br>7707AT13-8       | Eight channel AES Audio Fiber Transmitter Mux , 1310nm FP, VistaLINK®  |         |
| 7707AT13-8U                    | Eight channel AES Unbalanced Audio Fiber Transmitter Mux, 1310nm FP, VistaLINK®, AES on BNC's  |         |
| 7707AT13-16                    | Sixteen channel AES Audio Fiber Transmitter Mux, 1310nm FP, VistaLINK®   |         |
| 7707AT15-8                     | Eight channel AES Audio Fiber Transmitter Mux , 1550nm DFB, VistaLINK®   |         |
| 7707AT15-8U                    | Eight channel AES Unbalanced Audio Fiber Transmitter Mux , 1550nm DFB, VistaLINK®  |         |
| 7707AT15-16                    | Sixteen channel AES Audio Fiber Transmitter Mux , 1550nm DFB, VistaLINK®   |         |
| 7707ATxx-8                     | Eight channel AES Audio Fiber Transmitter Mux, CWDM wavelength, VistaLINK®   |         |
| 7707ATxx-8U                    | Eight channel AES Unbalanced Audio Fiber Transmitter Mux , CWDM wavelength, VistaLINK®   |         |
| 7707ATxx-16                    | Sixteen channel AES Audio Fiber Transmitter Mux, CWDM wavelength, VistaLINK®   |         |
| 7707ATDxxx-8                   | Eight channel AES Audio Fiber Transmitter Mux, DWDM wavelength, VistaLINK®   |         |
| 7707ATDxxx-8U                  | Eight channel AES Unbalanced Audio Fiber Transmitter Mux, DWDM wavelength, VistaLINK®  |         |
| 7707ATDxxx-16                  | Sixteen channel AES Audio Fiber Transmitter Mux , DWDM wavelength, VistaLINK®  |         |
| 7707AT13-A8                    | Eight channel Analog Audio Fiber Transmitter Mux, 1310nm FP, VistaLINK®  |         |
| 7707AT15-A8                    | Eight channel Analog Audio Fiber Transmitter Mux, 1550nm DFB, VistaLINK®   |         |
| 7707AT13-A12                   | Twelve channel Analog Audio Fiber Transmitter Mux , 1310nm FP, VistaLINK®  |         |
| 7707AT15-A12                   | Twelve channel Analog Audio Fiber Transmitter Mux , 1550nm DFB, VistaLINK®   |         |
| 7707ATxx-A8                    | Eight channel Analog Audio Fiber Transmitter Mux , CWDM wavelength   |         |
| 7707ATxx-A12                   | Twelve channel Analog Audio Mux Fiber Transmitter, CWDM wavelength   |         |
| 7707ATDxxx-A8                  | Eight channel Analog Audio Mux Fiber Transmitter, DWDM wavelength  |         |
| 7707ATDxxx-A12                 | Twelve channel Analog Audio Mux Fiber Transmitter, DWDM wavelength   |         |
| 7707BPX                        | 2x1 Optical Bypass Protection Switch, VistaLINK®   |         |
| 7707CATVRA                     | CATV Fiber Receiver, 80/110 channel PAL/NTSC   | 253     |
| 7707CATVTA13-110-8             | CATV Fiber Transmitter, 80/110 channel PAL/NTSC  | 252     |
| 7707CATVTA13-110-11            | CATV Fiber Transmitter, 80/110 channel PAL/NTSC  |         |
| 7707CVDRA13-F2                 | Analog Video + Bi-di RS-232/422 Fiber Receiver, dual fiber, 1310nm TX & RX   | 256-257 |
| 7707CVDRA13-A4-F2              | Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber, 1310nm TX & RX   | 256-257 |
| 7707CVDRA13M-W                 | Analog Video + Bi-di RS-232/422 Fiber Receiver, single fiber, 1310nm TX @0dBm, RX on 1550nm  |         |
| 7707CVDRA13M-A4-W              | Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, single fiber, 1310nm TX @ 0dBm, RX on 1550nm   |         |
| 7707CVDRAxx-F2                 | Analog Video + Bi-di RS-232/422 Fiber Receiver, dual fiber, CWDM Laser   |         |
| 7707CVDRAxx-A4-F2              | Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber, CWDM Laser   | 256-257 |
| 7707CVDRADxxx-F2               | Analog Video + Bi-di RS-232/422 Fiber Receiver, dual fiber, DWDM Laser   |         |
| 7707CVDRADxxx-A4-F2            | Analog Video + Audio + Bi-di RS-232/422 Fiber Receiver, dual fiber,  |         |
| 7707CVDTA13-F2                 | Analog Video + Bi-di RS-232/422 Fiber Transmitter, dual fiber, 1310nm TX & RX  | 254-255 |
| 7707CVDTA13-A4-F2              | Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, dual fiber, 1310nm Laser  |         |
| 7707CVDTA15-W                  | Analog Video + Bi-di RS-232/422 Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm   |         |
| 7707CVDTA15-A4-W               | Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, single fiber, 1550nm TX, RX on 1310nm   | 254-255 |
| 7707CVDTAxx-F2                 | Analog Video + Bi-di RS-232/422 Fiber Transmitter, dual fiber, CWDM Laser  |         |
| 7707CVDTAxx-A4-F2              | Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, dual fiber, CWDM Laser  |         |
| 7707CVDTADxxx-F2               | Analog Video + Bi-di RS-232/422 Fiber Transmitter, dual fiber, DWDM Laser  | 254-255 |
| 7707CVDTADxxx-A4-F2            | Analog Video + Audio + Bi-di RS-232/422 Fiber Transmitter, dual fiber, DWDM Laser  |         |
| 7707CVRA                       | Analog Video with 4-Channel Analog Audio Fiber Receiver, VistaLINK®  |         |
| 7707CVRA-2                     | Dual Analog Video with 4-Channel Analog Audio Fiber Receiver, VistaLINK®   |         |
| 7707CVRA-H                     | Analog Video with 4-Channel Analog Audio High Sensitivity Receiver, VistaLINK®   |         |
| 7707CVRA-2-H                   | Dual Analog Video with 4-Channel Analog Audio High Sensitivity Receiver, VistaLINK®  |         |
| 7707CVRA-TRI                   | Tri Level Sync with 4-Channel Analog Audio Fiber Receiver, VistaLINK®  |         |
| 7707CVRA-2-TRI                 | Dual Tri Level Sync with 4-Channel Analog Audio Fiber Receiver, VistaLINK®   |         |
| 7707CVR-4                      | Quad Analog Video, Fiber Receiver, VistaLINK®  |         |
| 7707CVR-4-H                    | Quad Analog Video, Fiber Receiver, High Sensitivity, VistaLINK®  |         |
| 7707CVR-4-A16                  | Quad Analog Video, 16 Analog Audio, Fiber Receiver, VistaLINK®   |         |
| 7707CVR-8                      | Quad Analog Video, 16 Analog Audio, Fiber Receiver, High Sensitivity, VistaLINK®   |         |
| 7707CVR-8<br>7707CVR-8-H       | Eight Analog Video Fiber Receiver, VistaLINK®  |         |
| 7707CVR-8-H<br>7707CVTA13      | Eight Analog Video Fiber Receiver, High Sensitivity, VistaLINK®  |         |
| 7707CVTA13<br>7707CVTA13M      | Analog Video with 4-channel Analog Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®   |         |
| 7707CVTA13M                    | Dual Analog Video with 4-channel Analog Audio Fiber Transmitter 13 form FP Laser (00Bm launch), VistaLink®  Dual Analog Video with 4-channel Analog Audio Fiber Transmitter, 1310nm FP Laser, VistaLink® |         |
| 7707CVTA13M-2                  | Dual Analog Video with 4-channel Analog Audio Fiber Transmitter, 1310nm FP Laser, VistaLiNk®   |         |
| 7707CVTA15W-2                  | Analog Video with 4-channel Analog Audio Fiber Transmitter, 13 form FP Laser, (odbm launch), VistaLink® Analog Video with 4-channel Analog Audio Fiber Transmitter 1550nm DFB Laser, VistaLink®          |         |
| 7707CVTA15-2                   | Dual Analog Video with 4-channel Analog Audio Fiber Transmitter, 1550nm DFB Laser, VistaLINK®  |         |
| 7707CVTAXX                     | Analog Video with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®  |         |
| 7707CVTAxx-2                   | Dual Analog Video with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®   |         |
| 7707CVTADxxx                   | Analog Video with 4-channel Analog Audio Fiber Transmitter DWDM DFB Laser, VistaLINK®  |         |
| 7707CVTADxxx-2                 | Dual Analog Video with 4-channel Analog Audio Fiber Transmitter DWDM DFB Laser, VistaLINK®   |         |
| 7707CVTA13-TRI                 | Tri Level Sync with 4-channel Analog Audio Fiber Transmitter 1310nm FP Laser, VistaLINK®   |         |
| 7707CVTA13-2-TRI               | Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter, 1310nm FP Laser, VistaLINK®   |         |
| 7707CVTA15-TRI                 | Tri Level Sync with 4-channel Analog Audio Fiber Transmitter 1550nm DFB Laser, VistaLINK®  |         |
| 7707CVTA15-2-TRI               | Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter, 1550nm DFB Laser, VistaLINK®  |         |
| 7707CVTAxx-TRI                 | Tri Level Sync with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®  |         |
| 7707CVTAxx-2-TRI               | Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter CWDM DFB Laser, VistaLINK®   |         |
| 7707CVTADxxx-TRI               | Tri Level Sync with 4-channel Analog Audio Fiber Transmitter DWDM DFB Laser, VistaLINK®  |         |
| 7707CVTADxxx-2-TRI             | Dual Tri Level Sync with 4-channel Analog Audio Fiber Transmitter DWDM DFB Laser, VistaLINK®   |         |
| 7707CVT13-4                    | Quad Analog Video Fiber Transmitter, 1310nm FP Laser, VistaLINK®   |         |
| 7707CVT13-8                    | Eight Analog Video Fiber Receiver, VistaLINK®  |         |
| 7707CVT15-4                    | Quad Analog Video Fiber Transmitter, 1550nm DFB Laser, VistaLINK®  |         |
| 7707CVT15-8                    | Eight Analog Video Fiber Receiver, 1550nm DFB Laser, VistaLINK®  |         |
| 7707CVT13-4-A16                | Quad Analog Video, 16 Analog, Audio Fiber Transmitter, 1310nm FP Laser, VistaLINK®   |         |
| 7707CVT15-4-A16                | Quad Analog Video, 16 Analog, Audio Fiber Transmitter, 1550nm FP Laser, VistaLINK®   |         |
| 7707CVTxx-4                    | Quad Analog Video Fiber Transmitter, CWDM DFB Laser, VistaLINK®  |         |
| 7707CVTxx-8                    | Eight Analog Video Fiber Receiver, CWDM DFB Laser, VistaLINK®  |         |
| 7707CVTxx-4-A16                | Quad Analog Video, 16 Analog, Audio Fiber Transmitter, CWDM DFB Laser, VistaLINK®  |         |

| The state of the s |   |                    |
|--|---|--------------------|
| 7707CVTDxxx-4  | Quad Analog Video Fiber Transmitter, dWDM DFB Laser, VistaLINK®   | 260-261            |
| 7707CVTDxxx-8  | Eight Analog Video Fiber Receiver, DWDM DFB Laser, VistaLINK®   | 260 261            |
| 7707CVTDxxx-4-A16<br>7707DT13M-W   | Quad Analog Video, 16 Analog, Audio Fiber Transmitter, DWDM DFB Laser, VistaLINK®   |                    |
| 7707DT13M-W-GPIO   | Multi RS232/422 and GPIO Fiber Data Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK®  |                    |
| 7707DT15-W   | Multi RS232/422 Fiber Data Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®  |                    |
| 7707DT15-W-GPIO  | Multi RS232/422 and GPIO Fiber Data Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®   |                    |
| 7707DT13-F2<br>7707DT13-F2-GPIO  | Multi RS232/422 Fiber Data Transceiver, dual fiber, 1310nm FP TX & RX, VistaLINK® Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber, 1310nm FP TX & RX, VistaLINK®  |                    |
| 7707DT-13-12-G110  | Multi RS232/422 Fiber Data Transceiver, dual fiber, CWDM TX   |                    |
| 7707DT-xx-F2-GPIO  | Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber, CWDM TX  |                    |
| 7707DTDxxx-F2  | Multi RS232/422 Fiber Data Transceiver, dual fiber, DWDM TX   |                    |
| 7707DTDxxx-F2-GPIO<br>7707DVIT   | Multi RS232/422 and GPIO Fiber Data Transceiver, dual fiber, DWDM TX  |                    |
| 7707DVIT<br>7707DVIT13   | DVI/KVM Fiber Transmitter, 1310nm FP  |                    |
| 7707DVIT13-A2  | DVI + 2 Analog Audio Fiber Transmitter, 1310nm FP Laser   |                    |
| 7707DVIT13-A2KM-F2   | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, 1310nm TX & RX   |                    |
| 7707DVIT15-A2KM-USB-F2   | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Transmitter, dual fiber, 1310nm TX & RX   |                    |
| 7707DVIT15-A2KM-W<br>7707DVIT15-A2KM-USB-W   | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, single fiber, TX on 1550nm, RX on 1310nm   |                    |
| 7707DVIT137\2\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\   | DVI Fiber Transmitter, CWDM Laser   |                    |
| 7707DVITxxA2   | DVI + 2 Analog Audio Fiber Transmitter, CWDM Laser  |                    |
| 7707DVITxxA2KM-F2  | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, CWDM Laser   |                    |
| 7707DVITxxA2KM-USB-F2<br>7707DVITDxxx  | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Transmitter, CWDM Laser   |                    |
| 7707DVITDXXX<br>7707DVITDXXX-A2  | DVI + 2 Analog Audio Fiber Transmitter, DWDM Laser  |                    |
| 7707DVITDxxx-A2KM-F2   | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse Fiber Transmitter, dual fiber, DWDM Laser   |                    |
| 7707DVITDxxx-A2KM-USB-F2   | DVI + 1 Analog Audio + Bi-di Keyboard and Mouse + USB Fiber Transmitter, dual fiber, DWDM Laser   |                    |
| 7707DVIR   | DVI/KVM Fiber Receiver  | 280-281            |
| 7707DVIR-A2<br>7707DVIR13-A2KM-F2  | DVI + 2 Analog Audio Fiber Receiver   | 280-281<br>280-281 |
| 7707DVIR13-A2KM-USB-F2   | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and mouse + USB Fiber Receiver, dual fiber, 1310nm TX & RX  |                    |
| 7707DVIR13-A2KM-W  | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and mouse Fiber Receiver, single fiber, 1310nm TX & RX on 1550nm  | 280-281            |
| 7707DVIR13-A2KM-USB-W  | DVI/KVM + 2 Analog Audio + Bi-di Keyboard mouse and USB Fiber Receiver, single fiber, 1310nm TX & RX on 1550nm  |                    |
| 7707DVIRxx-A2KM-F2<br>7707DVIRxx-A2KM-USB-F2   | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and mouse Fiber Receiver, dual fiber, CWDM Laser  | 280-281<br>280-281 |
| 7707DVIRXX-A2KW-03B-12   | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and mouse Fiber Receiver, dual fiber, DWDM Laser  |                    |
| 7707DVIRDxxxA2KM-USB-F2  | DVI/KVM + 2 Analog Audio + Bi-di Keyboard and mouse + USB Fiber Receiver, dual fiber, DWDM Laser  |                    |
| 7707EO13   | SDI Electrical to Optical Converter 19.4Mb/s or 143-540Mb/s, 1310nm, FP Laser, VistaLINK®   |                    |
| 7707EO15   | SDI Electrical to Optical Converter 19.4Mb/s or 143-540Mb/s, 1550nm, DFB Laser, VistaLINK®  |                    |
| 7707EOxx<br>7707EODxxx   | SDI Electrical to Optical Converter 19.4Mb/s of 143-540Mb/s, CWDM DFB Laser, VisiaLink®   |                    |
| 7707EO13-3   | Triple SDI Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s, 1310nm FP laser, VistaLINK®  |                    |
| 7707EO13-3-HD  | Triple HD or SD Electrical to Optical Converter, 19.4Mb/s or 143Mb/s-1.485Gb/s, 1310nm FP laser, VistaLINK®   |                    |
| 7707EO15-3-HD  | Triple HD or SD Electrical to Optical Converter, 19.4Mb/s or 143Mb/s-1.485Gb/s, 1550nm DFBlaser, VistaLINK® DS3 Electrical to Optical Converter, VistaLINK®, 1310nm, FP Laser |                    |
| 7707EO13-DS3<br>7707EO15-DS3   | DS3 Electrical to Optical Converter, VistaLink®, 13 form, FP Laser  |                    |
| 7707EOxx-DS3   | DS3 Electrical to Optical Converter, CWDM DFB Laser, VistaLINK®   |                    |
| 7707EODxxx-DS3   | DS3 (45Mb/s) Electrical to Optical Converter, DWDM Laser, +7dBm, VistaLINK®   |                    |
| 7707EO13-HD  | HD Electrical to Optical Converter, 1310nm, FP Laser (up to 10 km) VistaLINK®   | 312                |
| 7707EO15-HD<br>7707EOxx-HD   | HD Electrical to Optical Converter, 1550nm, VistaLink®  |                    |
| 7707EODxxx-HD  | HD & SD Electrical to Optical Converter, 19.4Mb/s or 143-540Mb/s, DWDM Laser, +7dBm, VistaLINK®   |                    |
| 7707EO13-E3  | E3 Electrical to Optical Converter, 1310nm, FP Laser VistaLINK®   |                    |
| 7707EOxx-E3  | E3 Electrical to Optical Converter, CWDM Laser, VistaLINK®  | 348                |
| 7707EODxxx-E3<br>7707ET13M-W   | E3 Electrical to Optical Converter, DWDM Laser, VistaLINK®  | 336-337            |
| 7707ET15W-VV   | Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®  |                    |
| 7707ET13-F2  | Ethernet Fiber Transceiver - Dual Fiber, 1310nm, FP Laser, VistaLINK® Monitoring  | 336-337            |
| 7707ETxx-F2  | Ethernet Fiber Transceiver - Dual Fiber, CWDM, DFB Laser, VistaLINK® Monitoring   |                    |
| 7707ETDxxx-F2<br>7707ET13M-TE1-W   | Ethernet Fiber Transceiver, dual fiber, DWDM TX, VistaLINK®   |                    |
| 7707ET15W=1E1=W  | Ethernet & T1/E1/J1 Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®   |                    |
| 7707ET13-TE1-F2  | Ethernet and TI/EI/J1 Fiber Transceiver, Dual Fiber, 1310 nm, FP Laser, VistaLINK®  |                    |
| 7707ETxx-TE1-F2  | Ethernet and TI/EI/J1 Fiber Transceiver, Dual Fiber, CWDM, DFB Laser, VistaLINK®  |                    |
| 7707ETDxxx-TE1-F2<br>7707ET13M-4-W   | Ethernet & T1/E1/J1 Fiber Transceiver, dual fiber, DWDM TX, VistaLINK®  |                    |
| 7707ET15-4-W   | Quad Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm   |                    |
| 7707ET13-4-F2  | Quad Ethernet Fiber Transceiver, dual fiber, 1310nm FP TX & RX  |                    |
| 7707ETxx-4-F2  | Quad Ethernet Fiber Transceiver, dual fiber, CWDM TX  |                    |
| 7707ETxx-4-F2-H<br>7707ETDxxx-4-HD-F2  | Quad Ethernet Fiber Transceiver, dual fiber, CWDM TX, High Sensitivity RX   |                    |
| 7707ETDxxx-4-HD-F2-H   | Quad Ethernet Fiber Transceiver, dual fiber, DWDM TX, High Sensitivity RX   |                    |
| 7707GPS-DR13-F2  | Dual GPS Data Fiber Receiver, 1310nm FP Tx and Rx   | 345                |
| 7707GPS-DR15-F2  | Dual GPS Data Fiber Receiver, 1550nm DFB Tx and Rx  | 345                |
| 7707GPS-DT13-F2<br>7707GPS-DT15-F2   | Dual GPS Data Fiber Transmitter, 1310nm FP Tx and Rx  | 344                |
| 7707GF3-D113-F2<br>7707GT13M-W   | Gigabit Ethernet Fiber Transceiver, single fiber, WDM, 1310nm DFB TX, RX on 1550nm, VistaLINK®  |                    |
| 7707GT15-W   | Gigabit Ethernet Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm, VistaLINK®  | 342-343            |
| 7707GT13-F2  | Gigabit Ethernet Fiber Transceiver, dual fiber, 1310nm FP TX & RX, VistaLINK®   |                    |
| 7707GTxx-F2-H  | Gigabit Ethernet Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®   |                    |
| 7707GTxx-F2-H<br>7707GTDxxx-F2   | Gigabit Ethernet Fiber Transceiver, dual liber, CWDM TX, High Sensitivity KX, VistaLiNK®  | 342-343            |
| 7707GTDxxx-F2-H  | Gigabit Ethernet Fiber Transceiver, dual fiber, DWDM TX, High Sensitivity RX, VistaLINK®  | 342-343            |
| 7707IFRA   | 70/140MHz IF Fiber Receiver, VistaLINK® Monitoring  | 368-369            |
| 7707IFRA-H<br>7707IFTA13   | 70/140MHz IF High Sensitivity Fiber Receiver, VistaLINK® Monitoring   | 366-36             |
| 7707IFTA13<br>7707IFTA13L  | IOTOTILITE LASEI, OHOIL IO MICUIUII HAUI  | 000-00             |
| 7707IFTA15   | 1310nm DFB Laser, Medium Haul   | 366-367            |
| 770711 17413   | 1310nm DFB Laser, Medium Haul   | 366-367            |
| 7707IFTAxx   | 1550nm DFB Laser, Long Haul   | 366-36<br>366-36   |
|  | 1550nm DFB Laser, Long Haul   | 366-36<br>366-36   |



| 7707IT1E 2 W                                     | 2 Channel Intercom Fiber Transcriver, simple fiber WDM 1550 DED TV DV as 1210  | 200 200   |
|--|--|---|
| 7707IT15-3-W<br>7707IT13-3-F2                    | 3 Channel Intercom Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm   |   |
| 7707IT13-3-F2<br>7707IT13M-8-W                   | 3 Channel Intercom Fiber Transceiver, dual fiber, 1310nm FP TX & RX  |   |
| 7707IT15W-6-W                                    | 8 Channel Intercom Fiber Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm  |   |
| 7707IT13-8-W                                     | 8 Channel Intercom Fiber Transceiver, single liber, WDM, 1550nm DFB 1X, RX on 1510nm   |   |
| 7707ITxx-3-F2                                    | 3 Channel Intercom Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®  |   |
| 7707ITxx-8-F2                                    | 8 Channel Intercom Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®  |   |
| 7707ITDxxx-3-F2                                  | 3 Channel Intercom Fiber Transceiver, dual fiber, DWDM TX, VistaLINK®  |   |
| 7707ITDxxx-8-F2                                  | 8 Channel Intercom Fiber Transceiver, dual fiber, DWDM TX, VistaLINK®  |   |
| 7707LR   | L-Band Satellite Fiber Receiver, VistaLINK® Monitoring   |   |
| 7707LR-H   | L-Band High Sensitivity Satellite Fiber Receiver, VistaLINK® Monitoring  |   |
| 7707LR-WB  |  |   |
|  | L-Band Satellite Fiber Receiver, Wideband  |   |
| 7707LR-H-WB                                      | L-Band High Sensitivity Satellite Fiber Receiver, Wideband   |   |
| 7707LTA13  | 1310nm, FP Laser, Short to Medium Haul   |   |
| 7707LTA13L                                       |  |   |
| 7707LTA15  | 1550nm, DFB Laser, Long Haul   |   |
| 7707LTA13-WB                                     | 1310nm, FP Laser, Short to Medium Haul, Wideband   |   |
| 7707LTA13L-WB                                    | 1310nm, DFB Laser, Medium Haul, Wideband   |   |
| 7707LTA15-WB                                     | 1550nm, DFB Laser, Long Haul, Wideband   | 374-375   |
| 7707LTAxx  | L-Band Satellite Fiber Transmitter, CWDM wavelength,   |   |
| 7707LTAxx-WB                                     | L-Band Satellite Fiber Transmitter, CWDM wavelength, Wideband  |   |
| 7707LTADxxx                                      | L-Band Satellite Fiber Transmitter, DWDM wavelength,   |   |
| 7707MB13M-W                                      | Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm, VistaLINK®   | 306-307   |
| 7707MB15-W                                       | Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, single fiber, WDM, 1550nm DFB TX, RX on 1310nm,   |   |
|  | VistaLINK® (use with 7707MB13M-W)  | 306-307   |
| 7707MB13-F2                                      | Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual fiber, 1310nm FP TX & RX, VistaLINK®   |   |
| 7707MBxx-F2                                      | Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual fiber, CWDM TX, VistaLINK®   |   |
| 7707MBDxxx-F2                                    | Bi-directional SDI, 2 AES, RS232/422, GPI/O Fiber Transceiver, dual fiber, DWDM Laser, VistaLINK®  |   |
| 7707MB-BHP-15                                    | Bulkhead Breakout Panel for 15 x 7707MB cards (includes 15 - 3 ft. cables)   |   |
| 7707MB-BHP-15-B                                  | Bulkhead Breakout Panel for 15 x 7707MB cards (includes 15 3 ft. cables) for balanced audio only   | 306-307   |
| 7707MX-BHP-1                                     | Bulkhead Breakout Panel for 1 x 7707MB card (includes 1 3ft cable)   | 306-307   |
| 7707MR13M-W                                      | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, single fiber, WDM, 1310nm FP TX, RX on 1550nm VistaLINK®   | 304-305   |
| 7707MR13-F2                                      | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, 1310nm FP TX & RX, VistaLINK®  | 304-305   |
| 7707MRxx-F2                                      | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, CWDM TX, VistaLINK®  | 304-305   |
| 7707MRDxxx-F2                                    | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, DWDM Laser, VistaLINK®   | 304-305   |
| 7707MRA13-HD-F2                                  | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, 1310nm FP Tx & Rx, VistaLINK®   | 324-325   |
| 7707MRA13-HD-W                                   | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, single fiber, WDM, 1310nm FP Tx, Rx on 1550nm, VistaLINK®   |   |
|  | (Use with 7707MTA15-HD-W)  | 324-325   |
| 7707MRAxx-HD-F2                                  | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, CWDM TX, VistaLINK®   | 324-325   |
| 7707MRAxx-HD-F2-H                                | High Sensitivity Receiver  | 324-325   |
| 7707MRADxxx-HD-F2                                | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Receiver, dual fiber, DWDM Tx, VistaLINK®   | 324-325   |
| 7707MRADxxx-HD-F2-H                              | High Sensitivity Receiver  | 324-325   |
| 7707MT15-W                                       | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter single fiber, WDM, 1550nm FP TX, RX on 1310nm VistaLINK®   | 302-303   |
| 7707MT13-F2                                      | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual fiber, 1310nm FP TX & RX, VistaLINK®  | 302-303   |
| 7707MTxx-F2                                      | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual fiber, CWDM TX, VistaLINK®  | 302-303   |
| 7707MTDxxx-F2                                    | SDI, 2 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter dual fiber, DWDM Laser, VistaLINK®   | 302-303   |
| 7707MTA13-HD-F2                                  | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, 1310nm FP Tx & Rx, VistaLINK®  | 302-303   |
| 7707MTA15-HD-W                                   | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, single fiber, WDM, 1550nm DFB Tx, Rx on 1310nm, VistaLINK®   | 502-505   |
| ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,          | (Use with 7707MRA13-HD-W)  | 326-327   |
| 7707MTAxx-HD-F2                                  | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, CWDM Tx, VistaLINK®  | 326-327   |
| 7707MTAxx-HD-F2-H                                | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, CWDM Tx, High Sensitivity, VistaLINK®  |   |
| 7707MTADxxx-HD-F2                                | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, DWDM Tx, VistaLINK®  |   |
| 7707MTADxxx-HD-F2-H                              | HD-SDI, 4 AES, Bi-directional RS232/422, GPI/O Fiber Transmitter, dual fiber, DWDM Tx, VisiaElfNt®   |   |
| 77070E   | SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK® Monitoring  |   |
| 7707OE-3   | Triple SDI Optical to Electrical Converter, 19.4Mb/s or 143-540Mb/s, VistaLINK®  |   |
| 7707OE-5<br>7707OE-E3                            | E3 Optical to Electrical Converter, VistaLINK®   |   |
| 7707OE-23<br>7707OE-3-HD                         |  | A CARLO DE LA CARLO DEL CARLO DE LA CARLO DE LA CARLO DEL CARLO DE LA CARONDO DE LA CARLO |
| 7707OE-3-11D<br>7707OE-DS3                       | Triple HD or SD Optical to Electrical Converter, 19.4Mb/s or 143Mb/s -1.485Gb/s, VistaLINK®  |   |
| 77070E-DS3<br>77070E-HD                          | DS3 Optical to Electrical Converter, VistaLINK® Monitoring   | 347   |
| 7707OE-HD-H                                      |  |   |
| 7707OC-11D-11<br>7707OO13                        | HDTV Optical to Electrical Converter, 19.4Mb/s to 1.5Gb/s, High Sensitivity receiver, VistaLINK® monitoring  |   |
| 77070015   | Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, 1310nm FP output Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, 1550nm DFB laser output |   |
| 77070013<br>770700xx                             | Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, 1550nm DFB laser output Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, CWDM output      |   |
| 7707OOXX<br>7707OODxxx                           | Optical Regenerator / Wavelength Converter for rates to 540Mb/s, 1270nm to 1610nm input, CWDM output   |   |
| 7707OODXXX<br>7707OO13-2-OC                      |  |   |
| 77070015-2-0C<br>77070015-2-0C                   | Optical to Optical Wavelength Shifter/Regenerator, 1310nm FP Laser and Standard Receiver, VistaLINK®   | 378-379   |
| 77070015-2-0C<br>77070015-2L-0C                  | Optical to Optical Wavelength Shifter/Regenerator, 1550nm DFB Laser and Standard Receiver, VistaLINK®  | 378-379<br>378-379  |
| 7707OOxx-2-OC                                    | Optical to Optical Wavelength Shifter/Regenerator, 1930/III FF Laser, Dual Line, VistaLink®  |   |
| 7707OOxx-2-OC<br>7707OOxx/yy-2L-OC               | Optical to Optical Wavelength Shifter/Regenerator, CWDM DFB Laser and Standard Receiver, VistaLINK®  | 378-379   |
| 7707OOxx/yy-2L-OC<br>7707OOxx-2-OC-H             | Optical to Optical Wavelength Shifter/Regenerator, CWDM DFB Laser, Dual Line, Standard Receiver, VistaLINK®  | 378-379   |
| 7707OOXX-2-OC-H                                  |  | 378-379   |
| 7707OODxxx-2-OC<br>7707OODxxx/Dyyy-2L-OC         | Optical to Optical Wavelength Shifter/Regenerator, DWDM Laser, Dual Line, Standard Receiver, Vistal INK®   | 378-379   |
| 7707OODxxx/Dyyy-2L-OC<br>7707OODxxx-2-OC-H       | Optical to Optical Wavelength Shifter/Regenerator, DWDM Laser, Dual Line, Standard Receiver, VistaLINK®  | 378-379   |
| 7707OODxxx-2-OC-H                                | Optical to Optical Wavelength Shifter/Regenerator, DWDM DFB Laser, Fligh Sensitivity Receiver, VistaLINK®  | 378-379   |
| 770700DXXX/Dyyy-2L-0C-H                          |  | 378-379   |
| 77070015-2L-3G<br>77070015-2L-3G                 | Dual Optical to Optical Wavelength Shifter/Regenerator, 1310nm FP Standard Receiver, VistaLINK®  |   |
| 77070015-2L-3G<br>770700xx/yy-2L-3G              | Dual Optical to Optical Wavelength Shifter/Regenerator, 1550nm FP Standard Receiver, VistaLINK®  |   |
| 770700xx/yy-2L-3G<br>770700xx/yy-2L-3G-H         | Dual Optical to Optical Wavelength Shifter/Regenerator, CWDM DFB Laser, Standard Receiver, VistaLINK®  |   |
| 770700xx/yy-2L-3G-H<br>770700Dxxx/Dyyy-2L-3G     | Dual Optical to Optical Wavelength Shifter/Regenerator, CWDM DFB Laser, High Sensitivity Receiver, VistaLINK®  |   |
| 7707OODxxx/Dyyy-2L-3G<br>7707OODxxx/Dyyy-2L-3G-H | Dual Optical to Optical Wavelength Shifter/Regenerator, DWDM DFB Laser, Standard Receiver, VistaLINK®  |   |
| 770700DXXX/Dyyy-2L-3G-H<br>77070013-HD           | Dual Optical to Optical Wavelength Shifter/Regenerator, DWDM DFB Laser, High Sensitivity Receiver, VistaLINK®  |   |
| 77070013-HD<br>77070015-HD                       | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, 1310nm FP output  |   |
|  | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, 1550nm DFB Laser output   |   |
| 7707OOxx HD H                                    | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, CWDM output   |   |
| 7707OOXx-HD-H                                    | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, High Sensitivity (-28 dBm) input, CWDM output   |   |
| 7707OODxxx-HD<br>7707OODxxx-HD-H                 | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, 1270nm to 1610nm input, DWDM output   |   |
| COLOR BUNYY-HILL-H                               | Optical Regenerator / Wavelength Converter for rates to 1.5Gb/s, High Sensitivity (-28dBm) input, DWDM output  | 377   |

| 7707VR-4-HS-H                | Quad SD/Dual HD Demux Fiber Receiver, High sensitivity RX, VistaLINK®   |       | 31  |
|------------------------------|---|-------|-----|
| 7707VR-8                     | Eight SDI/ASI Demux Fiber Receiver, VistaLINK®  |       | 30  |
| 7707VR-8-H                   | Eight SDI/ASI Demux Fiber Receiver, High sensitivity RX (-28dBm), VistaLINK®  |       | 30  |
| 7707VR13-3-HS-OC48           | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Receiver, 1310nm FP Laser, VistaLINK®   | -360- | 36  |
| 7707VR15-3-HS-OC48           |   | -360- | 36  |
| 7707VRxx-3-HS-OC48           |   | -360- |     |
| 7707VRDxxx-3-HS-OC48         |   | -360- |     |
| 7707VR-13-8-OC48             |   | -356- |     |
| 7707VR×x-8-OC48              |   |       |     |
|                              |   | -356- |     |
| 7707VRxx-8-OC48-H            |   | -356- |     |
| 7707VRDxxx-8-OC48            |   | -356- |     |
| 7707VRDxxx-8-OC48-H          |   | -356- | 35  |
| 7707VT13-4                   | Quad SDI/ASI Mux Fiber Transmitter, 1310nm FP, VistaLINK®   |       | 298 |
| 7707VT15-4                   | Quad SDI/ASI Mux Fiber Transmitter, 1550nm DFB, VistaLINK®  |       |     |
| 7707VTxx-4                   | Quad SDI/ASI Mux Fiber Transmitter, CWDM Laser, VistaLINK®  |       | 298 |
| 7707VTDxxx-4                 | Quad SDI/ASI Mux Fiber Transmitter, DWDM Laser, VistaLINK®  |       | 298 |
| 7707VT13-4-HS                | Quad SD/Dual HD Fiber Transmitter, 1310nm FP, VistaLINK®  |       | 314 |
| 7707VT15-4-HS                | Quad SD/Dual HD Fiber Transmitter, 1550nm DFB, VistaLINK®   |       |     |
| 7707VTxx-4-HS                | Quad SD/Dual HD Fiber Transmitter, CWDM Laser, VistaLINK®   |       | 314 |
| 7707VTDxxx-4-HS              | Quad SD/Dual HD Fiber Transmitter, DWDM Laser, VistaLINK®   |       |     |
| 7707VT-13-8                  | Eight SDI/ASI Mux Fiber Transmitter, 1310nm FP, VistaLINK®  |       |     |
| 7707VT-15-8                  |   |       | 300 |
|                              | Eight SDI/ASI Mux Fiber Transmitter, 1550nm DFB, VistaLINK®   |       | 300 |
| 7707VTxx-8                   | Eight SDI/ASI Mux Fiber Transmitter, CWDM Laser, VistaLINK®   |       | 300 |
| 7707VTDxxx-8                 | Eight SDI/ASI Mux Fiber Transmitter, DWDM Laser, VistaLINK®   |       | 300 |
| 7707VT13-3-HS-OC48           | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, 1310nm FP Laser, VistaLINK®  | -358- | 359 |
| 7707VT15-3-HS-OC48           | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, 1550nm DFB Laser, VistaLINK®   | -358- | 359 |
| 7707VTxx-3-HS-OC48           | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, CWDM DFB Laser, VistaLINK®   | -358- | 359 |
| 7707VTDxxx3-HS-OC48          | Triple SDI/Single HD-SDI + Ethernet SONET/SDH Fiber Transmitter, DWDM DFB Laser, VistaLINK®   | -358- | 359 |
| 7707VT13-8-OC48              |   | -354- |     |
| 7707VTxx-8-OC48              |   | -354- |     |
| 7707VTxx-8-OC48-H            |   | -354- |     |
| 7707VTDxxx-8-OC48            |   | -354- |     |
| 7707VTDxxx-8-OC48-H          | Eight Channel SDI + Ethernet SONET/SDH Fiber Transmitter, DWDM DFB Laser, High Sensitivity Receiver, VistaLINK®   |       |     |
| 7708LRA                      | C 107 AVICE AVICA AVICE AVICA AVICA AVICE AVICA AVICE AVICA AVICE AVICA AVICE AVICA AVICE AVICE AVICE AVICE |       |     |
| 7708LRA-B50                  | L-Band Fiber Receiver with VistaLINK® and Smartmon™   |       | 372 |
|                              | L-Band Fiber Receiver with VistaLINK® and Smartmon™, 50Ω BNC connectors   |       |     |
| 7708LR-H                     | High Sensitivity L-Band Fiber Receiver with VistaLINK® and Smartmon™  |       |     |
| 7708LR-H-B50                 | L-Band Fiber Receiver with VistaLINK® and Smartmon™, 50Ω BNC connectors   |       |     |
| 7708LT-13                    | L-Band Fiber Transmitter, 310nm FP laser, SmartMON™, VistaLINK®   |       | 373 |
| 7708LT-13-B50                | L-Band Fiber Transmitter, 1310nm FP laser, 50. BNC Connectors, SmartMON™, VistaLINK®  |       | 373 |
| 7708LT-27 to 61              | L-Band Fiber Transmitter, CWDM DFB laser, SmartMON™, VistaLINK®   |       | 373 |
| 7708LT-27 to 61-B50          | L-Band Fiber Transmitter, CWDM DFB laser, 50. BNC Connectors, SmartMON™, VistaLINK®   |       | 373 |
| 7710ARC                      | SD Aspect Ratio Converter   | -168- | 169 |
| 7710ARC-F                    |   | 168-  |     |
| 7710DCDA-HD                  | HD Downconverter and Distribution Amplifier (4HD reclocked 1.5Gb/s, selectable 3 SD SDI outputs or 3 composite analog outputs) -  |       |     |
| 7710NR-HD                    | HD Noise Reducer with Image Enhancement   |       |     |
| 7710UC-KF                    | HD Key/Fill Upconverter   |       | 170 |
| 7710XC-HD                    | HD Cross Converter with VANC and Embedded Audio support   |       |     |
| 7710XC-AES4-HD               |   |       |     |
| 7710XUC-HD                   | HD Cross Converter with VANC, Embedded Audio and discrete AES support   |       |     |
|                              |   | 176-  |     |
| 7710XUC-AES4-HD              | HD Format Up/Down/Cross Converter with external AES   |       |     |
| 7710XUDC-AES4-HD             |   | 176-  |     |
| 7711UC-HD                    | HD upconverter (with noise reduction and image enhancement)   |       |     |
| 7711UC-AES4-HD               | HD upconverter (with noise reduction and image enhancement) and External AES  |       |     |
| 7713HDC                      | Downconverter and Distribution Amplifier  | 180-  | 181 |
| 7714HDC                      | High Quality Downconverter  | 182-  | 183 |
| 7720AD-A4                    | SD-SDI AES Audio De-embedder with 2 unbalanced AES outputs and 4 analog audio outputs   |       | 188 |
| 7720AD-B-A4-LTC              | SD-SDI AES Audio De-embedder with 2 balanced AES outputs, 4 analog audio outputs and VITC to LTC Translator   |       |     |
| 7720AD4                      | SD-SDI AES Audio De-embedder with 4 unbalanced AES outputs (2 audio groups)   |       |     |
| 7720AD4-B                    | SD-SDI AES Audio De-embedder with 4 balanced AES outputs (2 audio groups)   |       |     |
| 7720ADC-A4                   | Quad Analog Audio to Dual AES Converter   |       |     |
| 7720ADC-A4-B                 | Quad Analog Audio to Dual Balanced AES Converter  |       |     |
| 720ADC-A4-B<br>7720AD8-DD-HD |   |       |     |
| 720AD8-DD-HD<br>7720AE4      | HD/SD-SDI Audio De-embedder & Dolby E™/AC-3 Decoder & Re-embedder   |       |     |
|                              | SD-SDI 4 AES Audio Embedder   |       |     |
| 7720AM-AES4 B                | Quad AES Audio, Mixer, Delay, Audio Swapper   |       |     |
| 7720AM-AES4-B                | Quad AES Audio, Mixer, Delay, Audio Swapper   |       | 186 |

| 7720DAC-A4                 | Dual AES to Quad Analog Audio Converter  |           |
|----------------------------|--|-----------|
| 7720DAC-A4-B               | Dual AES to Quad Analog Audio Converter with 2 balanced AES inputs   |           |
| 7721AD4-HD                 | HD-SDI Audio De-embedded with 4 Unbalanced AES Outputs   |           |
| 7721AD4-B-HD               | HD-SDI Audio De-embedded with 4 balanced AES Outputs   |           |
| 7721AD8-HD                 | HD/SD 8 AES (16 Channel) Audio De-embedder   |           |
| 7721AD8-B-HD               | HD/SD-SDI 8 Balanced AES (16 channel) Audio De-embedder  |           |
| 7721AD8-3G<br>7721AD-A4-HD | 3G/HD/SD 8 AES (16 channel) Audio De-embedder  |           |
| 7721AD-A4-HD<br>7721AE-A4  | HD-SDI Audio De-embedder with 2 Unbalanced AES and 4 Analog Audio Outputs                                      |           |
|                            | HD-SDI 4 AES Audio Embedder  |           |
| 7721AE4-HD                 | HD-SDI 4 AES Audio Embedder  |           |
| 7721AE4-B-HD               |  |           |
| 7721AE-A4-HD               | HD/SD Analog Audio Embedder  |           |
| 7721AE8-AC3E-HD            | HD/SD-SDI 8 AES Audio Embedder with Dolby Digital (AC-3) Encoder   |           |
| 7721AE8-HD                 | HD/SD-SDI 8 AES (16 Channel) Audio Embedder  |           |
| 7721AE8-B-HD               | HD/SD-SDI 8 Balanced AES (16 Channel) Audio Embedder   | 195       |
| 7721AE8-DEE-HD             | HD/SD-SDI Audio Embedder & Dolby E™ Encoder  |           |
| 7721AE8-3G                 | 3G/HD/SD-SDI 8 AES (16 channel) Audio Embedder   | 198-199   |
| 7721DD4-HD                 | HD/SD-SDI Quad Serial Data De-embedder   |           |
| 7721DE4-HD                 | HD/SD-SDI Quad Serial Data Embedder  |           |
| 7725VBI-K-HD               | HD/SD VBI Sidechain Bridge/Keyer   |           |
| 7730ADC                    | Component Analog Video to SDI Converter  |           |
| 7730ADC-A4                 | Component Analog Video to SDI converter with 4 channel analog audio converter/embedder                         |           |
| 7730ADC-HD                 | HD Component Analog Video to HD SDI converter  |           |
| 7730ADC-A4-HD              | HD Component Analog Video to HD SDI converter with a 4 analog audio converter/embedder                         |           |
| 7730DAC                    | SDI D to A Component Analog Video Converter  |           |
| 7730DAC-A4                 | SDI D to A Component Analog Video Converter with a four-channel Analog Audio converter/embedder                |           |
| 7731DAC-HD                 | HD SDI to HD Component Analog or (optional VGA) Converter  |           |
| 7732DVP-HD                 | HD Dual Link Video Processor   |           |
| 7732DVP-3D-HD              | 3D HD Video Processor  |           |
| 7732PFT-HD                 | HDTV Progressive Format Translator   |           |
| 7736CD2                    | Dual Component Decoder   |           |
| 7736CD2-A4                 | Dual Component Decoder with 4 analog outputs   |           |
| 7736CD2-A8                 | Dual Component Decoder with 8 analog outputs   | 218-219   |
| 7736CE2                    | Dual Composite Encoder   |           |
| 7736CE2-A4                 | Dual Composite Encoder with 4 analog outputs   |           |
| 7736CE2-A8                 | Dual Composite Encoder with 8 analog outputs   | 215-217   |
| 7743DLY-HD                 | HD/SD-SDI Video Delay  | 236       |
| 7746FSE                    | SD-SDI Frame Synchronizer  | 220 - 221 |
| 7746FS-EAES4               | SD-SDI Frame Synchronizer with 4 AES Audio Processing Support  | 220-221   |
| 7746FSE-GPI                | SD-SDI Frame Synchronizer with GPI   | 222-223   |
| 7746FSE-GPI-HD             | HD/SD-SDI Frame Synchronizer with GPI  | 224-225   |
| 7746FSE-HD                 | HD/SD Frame Synchronizer   | 226 - 227 |
| 7746FS-EAES4-HD            | HD/SD Frame Synchronizer with 4 AES Audio Pairs and Embedded Audio Processing & AES Support                    |           |
| 7746FS-EAES8-HD            | HD/SD-SDI Frame Synchronizer with Embedded Audio Processing & 8 AES Support                                    |           |
| 7746FS-EAES8-DD-HD         | HD/SD-SDI Frame Synchronizer with Dolby E™/AC-3 Decoder & 8 AES Support  | 232 - 233 |
| 7746FS-EAES8-DD-AC3E-HD    | HD/SD-SDI 8 AES Frame Synchronizer with Dolby Decoder and Dolby Digital (AC-3) Encoder                         |           |
| 7746FS-EAES8-3G            | 3G/HD/SD-SDI Frame Synchronizer with Embedded Audio Processing & 8 AES Support                                 |           |
| 7751SRG-HD                 | HD Tri-Level Sync Generator  | 407       |
| 7750TG                     | SDI Test Signal Generator  | 408       |
| 7750TG-TS                  | SMPTE 310M/DVB-ASI Transport Stream Generator  |           |
| 7751TG2-HD                 | Dual HD Test Signal Generator with embedded audio  | 405       |
| 7751TG2-CF-HD              | HD Test Signal Generator with Trouble Slide  |           |
| 7760AVM2-A (A to B)        | SDI Video & Audio Monitor/Conversion with On Screen Display (Single Slot) with Teletext subtitle decoder       |           |
| 7760AVM2-HD                | HD Video & Audio Monitoring  | 124-125   |
| 7760AVM-Lite A & B         | SDI Video & Audio Monitoring/Conversion (A for AES Output; B for AES Input)                                    | 126       |
| 7760VMS-HD                 | HD Video Monitoring Splitter   | 127       |
| 7760AVM-BHP-10             | Bulkhead Breakout Panel for 10x7760AVMs (includes 10-3ft cables)   | 130-131   |
| 7760AVM-BHP-5              | Bulkhead Breakout Panel for 5x7760AVMs (includes 5-3ft cables)   | 130-131   |
| 7760CCM-HD                 | HD-SDI/SD-SDI Closed Caption CEA-608 / CEA-708 Translator  |           |
| 7761AVM2-DC                | Dual Channel Video & Analog Audio Monitoring   | 128-129   |
| 7761AVM2-SDC               | Dual Channel S-Video & Analog Audio Monitoring   | 128-129   |
| 7761AVM2-SDC-S             | Dual S-Video & Analog Audio Monitoring with Dual S-Video Outputs   | 128-129   |
| 7761AVM-DC-BHP-15          | Bulkhead Breakout Panel for 15x7761AVM-DCs (includes 15-3ft cables)  | 130-131   |
| 7767VIP4-HSN               | 4 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I                                 | 42-43     |
| 7767VIP4-HSN-G             | 4 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output  |           |
| 7767VIP4-SN                | 4 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHVI)                  |           |
| 7767VIP8-HSN               | 8 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I                                 |           |
| 7767VIP8-HSN-G             | 8 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output  |           |
| 7767VIP8-SN                | 8 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I (DVI-D or RGBHVI)                  |           |
| 7767VIP12-HSN              | 12 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I                                |           |
| 7767VIP12-HSN-G            | 12 asynchronous HD/SD/NTSC/PAL inputs with embedded audio, one background DVI-I & single built-in fiber output |           |
| 7767VIP12-SN               | 12 asynchronous SD/NTSC/PAL inputs with embedded audio, one background DVI-I                                   |           |
| 7767VIP-AI-BAL             | Discrete balanced AES/EBU audio or Analog audio input breakout panel (2RU)                                     |           |
| 7767VIP-AI-U               | Discrete unbalanced AES/EBU audio input (4 AES per video input) breakout panel (2RU)                           |           |
| 7767VIP-BHP-AUX            | BHP GPI/O and AUX Breakout   |           |
| 7772MFD-HD                 | HD JPEG 2000 De-Compression CODEC  |           |
| 7772MFC-HD                 | HD JPEG 2000 Compression CODEC   |           |
| 7772MFX-HD                 | HD JPEG 2000 HD/SD Encoder and decoder   | 402-403   |
| 7780TSM-ASI                | MPEG2/H.264 ASI Transport Stream Monitor   | 392-393   |
| 7780TSM-IP                 | MPEG2/H.264 IP Transport Stream Monitor  | 392-393   |
| 7780ASI-IP2                | Dual Channel ASI to IP Encapsulator  | 394       |
| 7780DLY-ASI                | ASI Delay  | 395       |
| 7780IP-ASI2                | Dual Channel IP to ASI De-encapsultop  | 396       |
| 7780M4-ASI                 | Quad ASI TDM-Mux   | 397       |
| 7780R2x1-ASI-CS            | Compressed TS Automatic Smart Switch   | 398       |
| 7780R2x1-ASI-CS2           | Dual Compressed TS Automatic Smart Switch  | 399       |
| 8010TM                     | SDI Time Code Generator/Reader with Character Inserter   |           |
| 8010TM-IRIG                | SDI Time Code Generator with IRIG Reader   |           |
| 8083XDS-AD                 | Analog & SD-SDI XDS Encoder  |           |
| 8084                       | SD-SDI Closed Caption Encoder  | 453       |
| 8084AD                     | Analog & SD-SDI Closed Caption Encoder   | 45        |
| 9000DWDM-D32               | 32 Ch DWDM Demux, 100Ghz spacing, 1RU enclosure  | 38        |
|                            |  |           |

| 00000014/014 1400  | 40 Ch DWDM Demux, 100Ghz spacing, 1RU enclosure   | -387  |
|--|---|---|
| 9000DWDM-M32   | 32 Ch DWDM Mux, 100Ghz spacing, 1RU enclosure   |   |
| 9000DWDM-M40<br>9000EDFA-B,-L & P  | Erbium Doped Fiber Amplifiers   |   |
| 9000NCP  | VistaLINK® Network Control Panel (includes Monitoring Toolkit CD-ROM) (1RU)   | -138  |
| 9000NCP2<br>9590   | VistaLINK® Network Control Panel (includes Monitoring Toolkit CD-ROM) (2RU)   |   |
| 9725LG   | SDI Digital Graticule Generator   |   |
| 9725LGA  | SDI Media Inserter System14   | 4-15  |
| AESIMP-1M<br>AESIMP-6F6M   | In-line transformer with a single BNC to a single male  | 187   |
| AN9725LG   | Logo Inserter System  | 7-18  |
| CaptionWare  | Closed Caption and XDS Configuration Utility  | 451   |
| CB-FP1M-SCPC<br>CB-FP1M-STPC   | Single Mode Fiber Cable, 1m, SC/PC male termination   |   |
| CB-FP5M-SCPC   | Single Mode Fiber Cable, 5m, SC/PC male termination   |   |
| CB-FP5M-STPC   | Single Mode Fiber Cable, 5m, ST/PC male termination   |   |
| CB-FP10M-SCPC<br>CB-FP10M-STPC   | Single Mode Fiber Cable, 10m, SC/PC male termination  |   |
| CI-0001  | RS232/422 Serial Interface Card   |   |
| CI-0001-1  | RS232/422 Serial Card Mod   |   |
| CI-0004<br>CP-1000E  | Multi Q-Link Card   |   |
| CP-1600A   | Remote mini XY panel, BPS   | 100   |
| CP-1600A-LP  | Local Mini XY Panel, BPS  |   |
| CP1601A<br>CP-1601A-LP   | Remote Panel, multi-mode 16 BPS and Lock  |   |
| CP-1601A-P   | Remote Passive Panel, 16 BPS and Lock   | 100   |
| CP-1604<br>CP-2024E  | Remote multi-mode panel, 20 button per source   |   |
| CP-2024E<br>CP-2032E   | Intelligent Remote Panel, 2RU 24 buttons  |   |
| CP-2048E   | Intelligent Remote Panel, 2RU 48 buttons  | 104   |
| CP-2200E<br>CP-2402  | Advanced Display Remote Control Panel. 2RU105& Remote Control Panel   |   |
| CP-2402-LP   | Local Control Panel   |   |
| CP-3200E   | Remote Panel with keypad and display  |   |
| CP-3201<br>CP-3201-P   | Remote Control Panel, multi-mode, 40 button per source  |   |
| CP-3208E   | Remote Control Panel, eight destination, 32 button per source   |   |
| CP-3216-PR   | Programmable Video/Audio Proc Control Panel107&   | 141   |
| CP-6400E<br>CP-6401E   | Remote Display Panel, XY, keypad  |   |
| CP-6402E,6404E,6406E,6408E   | Remote Control Panel, 2,4,6 & 8 destinations  |   |
| CWDM & DWDM Options  | CWDM & DWDM Wavelength Ordering Information   |   |
| ECAS-HD<br>ECAS-1394-HD  | Camera Adapter for HDCAM Sony cameras   |   |
| ECAS-LEMO-HD   | Camera Adapter with fiber optic I/O for HDCAM Sony cameras, LEMO fiber connector  |   |
| ECAS-1394-LEMO-HD<br>ECAX-HD   | Camera Adapter with 1394A I/O and fibre optic I/O for HDCAM Sony cameras - LEMO fiber connector   |   |
| ECAX-HD<br>ECAX-1394-HD  | Camera Adapter for XDCAM-HD Sony cameras  |   |
| ECAX-LEMO-HD   | Camera Adapter with fiber optic I/O for HDCAM-HD Sony cameras, LEMO fiber connector   | 499   |
| ECAX-1394-LEMO-HD<br>ECAP-HD   | Camera Adapter with 1 394A I/O and fiber optic I/O for XDCAM-HD Sony cameras-LEMO fiber connector   | 499   |
|  | I amera enanter for filling definition panaconic camprac  |   |
| ECAP-LEMO-HD   | Camera Adapter for high definition Panasonic cameras  | 499   |
| ECAP-1394-HD   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499   |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499  |
| ECAP-1394-HD   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499   |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD<br>ECB-LEMO-HD<br>ECB-CP-LEMO-HD<br>ECA-PS   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499   |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD<br>ECB-LEMO-HD<br>ECB-CP-LEMO-HD   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD<br>ECB-LEMO-HD<br>ECB-CP-LEMO-HD<br>ECA-PS<br>ECA-PS-160   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD<br>ECB-LEMO-HD<br>ECB-CP-LEMO-HD<br>ECA-PS<br>ECA-PS-160<br>EQT-3232H<br>EQT-3232H-R   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector 498- Camera Adapter with 1394A I/O and fibre optic I/O for HD Panasonic cameras - LEMO fiber connector   | 499<br>499<br>499<br>499<br>499<br>0-71   |
| ECAP-1394-HD<br>ECAP-1394-LEMO-HD<br>ECB-LEMO-HD<br>ECB-CP-LEMO-HD<br>ECA-PS<br>ECA-PS-160<br>EQT-3232H  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>0-71<br>0-71   |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R EQT-3232-3G EQT-3232-3G-R  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector 498- Camera Adapter with 1394A I/O for HD Panasonic cameras 498- Camera Adapter with 1394A I/O and fibre optic I/O for HD Panasonic cameras - LEMO fiber connector 498- Base Station for HD camera adapters - LEMO fiber connector | 499<br>499<br>499<br>499<br>499<br>0-71<br>0-71<br>0-71   |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R EQT-3232-3G EQT-3232-3G EQT-3232-3G-R  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>0-71<br>0-71<br>0-71<br>5<br>0-71  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>0-71<br>0-71<br>0-71<br>6<br>116<br>116<br>1-55                     |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>0-71<br>0-71<br>0-71<br>116<br>116<br>1-55<br>1-55                  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>0-71<br>0-71<br>0-71<br>116<br>116<br>1-55<br>1-55                  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x36-3G-F EQX16-18X18S  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-71<br>1-16<br>1-55<br>1-55<br>1-55<br>1-55        |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX26-18x18-3G EQX16-18X18S EQX16-18X18H  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-71<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55        |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x36-3G-F EQX16-18X18S  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-71<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55        |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX16-18X18S EQX16-18X18H EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55        |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18X18H EQX26-18X18H EQX16-18X18S EQX16-18X18H EQX16-18X18H EQX16-18X18H EQX16-18X18H EQX16-18X18H EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55 |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX16-18X18S EQX16-18X18H EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>1-71<br>1-71<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55<br>1-55        |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX16-18x18S EQX16-18x18S EQX16-18x18H EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR/5550/UV-3 HD9084  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX26-18x18H EQX16-18x18S EQX16-18x18H EQX16-18x18H EQX16-18x18H EQX16-18x18H EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR HDSD9045TR HDSD9045TR   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX16-18x18S EQX16-18x18S EQX16-18x18H EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR/5550/UV-3 HD9084  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX26-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR/5550/UV-3 HD9084 HDSD9155Q HD9626DSK HD9690 HD9690-444                   | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232H-R  EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX26-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR HDSD9045TR HDSD9045TR/5550/UV-3 HD9084 HDSD9155Q HD9626DSK HD9690  | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |
| ECAP-1394-HD ECAP-1394-LEMO-HD ECB-LEMO-HD ECB-CP-LEMO-HD ECA-PS ECA-PS-160 EQT-3232H EQT-3232-3G EQT-3232-3G EQT-3232-3G-R  EQX Server EQX Server-R EQX26-18X18S EQX26-18X18H EQX26-18x18-3G EQX26-18x18-3G EQX26-18x18-3G EQX16-18x18-3G EQX16-18x36-3G-F HD9010TM HD9010TM-IRG HDSD9045TR HDSD9045TR HDSD9045TR HDSD9045TR HDSD9045TR HDSD9045TR HDSD9155Q HD9626DSK HD9690 HD9690-444 HD9725LG | Camera Adapter with fiber optic I/O for HD Panasonic cameras, LEMO fiber connector  | 499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499<br>499  |

| MBL-FCR-TAC4-300  | Cable Reel and 300m TAC4, SMF fiber, Hermaphroditic Connectors   |                              |
|---|--|------------------------------|
| MBL-FCR-TAC4-400  | Cable Reel and 400m TAC4, SMF fiber, Hermaphroditic Connectors   |                              |
| MBL-FCR-TAC4-450<br>MBL-FR-TAC4-500   | Cable Reel and 450m TAC4, SMF fiber, Hermaphroditic Connectors   |                              |
| MBL-FCR-TAC4-500  | Cable Reel and 500m TAC4, SMF fiber, Hermaphroditic Connectors   |                              |
| MBL-IRCBP-TAC4-3-ST   | Breakout Cable Delphi Hermaphroditic TAC4 to ST/PC, 1 meter  |                              |
| MBL-FS3H-TAC4-3-ST  | Breakout cable, Hermaphroditic TAC4 to ST/PC, metal receptacle, SM, 3 foot length  |                              |
| MBL-FCR-TAC6-300  | Cable Reel and 300m TAC6, SMF fiber, Hermaphroditic Connectors   |                              |
| MBL-FS3H-TAC6-3-ST  | Breakout cable, Hermaphroditic TAC6 to ST/PC, metal receptacle, SM, 3 foot length  | 494                          |
| MBL-FCR-TAC12-300   | Cable Reel and 300m TAC12, SMF fiber, Hermaphroditic Connectors  |                              |
| MBL-FS3H-TAC12-3-ST   | Breakout cable, Hermaphroditic TAC12 to ST/PC, metal receptacle, SM, 3 foot length   |                              |
| MBL-FCR-IRC   | Fiber Cable Reel, Impact Resistant Carrying Case   |                              |
| MBL-IRC-420<br>MBL-IRCBH+AB   | Impact Resistant Transit Case  | 495                          |
| MBL-IRCBP-TAC4-3-ST   | Tactical Plastic Receptacle to ST, Delphi Hermaphroditic TAC4, SM, 3 foot length   |                              |
| Overture™   | Overture™ Branding Software  |                              |
| PA-SW-708   | ProCAP Author Software only, 1 Station License, Adds 708 to Base   |                              |
| PA-SW-BASE  | ProCAP Author Software only, 1 Station License, Base CEA-608 Standard  |                              |
| PA-SW-DVD   | ProCAP Author Software only, 1 Station License, Adds DVD to Base   | 456-457                      |
| PA-SW-FULL  | ProCAP Author Software only, 1 Station License, All Options  |                              |
| PC-HW   | ProCAP Capture Hardware and Third Party Software   |                              |
| PCT-HW-TC   | ProCAP Transfer PCI Timecode Reader Board  |                              |
| PT-SW   | ProCAP Transfer Software only, 1 Station License, with 1 year supportPl-1604A System Controller with four ports  |                              |
| PT-SW<br>PI-1604A   | ProCAP Transfer Software Only, 1 Station License, with 1 year support  |                              |
| PI-1608A  | System Controller with lour ports  |                              |
| PKG3000MVP-8-SN   | 8 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)   |                              |
|   | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-16-SN  | 16 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | •=                           |
|   | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-24-SN  | 24 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | prof. (1)                    |
| DIVO2000MAN /D 20 CM  | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-32-SN  | 32 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | 07.00                        |
| PKG3000MVP-40-SN  | video inputs, with frame and frame controller, single power supply and single processor/output display module 40 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | 27-32                        |
| 1 1(0300010101 -40-010  | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-48-SN  | 48 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | 27 02                        |
|   | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-56-SN  | 56 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  |                              |
|   | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-64-SN  | 64 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  |                              |
| DICCOOONIND 70 ON   | video inputs, with frame and frame controller, single power supply and single processor/output display module  | 27-32                        |
| PKG3000MVP-72-SN  | 72 auto-detecting SD-SDI (with embedded audio as a standard feature) and Composite Analog (NTSC, PAL)  | 27 22                        |
| PKG9625SW   | video inputs, with frame and frame controller, single power supply and single processor/output display module SD Mini Master Control Switcher Package  |                              |
| PKGHD9625SW   | HD Mini Master Control Switcher Package  | 8-9                          |
| PKGXRF6L-16x16  | 16x16 RF Routing System  | 119-120                      |
| PKGXRF6S-16x16  | 16x16 RF Routing System  | 119-120                      |
| XRF1A-8x8   | 1RU 8x8 RF Router  |                              |
| XRF1A-8x8-LNB   | 1RU 8x8 RF Router with LNB power supply  |                              |
|   |  |                              |
| XRF1A-16x16   | 1RU 16x16 RF Router  | 118                          |
| XRF1A-16x16<br>XRF1A-16x16-LNB  | 1RU 16x16 RF Router  | 118<br>118                   |
| XRF1A-16x16<br>XRF1A-16x16-LNB<br>PROCAP  | 1RU 16x16 RF Router  | 118<br>118<br>456-457        |
| XRF1A-16x16<br>XRF1A-16x16-LNB  | 1RU 16x16 RF Router  | 118<br>118<br>456-457<br>1-7 |
| XRF1A-16x16<br>XRF1A-16x16-LNB<br>PROCAP<br>QMC-MCS   | 1RU 16x16 RF Router  |                              |
| XRF1A-16x16<br>XRF1A-16x16-LNB<br>PROCAP<br>QMC-MCS<br>QMC-DCP  | 1RU 16x16 RF Router  1RU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced   |                              |
| XRF1A-16x16<br>XRF1A-16x16-LNB<br>PROCAP<br>QMC-MCS<br>QMC-DCP<br>QMG<br>QMC-2-SD-U<br>QMC-2-SD-B   | 1RU 16x16 RF Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2   | 1RU 16x16 RF Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U  | 1RU 16x16 RF Router with LNB power supply  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B   | 1RU 16x16 RF Router  1RU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced  SD Master Control Switcher Single channel SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-B  | 1RU 16x16 RF Router  1RU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced  SD Master Control Switcher Single channel SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B   | 1RU 16x16 RF Router  1RU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced  SD Master Control Switcher Single channel SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  16x16 HD/SD High Definition Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H   | 1RU 16x16 RF Router  1RU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced  SD Master Control Switcher Single channel SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio  Additional Switcher/Mixer Channel  16x16 HD/SD High Definition Router  32x32 HD/SD High Definition Router  16x16 SD Router   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S  | 1RU 16x16 RF Router with LNB power supply  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N  | 1RU 16x16 RF Router with LNB power supply  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N  | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 32x32 Analog Video Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA   | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA  | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H  | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 32x32 SD Router 16x16 Analog Video Router 32x32 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-U QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S  | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 32x32 Analog Video Router 32x32 Analog Audio Router 8x2 High Definition Video Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H  | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 32x32 SD Router 16x16 Analog Video Router 32x32 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N  | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 32x32 Analog Audio Router 32x32 Analog Audio Router 8x2 High Definition Video Router 16x1 Serial Video Router 16x1 Analog Video Router 16x2 High Definition Video Router   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H  | 1RU 16x16 RF Router with LNB power supply  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602S Q16-1604-AAS   | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x 16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 SD Router 16x16 SD Router 32x32 Analog Video Router 32x32 Analog Video Router 32x32 Analog Audio Router 32x32 Analog Audio Router 8x2 High Definition Video Router 16x1 Serial Video Router 16x1 Analog Video Router 16x2 High Definition Video Router 16x2 Analog Video Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602S Q16-1604-AAS Q16-1608-AAS  | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Audio Router 16x1 Serial Video Router 16x1 Serial Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Serial Video Router 16x2 Serial Video Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602S Q16-1608-AAS Q16-1608-AAS  | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Chtrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 8x2 High Definition Video Router 16x1 Serial Video Router 16x1 Analog Video Router 16x1 Analog Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x3 Dual Audio Router 16x4 Dual Audio Router 16x6 Dual Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAS   | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 8x2 High Definition Video Router 16x1 Serial Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x3 Analog Video Router 16x4 Dual Audio Router 16x6 Dual Audio Router 16x7 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAS Q16-1616-AAS  | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 BD Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x3 Daul Audio Router 16x6 Dual Audio Router 16x8 Dual Audio Router 16x9 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAS   | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 8x2 High Definition Video Router 16x1 Serial Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x3 Analog Video Router 16x4 Dual Audio Router 16x6 Dual Audio Router 16x7 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602S Q16-1604-AAS Q16-1608-AAS Q16-1616-AAM Q16-3208-AAM Q16-3208-AAM   | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 BD Router 16x16 Analog Video Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Audio Router 16x16 Analog Video Router 16x1 Serial Video Router 16x2 High Definition Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x3 Analog Video Router 16x4 Dual Audio Router 16x6 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 16x8 Dual Audio Router 32x8 Mono or 16x8 Dual Audio Router 32x82 Mono or 16x8 Dual Audio Router 32x82 Mono or 16x8 Dual Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM  | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 16x16 SD Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 8x2 High Definition Video Router 16x1 Analog Video Router 16x1 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x3 Pail Video Router 16x4 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router 32x32 Mono or 16x4 Dual Audio Router   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602B Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAS Q16-1616-AAM Q16-3208-AAM Q16-3216-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-S & Q32-S Q16-1616-AESB   | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer balanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 UD/SD High Definition Router 16x16 SD Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Video Router 32x32 Analog Audio Router 32x32 Analog Audio Router 16x1 Serial Video Router 16x1 Serial Video Router 16x1 Serial Video Router 16x2 High Definition Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x3 Serial Video Router 16x4 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Dual Audio Router 32x38 Mono or 16x4 Dual Audio Router 32x32 Mono or 16x6 Dual Audio Router 32x32 Mono or 16x6 Dual Audio Router 32x32 SD Video & Embedded Audio Router Analog Video Routers 16x16 to 32x32 SD Video & Embedded Audio Router  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3208-AAM Q16-3216-AAM Q16-3232-AAM Q16-3232-AAM Q16-S & Q32-S Q16-1616-AESB Q16-1616-AESB Q16-3232-AESB   | 1RU 16x16 RF Router IRU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer unbalanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 16x16 HD/SD High Definition Router 16x18 SD Router 16x18 SD Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 16x18 Farial Video Router 16x1 Serial Video Router 16x2 Analog Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x18 Dual Audio Router 16x18 Mono or 16x8 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602B Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-S & Q32-N Q16-S & Q32-S Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB  | 1RU 16x16 RF Router  IRU 16x16 RF Router with LNB power supply  Offline Captioning  Master Control Switcher  QMC Desk Cntrol Panel  Quartz Media Graphics  SD Master Control Switcher Single channel SDI switcher/mixer unbalanced  SD Master Control Switcher Single channel SDI switcher/mixer balanced  Additional Switcher/Mixer Channel  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced  HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio  Additional Switcher/Mixer Channel  16x16 HD/SD High Definition Router  32x32 HD/SD High Definition Router  32x32 BD/SD Router  32x32 BR outer  16x16 Analog Video Router  16x16 Analog Video Router  16x16 Analog Video Router  16x16 Analog Video Router  16x1 Serial Video Router  16x2 High Definition Video Router  16x2 High Definition Video Router  16x2 Analog Video Router  16x3 Analog Video Router  16x4 Dual Audio Router  16x6 Dual Audio Router  16x6 Dual Audio Router  16x16 Mono or 16x8 Dual Audio Router  32x32 Mono or 16x4 Dual Audio Router  32x32 Mono or 16x4 Dual Audio Router  32x32 Diyldeo & Embedded Audio Router  Analog Video Routers 16x16 to 32x32  SD Video & Embedded Audio Router  Analog Video Routers 16x16 to 32x32  SD Video & Embedded Audio Router  Analog Video Routers 16x16 to 32x32  SD Video & Embedded Audio Router  Analog Video Routers 16x16 to 32x32  SD Video & Embedded Audio Router                               |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-ABSB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB                                      | 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer unbalanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 D Router 16x16 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 8x2 High Definition Video Router 16x1 Analog Video Router 16x1 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x3 Perial Video Router 16x4 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 16x8 Dual Audio Router 32x32 Mono or 16x8 Dual Audio Router 32x33 Mono or 16x8 Dual Audio Router 32x32 Mono or 16x8 Dual Audio Router 32x32 Digital Audio, 2RU Unrubalanced 32x32 Digital Audio, 2RU Unrubalanced 16x16 Digital Audio, 2RU Unrubalanced  |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601S Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3208-AAM Q16-3208-AAM Q16-3208-AAM Q16-3232-AAM Q16-S & Q32-N Q16-S & Q32-S Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-3232-AESB Q16-1616-AESU Q16-3232-AESB Q16-1616-AESU Q16-3232-AESB | IRU 16x16 RF Router IRU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer unbalanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel HD SDI Switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 DRouter 16x16 SAD Router 32x32 SD Router 16x16 FA analog Video Router 16x16 FA analog Video Router 16x16 Farial Video Router 16x1 Serial Video Router 16x1 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Pigh Definition Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x4 Dual Audio Router 16x4 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Monor of 16x8 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router 32x32 Mono or 16x4 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router 32x32 Digital Audio, 1RU Balanced 16x16 Digital Audio, 2RU Unmbalanced 32x32 Digital Audio, 2RU Unmbalanced 32x32 Digital Audio, 2RU Unmbalanced   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-SD-CH2 QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-ABSB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB                                      | 1RU 16x16 RF Router 1RU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer unbalanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 HD/SD High Definition Router 16x16x16 SDR Router 32x32 SD Router 16x16 Analog Video Router 16x16 Analog Video Router 16x16 Analog Audio Router 32x32 Analog Video Router 16x1 Analog Audio Router 16x1 Analog Video Router 16x2 High Definition Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x3 Serial Video Router 16x6 Dala Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Mono or 8x8 Dual Audio Router 16x16 Mono or 16x8 Dual Audio Router 16x28 Mono or 16x8 Dual Audio Router 16x16 Mono or 16x8 Dual Audio Router 16x232 Signital Audio, 2RU Unabalanced 16x323 Digital Audio, 2RU Unabalanced 16x323 Digital Audio, 2RU Unabalanced 16x8 Analog Video Router   |                              |
| XRF1A-16x16 XRF1A-16x16-LNB PROCAP QMC-MCS QMC-DCP QMG QMC-2-SD-U QMC-2-SD-B QMC-2-HD-U QMC-2-HD-B QMC-2-HD-CH2 QT-1616H QT-3232H QT-1616S QT-3232S QT-1616N QT-3232N QT-1616-AA QT-3232-AA Q-0802H Q-1601S Q-1601N Q-1602H Q-1602N Q-1602S Q16-1604-AAS Q16-1616-AAS Q16-1616-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-3232-AAM Q16-S & Q32-N Q16-S & Q32-S Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESB Q16-1616-AESU Q16-3232-AESB Q16-1604N Q16-3232-AESB  | IRU 16x16 RF Router IRU 16x16 RF Router with LNB power supply Offline Captioning Master Control Switcher QMC Desk Cntrol Panel Quartz Media Graphics SD Master Control Switcher Single channel SDI switcher/mixer unbalanced SD Master Control Switcher Single channel SDI switcher/mixer unbalanced Additional Switcher/Mixer Channel HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer unbalanced HD Master Control Switcher Single channel HD SDI switcher/mixer balanced AES audio Additional Switcher/Mixer Channel HD SDI Switcher/mixer balanced AES audio Additional Switcher/Mixer Channel 16x16 HD/SD High Definition Router 32x32 HD/SD High Definition Router 32x32 DRouter 16x16 SAD Router 32x32 SD Router 16x16 FA analog Video Router 16x16 FA analog Video Router 16x16 Farial Video Router 16x1 Serial Video Router 16x1 Analog Video Router 16x2 Analog Video Router 16x2 Analog Video Router 16x2 Pigh Definition Video Router 16x2 Serial Video Router 16x2 Serial Video Router 16x4 Dual Audio Router 16x4 Dual Audio Router 16x8 Dual Audio Router 16x8 Dual Audio Router 16x16 Monor of 16x8 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router 32x32 Mono or 16x4 Dual Audio Router 32x32 Mono or 16x16 Dual Audio Router 32x32 Digital Audio, 1RU Balanced 16x16 Digital Audio, 2RU Unmbalanced 32x32 Digital Audio, 2RU Unmbalanced 32x32 Digital Audio, 2RU Unmbalanced   |                              |



| Q16-1604S                             | 16x4 Serial Video Router   |                |
|---------------------------------------|--|----------------|
| Q16-1608S                             | 16x8 Serial Video Router   |                |
| Q16-1616S<br>Q16-AES & Q32-AES        | Digital Audio Routers 16x16 to 32x32   |                |
| Q16-AA & Q32-AA                       | Mono & Stereo Analog Audio Routers 16x40 to 32x32  | 94-95          |
| Q32-1604-AAS                          | 16x4 Dual Audio Router, 2RU Frame, Dual Channel  |                |
| Q32-1608-AAS<br>Q32-1616-AAS          | 16x8 Dual Audio Router, 2RU Frame, Dual Channel  | 94-95<br>94-95 |
| Q32-1616-AAM                          | 16x16 Mono or 8x8 Dual Audio Router  | 94-95          |
| Q32-3208-AAM                          | 32x8 Mono or16x4 Dual Audio Router   |                |
| Q32-3216-AAM<br>Q32-3232-AAM          | 32x16 Mono or 16x8 Dual Audio Router   |                |
| Q32-3208-AAS                          | 32x8 Dual or 64x8 Mono Audio Router  |                |
| Q32-3216-AAS                          | 32x16 Dual or 64x16 Mono Audio Router  |                |
| Q32-3232-AAS<br>Q32-1616N             | 32x32 Dual or 64x32 Mono Audio Router  |                |
| Q32-1616N<br>Q32-3216N                | 32x16 Analog Video Router  | 90-91          |
| Q32-3232N                             | 32x32 Analog Video Router  | 90-91          |
| Q32-1616-AESB                         | 16x16 Digital Audio, 2RU Balanced  |                |
| Q32-3232-AESB<br>Q32-1616-AESU        | 16x16 Digital Audio, 2RU Unbalanced  |                |
| Q32-3232-AESU                         | 32x32 Digital Audio, 2RU Unbalanced  | 92-93          |
| Q32-PR & Q64-PR                       | Port-to-Port Data Routers  |                |
| Q32-1608-RR-2P<br>Q32-1616-RR-2P      | 16x8 Relay Data Router 2 Pole  |                |
| Q32-1616S                             | 16x16 Serial Video Router  | 89             |
| Q32-3204S                             | 32x4 Serial Video Router   |                |
| Q32-3208S<br>Q32-3232S                | 32x8 Serial Video Router   |                |
| Q32-16PR                              | 16 Port Data Router  | 96             |
| Q32-32PR                              | 32 Port Data Router  |                |
| Q64-16PR<br>Q64-32PR                  | 16 Port Data Router  |                |
| Q64-48PR                              | 48 Port Data Router  |                |
| Q64-64PR                              | 64 Port Data Router  |                |
| Q256-SD<br>Q256-032032-AESB           | SDI Video Router   |                |
| Q256-032032-AESU                      | Q256 32x32 Digital Audio Router (Balanced)   |                |
| Q6400-AA                              | Analog Audio Router  | 60-61          |
| Q6400-3232N<br>Q6400-6432N            | 32x32 Analog Video Router  |                |
| Q6400-6464N                           | 64x64 Analog Video Router  |                |
| Q6400-4816-AAM                        | 48x16 Mono Audio Router  | 60-61          |
| Q6400-4832-AAM                        | 48x32 Mono Audio Router  |                |
| Q6400-4848-AAM<br>Q6400-6416-AAM      | 48x48 Mono Audio Router  | 000.           |
| Q6400-6432-AAM                        | 64x32 Mono Audio Router  | 60-61          |
| Q6400-6448-AAM                        | 64x48 Mono Audio Router  |                |
| Q6400-6464-AAM<br>Q6400-3232-AAS      | 64x64 Mono or 32x32 Dual Audio Router  |                |
| Q6400-4816-AAS                        | 48x16 Dual Audio Router  | 60-61          |
| Q6400-4832-AAS                        | 48x32 Dual Audio Router  |                |
| Q6400-4848-AAS<br>Q6400-6416-AAS      | 48x48 Dual Audio Router  |                |
| Q6400-6432-AAS                        | 64x32 Dual Audio Router  |                |
| Q6400-6448-AAS                        | 64x48 Dual Audio Router  |                |
| Q6400-6464-AAS<br>Q6400-4816-AAX      | 64x64 Dual Audio Router  |                |
| Q6400-4832-AAX                        | 48x32 Dual Audio Router with Xover   | 60-61          |
| Q6400-4848-AAX                        | 48x48 Dual Audio Router with Xover   |                |
| Q6400-6416-AAX<br>Q6400-6432-AAX      | 64x16 Dual Audio Router with Xover   |                |
| Q6400-6448-AAX                        | 64x48 Dual Audio Router with Xover   | 60-61          |
| Q6400-6464-AAX                        | 64x64 Dual Audio Router with Xover   | 60-61          |
| Q6400-9616-AAM<br>Q6400-9632-AAM      | 96x16 Mono Audio Router  |                |
| Q6400-9648-AAM                        | 96x48 Mono Audio Router  | 60-61          |
| Q6400-128016-AAM                      | 128x16 Mono Audio Router   |                |
| Q6400-128032-AAM<br>Q6400-128048-AAM  | 128x32 Mono Audio Router   |                |
| Q6400-128064-aam                      | 128X64 Mono Audio Router   | 60-61          |
| S501FR                                | Standalone Compact High Density Distribution Frame   |                |
| S501FR-RP<br>S7701FR                  | Rackmount panel-mounts 3, S501FR enclosures in 1RU rack space  |                |
| S7701FR-RP                            | Rackmount panel-mounts 3, new style S7701FR enclosures in 1RU rack space   |                |
| S7701P                                | Rear connector plate for Standalone frame (Price applies when ordered separately: discounted when ordered with module) |                |
| S7702FR<br>SC-500A                    | Standalone Frame which holds 1-3 slot modules with power supply  |                |
| SC-1000                               | System Controller, single processor and single power supply  |                |
| SI-0001                               | Serial Interface Adapter   | 115            |
| SI-0004<br>SRF1-8-1x4LB               | Q-Link Isolator/Repeater   |                |
| SRF1-16-1x2LB                         | 16-channel 1x2 splitter/combiner in 1RU chassis  |                |
| SRF3-32-1x4LB                         | 32-channel 1x4 splitter/combiner in 3RU chassis  | 389            |
| SRF3-64-1x2LB<br>FAC-4, TAC-6, TAC-12 | 64-channel 1x2 splitter/combiner in 3RU chassis Tactical Mobile Fiber Optic Cable Reels & Breakout Assemblies          |                |
| TR-3200A                              | 64x32 Tally Data Router, 1RU unit, relay tally outputs   |                |
| JV-3                                  | Universal 16/35mm Reader Head  | 506-507        |
| JVS-3<br>JVT-3                        | Universal 16/35mm Reader Head for Sony Telecine  |                |
| JV-TOUCHLESS kit                      | Touchless option for UV heads  |                |


| VLPRO (VistaLINK® PRO)            | VistaLINK® PRO SNMP Alarm Monitoring, Email Notification & Configuration (1 client 1 year)      | 21-26  |
|-----------------------------------|---|--------|
| VLPRO PLUS                        | VistaLINK® PRO PLUS SNMP Alarm Monitoring, Email Notification & Configuration (1 client 1 year) | -21-26 |
| VLPRO PLUS UPGRADE                | Upgrade existing VistaLINK® PRO client to VistaLINK® PRO PLUS (1 client 1 year)                 |        |
| VLPRO-SCH-UPGRADE                 | Upgrade existing VLPRO to include Automated Configuration & Scheduling software                 |        |
| VLPRO-WEB1-UPGRADE                | Upgrade for existing VLPRO to include remote site VistaLINK® system monitoring                  |        |
| VLPRO Set-Up &/or Training        | VistaLINK® Configuration and Training Session (per diem)  |        |
| VLPRO-Ser/Sup/Lic. 1yr            | Extra 1yr VistaLINK® PRO-PLUS license & support/client  |        |
| VLPRO-Ser/Sup/Lic. 2yr            | Extra 2yr VistaLINK® PRO-PLUS license & support/client  |        |
| VLPRO-Ser/Sup/Lic. 3yr            | Extra 3yr VistaLINK® PRO-PLUS license & support/client  |        |
| X-0401H<br>X-0401H AES4           | 4x1 HDTV video router   | 72-73  |
| X-0401H-AES4<br>X-0401H-AES4-HES  |   |        |
| X-0401H-AES4-HSS                  | 4x1 HDTV video router with 4 (4x1) AES busses and Embedded SoftSwitch™                          |        |
| X-0401H-ALS4-HSS<br>X-0401H-PANEL | Additional remote control panel (Works in addition to front control panel)                      |        |
| X-0401S                           | 4x1 SDI video router  |        |
| X-0401S-AES4                      | 4x1 SDI video router with 4 (4x1) AES busses  |        |
| X-0401S-AES4-SS                   | 4x1 SDI video router with 4 (4x1) AES busses with SoftSwitch™                                   |        |
| X-0401S-ATSC                      | 4x1 SDI video router with 4 (4x1) AES busses (reclocked)  |        |
| X-0601H-444                       | 6x1 Dual Link HDTV Router   |        |
| X-0601H-444-AES4                  | 6x1 Dual Link HDTV video router with 4 (6x1) AES busses (includes 1 AES breakout panel)         | -74-75 |
| X-0808-OO13                       | 8x8 Optical Router with 8 1310nm Optical Outputs  | 123    |
| X-0808-OOCWDM                     | 8x8 Optical Router with 8 CWDM (1470nm-1610nm) optical outputs                                  |        |
| X-1201H                           | 12x1 HDTV video router  |        |
| X-1201H-AES                       | 12x1 HDTV video router with 2 (12 x 1) AES busses (includes 1 AES breakout panel)               |        |
| X-1201H-AES4                      | 12x1 HDTV video router with 4 (12 x 1) AES busses (includes 2 AES breakout panels)              |        |
| X-1202H                           | 12x2 HDTV video router  |        |
| X-1202H-AES                       | 12x2 HDTV video router with 2 (12 x 2) AES busses (includes 1 AES breakout panel)               |        |
| X-1202H-AES4                      | 12x2 HDTV video router with 4 (12 x 2) AES busses (includes 2 AES breakout panels)              |        |
| X-1202H-PANEL                     | Additional remote control panel (Works in addition to front control panel)                      |        |
| X-1201S                           | 12x1 SDI video router   |        |
| X-1201S-AES<br>X-1201S-AES4       | 12x1 SDI video router with 2 (12 x 1) AES busses (includes 1 AES breakout panel)                |        |
| X-12013-AE34<br>X-1202S           | 12x1 SDI video router with 4 (12 x 1) AES busses (includes 2 AES breakout panels)               |        |
| X-1202S<br>X-1202S-AES            | 12x2 SDI video router with 2 (12 x 2) AES busses (includes 1 AES breakout panel)                |        |
| X-1202S-AES4                      | 12x2 SDI video router with 4 (12 x 2) AES busses (includes 1 AES breakout panels)               |        |
| X-1201ABO                         | Unbalanced AES Audio Breakout Panel (for all 1201 series routers)                               |        |
| X-1201ABOB                        | Balanced AES Audio Breakout Panel (For all 1201 series routers)                                 |        |
| X-1201ABOB-BP                     | Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1201 series routers)           |        |
| X-1201ABO-BP                      | Unbalanced AES (with Bypass Relays) Audio Breakout Panel (For all 1201 series routers)          |        |
| X-1202ABO                         | Unbalanced AES Audio Breakout Panel (for all 1202 series routers)                               | 84-85  |
| X-1202ABOB                        | Balanced AES Audio Breakout Panel (For all 1202 series routers)                                 |        |
| X-1202ABOB-BP                     | Balanced AES (with Bypass Relays) Audio Breakout Panels (for all 1202 series routers)           |        |
| X-1202ABO-BP                      | Unbalanced AES (with Bypass Relays) Audio Breakout Panel (For all 1202 series routers)          |        |
| X-1616G                           | 16x16 G-LINK Router, 16 Electrical inputs, 16 Electrical outputs                                |        |
| X-1616G-F                         | 16x16 G-LINK Router, 16 Electrical inputs, 16 Fiber outputs                                     |        |
| X-3232G                           | 32x32 G-LINK Router, 32 Electrical inputs, 32 Electrical outputs                                |        |
| X-3216G-F                         | 32x16 G-LINK Router, 32 Electrical inputs, 16 Fiber outputs                                     |        |
| XE4-3232SX<br>XE4-3232SX+F        | Xenon 4RU 32x32 SDI Router  |        |
| XE4-3232HX                        | Xenon 4RU 32x32 SDI Router (liber capable- no modules)  | -56-57 |
| XE4-3232HX+F                      | Xenon 4RU 32x32 HD/SD Router (fiber capable- no modules)  |        |
| XE4-3232-3G                       | Xenon 4RU 32x32 11D/SD Router   |        |
| XE4-3232-3G+F                     | Xenon 4RU 32x32 3G/HD/SD Router (fiber capable- no modules)                                     |        |
| XE4-3232AESB                      | Xenon 4RU 32x32 Digital Audio Router (balanced)   |        |
| XE4-3232AESU                      | Xenon 4RU 32x32 Digital Audio Router (unbalanced)   |        |
| XE8-3232SX                        | Xenon 8RU 32x32 SDI Router  |        |
| XE8-3232SX+F                      | Xenon 8RU 32x32 SDI Router (fiber capable- no modules)  | 56-57  |
| XE8-3232HX                        | Xenon 8RU 32x32 HD/SD Router  | 56-57  |
| XE8-3232HX+F                      | Xenon 8RU 32x32 HD/SD Router (fiber capable- no modules)  |        |
| XE8-3232-3G                       | Xenon 8RU 32x32 3G/HD/SD Router   |        |
| XE8-3232-3G+F                     | Xenon 8RU 32x32 3G/HD/SD Router (fiber capable- no modules)                                     | -56-57 |
| XE8-3232AESB                      | Xenon 8RU 32x32 Digital Audio Router (balanced)   | -56-57 |
| XE8-3232AESU                      | Xenon 8RU 32x32 Digital Audio Router (unbalanced)   | -50-5/ |
| XRF1A-8x8                         | 1RU 8x8 RF Router   | 110    |
| XRF1A-8x8-LNB<br>XRF1A-16x16      | 1RU 8x8 RF Router with LNB power supply   | 110    |
| XRF1A-16x16<br>XRF1A-16x16-LNB    | 1RU 16x16 RF Router   |        |
| XRF6                              | 32x64, 64x64 RF Router  | 119    |
|                                   |   |        |









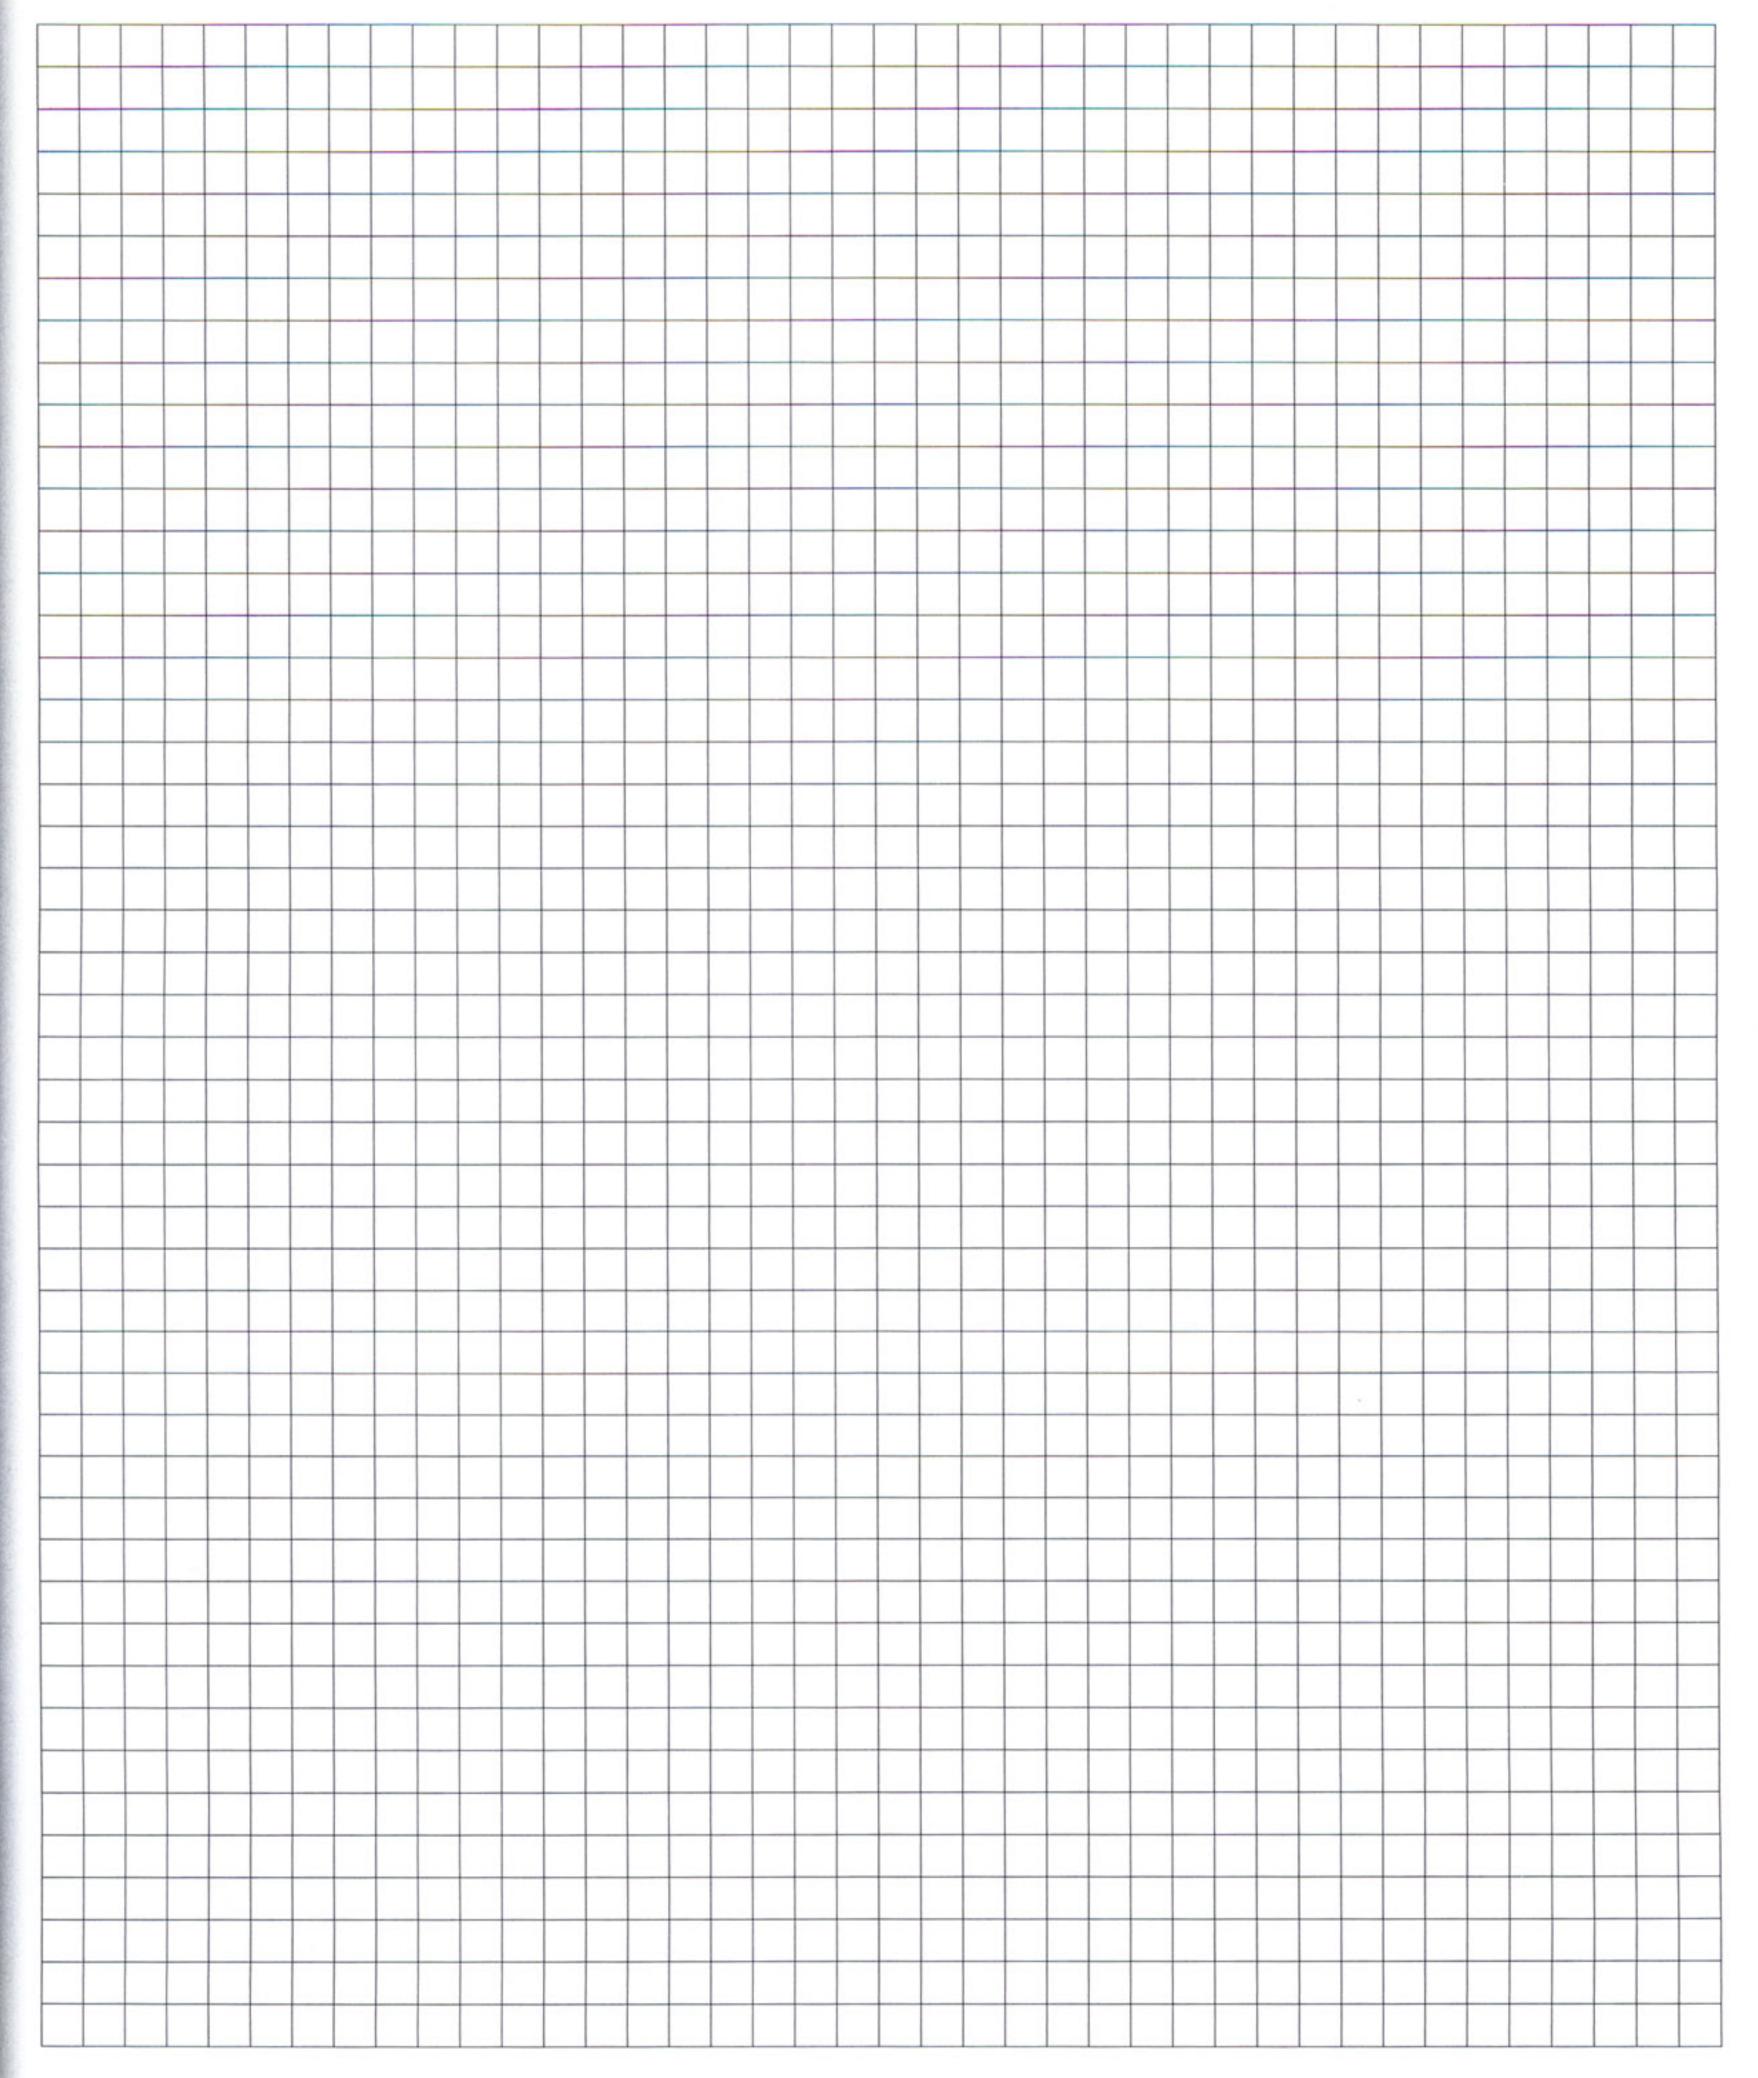

















#### www.evertz.com

## PROVIDES SALES & SERVICE COVERAGE WORLDWIDE

#### CORPORATE HEAD OFFICE

5288 John Lucas Drive Burlington, Ontario Canada, L7L 5Z9 1-905-335-3700 1-877-995-3700 sales@evertz.com


#### SALES OFFICES

- West Coast Sales
  212 N. Evergreen St
  Burbank, CA 91505 USA
  818.558.3910
  uswestsales@evertz.com
  LAsales@evertz.com
- UK Sales / Quartz
   59 Suttons Business Park
   Reading RG6 1AZ UK
   +44 118 935 0200
   uksales@evertz.com
- Washington DC & Gov't Sales 10621 Gateway Blvd. Suite 206 Manassas, VA 20110 USA 703.330.8600 dcsales@evertz.com

- Asia Pacific Sales
   Room 601, 6/F, Nan Fung Tower
   173 Des Voeux RD Central
   Hong Kong
   +852 2159 9653
   asiapacificsales@evertz.com
- South-East Europe Sales
  +385 1 2059 325
  darko@evertz.com
- New York Sales newyorksales@evertz.com

# The New Leader in Signal Processing

With over 9000 frames shipped in the last 12 months, Evertz is now the world's largest manufacturer of broadcast signal processing equipment\*

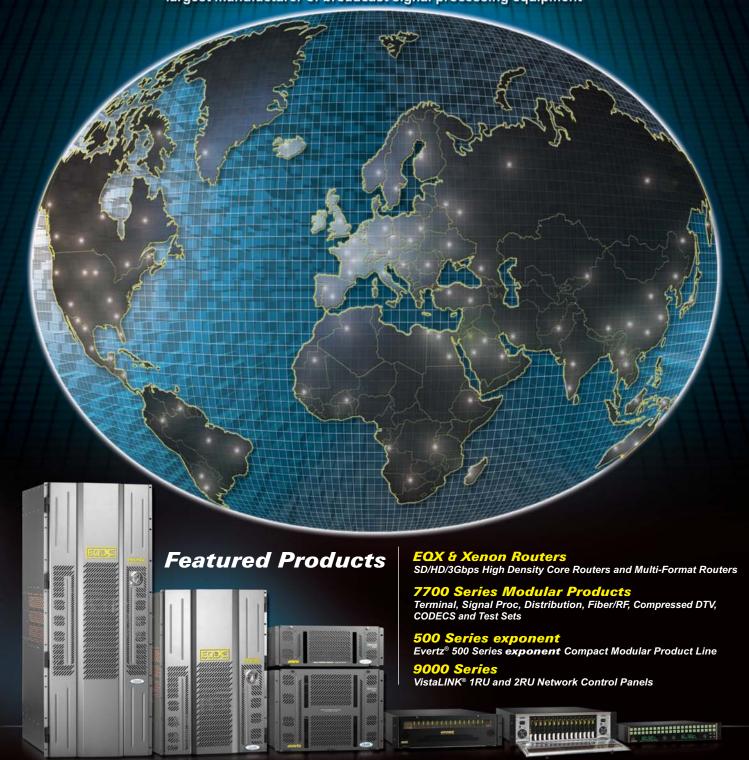

# More Broadcasters Rely on Evertz® for New Installs

Evertz<sup>®</sup> has always been a leader in technology, and now we are the leader most relied upon worldwide!

Processors / Monitoring & Control / Fiber / Master Control & Branding / Time Code / Distribution & Conversion / Multi-Format Routing / Management Software



US & International Sales 905.335.3700 US West Coast Sales 818.558.3910 LAsales@evertz.com

New York Sales newyorksales@evertz.com

Asia Pacific Sales asiapacificsales@evertz.com

1-877-995-3700 • www.evertz.com

Washington DC Sales 703.330.8600 dcsales@evertz.com UK Sales 011 44 118 935 0200 uksales@evertz.com

