


# PH-2 & PH-3

## **Dual-Sided Headsets with Flexible Dynamic Boom Mics**

The PH-2 and PH-3 are dual-sided mono, medium-weight headsets with foam-filled cushions that offer a light feel with moderate isolation from ambient noise. The dynamic noise-canceling mic is easily positioned with a unique ball joint for continuous adjustability. The PH-2 is available with 4-pin male or female XLR connectors, or pigtail termination. The PH-3 is available with 5-pin male or female XLR connectors.

### Wiring Diagram

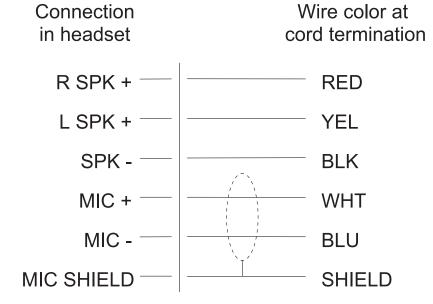

## **PH-2 Specifications**

**Connector Termination** PH-2: XLR 4-pin Female PH-2PT: Stripped Wire PH-2R: XLR 4-pin Male

**Type** PH-2: Dual Sided Monaural PH-2PT: Dual Sided PH-2R: Dual Sided Monaural

Mic Type Dynamic Noise-Canceling

Mic Sensitivity -65dBV/Pa @1cm

Mic Frequency Range 200Hz - 6kHz

Mic Impedance 150Ω

Speaker Sensitivity 95dB SPL @1kHz, 1mW

**Speaker Frequency Range** 100Hz - 10kHz

**Speaker Impedance** PH-2: 150Ω PH-2PT: 300Ω per side PH-2R: 150Ω

Weight 13oz. (not including cord)

Cord Length 5.5 ft.

# **PH-3 Specifications**

**Connector Termination** PH-3: XLR 5-pin Female PH-3R5: XLR 5-pin Male

**Type** PH-3: Dual Sided Stereo PH-3R5: Dual Sided Stereo

**Mic Type** Dynamic Noise-Canceling

Mic Sensitivity -65dBV/Pa @1cm

Mic Frequency Range 200Hz - 6kHz

Mic Impedance 150Ω

Speaker Sensitivity 95dB SPL @1kHz, 1mW

**Speaker Frequency Range** 100Hz - 10kHz

Speaker Impedance  $300\Omega$  per side

Weight 13oz. (not including cord)

**Cord Length** 5.5 ft.

#### **Ordering Information**

PH-2 Dual-Sided Headset with Flexible Dynamic Boom Mic & A4F Connector Catalog Number: 64437-100 PH-2PT Dual-Sided Headset with Flexible Dynamic Boom Mic, & Pigtail Termination Catalog Number: 64437-202 PH-2R Dual-Sided Headset with Flexible Dynamic Boom Mic & A4M Connector Catalog Number: 64437-102 PH-3 Dual-Sided Headset with Flexible Dynamic Boom Mic & A5F Connector Catalog Number: 64437-200 **PH-3R5** Dual-Sided Headset with Flexible Dynamic Boom Mic & A5M Connector Catalog Number: 64437-201 This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.