

7700ADA7


Analog Video Distribution Amplifier with Loop Thru

The 7700ADA7 Analog Distribution Amplifier is a general purpose amplifier for distributing analog video signals. The 7700ADA7 features one balanced input with seven outputs. The 7700ADA7 amplifier has been designed to distribute a wide range of analog video signals. It can also distribute other pulses and signals that are less than 2V p-p.

The 7700ADA7 occupies one card slot and can be housed in a 1RU frame which will hold up to 3 modules, a 3RU frame which will hold up to 15 modules, a 350FR portable frame which will hold up to 7 modules or a standalone enclosure that will hold 1 module.

► Features & Benefits

- 75Ω or high impedance input (jumper selectable)
- High common mode range and common mode rejection ratio (CMRR)
- Gain control
- Jumper selectable AC or DC coupling
- Looping feature with external "T" connector
- Consistent input impedance if card power is lost
- VistaLINK® -capable offering remote control and configuration capabilities via SNMP (using VistaLINK® PRO, 9000NCP or 9000NCP2 Network Control Panel) is available when modules are used with the 3RU 7700FR-C frame and a 7700FC VistaLINK® Frame Controller

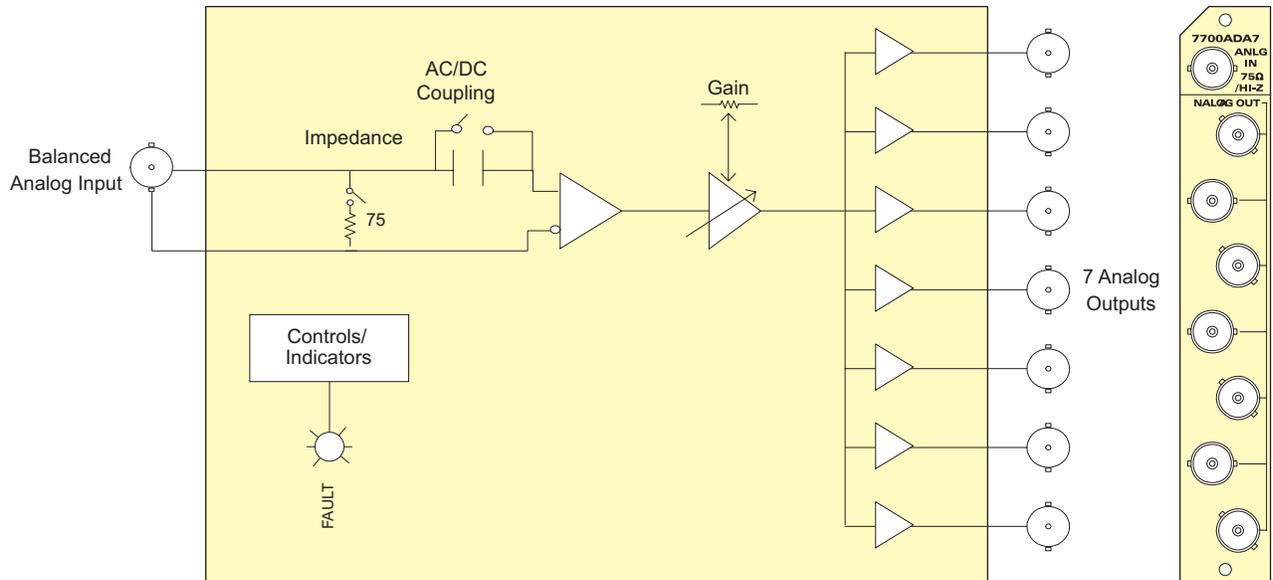

► Specifications

Analog Video Input:

Standards: Any analog video format, up to 2V p-p and 30MHz bandwidth
 Connector: BNC per IEC 61169-8 Annex A
 Common mode range: > 6V p-p
 CMRR: > 70dB to 1kHz
 Signal amplitude: 2.5V p-p max
 Impedance: 75Ω terminated, 35kΩ Hi-Z (jumper selectable)
 Coupling: AC or DC (jumper selectable)
 Return loss: > 40dB to 10MHz, > 30dB to 30MHz

Analog Video Outputs:

Number of Outputs: 7 per card
 Connector: BNC per IEC 61169-8 Annex A
 Output impedance: 75Ω
 Gain control range: ±5dB
 DC level (DC Coupling active): < ±100mV
 Freq. Response: < ±0.05dB (to 5.5MHz)
 Differential Gain: < 0.17%
 Differential Phase: < 0.19°
 C/L gain inequality: < ±0.1%
 C/L Delay: < ±2nsec
 Output isolation: 42dB to 10MHz, 32dB to 30MHz
 Output return loss: > 40dB to 30MHz
 Noise performance: < -78dB RMS NTC7 weighting, < -70dB RMS 15kHz to 5.5MHz

Electrical:

Voltage: +12V DC
 Power: 4.6W
 EMI/RFI: Complies with FCC Part 15, Class A, EU EMC Directive

Physical:

Number of Slots: 1

►►► Ordering Information

7700ADA7 Analog Video Distribution Amplifier (1x7)

Ordering Options Rear Plate must be specified at time of order
 Eg: Model +3RU

Rear Plate Suffix

+3RU 3RU Rear Plate for use with 350FR & 7700FR-C Multiframe
+1RU 1RU Rear Plate for use with 7701FR Multiframe
+SA Standalone Enclosure Rear Plate

Enclosures

350FR 3RU Portable Multiframe which holds up to 7 single slot modules
7700FR-C 3RU Multiframe which holds up to 15 single slot modules
7701FR 1RU Multiframe which holds up to 3 single or dual slot modules
S7701FR Standalone enclosure

