


Home > Battery > DV

LB-CA90C | Canon BP-A Series Battery Pack



- ◆ 14.4V nominal voltage Li-ion battery
- ◆ Canon BP-A30/A60 battery comparable
- ◆ For Canon EOS-C70, C200, C300MK2, C500MK2
- ◆ For Canon XF605, XF705
- ◆ 90Wh / 6.2Ah capacity
- ◆ Built-in 14.4V D-tap output / Charging input
- ◆ Built-in 45W USB-C input and output
- ◆ 4-level LED power indicator
- ◆ Multiple circuit protections

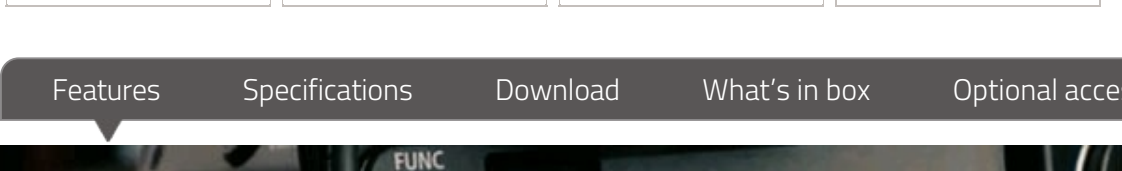

MSRP Ex TAX / Shipping

Features Specifications Download What's in box Optional accessory Related



90Wh Canon BP-A Battery with D-tap and USB-C

LB-CA90C is a 90Wh large capacity Canon BP-A compatible battery with D-tap output and 45W USB-C in/out, for Canon EOS C70, C200, C300MK2, C500MK2, XF605, XF705 cameras.



90Wh Large Capacity

LB-CA90C consists of 8pcs battery cells, 14.4V nominal voltage, 90Wh/6200mAh large capacity to keep cameras powered for longer time. The constant power load is 50W/4A.



14.4V D-tap Power Socket

The LB-CA90C BP-A battery provides a D-tap power socket of 11-16.8V voltage, 50W/4A load for various kinds of video devices. You can also charge the battery via the D-tap socket.



USB-C 45W for Laptop

LB-CA90C provides a USB-C socket of 5V/9V/12V/15V/20V(Max) 2.25A, 45W power output for various kinds of laptop, tablets or smart phones, supports BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP multiple protocols.

(For Macbook 13, Macbook Pro 13/15, ThinkPad New S2/T470/X270, Dell XPS 13/Latitude, HP Spectre x360-13/EliteBook Folio G1, Samsung Chromebook Plus, Google Pixelbook, Huawei Matebook, etc)



USB-C 45W Charging Input

You can also charge LB-CA90C by USB-C charger. Supports 5V/9V/12V/15V/20V(Max) 2.25A, 45W power input, which means you can fully charge the 90Wh battery within 3 hours.



4-level Power Indicator

Press the power check bottom, the 4-level LEDs indicates remaining power percentage.



D-tap Charging

Besides USB-C charging, you can charge LB-CA90C via D-tap socket, by SWIT ultra portable 2-way D-tap charger PC-U130B2, fully charge within 2h 40m.



Canon Charger Compatible

You can also use Canon original charger CG-A10 or CG-A20 to charge LB-CA90C within 5 hours.

SWIT®

Canon BP-A Series Compatible Battery With D-tap & USB-C

LB-CA90C 90Wh

A 90Wh Canon BP-A Style

LB-CA90C is a 90Wh large capacity Canon BP-A30/A60 replacement DV battery with D-tap and USB-C sockets. Support Canon CG-A20 charger.



Comparable Batteries

Canon BP-A30, BP-A60

Compatible Cameras

Canon EOS-C200, EOS-C300 Mark ii, EOS-C500 Mark ii
Canon XF605/XF705

D-tap Out and Charging Input



D-tap 14.4V 50W

The LB-CA90C battery provides a 14.4V D-tap power output socket of 50W/4A power load, and support DC 16.8V/3A charging input via the D-tap.

C USB-C 45W In & Out

Support Charging Laptops

USB-C 45W power output:

5V/9V/12V/15V/20V \equiv 2.25A
BC1.2, PD2.0/3.0, QC2.0/3.0,
FCP, SCP multiple protocols
Macbook 13, Macbook Pro 13/15,
ThinkPad New S2/T470/X270,
HP Spectre x360-13/Folio G1,
Dell XPS 13/Latitude, Google Pixelbook,
Samsung Chromebook Plus,
Huawei Matebook, etc

USB-C 45W charging input:

5V/9V/12V/15V/20V \equiv 2.25A
Fully charge the 90Wh battery
by USB-C charger within 3 hours.



Specifications

Model	LB-CA90C
Voltage	14.4V nominal
Capacity	90Wh, 6200mAh
Power Load	50W, 4A
D-tap	11-16.8V output; 16.8V/3A charging input 45W in and 45W out
USB-C	5V/9V/12V/15V/20V \equiv 2.25A BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP
Dimension	70×42×96mm
Weight	0.46g


SWIT Electronics Co., Ltd.
+86-25-85805753
<http://www.swit.cc>
Email: contact@swit.cc

SWIT Electronics America, Inc
1-(408)260-8258
<http://www.switusa.com>
Email: info@swit.us

SWIT Electronics Europe GmbH
+49(0)21316632331
<http://www.switeu.com>
Email: info@swit-europe.com



Facebook Page



Instagram

SWIT[®] LB-CA90C

Capacity: 14.4V, 6.2Ah (90Wh) Load: 50W/4A

USB-C IN & OUT: 45W

5V/9V/12V/15V/20V \approx 2.25A

Protocol:

BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP



CE UK
CA

SWIT ELECTRONICS CO., LTD. MADE IN CHINA



IN & OUT 45W  USB-C


SWIT® LB-CA90C

25% 50% 75% 100%



IN & OUT 45W  USB-C

SWIT® LB-CA90C


25% 50% 75% 100%



D-TAP





IN & OUT 45W  USB-C

SWIT® LB-CA90C


25% 50% 75% 100%



 D-TAP