


Home > Charger/Adaptor > V-mount

S-4010 | Dual 14.4V Power Station Box




- > PP+ Fiber glass case, strong and durable
- > Install 4 x V-mount batteries
- > 2-ch 14.4V 4-pin XLR DC output
- > LED voltage display and warning
- > Charging without take out batteries
- > Intelligent protective circuit design

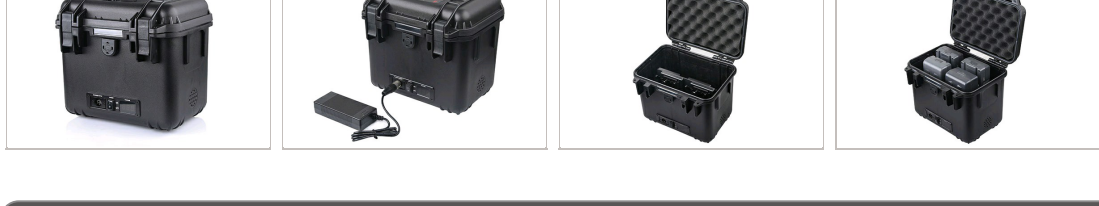

MSRP Ex TAX / Shipping

[Features](#) [Specifications](#) [Download](#) [What's in box](#) [Optional accessory](#) [Related](#)

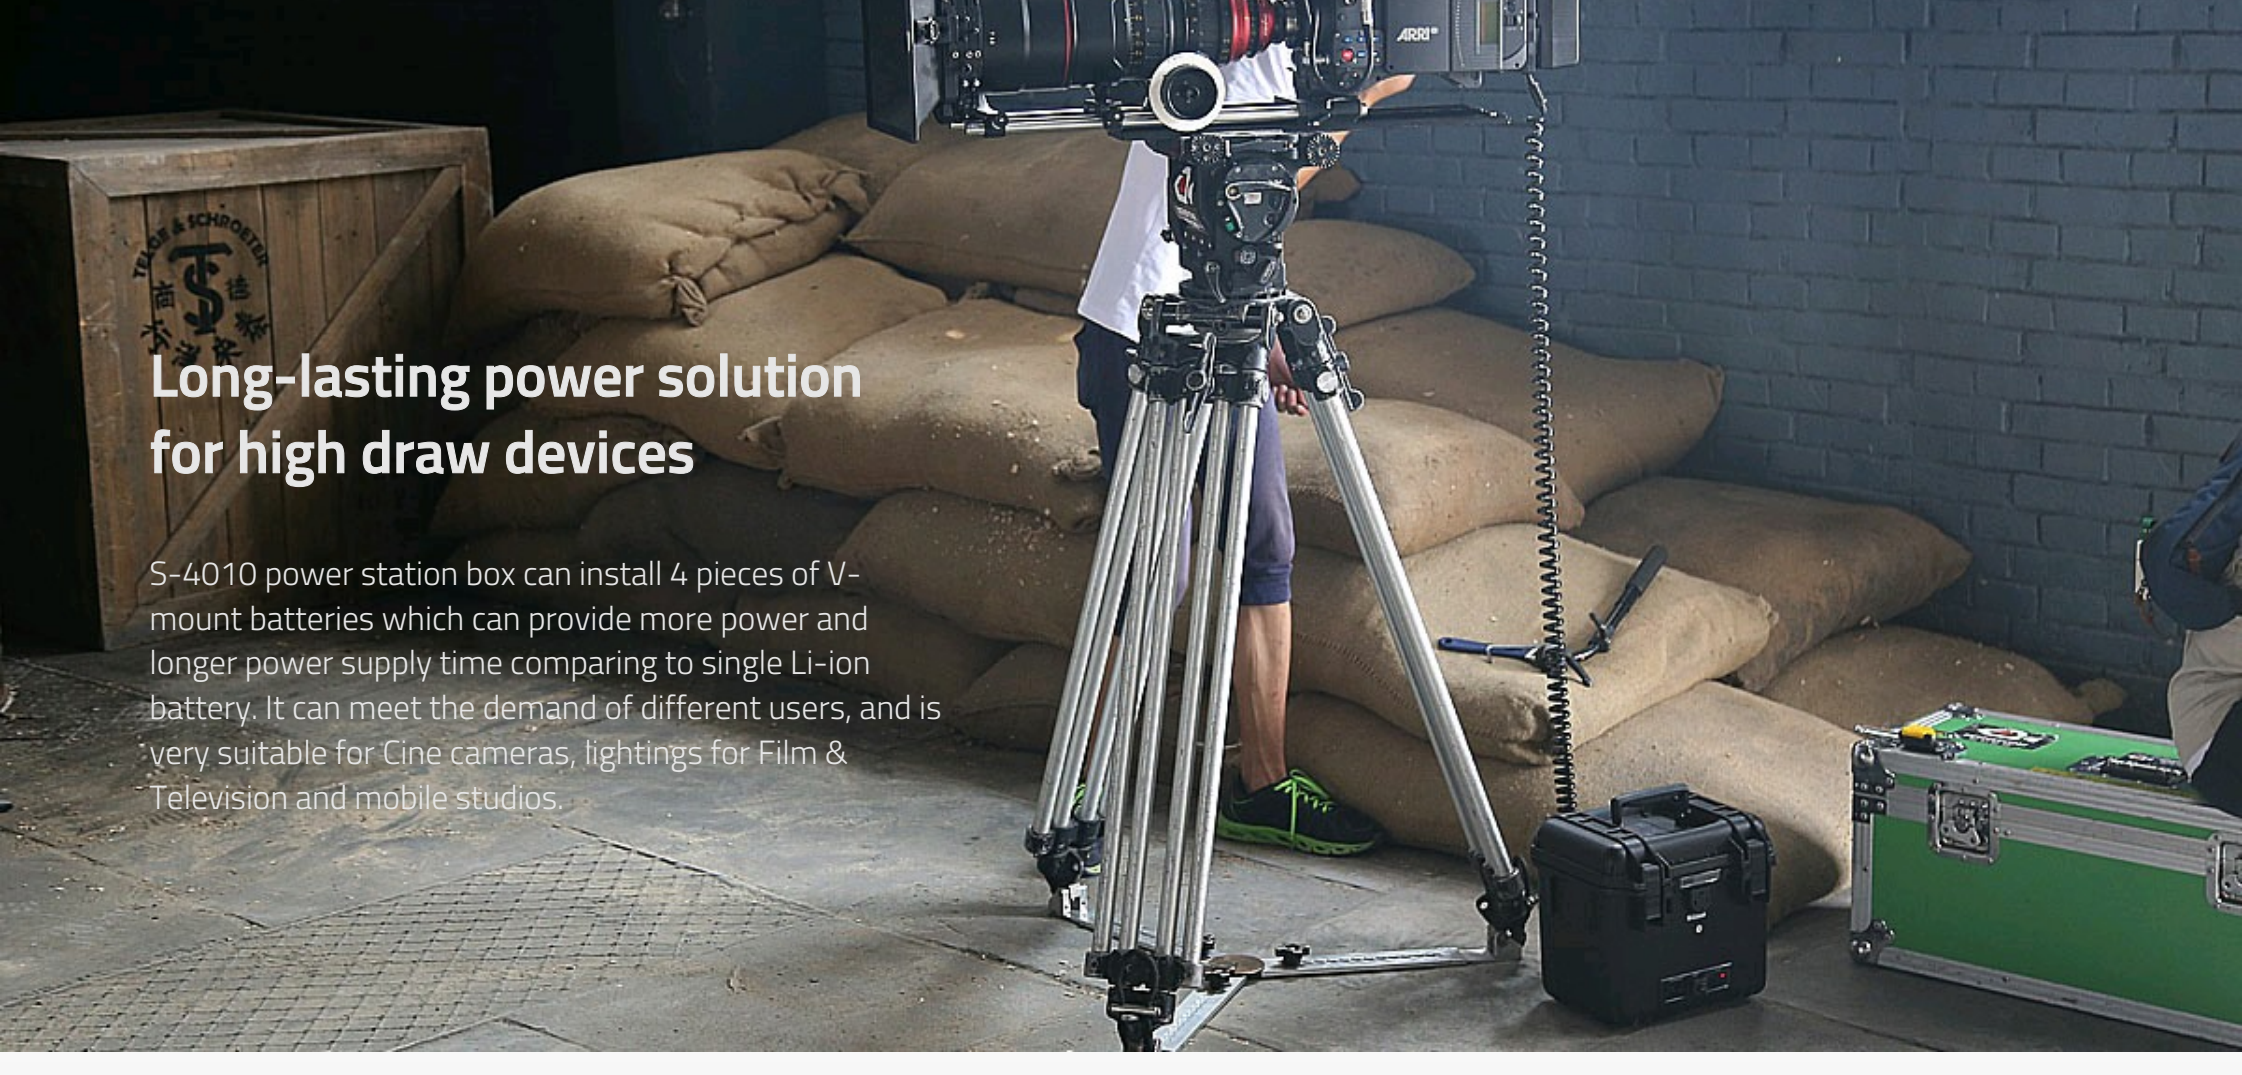

Long-lasting power solution for high draw devices

S-4010 power station box can install 4 pieces of V-mount batteries which can provide more power and longer power supply time comparing to single Li-ion battery. It can meet the demand of different users, and is very suitable for Cine cameras, lightings for Film & Television and mobile studios.



PP+ Fiber glass case

S-4010 adopts PP+ Fiber glass case which is high intensity, high toughness and high temperature resistant.

Power with 4 V-lock batteries

Considering the size, weight, power efficiency, and usability, S-4010 is designed to be powered with 1-4 V-lock batteries. With auto-balanced circuite design, the different models and capacities batteries can be mixed. The max output power is limited by battery inside.



2-ch 4-pin XLR DC output

With 2-ch 4-pin XLR output sockets, S-4010 is capable of outputting 2-ch 11-16.8V, max 15A power simultaneously. And S-4010 is designed with multiple circuit protections, such as over load, over voltage, and etc.



LED panel display status

With a LED panel, S-4010 can display real-time voltage, and when battery capacity is too low, the LED panel will keep flashing to remind you to change or charge batteries.



Charging with batteries inside

With the supplied 5A charger, user can charge the batteries in the S-4010 directly, without taking out of them.

Cooling fan design

The fan keeps dissipating heat from the box, and makes it safe when working in high temperature environment.



SWIT Electronics Europe GmbH

Heerdterbuschstrasse 10 / HALLE 9,
41460 Neuss, NRW Germany
VAT: DE308323924
WEEE-Reg.-Nr. DE 37399843
Email: info@swit-europe.com

Email Newsletter

Please enter Email address below and subscribe our newsletters.

[submit](#)

[Privacy Policy](#)

[leave a message](#)



4-Battery Power Station Box

S-4010/S-4020/S-4030

- ◆ Install 4x V-mount batteries
- ◆ 2x XLR DC output (12V or 24V option)
- ◆ Real time output voltage LED display
- ◆ Low battery warning
- ◆ Charging without take out batteries
- ◆ Intelligent protective circuit design
- ◆ PP + Fiber glass case, strong and durable



| | |
|-----------------------|------------------------------|
| | |
| PP + Fiber glass case | Install 4x V-mount batteries |
| | |
| Inside charging (5A) | Voltage display / alert |

Output Descriptions:

| | | |
|--|--------------------------------------------|-------------------------------------------------------------------------------------------------------|
| | S-4010 12v + 12v Dual 12V output | 4-pin XLR 11-16.8V DC output x2 Max Load: 15A/180W per channel 2 channels output simultaneously |
|--|--------------------------------------------|-------------------------------------------------------------------------------------------------------|

| | | |
|--|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | S-4020 12v + 24v 12V + 24V output | 4-pin XLR 11-16.8V DC output x1 Max Load: 15A/180W 3-pin XLR 22-33.6V DC output x1 Max Load: 15A/360W 12V and 24V will not output simultaneously |
|--|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|

| | | |
|--|--------------------------------------------|----------------------------------------------------------------------------------------------------|
| | S-4030 24v + 24v Dual 24V output | 3-pin XLR 22-33.6V DC output x2 Max Load: 15A/360W in total 2 channels output simultaneously |
|--|--------------------------------------------|----------------------------------------------------------------------------------------------------|

Specification

| Model | S-4010 | S-4020 | S-4030 |
|---------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------------|
| Input | DC 16.8V 5A (Charging) | DC 16.8V 5A (Charging) | DC 16.8V 5A (Charging) |
| Output | DC11-16.8V 15Ax2 (180Wx2) | DC 11-16.8V 15A (180W) Or DC 22-33.6V 15A (360W) | DC 22-33.6V x2 Total 15A(360W) |
| Dimension | 290mm x 221mm x 278mm | | |
| Net weight | 3.45Kg | | |
| Working environment | Working temperature: 0°C ~ +40°C Working humidity: 10% ~ 90% Storage temperature: -15°C ~ + 60°C | | |







