


The BRC Family

Easy guide for models and options

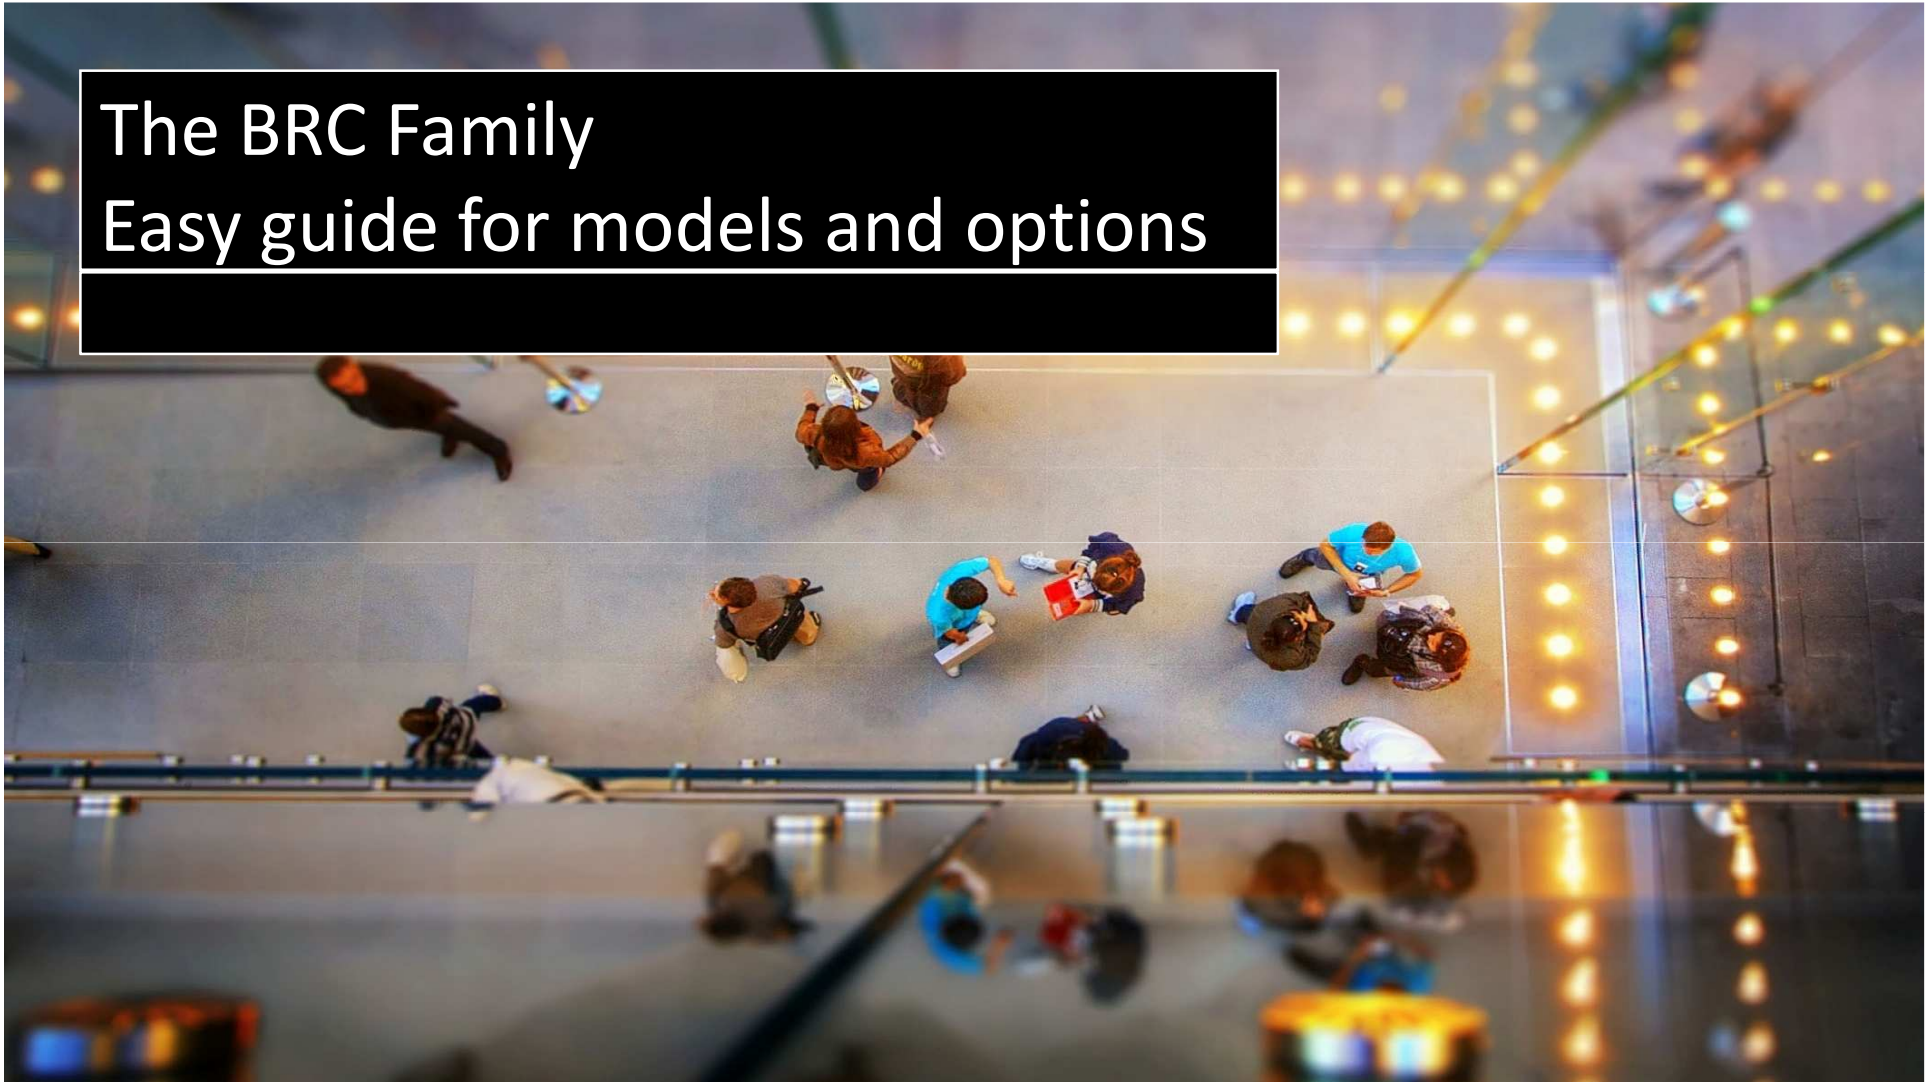

← HD →

← SD →



BRC-H900

3x HD **CMOS 1/2"**
Mpixels
1080/50i & 59.94i & 720p
14x zoom
±170° Pan
-30° +90° Tilt
Optical Image stabilizer
Top Sensitivity (F10)
Widest viewing angle

BRC-H700

3x HD **CCD 1/3"**
1,07Mpixels
1080/50i & 59.94i
12x zoom
±170° Pan
-30° +90° Tilt
Optical Image stabilizer
-
Widest viewing angle

BRC-Z700

3x HD **CMOS 1/4"**
1,04Mpixels
1080/50i & 59.94i
20x zoom auto-focus lens
±170° Pan
-30° +90° Tilt
Optical Image stabilizer
-
Optional x0.8 wide conv lens

BRC-Z330

1x HD **CMOS 1/3"**
2Mpixels
1080/50i & 50,94i & **720p**
18x zoom
±**175°** Pan
-30° +90° Tilt
-
-
-

BRC-300

3x SD **CCD 1/4.7"**
0,69Mpixels
PAL
12x zoom
±170° Pan
-30° +90° Tilt
-
-
-

- All equipped with RS-232C (15m) and RS-422 (1200m), supporting Visca Protocol for controlling up to 7 cameras at 38,400 bps

← HD →

← SD →



BRC-H900

3x HD CMOS 1/2"

4 lux at 18dB

0 to 18dB

AWB

Color DTL

Matrix Adjustment

Gamma Std1//2/3 Cine1/2/3/4

-

-

16 preset memories



BRC-H700

3x HD CCD 1/3"

6 lux at 18dB

0 to 18dB

AWB

-

-

-

ND1/ND2

16 preset memories



BRC-Z700

3x HD CMOS 1/4"

6 lux at 24dB

0 to 24dB

AWB 1 & 2(wider range)

Color DTL

-

-

-

-

16 preset memories



BRC-Z330

1x HD CMOS 1/3"

6 lux at 24dB

-3 to +24dB

AWB 1 & 2

Color DTL

-

-

Color AE

1/4; 1/16

16 preset memories



BRC-300

3x SD CCD 1/4.7"

7 lux at 18 dB

-3 to +18dB

AWB

-

-

-

-

-

6 preset memories

I/O interfaces as standard, and optional converter lenses

	← HD →				← SD →
					
	BRC-H900	BRC-H700	BRC-Z700	BRC-Z330	BRC-300
SDI (HD/SD) Out	✓	✗	✗	✗	✗
YPbPr / RGB	✓	✓	✓	✓	✗
VBS BNC	✓	✗	✓	✓	✓
S Video	✓	✗	✓	✓	✓
Wide Converter Lens	✗	✗		✗	
			VCL-HG0862 62mm The supplied hood cannot be used with the BRC		VCL-0737W
					SONY

← HD →			← SD →	
 BRC-H900 2 BRBK-HSD2 3x HD-SDI or SD-SDI 2 BRBK-SA1 1x VBS, S-Video, YCbCr/RGB BRBK-SF1 Up to 2000m FO to BRU-SF10	 BRC-H700 1 HFBK-HD1 2x HD-SDI, Y/Pb/Pr, RGB 1 HFBK-SD1 1xSD-SDI;1xVBS;Y/C;YCbCr/RGB 1 HFBK-TS1 i.LINK (HDV) 1 HFBK-XG1 WXGA,XGA,VGA BRBK-H700 Up to 1000m FO link to BRU-H700	 BRC-Z700 BRBK-HSD1 2x SDI HD/SD BRBK-MF1 Up to 1000m FO link to BRU-H700	 BRC-Z330 2 BRBK-HSD2 3x HD-SDI or SD-SDI Discontinued BRBK-HD2 2x HD-SDI 2 BRBK-SA1 1x VBS, S-Video, YCbCr/RGB BRBK-SF1 Up to 2000m FO to BRU-SF10	 BRC-300 3 BRBK-301 VBS, Y/C, Y/Cb/Cr, RGB 3 BRBK-302 1x SD-SDI 3 BRBK-304 i.Link (DV) BRBK-303 Up to 500m FO link to BRU-300P

1) common boards for BRC-H700 and BRU-H700
2) common boards for BRC-H900, BRC-Z330 and BRU-SF10
3) common boards for BRC-300P and BRU-300P

BRUs - I/O interfaces supplied as standard



BRU-H700

1Km to **BRC-H700** & **BRC-Z700**



BRU-SF10

2Km to **BRC-H900** & **BRC-Z330**



BRU-300P

500m to **BRC-300P**

HD YPbPr / RGB Out	✓	✓	✗
VBS (BNC); Y/C Out	✗	✗	✓
Analog Audio L/R Out	✓	✓	✗
External Sync I/O	✓	✓	✓
RS-232C (VISCA) – 15m	✓	✓	✓
RS-422 (VISCA) – 1200m	✓	✓	✓
LC Duplex Fiber conn.	✓	✓	✓

BRU-H700



1Km to **BRC-H700** & **BRC-Z700**



HFBK-HD1
HD-SDI, Y/Pb/Pr, RGB



HFBK-SD1
1xSD-SDI, 1xVBS, Y/C, Y/Cb/Cr, RGB



HFBK-TS1
i.LINK (HDV)



HFBK-XG1
WXGA, XGA, VGA



CCFC-M100HG
(Multi Mode)

BRU-SF10



2Km to **BRC-H900** & **BRC-Z330**



BRBK-HSD2
2x SDI HD/SD




BRBK-SA1
VBS, Y/C, Y/Cb/Cr, RGB



CCFC-S200
(Single Mode fiber)


BRU-300P

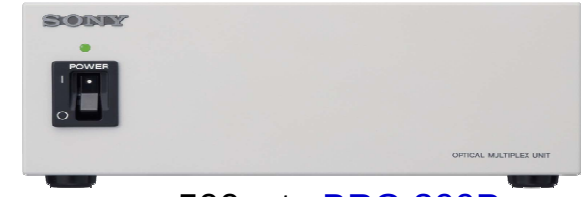


500m to **BRC-300P**



BRBK-301
VBS, Y/C, Y/Cb/Cr, RGB

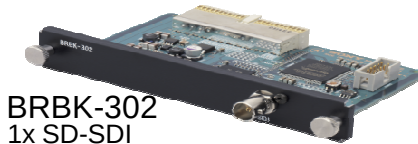

BRBK-302
1x SD-SDI

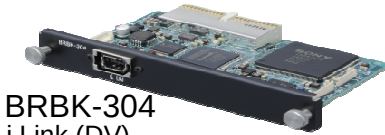

BRBK-304
i.Link (DV)



CCFC-M100
(Multi mode)