

520DARS-W

Unbalanced AES Word Clock Extractor Audio Distribution Amplifier


The 520DARS-W provides a compact method of extracting word clock from your AES digital audio reference signals. The 520DARS-W features one auto-equalized input with 4 word clock outputs and 5 reclocked AES audio outputs.

The 520DARS-W is housed in the 3RU 500FR **exponent** Frame that will hold up to 16 modules.

The 520DARS-W can be used in conjunction with the 5600MSC Master Clock/SPG system.

►Features & Benefits

- Supports AES audio over 75Ω coax (SMPTE 276M)
- 4 word clock outputs (AES11-2003)
- 5 reclocked AES outputs provides jitter reduction (SMPTE 276M)
- Automatic equalization provides extended cable length capabilities
- High impedance or 75Ω termination on input (jumper selectable)
- Card edge indicators for AES present, reclocker rate, and AES validity bit
- Tally output of input error conditions
- VistaLINK®-capable for remote monitoring via SNMP (using VistaLINK® PRO) when installed in 500FR frame with 500FC VistaLINK® Frame Controller

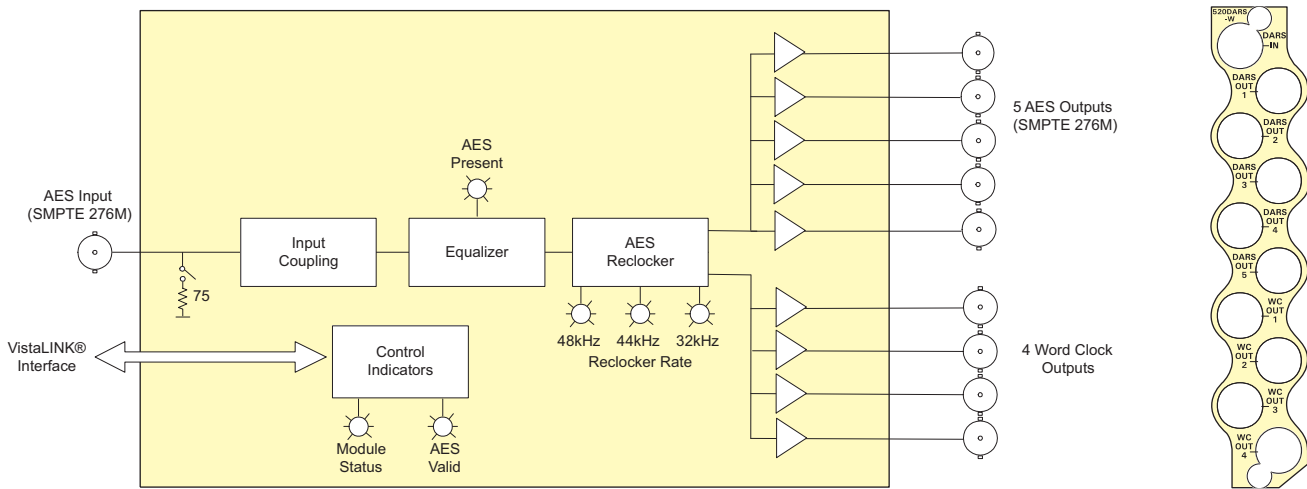

►Specifications

AES Input: Standard: SMPTE 276M Number of Inputs: 1 Connector: BNC per IEC 61169-8 Annex A Input Level: 1V p-p Coupling: Transformer Input Impedance: 75Ω Return Loss: > 25dB 100kHz to 6MHz Equalization: Automatic to 1500m with Belden 1694A (or equivalent) @ 48kHz AES signal Sampling Frequency: 32kHz, 44.1kHz, 48kHz and 96kHz	AES Output: Number of Outputs: 5 Unbalanced AES Connector: BNC per IEC 61169-8 Annex A Output Level: 1V p-p Output Impedance: 75Ω Return Loss: > 25dB 100kHz to 6MHz Word Clock Outputs: Standard: AES11-2003 Number of Outputs: 4 Connectors: BNC per IEC 61169-8 Annex A Signal Level: 5V p-p square wave (0-5V) ±0.5V	Electrical: Voltage: +12V DC Power: 5W EMI/RFI: Complies with FCC Part 15 Class A EU EMC Directive Physical: Number of Slots: 1
--	---	--

►Ordering Information

520DARS-W Unbalanced AES Word Clock Extractor Audio Distribution Amplifier

Enclosures
500FR
S501FR

exponent
Compact High Density Distribution Frame
Standalone enclosure