


OMI

OMNEO Matrix Interface

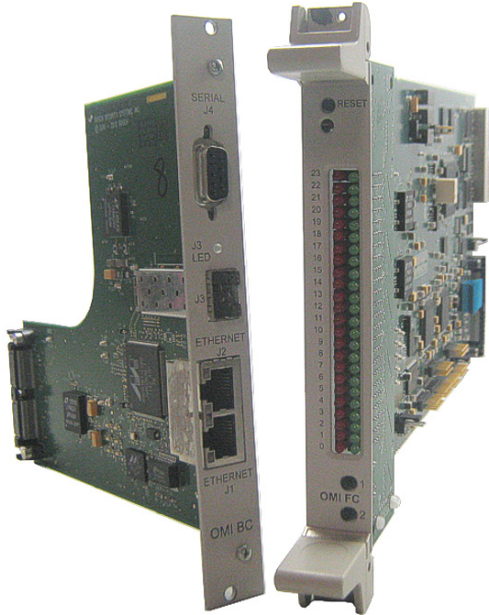

The OMI (OMNEO Matrix Interface) card set for RTS ADAM and ADAM-M intercom frame provides fully IP compliant connectivity into the ADAM intercom BUS for OMNEO compatible devices. The card set consists of a back card and front card and supports fiber optic cabling (through the use of optional fiber modules) and RJ45 copper Ethernet connections.

OMNEO is a fully Layer 3 compliant media-networking architecture, uniting devices normally inaccessible without time-consuming and expensive cabling projects, planned weeks or months ahead of the implementation of the actual system. OMNEO fully supports currently available network infrastructure to provide low cost of implementation. OMNEO also provides extremely low latency and high audio fidelity which make it useable in virtually any application.

OMNEO employs Audinate's Dante, a standards-based, routable IP media transport technology, and OCA (Open Control Architecture) as the control protocol, which is a proposed open public standard used for control and monitoring of professional media networks. Together this allows for the freedom to assemble from 2 to 10,000 cooperating devices that can exchange studio-quality, synchronized, multi-channel audio and share common control systems.


OMNEO also supports the current AVB (Audio/Video Bridging) standards and can take advantage of the special features of AVB switches and networking hardware.

Through the use of multiple open standards, OMI provides an ideal solution for Layer 2 or Layer 3 media networking within a variety of IT infrastructures.

Features

- Supports Layer 2 or 3 IT environments
- Supports DHCP and Bonjour Protocols
- Fully Routable Synchronized Audio Across Multiple Subnets
- Supports Fiber (with optional single or multimode fiber module) and Cat-5/6 and Cat-5e (Ethernet 10/100MB and 1GB) for Simplified Wiring
- Up to 64 ports per card maximum
- Provides up to 512 ports in a single ADAM Frame (8 OMI Cards) or 256 Ports in an ADAM-M Frame (4 OMI Cards)
- Field upgradable firmware to ensure compliance with future changes to industry standards
- OMI interoperates with PoE based switches

Line Drawing

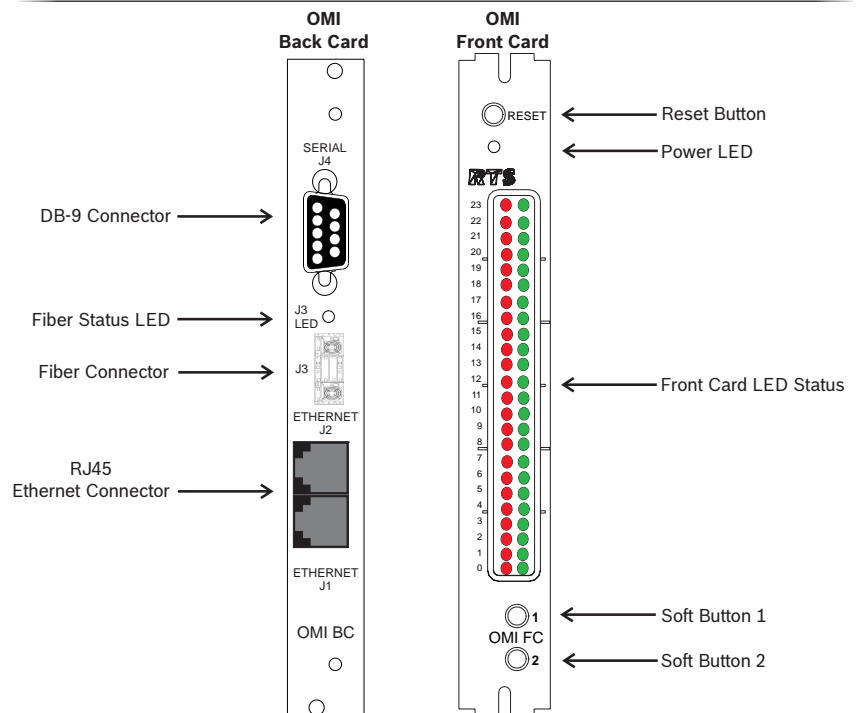

Specifications

Power

Power Consumption..... 14.9W @5V(Front and Back combined)

Audio Performance

THD+N at 1KHzbetter than 0.01%@8dB

Frequency Response

.....within ±1dB from 20Hz - 20kHz

Channel Support

64 Channels

Connections

Fiber Optic SFP Module with LC Connector

Single Mode Distance 9.32 miles (15km)

Multi-Mode Distance 1.86 miles (3km)

RS232/485 using a DB-9 connector

2- RJ45 Connectors

Environmental

Weight

Front Card: 0.65lbs (.29kg)

Back Card: 0.30lbs (.14kg)

Temperature

Operating: 32°F to 122°F (0°C to 50°C)

Storage: -40°F to 158°F (-40°C to 70°C)

NOTE: The fiber optic transceivers provide Class 1 eye safety by design and do not emit accessible laser radiation levels in excess of the acceptable emission limit (AEL) within the inherent design or intended use of the laser and do not pose a hazard under normal operating conditions. These low powered lasers are incapable of producing injury when used as designed and intended and are exempt from engineering and administrative controls. A Class 1 laser could potentially have an embedded higher class rating internally. During service procedures with service panels removed and interlocks bypassed, it might be necessary to comply with higher class laser control measures during the service/repair procedure. Class 1 includes lasers that were formerly classified as Class 2.

Order Information

- OMI 16-FC • OMNEO 16 Channel Matrix Interface Front Card
- OMI 32-FC • OMNEO 32 Channel Matrix Interface Front Card
- OMI 48-FC • OMNEO 48 Channel Matrix Interface Front Card
- OMI 64-FC • OMNEO 64 Channel Matrix Interface Front Card
- OMI BC • OMNEO Matrix Interface Back Card

The specification information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.