

High image quality and all features you need!

SFX-SERIES is a new line of professional LCD Monitors with 3G/HD/SD-SDI, HDMI, CVBS inputs and SFP Module slot for optional optical fiber or IP SMPTE-2022 compliant inputs. SFX-SERIES integrates our new superior quality 12 bit image processing engine and all the professional features you need: Realtime waveform and vectorscope, 16 channel audio level meters, UMD & tally, markers, blue only, backlight and color temperature adjustment,...

The LED backlight displays and our energy-efficient board design grant low temperature while working. The rugged and lightweight aluminium design and wide viewing angles displays, makes them easy to integrate.

New Quad-Mode makes the difference

Make the most of your monitors using our new Quad-mode feature! Display 4 of the inputs (2 x 3G SDI, 1 x HDMI, 1 x CVBS) simultaneously and control them with all the features (Realtime waveform and vectorscope, UMD and tally, markers,...) and with minimum processing delay!

All features you need!



ATC Time Code
(inside or outside the image)

Markers:
Center Marker: 15.9, 4.3, 15.9, 14.9,
15.9, 1.05:1, 2.35:1, 1.05:1 4:3, USER
Security Areas:
80 %, 85%, 88%, 90%, 93%, 100%

Real time colour Vectorscope &
Waveform (Y, Cb, Cr, YCbCr,
R, G, B, RGB) inputs 1 & 2
Located in any position of the screen

Tally
3 Modes: Square, UMD and Border
(GPIO, TSL 3.1 and TSL 5.0)

UMD (16 character)
TSL 3.1 and TSL 5.0

Colour Temperature Adjustment,
Gamma Correction
& RGB Channels

Video Format Information
& On screen alarms:
NO AUDIO, SILENCE, Audio
NO INPUT, BLACK, Image

Encoder & Dual Functionality
Direct Keys
Quick access to any adjustment
or screen configuration

Up to 16 Channel Audio Level
Meters (Vertical and horizontal)

Rugged and Lightweight Design

SFX-3G series have a lightweight and rugged aluminum chassis and direct lighting keys that can be configured with any of the adjustments of the OSD menu or to access directly to Quad-Mode or Full Screen Views. All monitors of SFX-3G integrate LED backlight displays with wide viewing angles, and our energy-efficient board design that grant low temperature while working. All connectors are all down-side mounted making them real slim design, allowing to be integrated in critical space locations. All monitors from 18,5" to 23,8" are compatible with VESA 100 mount systems, and optional brackets for 19" rack and table stands can be supplied. 32" and 42" monitors are VESA 200 compatible.





Speakers

Power On Switch

2 x 3G/HD/SD SDI Inputs
(with active loop through)

Ethernet
(Control and TSL 5.0)

CVBS Input

Power Supply
(XLR connector)

SFP SLOT

HDMI Input


USB
(Updates)

Audio Out
(Jack Phone)


RJ-11
TSL 3.1
RS-232

New Quad-Mode makes the difference

Select between Quad View or Full Screen View of any of your sources. In Quad Mode display the 2 x 3G/HD/SD-SDI, 1 x HDMI and 1 x CVBS inputs and each quadrant can display sources with different format (1080i50Hz, 1080p25Hz,...), and can integrate up to 16 channel Audio Level Meters of embedded audio (on the 3G SDI sources),... Each window has image resize capability in Quad and Full Screen view, so scopes, audio Level Meters,... can be located inside or outside the image. All this adjustments can be made using the OSD menu or remotely using our Soft4Boxes Lite control software.



Quad View
(2 x 3G/HD/SD-SDI, HDMI,
CVBS)

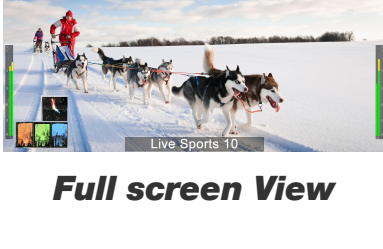

Full screen View


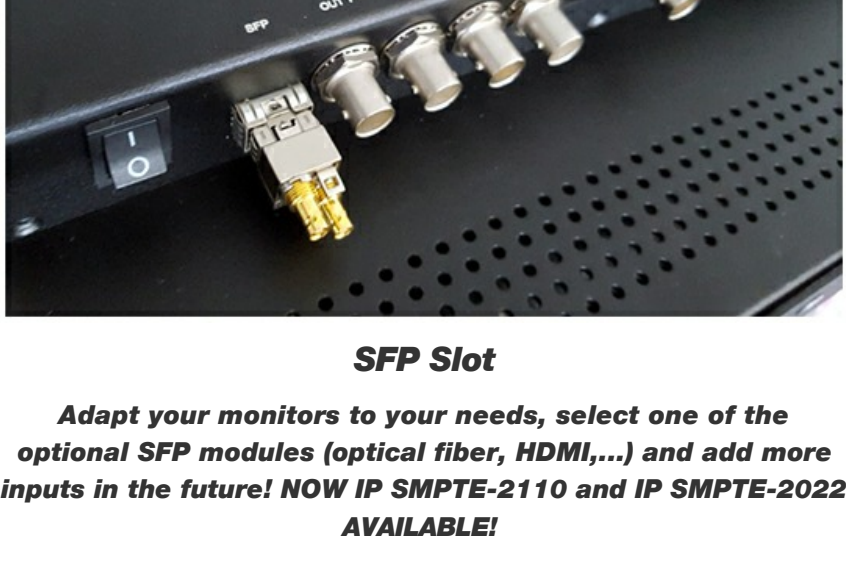


Image resize capability in Quad and Full
screen View


Professional broadcast adjustments

These monitors have all professional features and adjustments as UMD and Tally, Blue Only, Aspect Ratio Selection, Markers, Real time color Waveform and Vectorscope per input (SDI 1 and SDI2), 16 Channel Audio Level Meters, Alarms, Timecodes, backlight and color temperature adjustment (5600K, 6500K, 9300K, and RGB Gain and Bias adjustment),.. SFX-3G monitors integrate user configurable direct keys and encoder to easy navigate through the OSD menu. Any adjustment can be located in a direct key, to access functions just with a press, and keys LED lights can be turned off if required for dark environments.




SFP Slot

Adapt your monitors to your needs, select one of the optional SFP modules (optical fiber, HDMI,...) and add more inputs in the future! NOW IP SMPTE-2110 and IP SMPTE-2022 AVAILABLE!

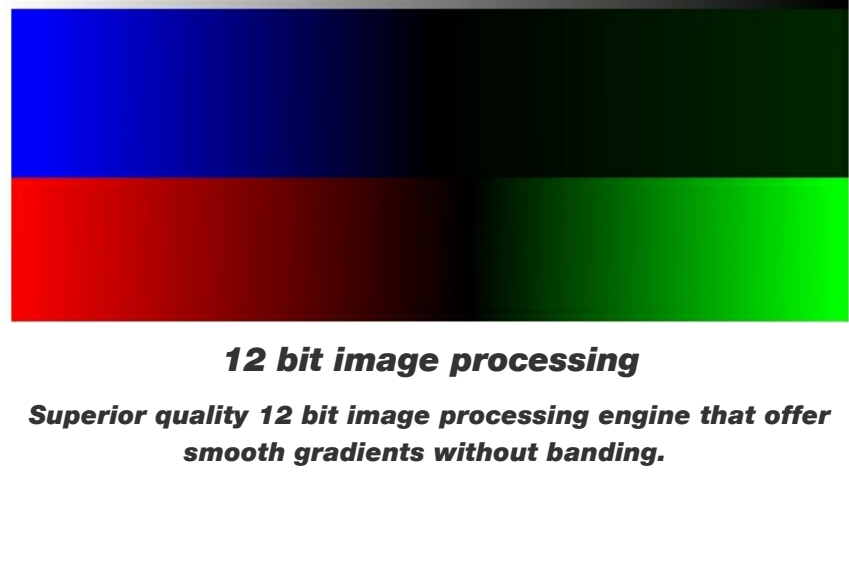


12 bit image processing

Superior quality 12 bit image processing engine that offer smooth gradients without banding.




Markers

Wide range of markers and security areas are available with line color and curtain transparency selection. A User Marker is available if any of standard markers fits your requirements.

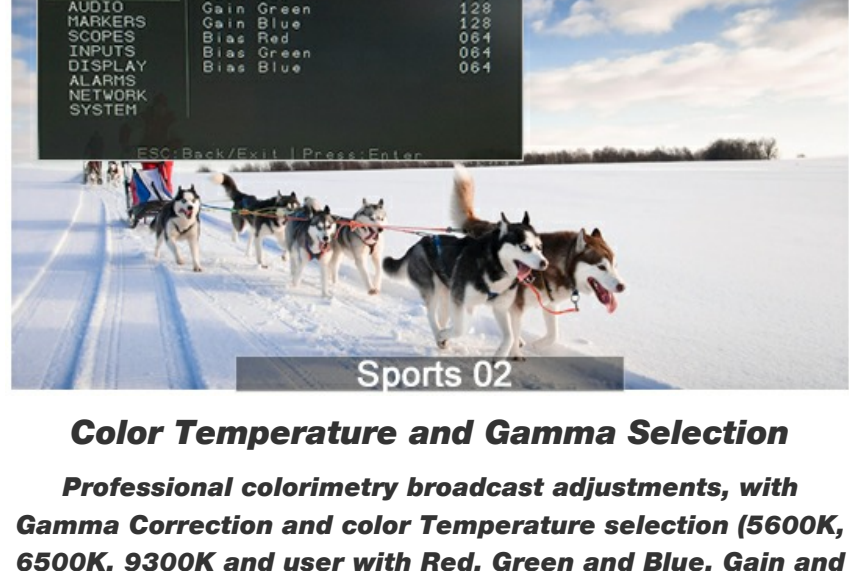


Color Temperature and Gamma Selection

Professional colorimetry broadcast adjustments, with Gamma Correction and color Temperature selection (5600K, 6500K, 9300K and user with Red, Green and Blue, Gain and Bias adjustments)

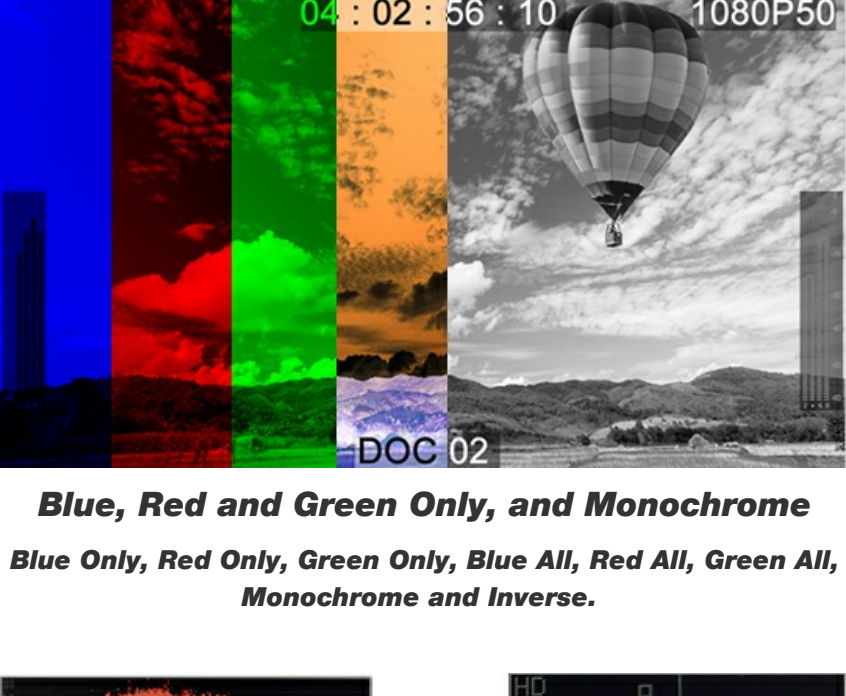


Blue, Red and Green Only, and Monochrome

Blue Only, Red Only, Green Only, Blue All, Red All, Green All, Monochrome and Inverse.

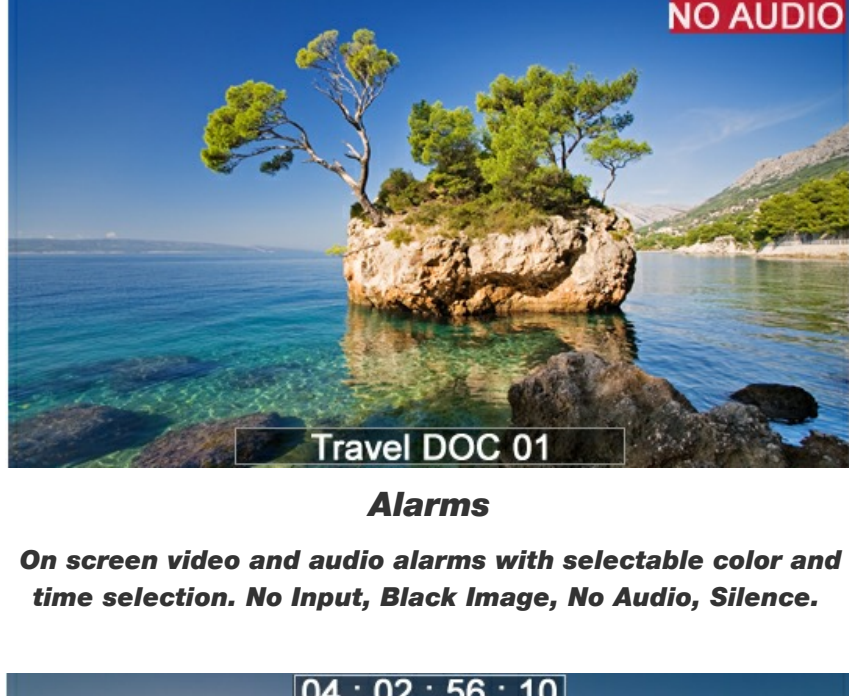


Alarms

On screen video and audio alarms with selectable color and time selection. No Input, Black Image, No Audio, Silence.



Waveform & Vectorscope

Real time color Waveform and vectorscope. Select between RGB, R, G, B, YCbCr, Y, Cb, Cr Waveform and two different sizes of scopes. Locate the scopes anywhere on the source quadrant.

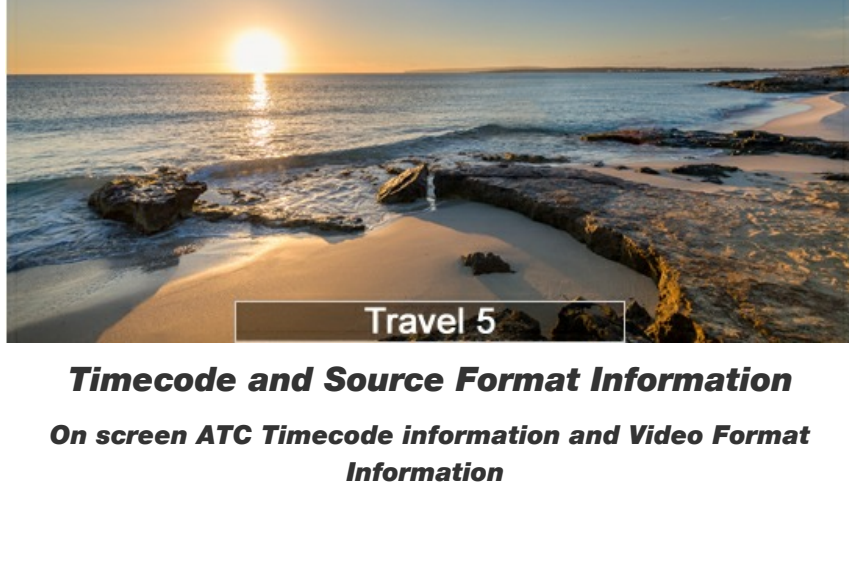

Timecode and Source Format Information

On screen ATC Timecode information and Video Format Information




16 Channel Audio Level Meter

Display up to 16 Channel Audio Level Meters with a wide range of options (All together, Separate in pairs-odds,... Selectable Yellow and Red color level and two different sizes.




Tally and UMD

Red, Green and Yellow tally and 16 character UMD compatible with TSL 3.1 and TSL 5.0. Three tally modes available: Square, Border and UMD (all can be activated together)




Focus Assist

Ajdustable focus assist. Multiple different colors.




False color

Check exposure of your image using False color tool.

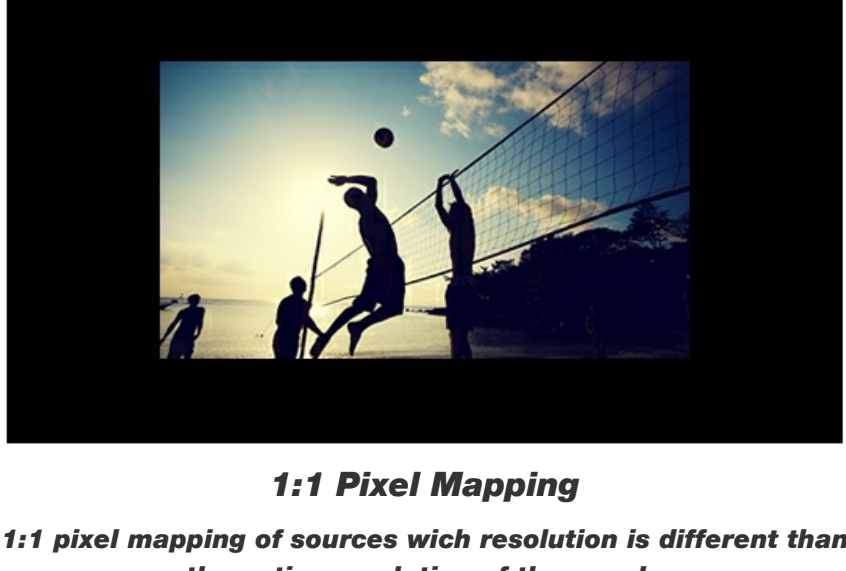


1:1 Pixel Mapping

1:1 pixel mapping of sources wich resolution is different than the native resolution of the panel.

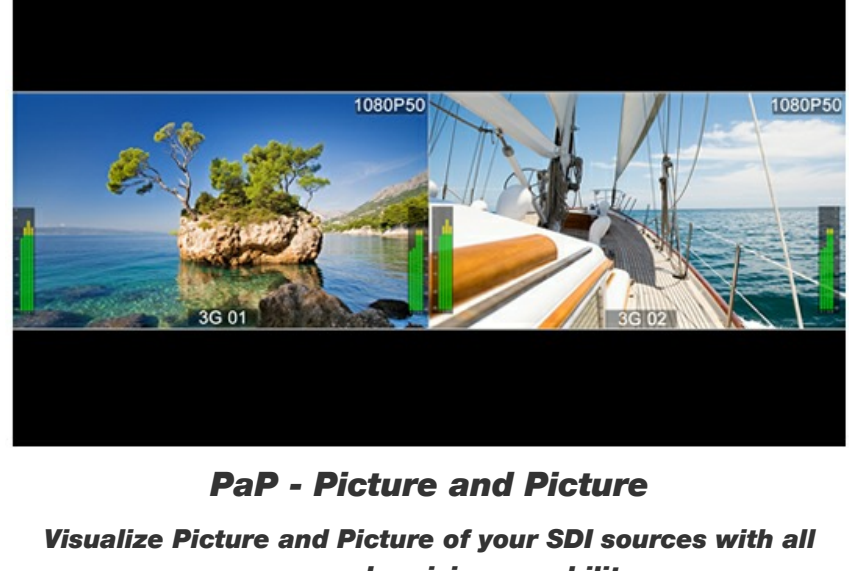


PaP - Picture and Picture

Visualize Picture and Picture of your SDI sources with all scopes and resizing capability

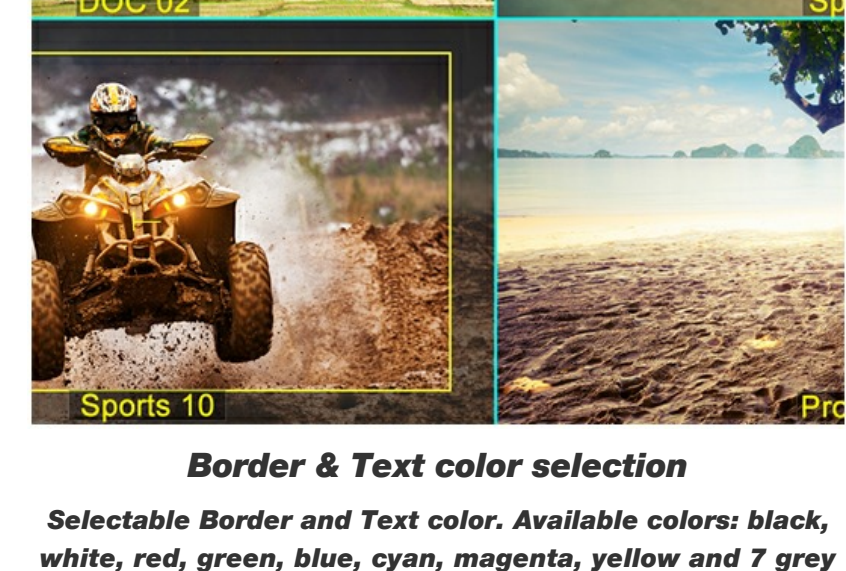


Border & Text color selection

Selectable Border and Text color. Available colors: black, white, red, green, blue, cyan, magenta, yellow and 7 grey levels.




Encoder & Dual Functionality Direct Keys

Encoder to easy navigate through the OSD menu, and direct keys with dual functionality (fixed/configurable). Activate [Fn] Mode to use F1 to F11 keys with your custom configuration and access your favourite adjustments just with a press. Keys LED lights can be turned off if required for dark environments.

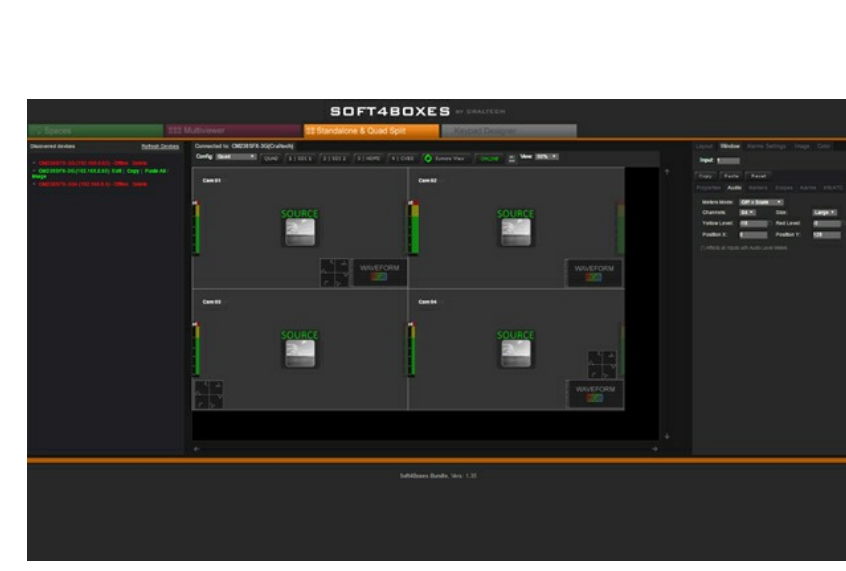

Soft4Boxes Pro Control Software

Soft4Boxes Pro is a software to control our SFX Series Monitors (Stand Alone & Quad-Split versions). S4B PRO is an intuitive and user-friendly "drag & drop" control software. * Click here for more information!



Encoder & Dual Functionality Direct Keys

Encoder to easy navigate through the OSD menu, and direct keys with dual functionality (fixed/configurable). Activate [Fn] Mode to use F1 to F11 keys with your custom configuration and access your favourite adjustments just with a press. Keys LED lights can be turned off if required for dark environments.

Key Features	Specifications	Image gallery	Ordering info	Product Documents
<ul style="list-style-type: none">- 21,5" IPS LED Backlight LCD Monitor- 3G/HD/SD-SDI Autosensing inputs with active loop through, HDMI, SFP Module slot and CVBS inputs- Hardware based (NO Pc, NO hard-drive)- Space-saving, fanless, energy-efficient and lightweight aluminium design- Rugged and user friendly system for easy integration- 12 bit image processing- Quick control: Easy to use keyboard with user configurable direct keys and encoder- Brightness, Contrast, Saturation adjustment- Low processing delay- Aspect Ratio Selection (4:3, 16:9)- Gamma correction- Backlight adjustment				<ul style="list-style-type: none">- Color temperature adjustment (5600K, 6500K, 9300K and User (R, G, B Gain and Bias adjustment))- Blue Only / Monochrome- Markers- Built in Audio Disembedder, 16 channel Audio Level Meters- UMD & Tally- Real time color Waveform and Vectorscope- Selectable RGB, R, G, B, YCbCr, Y, Cb, Cr waveform- Selectable transparency of all scopes and Audio level Meters- Focus assist- False color- 1:1 Pixel Mapping- Rugged and lightweight aluminium design.

More references