



NEXT DAY DELIVERY AVAILABLE
FREE STANDARD UK DELIVERY ON ALL ORDERS OVER £100
INDUSTRY LEADING CUSTOMER SERVICE
FREE TECHNICAL SUPPORT FROM OUR TEAM OF EXPERTS

Categories

- Audio and data connectors
- Video and RF connectors
- Power connectors, distribution and batteries
- Connection panels and stageboxes
- Fibre optic cables, connectors and interfaces
- Cable assemblies, patchcords and leads
- Cables
- Cabling accessories and tools
- Bags and cases
- Racks and enclosures
- Rack accessories and hardware
- Lights, clocks, furniture, fittings and equipment supports
- Drives, memory, media, labelling and sound effects
- Microphones
- Radio Microphones
- Microphone supports, amplifiers, powering and accessories
- Headphones, headsets, earpieces, amplifiers and wireless systems
- Hearing protection and noise control
- Record, replay and radio receivers
- Audio interfacing
- Video interfacing, processing, monitoring and camera accessories
- Audio mixers and processing
- Amplification
- Loudspeakers and audio monitoring
- Test and measurement
- Communications, conferencing and datacoms

- By brand
- Index
- New products
- Special offers
- Clearance list
- Remainder list

CANARE L-2.5CHWS CABLE Black (reel of 200m)




[Datasheet Print/PDF](#) [Ask a question](#)

Stock code
36-730

Brand
Canare

Model number
L-2.5CHWS

Colour
● Black

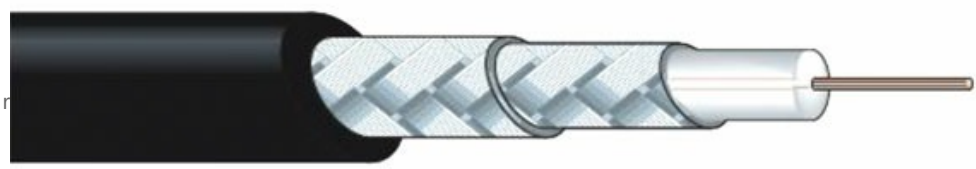

Resources

[Canare L-2.5CHWS Datasheet](#)

CANARE L-2.5CHWS DIGITAL VIDEO CABLE

Flexible and durable coaxial cable, suitable for mobile HD and UHD applications. Designed to withstand repeated bending, it has a stranded centre conductor, with a high-density, double-braided shield and high density foam dielectric insulation.

Technical Specification:

Cable size group:	Not in Canford scheme. Suitable 12G BNCs are Coax Connectors 10-005-W126-EJ1 (48-5064 , 48-5074) and Neutrik NBNC75BFG7X (48-6372).						
Inner conductor:	7/0.2mm (0.6mm O.D. 24AWG)						
Dielectric:	High density foam, 2.6mm O.D.						
Screen 1:	0.10mm/8/16, coverage 95% or more						
Screen 2:	0.10mm/9/16, coverage 94% or more						
Construction:	Coaxial cable						
Jacket:	PVC, 4.2mm OD.						
Impedance:	75 ohms						
Capacitance:	53 pF/m						
Inner conductor resistance:	8.5 ohms/100m						
Screen resistance:	1.0 ohms/100m						
Attenuation:	MHz	10	30	72	88	135	180
	dB/100m	4.00	7.00	10.90	12.10	15.10	17.50
	MHz	270	750	1300	1500	3000	6000
	dB/100m	21.70	37.40	50.50	54.70	81.00	121.90
Weight:	3.2kg/100m						
Reel Length:	200m						

Order [VAT / Delivery](#)

£292.50
per reel (ex. VAT)
5+ £280.80

1

Temporarily out of stock, available in 2-3 weeks.
Need it sooner? [Call us](#)

RoHS Status [Compliant](#)

Also bought [Find similar](#)

Customers also bought...

CANFORD HST-R-M CABLE 1 pair
£2.07

CANFORD CAT5E-F CABLE Black
£1.53

TECHFLEX EXPANDABLE SLEEVING...
£2.64

FLEXIBLE MAINS 3 core 1 sq.mm...
£0.71

NEUTRIK NBNC75BDD6X BNC 12G UHD...
£3.38

RJ45 PLUG 8P8CS
£0.80

NEUTRIK NC3MXX XLR Male cable...
£2.96

RJ45 STRAIN RELIEF BUSH 5.5mm...
£0.17

Cookie consent

This site uses cookies to store information on your computer. By continuing we assume your permission to store cookies, as detailed in our [privacy policy](#).

36-730 CANARE L-2.5CHWS CABLE Black (reel of 200m)



Flexible and durable suitable for mobile HD and UHD applications.
 Designed for withstanding repeated bending.
 Stranded center conductor.
 Double-braided shield.
 High density dielectric insulation.

Cable Size Group	Not in Canford scheme. (See 'Connectors & Tooling' below)		
Inner conductor:	7/0.2mm	(0.6mm O.D.	24AWG)
Dielectric :	2.6mm O.D.		
Screen 1:	0.10mm/8/16	(95% or more)	Braid
Screen 2:	0.10mm/9/16	(94% or more)	Braid
Construction:	Coaxial cable		
Jacket material:	PVC		
Overall diameter:	4.2mm		
Impedance:	75 ohms		
Capacitance:	53 pF/m		
Inner conductor resistance:	8.5 Ω/100m		
Screen resistance:	1.0 Ω/100m		

Attenuation:

MHz	10	30	72	88	135	180	270	750	1300	1500	3000	6000
dB/100m	4.00	7.00	10.90	12.10	15.10	17.50	21.70	37.40	50.50	54.70	81.00	121.90

Weight:	3.2kg/100m
Reel Length:	200m

Connectors & Tooling:

- 48-5064 COAX CONNS 10-005-W126-EJ1 BNC 12G Male cable crimp, 75 ohm, Canare L-2.5CHWS
- 48-5074 COAX CONNS 10-005-W126-EJ1 BNC 12G Male cable crimp, 75 ohm, Canare L-2.5CHWS (100 pack)
- 55-8187 COAX CONNS 96-HTS-77 CRIMP TOOL with cavities 1.07, 4.52, 6.48, 7.06mm AF (EF, EF1, FB1, FC1)

- 48-6372 NEUTRIK NBNC75BFG7X BNC 12G UHD Male cable, rear twist, group X
- 48-574 NEUTRIK HX-R-BNC CRIMP TOOL (without die-set)
- 48-563 NEUTRIK DIE-R-BNCX-PDG DIE SET For HX-R-BNC crimp tool

- 48-6371 NEUTRIK NBNC75BDD6X BNC 12G UHD Male cable, rear twist, Belden 1855A, Canare L2.5CHWS
- 48-574 NEUTRIK HX-R-BNC CRIMP TOOL (without die-set)
- 48-560 NEUTRIK DIE-R-BNC-PDC DIE SET For HX-R-BNC crimp tool