



Home > Accessories > Battery plate

## KA-A20S | ALEXA V-mount Plate

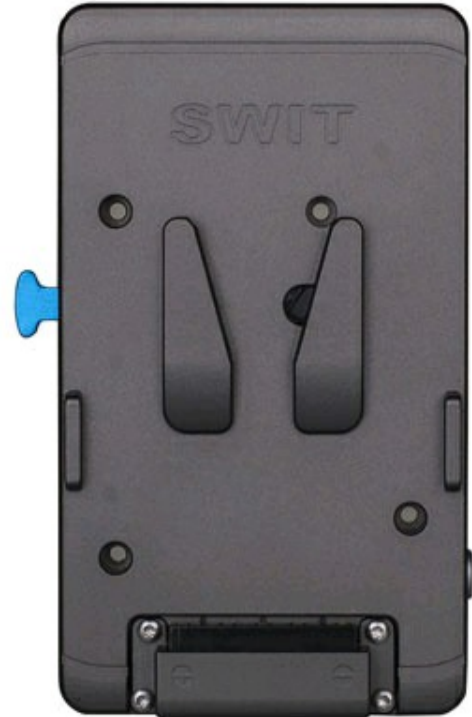


- > Standard V-mount plate
- > For ARRI ALEXA LF/65/SXT etc
- > Output 22-33.6V with PB-H290S
- > Output original voltage with other batteries
- > Aluminum CNC unibody housing
- > High load reliable pins
- > 2xD-tap, 1x LEMO, 1x USB output
- > Multiple circuit protections

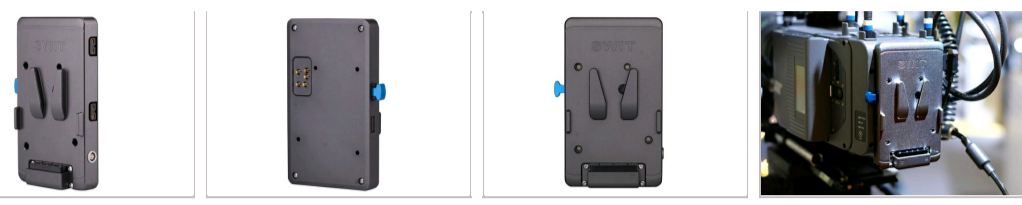

MSRP    Ex TAX / Shipping

Features    Specifications    Download    What's in box    Optional accessory    Related

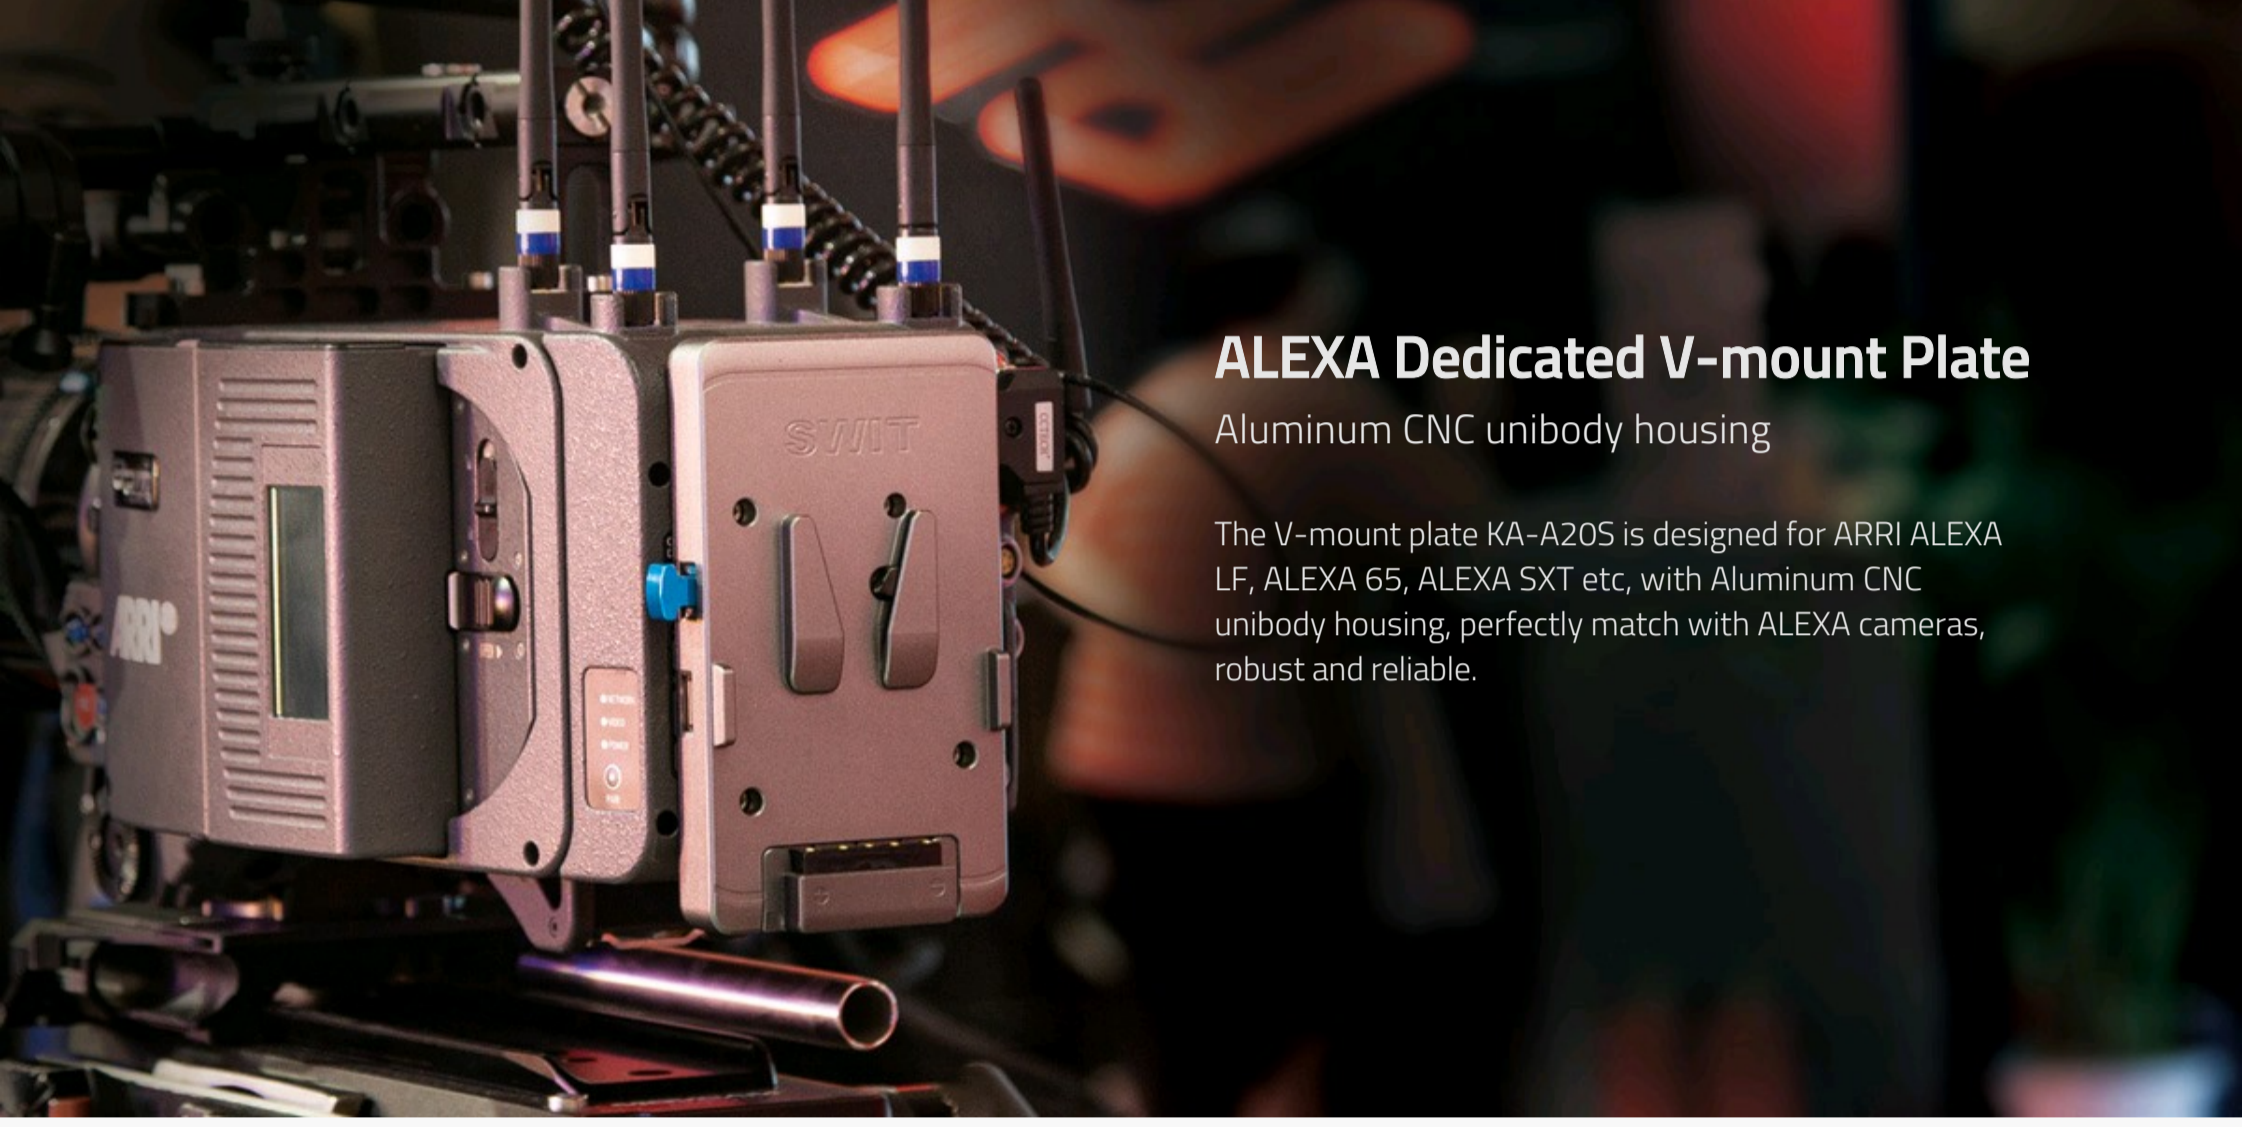

### ALEXA Dedicated V-mount Plate

Aluminum CNC unibody housing

The V-mount plate KA-A20S is designed for ARRI ALEXA LF, ALEXA 65, ALEXA SXT etc, with Aluminum CNC unibody housing, perfectly match with ALEXA cameras, robust and reliable.

### High Voltage to ALEXA

Match with PB-H290S to output 22-33.6V

SWIT Bi-voltage battery PB-H290S can recognize the KA-A20S plate and auto switch on 22-33.6V, to power Alexa LF/65/SXT etc. Use other batteries, the KA-A20S plate will not change voltage, and directly power the camera.



### High Load Reliable Pins

**Battery Contact Pins:**  
Unique lantern type pins, wider contact surface, support Max 16A current without overheating;  
**Camera Contact Pins:**  
Copper rod direct conducting (instead of spring conducting), and the strong spring makes fully contact with camera pins, ensure 10A reliable current and prevent overheat.

### Multi DC Sockets

D-tap / LEMO / USB

KA-A20S plate provides 2x D-tap, 1x 2-pin LEMO and 1x 5V/2A USB output.  
Under 22-33.6V power, the D-tap and LEMO outputs constant 16V, Max 6A;  
Under 11-16.8V power, the D-tap and LEMO outputs original battery power.



### SWIT Electronics Europe GmbH

Heerdterbuschstrasse 10 / HALLE 9,  
41460 Neuss, NRW Germany  
VAT: DE308323924  
WEEE-Reg.-Nr. DE 37399843  
Email: info@swit-europe.com

### Email Newsletter

Please enter Email address below and subscribe our newsletters.

[Privacy Policy](#)

[leave a message](#)







