
SWIT Global | SWIT America

O)

f



- > 28V, 32Wh 3Ah battery cells inside
- > 200W constant high load
- > At least 2 minutes run time
- > 120 seconds countdown display
- > 2x D-tap regulated 14V output
- > 1x 2-pin LEMO regulated 14V output
- > USB 5V/2A x1 power output
- > 22-33.6V 8-pin input for power station hotswap
- Aluminum CNC unibody housing
- Multiple circuit protections

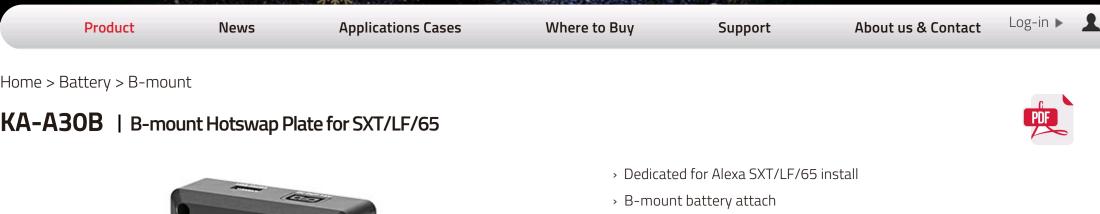

SW







Download

What's in box

Optional accessory

l accessory Related

# **B-mount Hot-swap Plate**

KA-A30B is a B-mount hot-swap plate for ARRI Alexa SXT / LF / 65 install. You don' t need to switch off the camera when changing battery.






# **28.8V Power for ALEXA**

Working with 28.8V B-mount battery, the KA-A30B power ALEXA SXT/LF/65 cameras at 28.8V (22-33.6V) by the rear contact pins, and when remove B-mount battery, the KA-A30B output reg. 28V to camera for hotswapping.

# 2mins at 200W load

KA-A30B has 32Wh/3Ah battery cells inside, 200W constant high load, even after 1000 cycle times, the plate can still ensure 2 minutes hot swap time for changing battery.

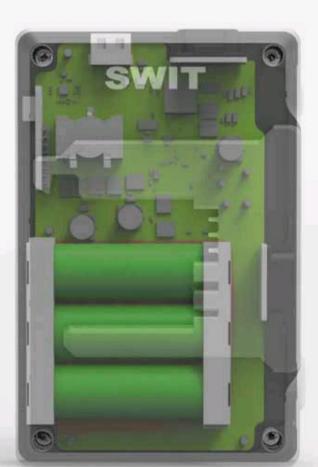



# **Power Interfaces**

KA-A30B provides: 2x D-tap 14V Reg. output 1x 2-pin LEMO 14V Reg. output 1x USB-A 5V/2A output 1x 8-pin 22-33.6V input (For power station hotswap)




# SWIT Electronics Europe GmbH

Heerdterbuschstrasse 10 / HALLE 9, 41460 Neuss, NRW Germany VAT: DE308323924 WEEE-Reg.-Nr. DE 37399843 Email: info@swit-europe.com

# Email Newsletter

#### Please enter Email address below and subscribe our newsletters.



leave a message



Battery

Fast Charger

# **Hot Swap Plate**



Fast Charge


USB-C

Drop-proof

### • OLED Power Info Display

High Load

B-mount



The OLED screen can display battery status and power information, includes power percentage, remaining running time, USB-A / USB-C status, and protection warning code if any abnormal detected.

# HB-A290B

290Wh 28.8V B-mount Battery

#### ◆ 21.6-33.6V Output

Completely compatible with ARRI camera and lighting systems. The high voltage helps to reduce current on high power devices, reliable and longer life time.

#### 250W / 10A High Load

Constant high load output for Cine cameras, camera-top gears, and high power light fixtures.

#### 2x D-tap 16V Reg. Output

Provides 2x D-tap with regulated 16V output for all kinds of camera-top gears, Max load 60W/3.8A in total.

#### USB-C 60W In & Out

Provides 1x USB-A 5V/2A and 1x USB-C 60W input and 60W output. You could charge smart phones, tablets and laptops on the filmset, and you can also charge the battery by USB-C chargers, within 5.5 hours.



USB-C 60W OUT 5V/9V/12V/15V/20V - 3A BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP

**USB-C 60W IN** 15V/20V - 3A 5.5 hours fully charge

60W USB-C can charge Macbook Air/13, Macbook Pro 13/15/16, Huawei Matebook E/12/X13/XPRO, Thinkpad, HP, ASUS, Dell and almost all laptops with USB-C ports.





# PC-P461B

4x100W Super Fast B-mount Charger

### ♦ 4-ch Simultaneous 100W Fast Charging

DC 33.6V 3A, 100W super fast charging output for 28.8V B-mount batteries. You can fully charge 4x batteries simultaneously within 3 hours and 50 minutes.

#### Color LCD Charging Info

Equipped with a 3.5-inch large screen to display power percentage, charging current, voltage, battery cycle times and charging abnormal alert.

1 READY Please put on battery.	CURRENT 2.98A VOLTAGE 30.44V
2 37%	4 <b>89%</b>
CURRENT 2,99A	CAPACITY 8962mAh
VOLTAGE 29.34V	

## B-mount Hot Swap Plates for ARRI Cameras



KA-A30B For ARRI ALEXA SXT / LF/ 65



## KA-R30B For ARRI ALEXA MINI / MINI LF



KA-R31B For ARRI ALEXA MINI / MINI LF with SDI 1-2 Distribution and Isolater

### ♦ 32Wh / 3Ah Battery Cells Inside

The hotswap plate has built-in 32Wh battery cells, and you don't need to switch off camera when you change battery, the inner cells will take over power till a new battery is mounted on.

### 200W Constant Load, 2mins Hot Swap

The inner battery supports 200W constant high load for at least 2 minutes hot swap time, even if it's over 1000 cycle times.

### 120 seconds Countdown Display

When battery is removed, the screen on the hotswap plate will countdown from 120s. You just need to put on a new battery before it count down to 0. The new battery will charge the hotswap plate. You can see the countdown seconds will go back to 120s after a period of time.



D-tap / LEMO Reg. 14V Output

Provides 2x D-tap and 1x 2-pin LEMO with regulated 14V output, and a 5V/2A USB-A for all kinds of camera-top gears.

### ◆ 8-pin LEMO Input for Power Station Hotswap

You can also input 22-33.6V DC via 8-pin LEMO from a power station, for longer run time and hotswap as well.

#### ARRI RAB-1 Clam

KA-R30B/R31B matches with ARRI original MINI / MINI LF support system by connection with RAB-1 Clamp 2 (KA.0023406)

\*The ARRI KA.0023406 clamp is not included in the KA-R30B/KA-R31B product pakage.





# SWIT Electronics Co., Ltd. SV +86-25-85805753 1 http://www.swit.cc ht

Email: contact@swit.cc

SWIT Electronics America, Inc 1-(408)260-8258 http://www.switusa.com Email: info@swit.us SWIT Electronics Europe GmbH +49(0)21316632331 http://www.switeu.com Email: info@swit-europe.com





Facebook Page

Instagram













