


Home > Battery > B-mount

## KA-S21B | B-mount battery to V-mount 28.8V Plate

- > V-mount device to use B-mount battery
- > 28.8V (21.6-33.6V) input & output
- > SWIT HB-A290B and BIVO series compatible
- > RED V-Raptor XL 28.8V power solution
- > Thinner and light weight

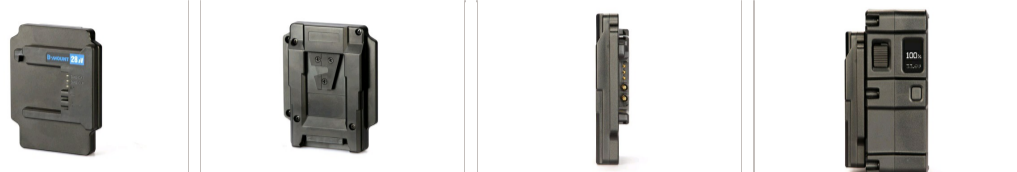

MSRP Ex TAX / Shipping

Features Specifications Download What's in box Optional accessory Related

### B-mount to V-mount 28.8V

KA-S21B conversion plate is to use the B-mount battery to power V-mount cameras or other devices. The ID pin of the B-mount plate is 28.8V, so the V-mount output voltage is 21.6-33.6V range. Please make sure the V-mount cameras or devices support up to 33.6V input.



### RED V-Raptor XL Power

The RED V-Raptor XL needs 28.8V high voltage power input to enable the various DC out sockets on the camera. Use B-mount batteries and the KA-S21B plate will power RED V-Raptor at 21.6-33.6V, to active the full functions of the camera, and avoid misuse on other cameras.



### Power RED XL by B-mount Batteries

Use SWIT B-mount batteries, including HB-A290B, BIVO-98, BIVO-160, BIVO-200, BIVO-290, and the KA-S21B plate, to power RED V-Raptor XL at 21.6-33.6V high voltage.

#### SWIT Electronics Europe GmbH

Heerdterbuschstrasse 10 / HALLE 9,  
41460 Neuss, NRW Germany  
VAT: DE308323924  
WEEE-Reg.-Nr. DE 37399843  
Email: info@swit-europe.com

#### Email Newsletter

Please enter Email address below and subscribe our newsletters.

[Privacy Policy](#)

[leave a message](#)





100%  
33.6V





RED DIGITAL CINEMA

RED

V-RAPTOR-XL

EJECT

EJECT

B-MOUNT 28.1V

SMB-DAT  
SMB-CLK  
ID

+

WARNING  
DO NOT REMOVE THE BATTERY COVER  
WHILE THE CAMERA IS ON



INTAKE: DO NOT OBSTRUCT