


Home > Lighting > Panel LED

S-2820 | 200W RGBW LED Panel Light

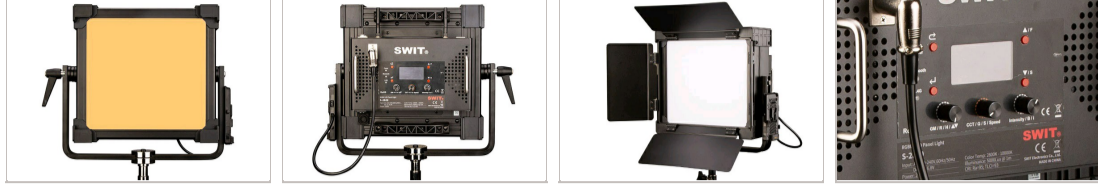

MSRP Ex TAX / Shipping


Features Specifications Download What's in box Optional accessory Related



200W RGBW 1:1 Panel

280pcs SMD LEDs


S-2820 is an RGBW 1:1 panel LED light, adopts 280pcs SMD LEDs, 200W power output, 5000Lux @ 1 meter.

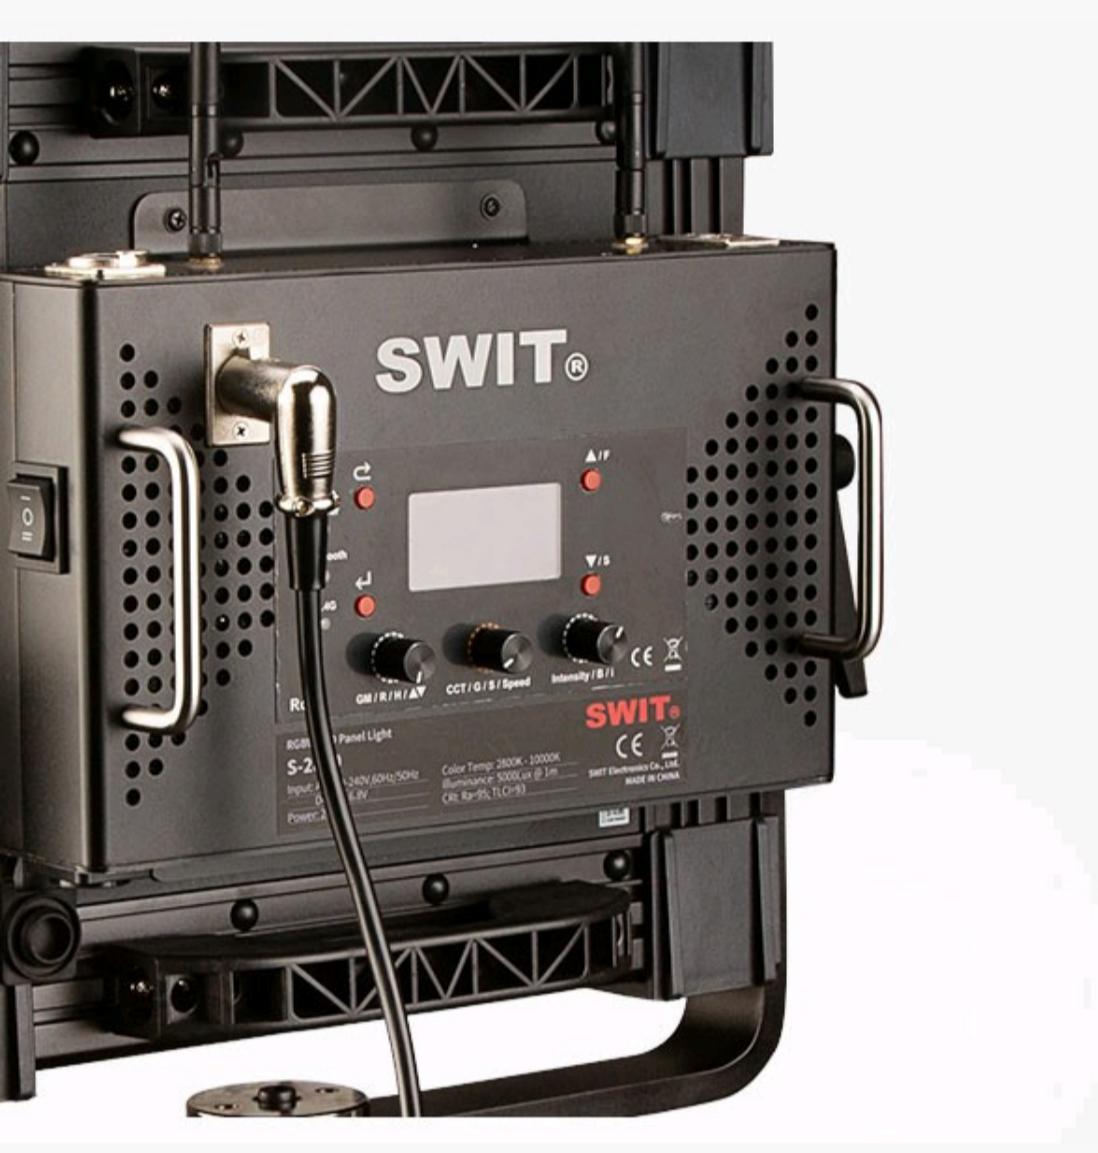

Smart Phone APP control

IOS and Android


S-2820 has a control panel on the rear side, and can also be operated by Smart Phone APP.
IOS APP: App Store, search "RGB Panel"
Android APP: Download [HERE](#).

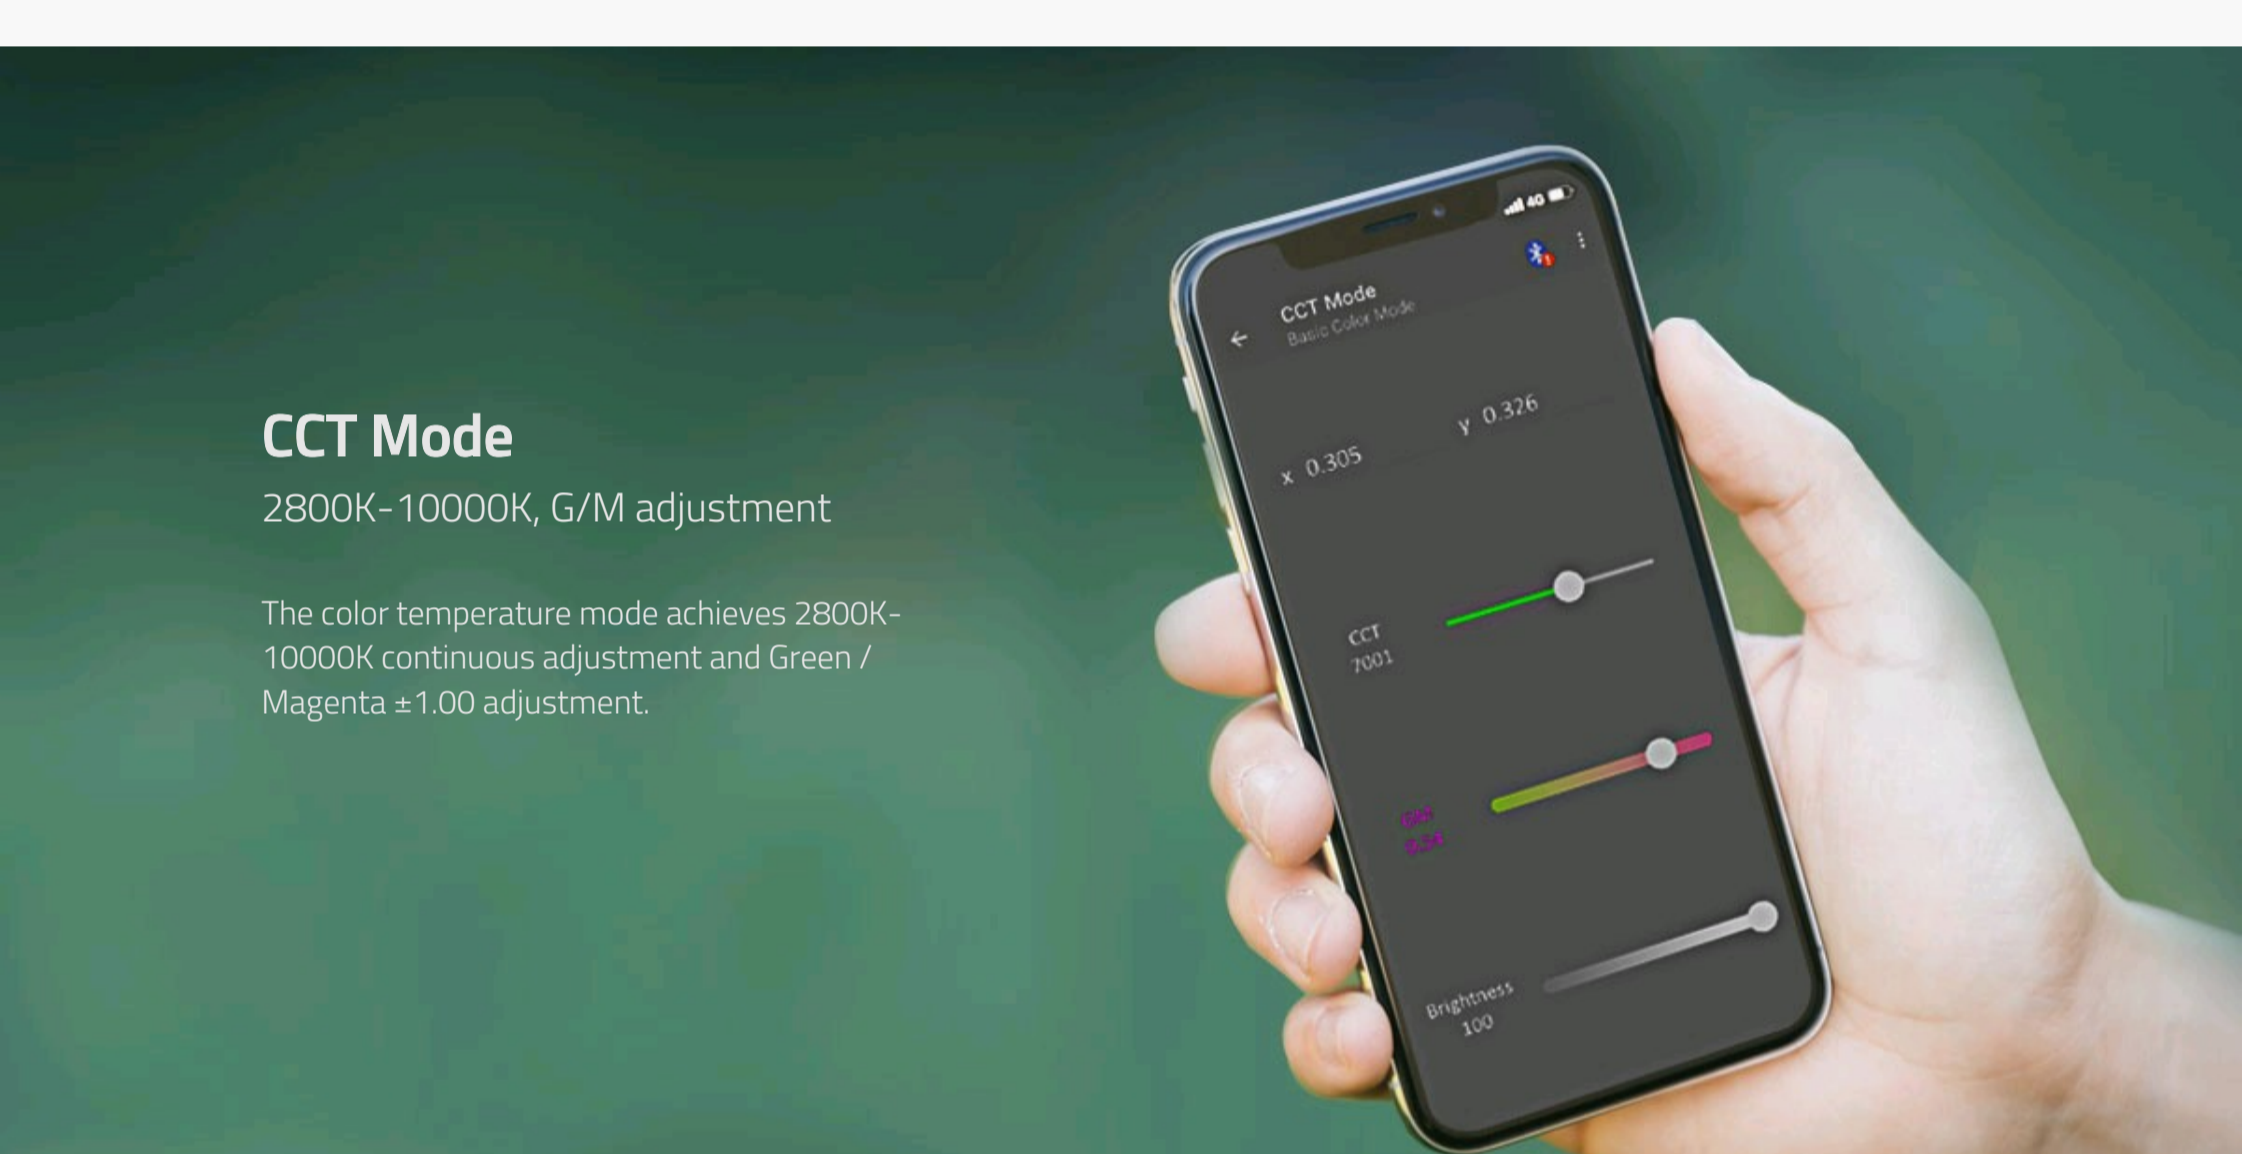

CCT Mode

2800K-10000K, G/M adjustment

The color temperature mode achieves 2800K-10000K continuous adjustment and Green / Magenta ±1.00 adjustment.

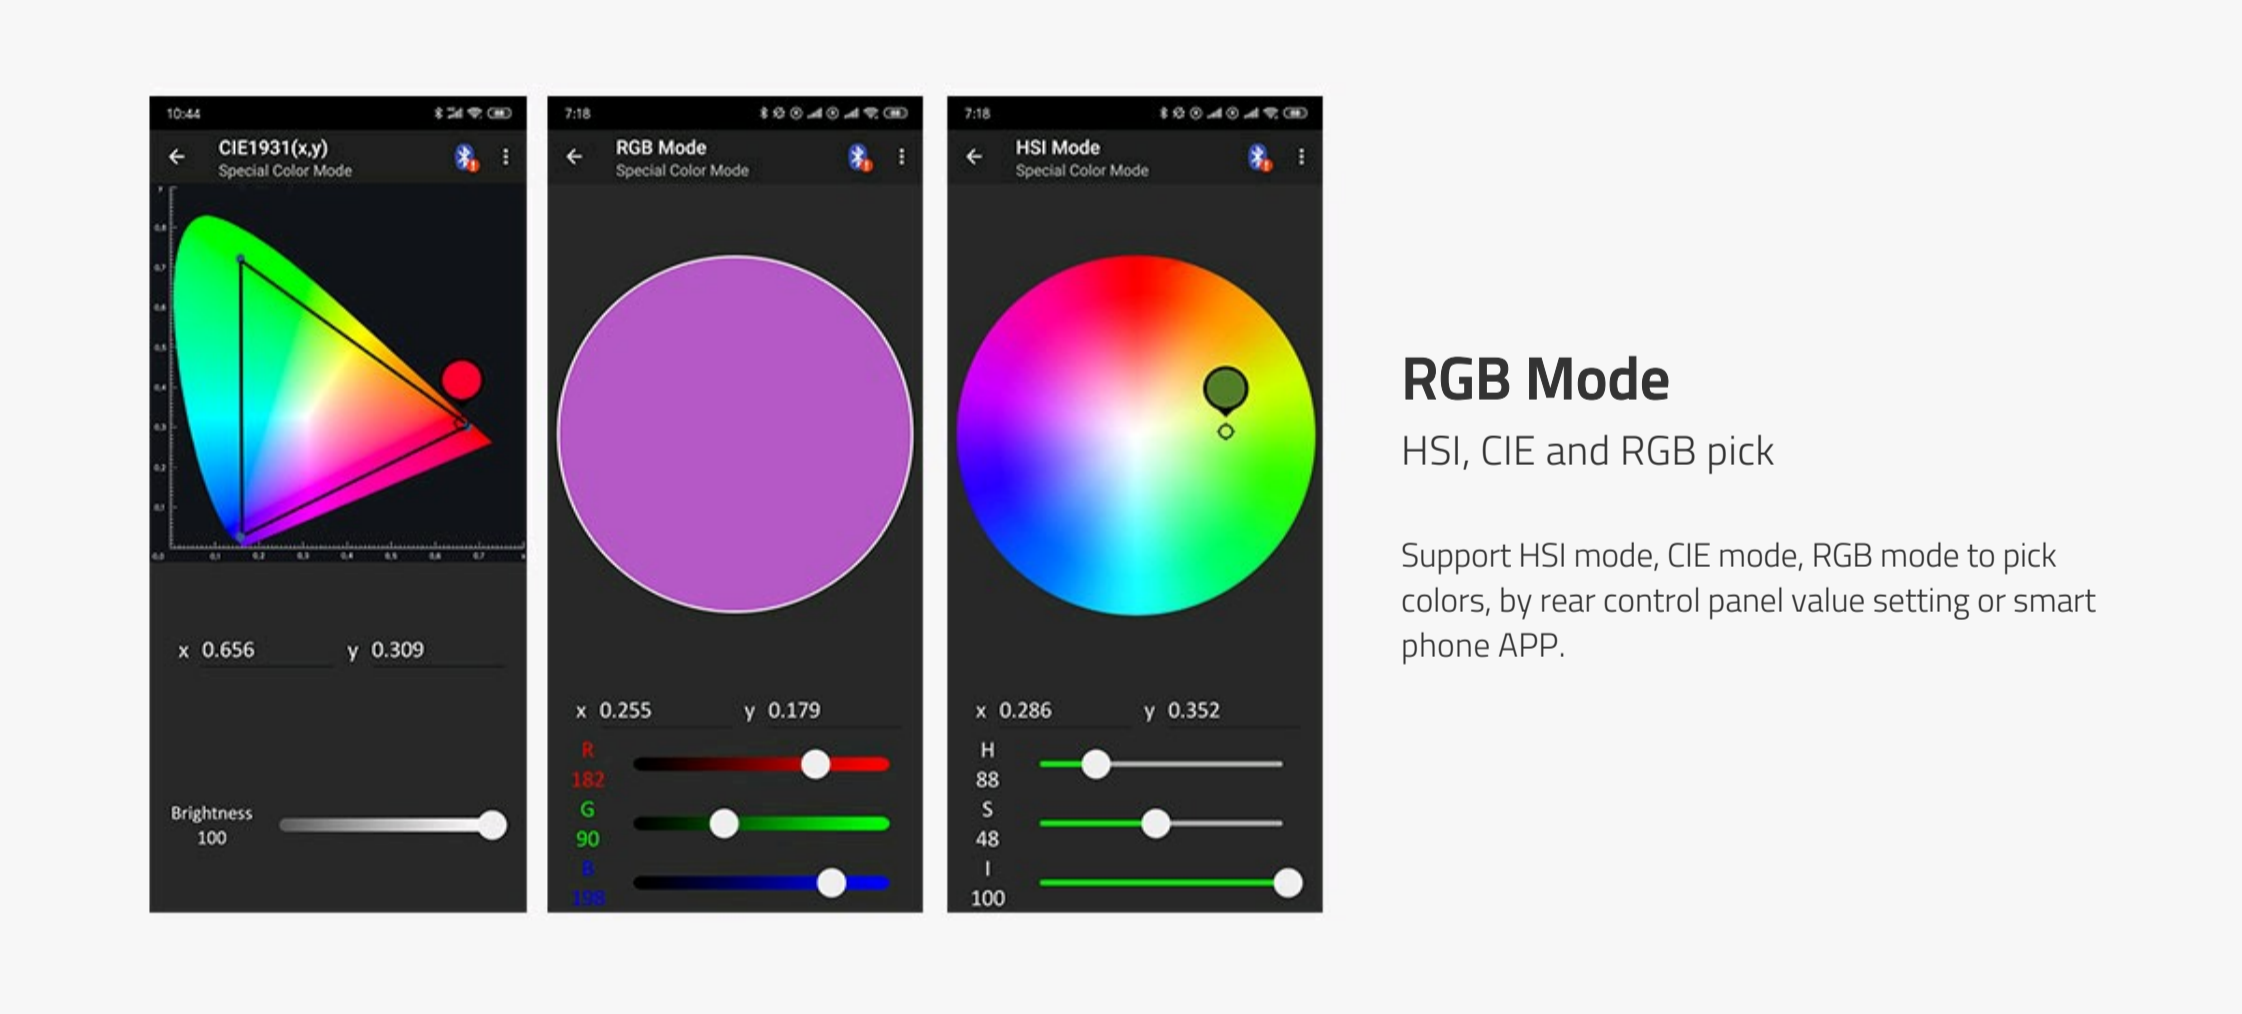

RGB Mode

HSI, CIE and RGB pick

Support HSI mode, CIE mode, RGB mode to pick colors, by rear control panel value setting or smart phone APP.



GEL Mode

Built-in Rosco and Lee Gels

S-2840 has built-in 20x Rosco Gels and 20x Lee Gels to easily switch by rear control panel or smart phone APP.

 Moss Green 089 x: 0.311, y: 0.580	 Deep Amber 134 x: 0.559, y: 0.398	 Ocean Blue 724 x: 0.251, y: 0.339	 Apricot 147 x: 0.534, y: 0.404	 Full C.T Blue 201 x: 0.330, y: 0.339	 Lime Green 088 x: 0.429, y: 0.505	 Moonlight White 603 x: 0.390, y: 0.373	 Medium Pink 036 x: 0.495, y: 0.345	 Middle Rose 110 x: 0.478, y: 0.354	 Platinum 602 x: 0.374, y: 0.368
 Ice and a Slice 513 x: 0.465, y: 0.456	 Bright Pink 128 x: 0.565, y: 0.256	 Special Lavender 137 x: 0.348, y: 0.300	 Lilac Tint 169 x: 0.418, y: 0.372	 Midnight Maya 508 x: 0.217, y: 0.106	 Fern Green 122 x: 0.336, y: 0.549	 Super Pink 194 x: 0.364, y: 0.293	 Peacock Blue 115 x: 0.198, y: 0.414	 Rose Purple 048 x: 0.454, y: 0.259	 Steel Blue 117 x: 0.332, y: 0.390



Power Input

AC, V-mount DC

S-2820 supports SpeakOn AC power input and 4-pin XLR DC 14.8-26V input. Provides with standard V-mount plate.

SWIT®

RGBW Panel Light

CCT / RGB / GEL / Effects / APP control


S-2820 1:1, 200W

S-2840 2:1, 400W




S-2820 200W

280pcs LEDs
5000 Lux @ 1m
CRI: 95 TLCI: 93
DMX 512 control
AC/V-mount power

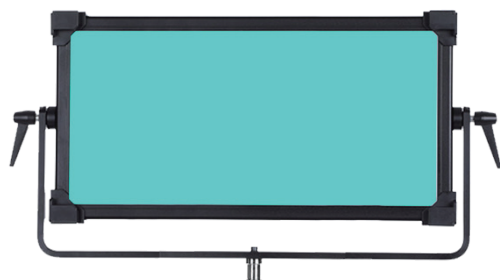


S-2840 400W

560pcs LEDs
10000 Lux @ 1m
CRI: 95 TLCI: 93
DMX 512 control
AC/V-mount power

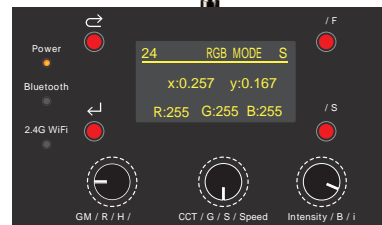

IOS & Android APP control (Bluetooth connection)

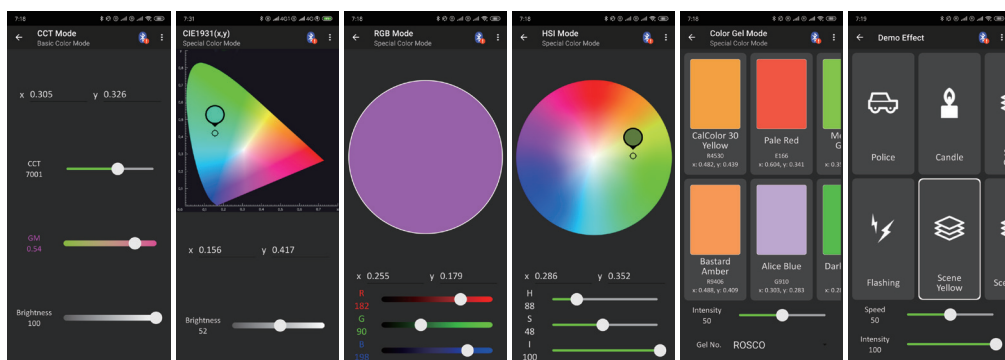

CCT Mode
2700K-10000K
Green/Magenta adjustment

CIE1931(x,y)

RGB Mode

HSI Mode

Color Gel
Rosco Gel (20)
LEE Gel (20)

Demo Effect
Police, Candle
Flashing, Custom

Optional Accessories




SWIT Electronics Co., Ltd.
+86-25-85805753
<http://www.swit.cc>
Email: contact@swit.cc

SWIT Electronics America, Inc
1-(408)260-8258
<http://www.switusa.com>
Email: info@swit.us

SWIT Electronics Europe GmbH
+49(0)20659799339
<http://www.swit-europe.com>
Email: info@swit-europe.com



Facebook Page



Instagram









SWIT®

Power  
Bluetooth  
2.4G  
▲/F  
▼/S  
GM/R/H/Δ  CCT/G/S/Speed  Intensity/B/I 

RoHS CE

RGBW LED Panel Light
S-2820
Input: AC 110-240V, 60Hz/50Hz
DC 11-16.8V
Power: 200W
Color Temp: 2800K - 10000K
Illuminance: 5000Lux @ 1m
CRI: Ra=95, TLCI=93
SWIT®
SWIT Electronics Co., Ltd.
MADE IN CHINA

