

Home > Charger/Adaptor > V-mount

## S-4020 | 14.4V/28.8V Power Station Box




- > PP+ Fiber glass case, strong and durable
- > Install 4 x V-mount batteries
- > 14.4V / 28.8V XLR DC switch output
- > LED voltage display and warning
- > Charging without take out batteries
- > Intelligent protective circuit design



MSRP Ex TAX / Shipping

[Features](#) [Specifications](#) [Download](#) [What's in box](#) [Optional accessory](#) [Related](#)

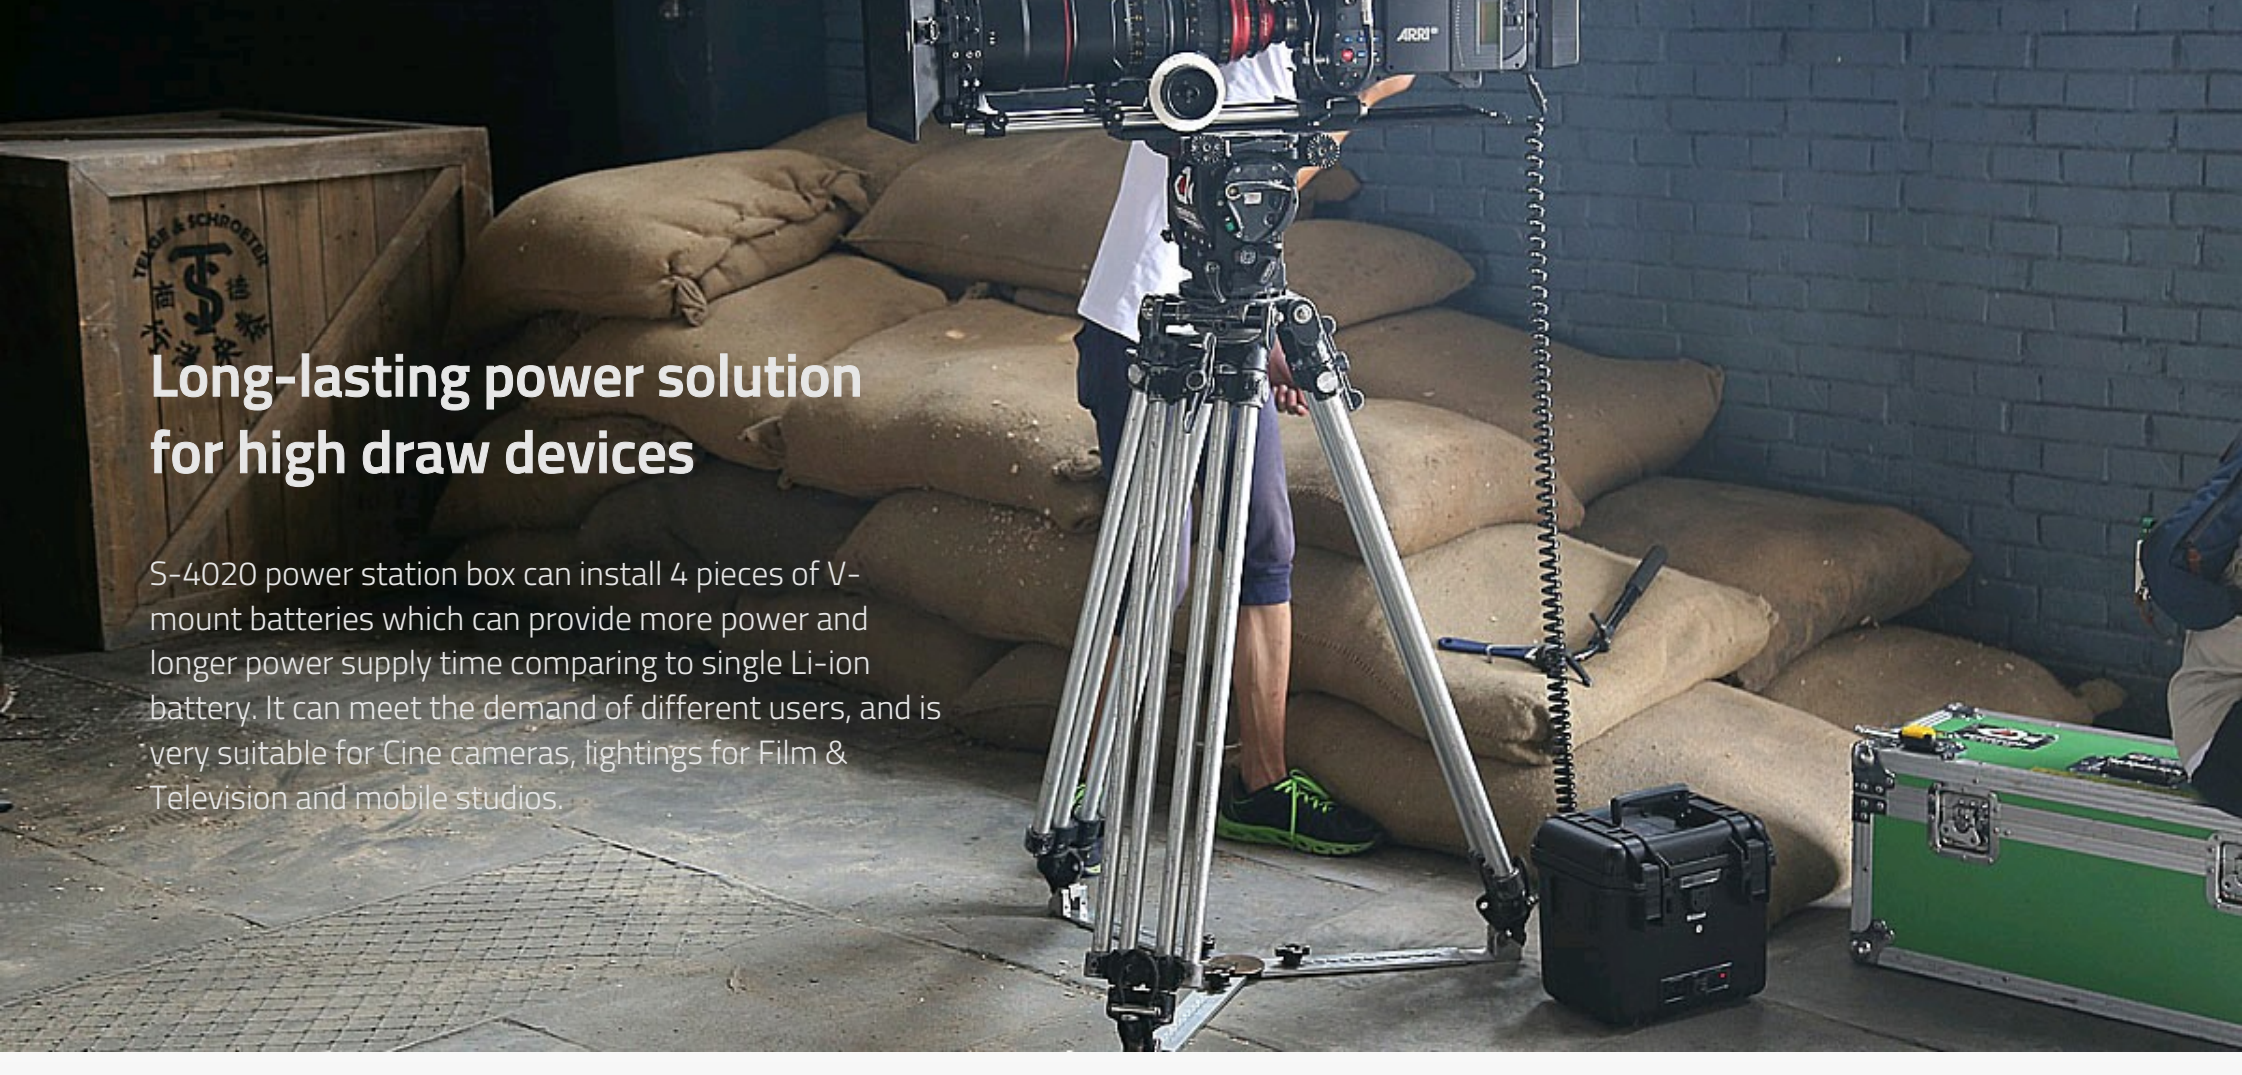

### Long-lasting power solution for high draw devices

S-4020 power station box can install 4 pieces of V-mount batteries which can provide more power and longer power supply time comparing to single Li-ion battery. It can meet the demand of different users, and is very suitable for Cine cameras, lightings for Film & Television and mobile studios.



### PP+ Fiber glass case

S-4020 adopts PP+ Fiber glass case which is high intensity, high toughness and high temperature resistant.


### Power with 4 V-lock batteries

Considering the size, weight, power efficiency, and usability, S-4020 is designed to be powered with 1-4 V-lock batteries. With auto-balanced circuite design, the different models and capacities batteries can be mixed. The max output power is limited by battery inside.



### 2-ch XLR DC output

Select 4-pin XLR 11-16.8V 15A(180W) or 3-pin XLR 22-33.6V15A(360W) to DC output And S-4020 is designed with multiple circuit protections, such as over load, over voltage, and etc.

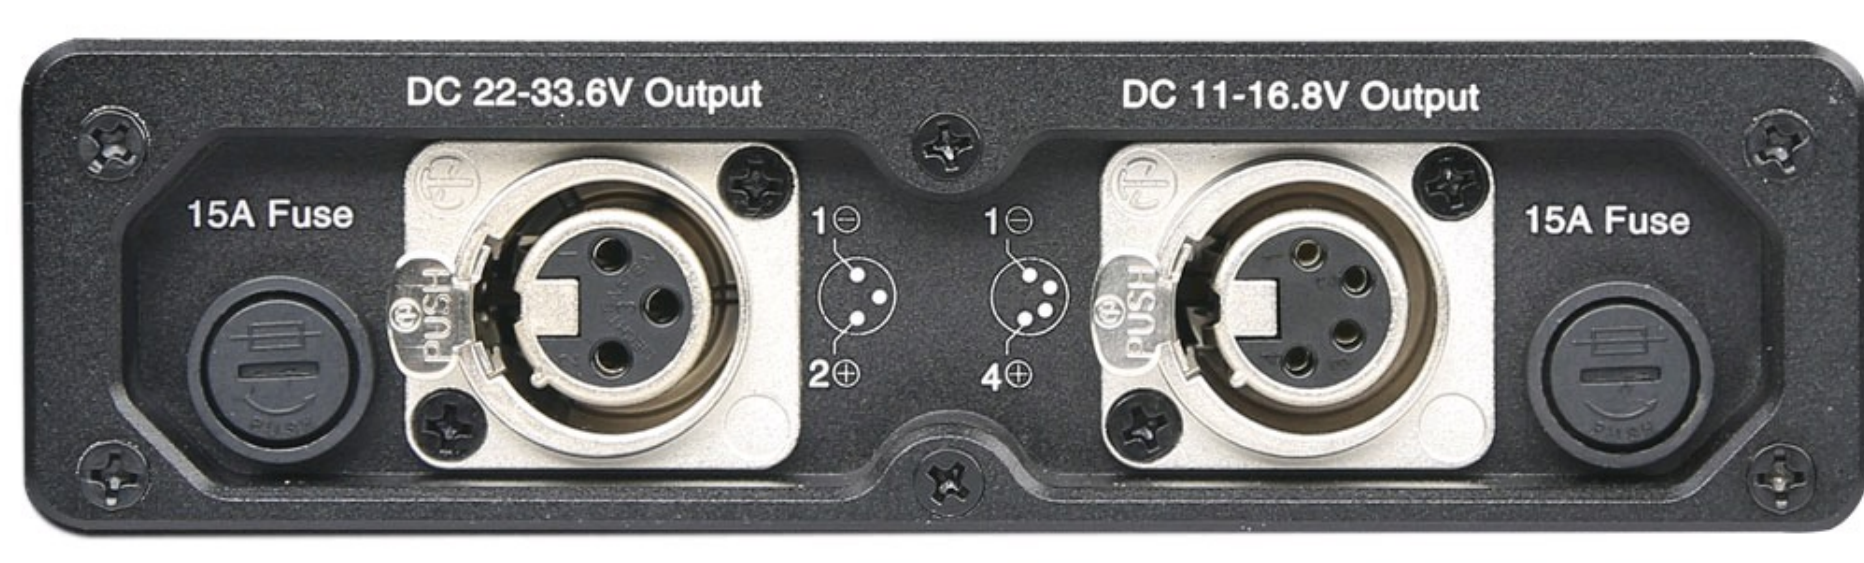

### LED panel display status

With a LED panel, S-4020 can display real-time voltage, and when battery capacity is too low, the LED panel will keep flashing to remind you to change or charge batteries.



### Charging with batteries inside

With the supplied 5A charger, user can charge the batteries in the S-4020 directly, without taking out of them.

### Cooling fan design

The fan keeps dissipating heat from the box, and makes it safe when working in high temperature environment.



### SWIT Electronics Europe GmbH

Heerdterbuschstrasse 10 / HALLE 9,  
41460 Neuss, NRW Germany  
VAT: DE308323924  
WEEE-Reg.-Nr. DE 37399843  
Email: info@swit-europe.com

### Email Newsletter

Please enter Email address below and subscribe our newsletters.

[submit](#)

[Privacy Policy](#)

[leave a message](#)



## 4-Battery Power Station Box

S-4010/S-4020/S-4030

- ◆ Install 4x V-mount batteries
- ◆ 2x XLR DC output (12V or 24V option)
- ◆ Real time output voltage LED display
- ◆ Low battery warning
- ◆ Charging without take out batteries
- ◆ Intelligent protective circuit design
- ◆ PP + Fiber glass case, strong and durable



PP + Fiber glass case

Install 4x V-mount batteries

Inside charging (5A)

Voltage display / alert

### Output Descriptions:

	<b>S-4010</b> 12v + 12v <b>Dual 12V output</b>	4-pin XLR 11-16.8V DC output x2 Max Load: 15A/180W per channel 2 channels output simultaneously
	<b>S-4020</b> 12v + 24v <b>12V + 24V output</b>	4-pin XLR 11-16.8V DC output x1 Max Load: 15A/180W 3-pin XLR 22-33.6V DC output x1 Max Load: 15A/360W 12V and 24V will not output simultaneously
	<b>S-4030</b> 24v + 24v <b>Dual 24V output</b>	3-pin XLR 22-33.6V DC output x2 Max Load: 15A/360W in total 2 channels output simultaneously

### Specification

Model	S-4010	S-4020	S-4030
Input	DC 16.8V 5A (Charging)	DC 16.8V 5A (Charging)	DC 16.8V 5A (Charging)
Output	DC11-16.8V 15Ax2 (180Wx2)	DC 11-16.8V 15A (180W) Or DC 22-33.6V 15A (360W)	DC 22-33.6V x2 Total 15A(360W)
Dimension	290mm x 221mm x 278mm		
Net weight	3.45Kg		
Working environment	Working temperature: 0°C ~ +40°C Working humidity: 10% ~ 90% Storage temperature: -15°C ~ + 60°C		

















CHARGER INPUT

POWER

12V  
OFF  
24V

VOLTAGE

8.88