

Home > Charger/Adaptor > V-mount

S-4040 | 24V/48V Power Station Box




- > PP+ Fiber glass case, strong and durable
- > Install 4 x V-mount batteries
- > 4-pin regulated 24V 10A DC output
- > 3-pin regulated 48V 10A DC output
- > LED voltage display and warning
- > Charging without take out batteries
- > Intelligent protective circuit design



MSRP Ex TAX / Shipping

[Features](#) [Specifications](#) [Download](#) [What's in box](#) [Optional accessory](#) [Related](#)

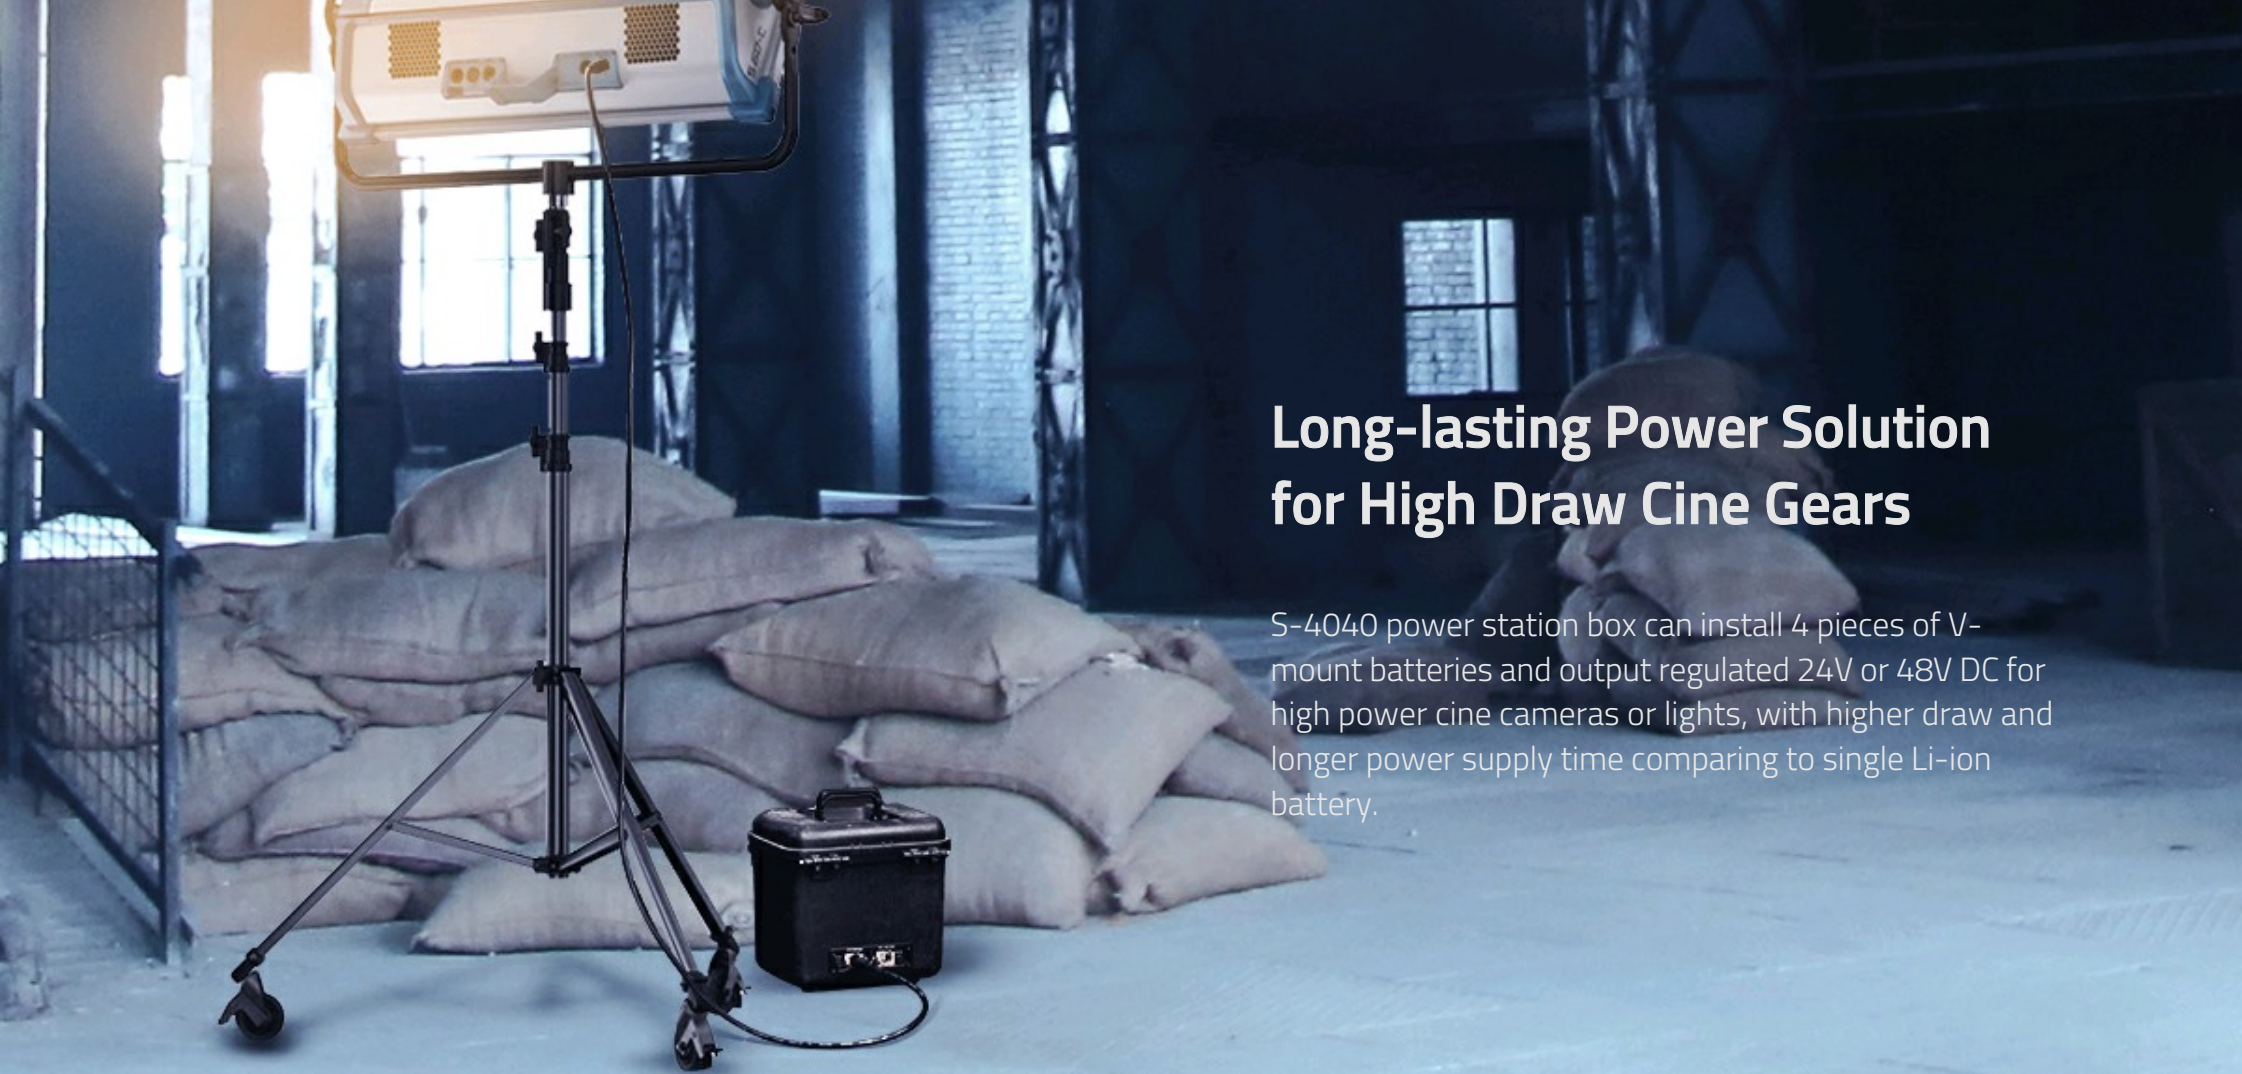

Long-lasting Power Solution for High Draw Cine Gears

S-4040 power station box can install 4 pieces of V-mount batteries and output regulated 24V or 48V DC for high power cine cameras or lights, with higher draw and longer power supply time comparing to single Li-ion battery.



PP+ Fiber glass case

S-4040 adopts PP+ Fiber glass case which is high intensity, high toughness and high temperature resistant.


Power with 4 V-lock batteries

Considering the size, weight, power efficiency, and usability, S-4040 is designed to be powered with 4 V-lock batteries. With auto-balanced circuite design, the different models and capacities batteries can be mixed.



24V/48V DC output

S-4040 switched with 1x 4-pin XLR regulated 24V DC output and 1x 3-pin XLR regulated 48V DC output, max 10A draw. It's recommended use 4 same model and same capacity batteries to reach 10A draw. The power station box requires 4 batteries to output 48V DC, and no limitation of battery quantity to output 24V DC.

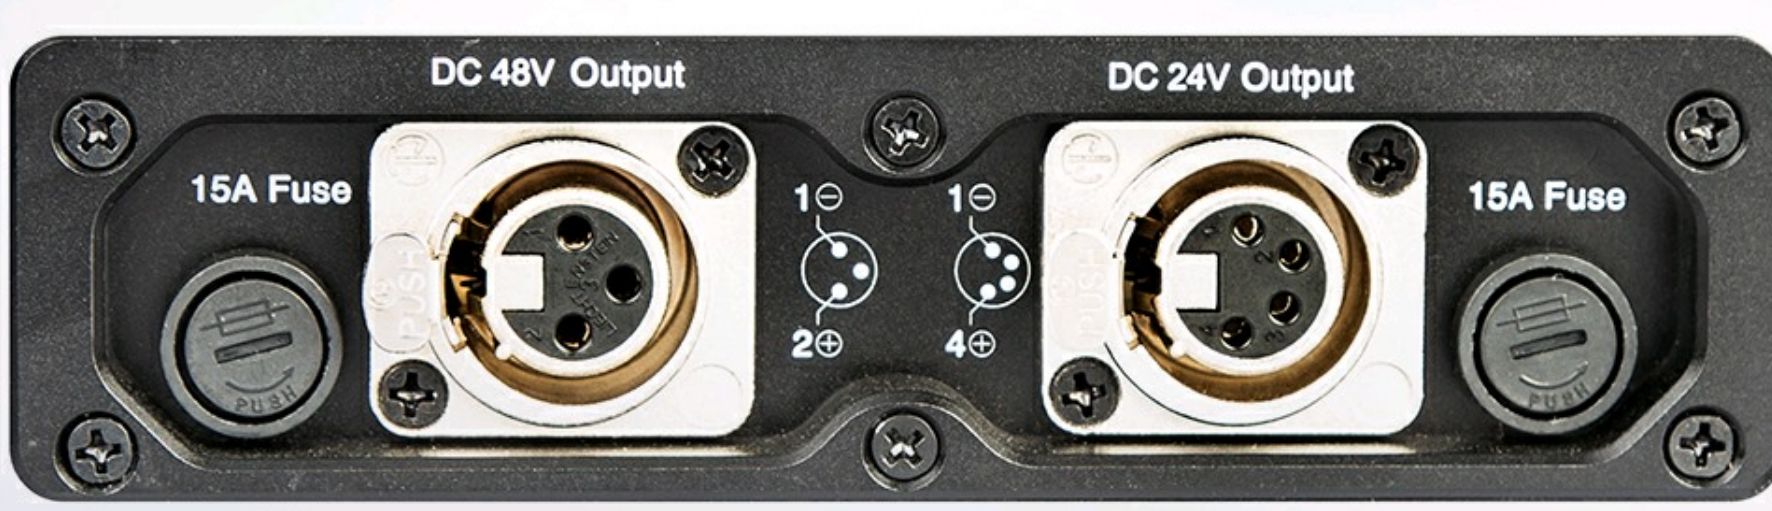

Battery voltage display

The S-4040 LED displays real-time average voltage of inner batteries, to judge the remaining capacity. The LED panel will keep flashing to remind you to change or charge batteries.



Charging with batteries inside

With the supplied 5A charger, user can charge the batteries in the S-4040 directly, without taking out of them.

Cooling fan design

The fan keeps dissipating heat from the box, and makes it safe when working in high temperature environment.



SWIT®

4 Batteries 48V/24V Power Station Box

S-4040

- ▶ 3-pin 48V/10A out
- ▶ 4-pin 24V/10A out
- ▶ PP+ Fiber glass case
- ▶ Charging inside (5A)



Output Description

Battery	Outlet	Voltage	Max Load
4x V-mount batteries (size ≤ 170x105x70mm)	3-pin XLR	48V Regulated	10A
	4-pin XLR	24V Regulated	10A

* 48V output requests 4 batteries together, and 24V output requests any 1-4 batteries.
* Use same model batteries and same capacity percentage are recommended.



Battery Run Time

Capacity \ Devices	Skypanel S60/S120 48V	Orbiter 48V	Alexa SXT 24V	Alexa LF 24V	Alexa Mini LF 24V
4x 160Wh batteries	>1.5 hours	>1.5 hours	>6.8 hours	>3.6 hours	>9 hours
4x 220Wh batteries	>2 hours	>2 hours	>9 hours	>5 hours	>12 hours
4x 240Wh batteries	>2.2 hours	>2.2 hours	>10 hours	>5.5 hours	>13 hours
4x 260Wh batteries	>2.4 hours	>2.4 hours	>11 hours	>6 hours	>14.5 hours
4x 290Wh batteries	>2.6 hours	>2.6 hours	>12 hours	>6.5 hours	>16 hours

The S-4040 Power Station Box doesn't include batteries, please purchase batteries separately.

SWIT Electronics Co., Ltd.
+86-25-85805753
<http://www.swit.cc>
Email: contact@swit.cc

SWIT Electronics America, Inc
1-(408)260-8258
<http://www.swit.us>
Email: info@swit.us

SWIT Electronics Europe GmbH
+49(0)20659799339
<http://www.swit-europe.com>
Email: info@swit-europe.com



Facebook Page



Instagram







