

**LB-SF65C | SONY L Series NP-F Battery Pack**



- ◆ SONY NP-F series battery comparable
- ◆ 7.2V nominal voltage Li-ion battery
- ◆ 65Wh / 9.02Ah capacity
- ◆ 30W / 4A constant power load
- ◆ Built-in 12V reg. D-tap output
- ◆ Built-in 25W USB-C input and output
- ◆ 4-level LED power indicator
- ◆ Multiple circuit protections



MSRP Ex TAX / Shipping

**65Wh NP-F Battery with D-tap and USB-C**

LB-SF65C is a new 65Wh large capacity NP-F type DV battery with regulated 12V D-tap output and 25W USB-C in/out, widely compatible with pro-video gears.  
\* Please Note this battery can't power SONY cameras.



**65Wh Large Capacity**

LB-SF65C consists of 6pcs battery cells and has 65Wh/9020mAh large capacity to keep your video devices powered for longer time. The constant power load is 30W/4A.

**Reg. 12V D-tap Output**

The LB-SF65C NP-F battery provides a D-tap power output socket of regulated 12V voltage, widely compatible with various kinds of video devices.  
\* The D-tap has 7.2V to 12V (Reg.) conversion and it's not allowed to charge input via this D-tap socket.



**USB-C 25W Output**

Fast Charging iPhone 12/13

LB-SF65C provides a USB-C sockets, supports 5V 3A, 9V 2.8A, 12V 2.1A, 15V 1.7A, 20V 1.3A, 25W power output to fast charge iphone 12/13 and all kinds of USB-C smart phones or tablets, with BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP multiple protocols.

**USB-C 25W Charging Input**

You can also charge LB-SF65C by USB-C charger. Supports PD 5V 3A, 9V 2.8A, 12V 2.1A, 15V 1.7A, 20V 1.3A, 25W power input, which means you can fully charge the 65Wh battery within 3.5 hours.



**4-level Power Indicator**

Press the power check bottom, the 4-level LEDs indicates remaining percentage.

**4-way Charging**

LB-SF65C can be charged by any NP-F charger. Use SWIT LC-D421 4-way charger you can charge 4 batteries simultaneously, and fully charging within 5 hours.



**SWIT Electronics Europe GmbH**

Heerdterbuschstrasse 10 / HALLE 9,  
41460 Neuss, NRW Germany  
VAT: DE308323924  
WEEE-Reg.-Nr. DE 37399843  
Email: info@swit-europe.com

**Email Newsletter**

Please enter Email address below and subscribe our newsletters.

[Privacy Policy](#)

# SWIT®

## NEW NP-F Battery With D-tap & USB-C

### LB-SF65C 65Wh



### F 65Wh NP-F Style Battery

LB-SF65C is a 65Wh large capacity NP-F style replacement DV battery with D-tap and USB-C sockets.



#### Comparable Batteries

SONY NP-F770, NP-F970



### 12V Reg. D-tap Output



D-tap  
12V Reg.

The LB-SF65C battery provides a D-tap power output socket of regulated 12V voltage, widely compatible with various kinds of video devices.

\* The D-tap has 7.2V to 12V (Reg.) conversion and it's not allowed to charge input via this D-tap socket.

### C USB-C 25W In & Out

iPhone 12/13 Fast Charging

USB-C 25W power output:  
5V=3A, 9V=2.8A, 12V=2.1A,  
15V=1.7A, 20V=1.3A  
BC1.2, PD2.0/3.0, QC2.0/3.0,  
FCP, SCP multiple protocols

USB-C 25W charging input:  
5V=3A, 9V=2.8A, 12V=2.1A,  
15V=1.7A, 20V=1.3A

You can fully charge the 65Wh battery by USB-C charger within 3.5 hours.



### Specifications

Model	LB-SF65C
Voltage	7.2V nominal
Capacity	65Wh, 9020mAh
Power Load	30W, 4A
D-tap	Regulated 12V output, 20W 25W in and 25W out
USB-C	5V/3A, 9V/2.8A, 12V/2.1A, 15V/1.7A, 20V/1.3A BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP
Dimension	71×39×76mm
Weight	0.345g

SWIT Electronics Co., Ltd.  
+86-25-85805753  
<http://www.swit.cc>  
Email: [contact@swit.cc](mailto:contact@swit.cc)

SWIT Electronics America, Inc  
1-(408)260-8258  
<http://www.switusa.com>  
Email: [info@swit.us](mailto:info@swit.us)

SWIT Electronics Europe GmbH  
+49(0)21316632331  
<http://www.switeu.com>  
Email: [info@swit-europe.com](mailto:info@swit-europe.com)



Facebook Page



Instagram



**SWIT**

USB-C



IN&OUT 25W

D-TAP  
12V



**SWIT**®

**LB-SF65C**

Capacity: 7.2V, 9Ah (65Wh) Load: 30W/4A



USB-C IN & OUT: 25W, 5V=3A, 9V=2.8A  
12V=2.1A, 15V=1.7A, 20V=1.3A  
Protocol: BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP  
SWIT ELECTRONICS CO., LTD.




MADE IN CHINA



**SWITT®**

**LB-SF65C**

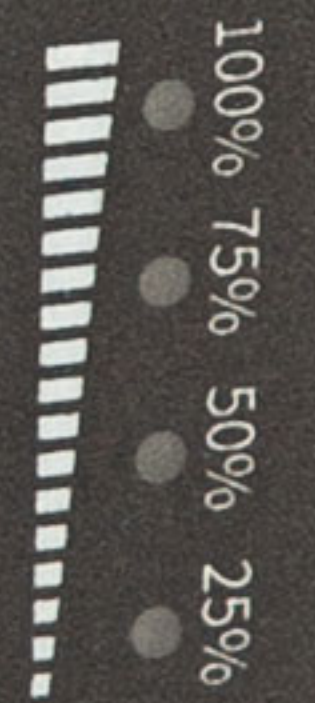

100% 75% 50% 25%

USB-C  
IN&OUT 25W

D-TAP  
12V

D-TAP



**SWIT**<sup>®</sup>

100% 75% 50%

USB-C  
IN&OUT 25W

D-TAP  
12V