



SEARCH

Field LCD Monitor [Home](#) > [Converter/Distributor](#) > S-4604 3GSDI 1 to 4 Distributor

Rack-Mount Monitor

Studio Monitor

Power Station Box

V-Mount Battery

Gold-Mount Battery

NP-1 Style Battery

Charger / Adaptor

Converter/Distributo

Fiber Camera System

Wireless Transmission System

LED Light

Battery for Sony

Battery for Panasonic

Battery for Canon

Battery for JVC

Accessories

Gra-Vue Products

AViPAS Products

B-Stock & Clearance

Dealers/ Rentals

Sales Reps

Shipping & Returns

Material Safety Data Sheets

FAQ

## S-4604 3GSDI 1 to 4 Distributor



Item# S-4604

**\$225.00**

**Availability:** Usually ships the next business day

[Add to cart](#)

### Product Description



S-4604 is a portable Mini converter for distributing 1 SDI input to 4 SDI output, supports up to 3Gb/s SDI, with embedded information, widely used on broadcast projects.

### Key Features:

- Portable 3G/HD/SD-SDI 1 to 4 distributor
- 1 SDI input, 4 SDI output
- SDI re-clocking and amplifier
- Power/Input/Output status indicators
- Pole-tap 6-18V DC power input
- Heavy duty aluminium housing
- Bottom screw threads for installing

### Specifications:

Input		
BNC x 1	3G/HD/SD-SDI Input	
Output		
BNC x 4	3G/HD/SD-SDI output	
Video Format		
SDI	SMPTE-425M	1080p (60 / 59.94 / 50)
	SMPTE-274M	1080i (60 / 59.94 / 50)
		1080p (30 / 29.97 / 25 / 24 / 23.98)
	SMPTE-RP211	1080psf (30 / 29.97 / 25 / 24 / 23.98)
	SMPTE-296M	720p (60 / 59.94 / 50)
	SMPTE-125M	480i (59.94)
	ITU-R BT.656	576i (50)
General		
Power	≤2W	
Working Voltage	DC 6-18V	
Working Environment	Temperature: 0°C-+70°C, Humidity:10%-90%	
Dimensions	105x84x29 mm	
Net weight	240g	

### Input and Output


S-4604 offers:

- 1x 3G/HD/SD-SDI input
- 4x 3G/HD/SD-SDI output (Reclocked)



### SDI Amplifier

The S-4604 feature low SDI jitter and SDI re-clocking, so that you can several S-4604 to prolong the SDI transmission distance.

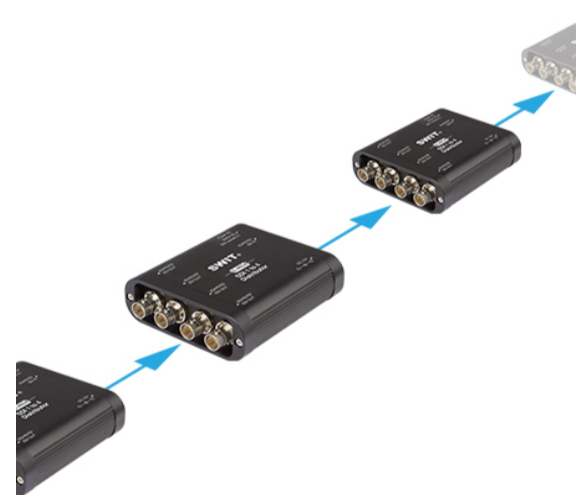

### Status Indicators

S-4604 provides 3 LED indicators, to check if the power is connected, and if the input/output signal is delivered.



### Power Supply

The mini converter is powered by pole-tap DC socket. The package includes an AC-DC power adaptor, and you can also connect DC cable from 6-18V batteries.



### Standard Package

S-4604 standard package includes:

- 1x AC-DC power adaptor (A-PA03)
- 1x Install plate (A-IP00)



**Warranty Period:** Two years conditional.

[View S-4604 User Manual](#)

