Product

Log-in ▶





> Support RED Raptor install > 140Wh/9.7Ah high capacity

> Tiny V-mount battery, Pocket fit

- > 150W/12A constant high load
- > 1x D-tap output & charging input

> 1x USB-A 5V/2A output

- > 1x USB-C 48W input & 65W output
- > 4-step LED power indicator > Power info for both SONY & RED
- > Wire-Free internal technic
- Multiple circuit protections

MSRP












Ex TAX / Shipping

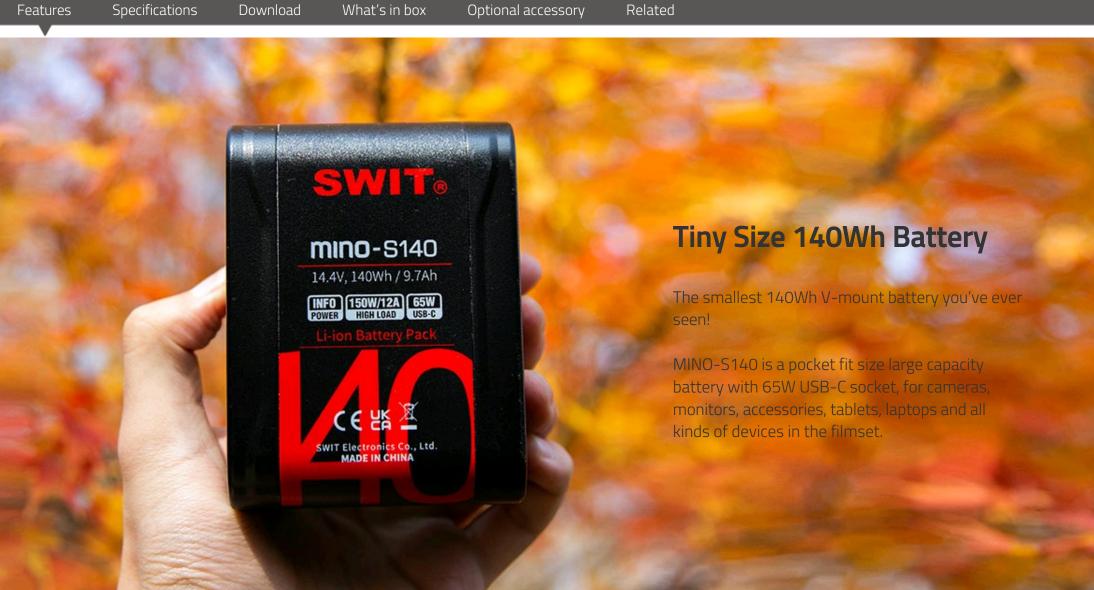

MINO-S140 consists of 8 high capacity cells, with 140Wh/9.7Ah high capacity, and support at least 150W/12A constant high load output, for high

150W/12A High Load

power cine cameras and lights.









supports PD 5V 2.4A, 9V 2.4A, 12V 2.4A, 15V 2.4A and Max 20V 2.4A, which means you can fully charge the

140Wh battery within 3.5 hours.



D-tap, USB-A and USB-C

USB-C x1 - 65W output and 48W charging input

USB-A x1 - 5V/2A output

The tiny size MINO-S140 didn't compromize on DC sockets. D-tap x1 - 120W/10A high load (Support charging input)



MINO-S140 has innovative "Wire-Free" internal technic. All the cells, D-tap, USB-A, USB-C, power indicator devices are directly soldered onto PCB, no connecting wires, to reduce internal resistance effectively, and make the circuit stable,

safe, and reliable.

USB-C ports)

USB-C 65W Power Output

You can power laptop via USB-C by MINO-S140 battery on the filmset. Supports 5V 3.25A, 9V 3.25A, 12V 3.25A, 15V 3.25A and Max 20V 3.25A,

E/12/X13/XPRO, Thinkpad, HP, ASUS, Dell and almost all laptops with

BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP multiple protocols.

(For Macbook Air/13, Macbook Pro 13/15/16, Huawei Matebook

SWIT Electronics Europe GmbH Heerdterbuschstrasse 10 / HALLE 9,

41460 Neuss, NRW Germany VAT: DE308323924 WEEE-Reg.-Nr. DE 37399843 Email: info@swit-europe.com

Email Newsletter

Please enter Email address below and subscribe our newsletters. submit









--



